


Important note:


EM2800 can only control AC97 from "analog input" to "digital output"
EM2800 can not control AC97 from "analog input" to "analog output"


- a. Use 4052 as analog mux, connect 4052 output to audio connector
- b. Use AC97 as USB audio.


Before USB2.0 audio driver is ready to use, shall use "CFG3 pull down" with 4052 analog mux as final shipping product.


After we verify the USB2.0 Microsoft audio drive or our own audio driver, can switch to "CFG3 pull up" with AC97 as new shipping product.

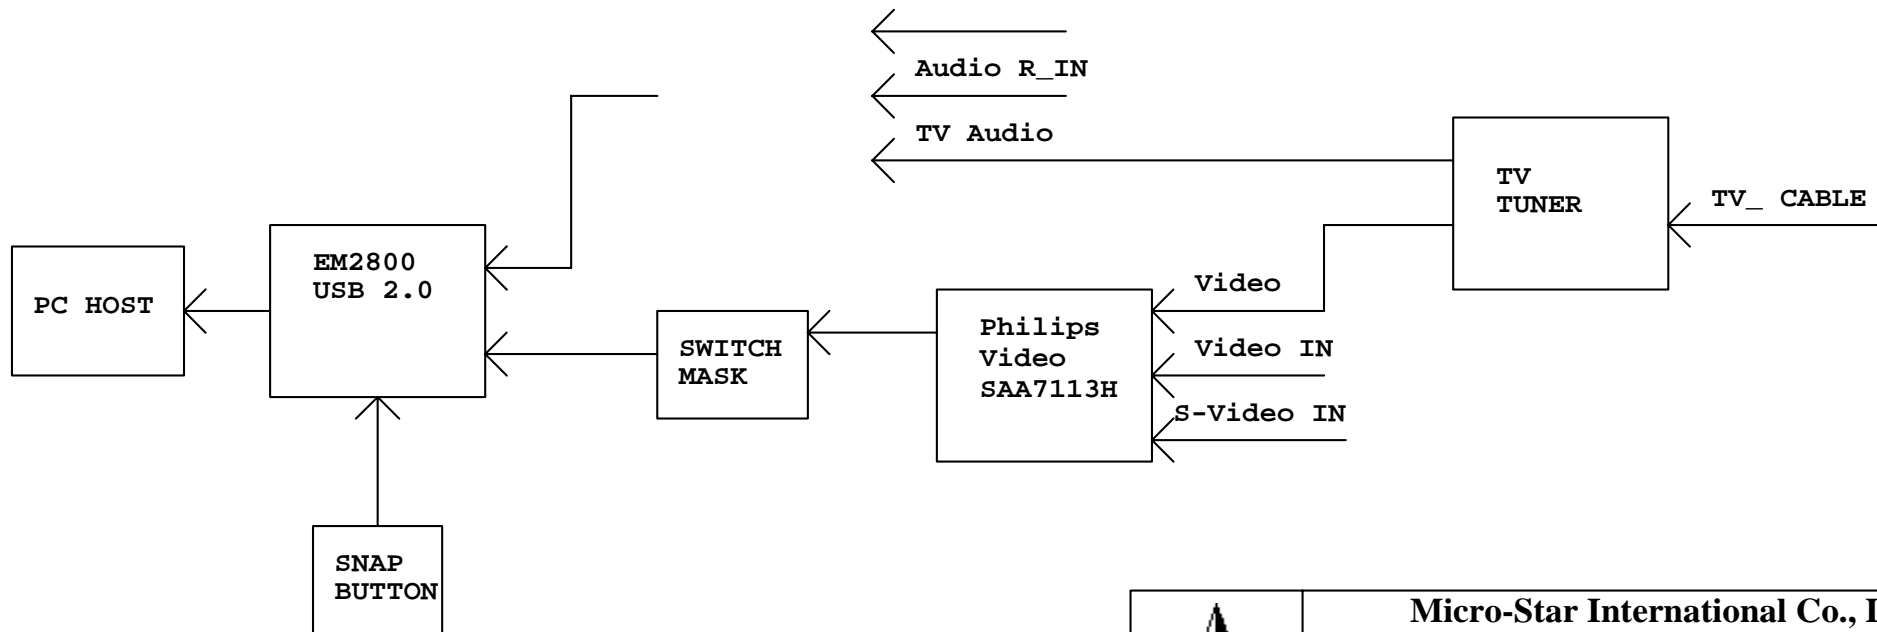

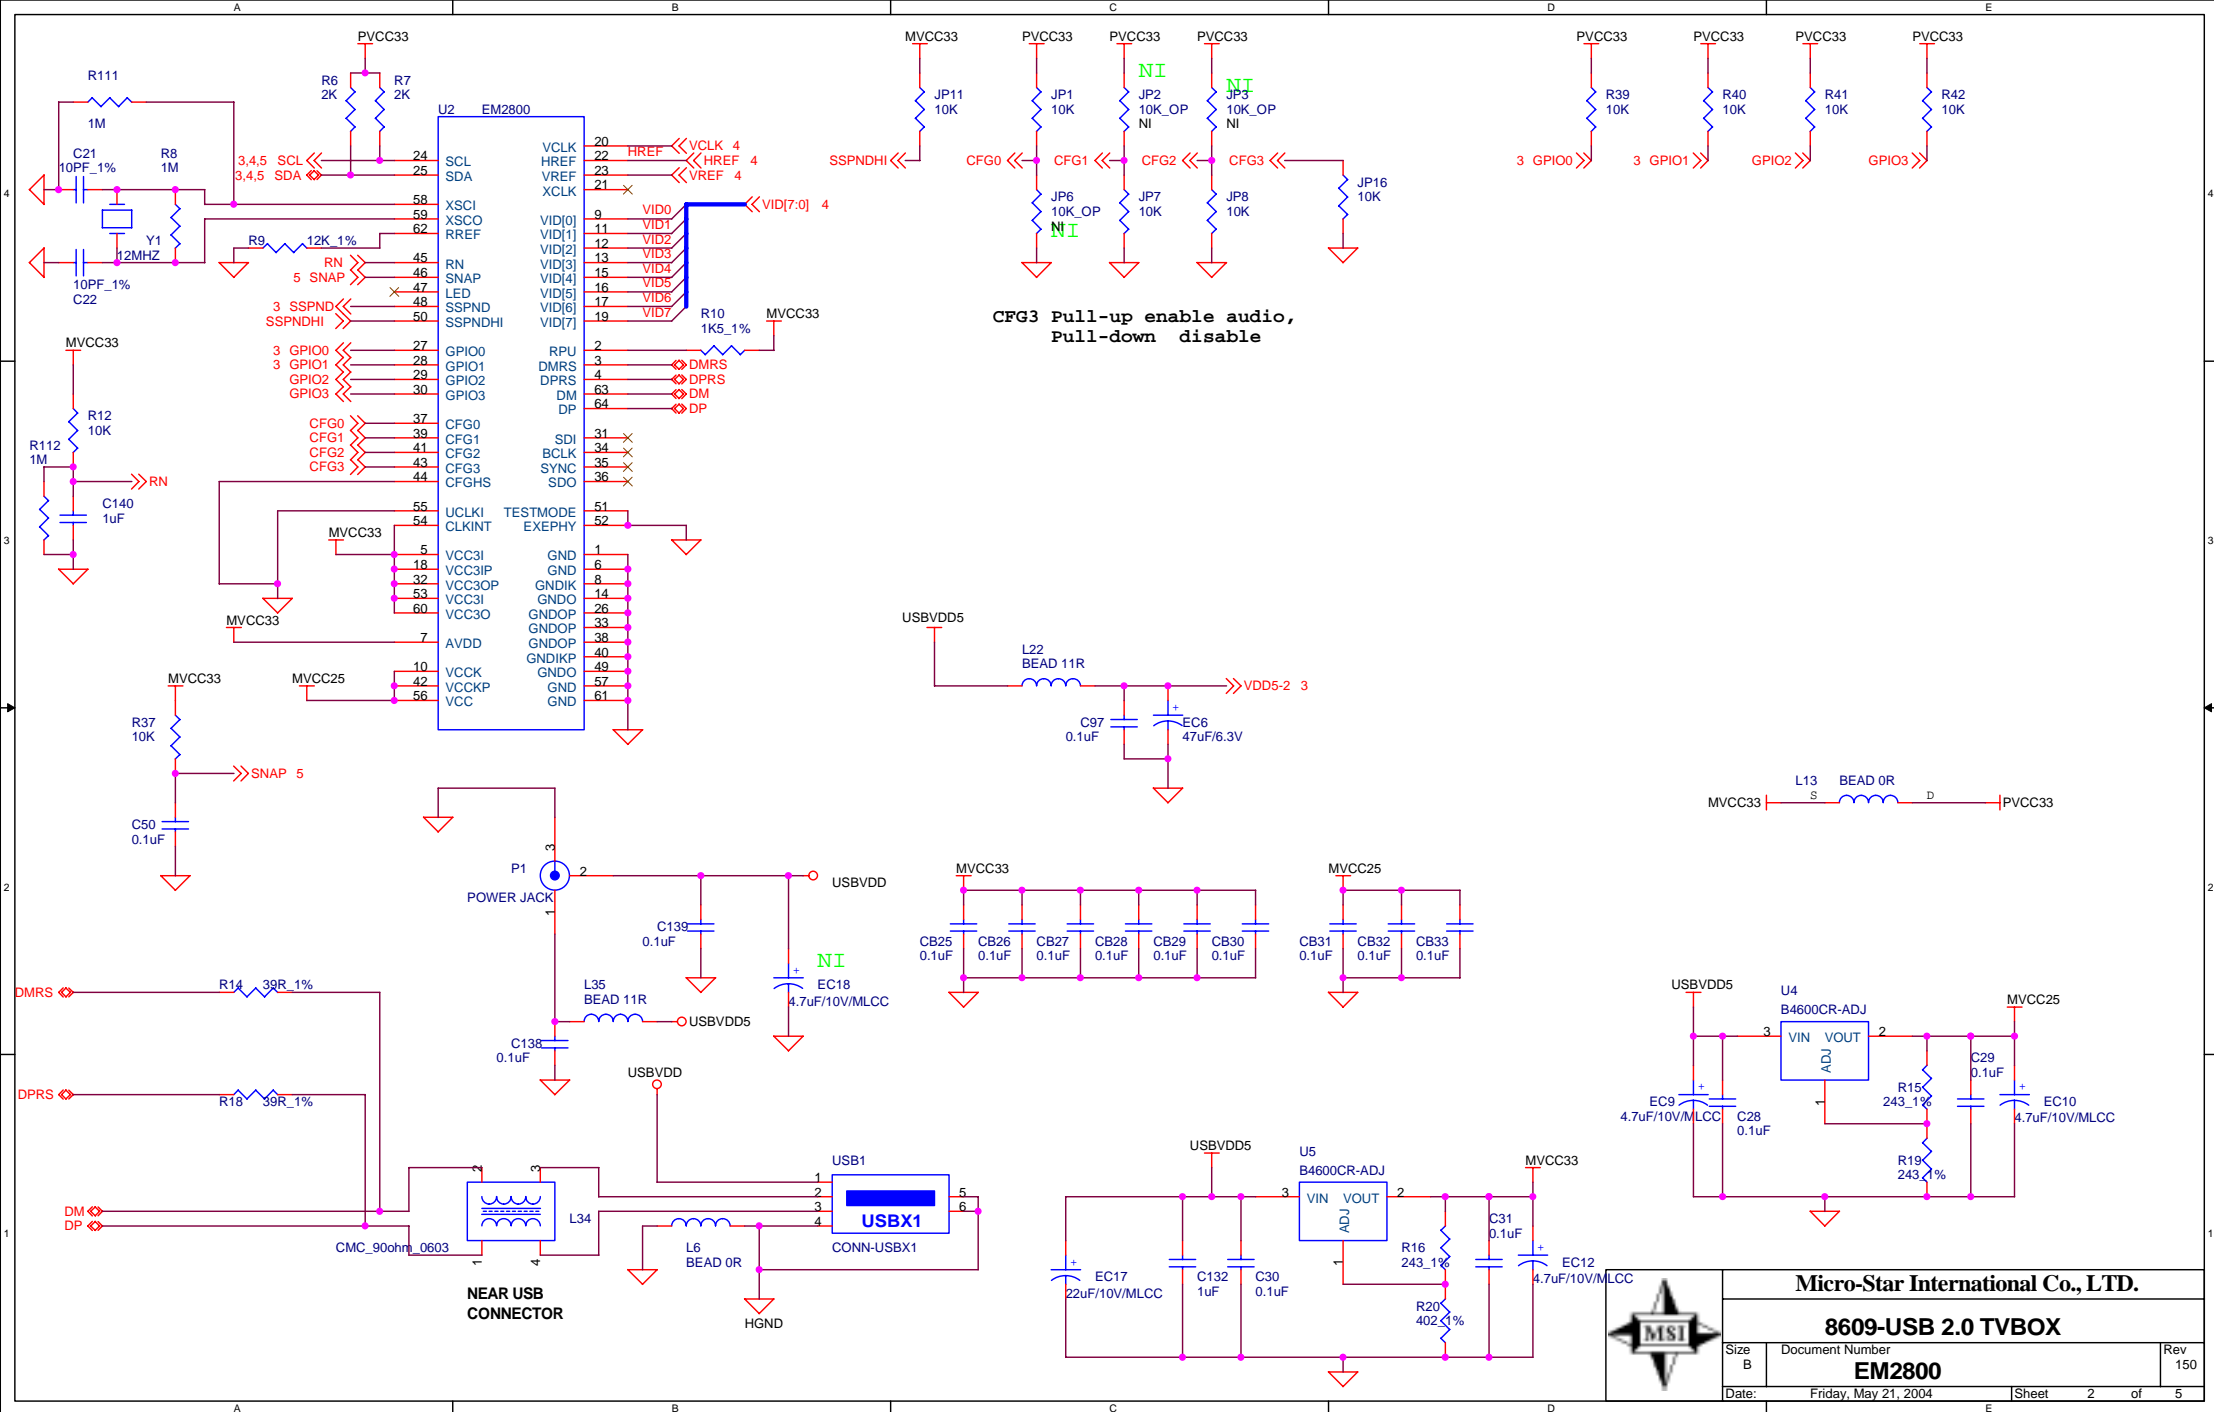

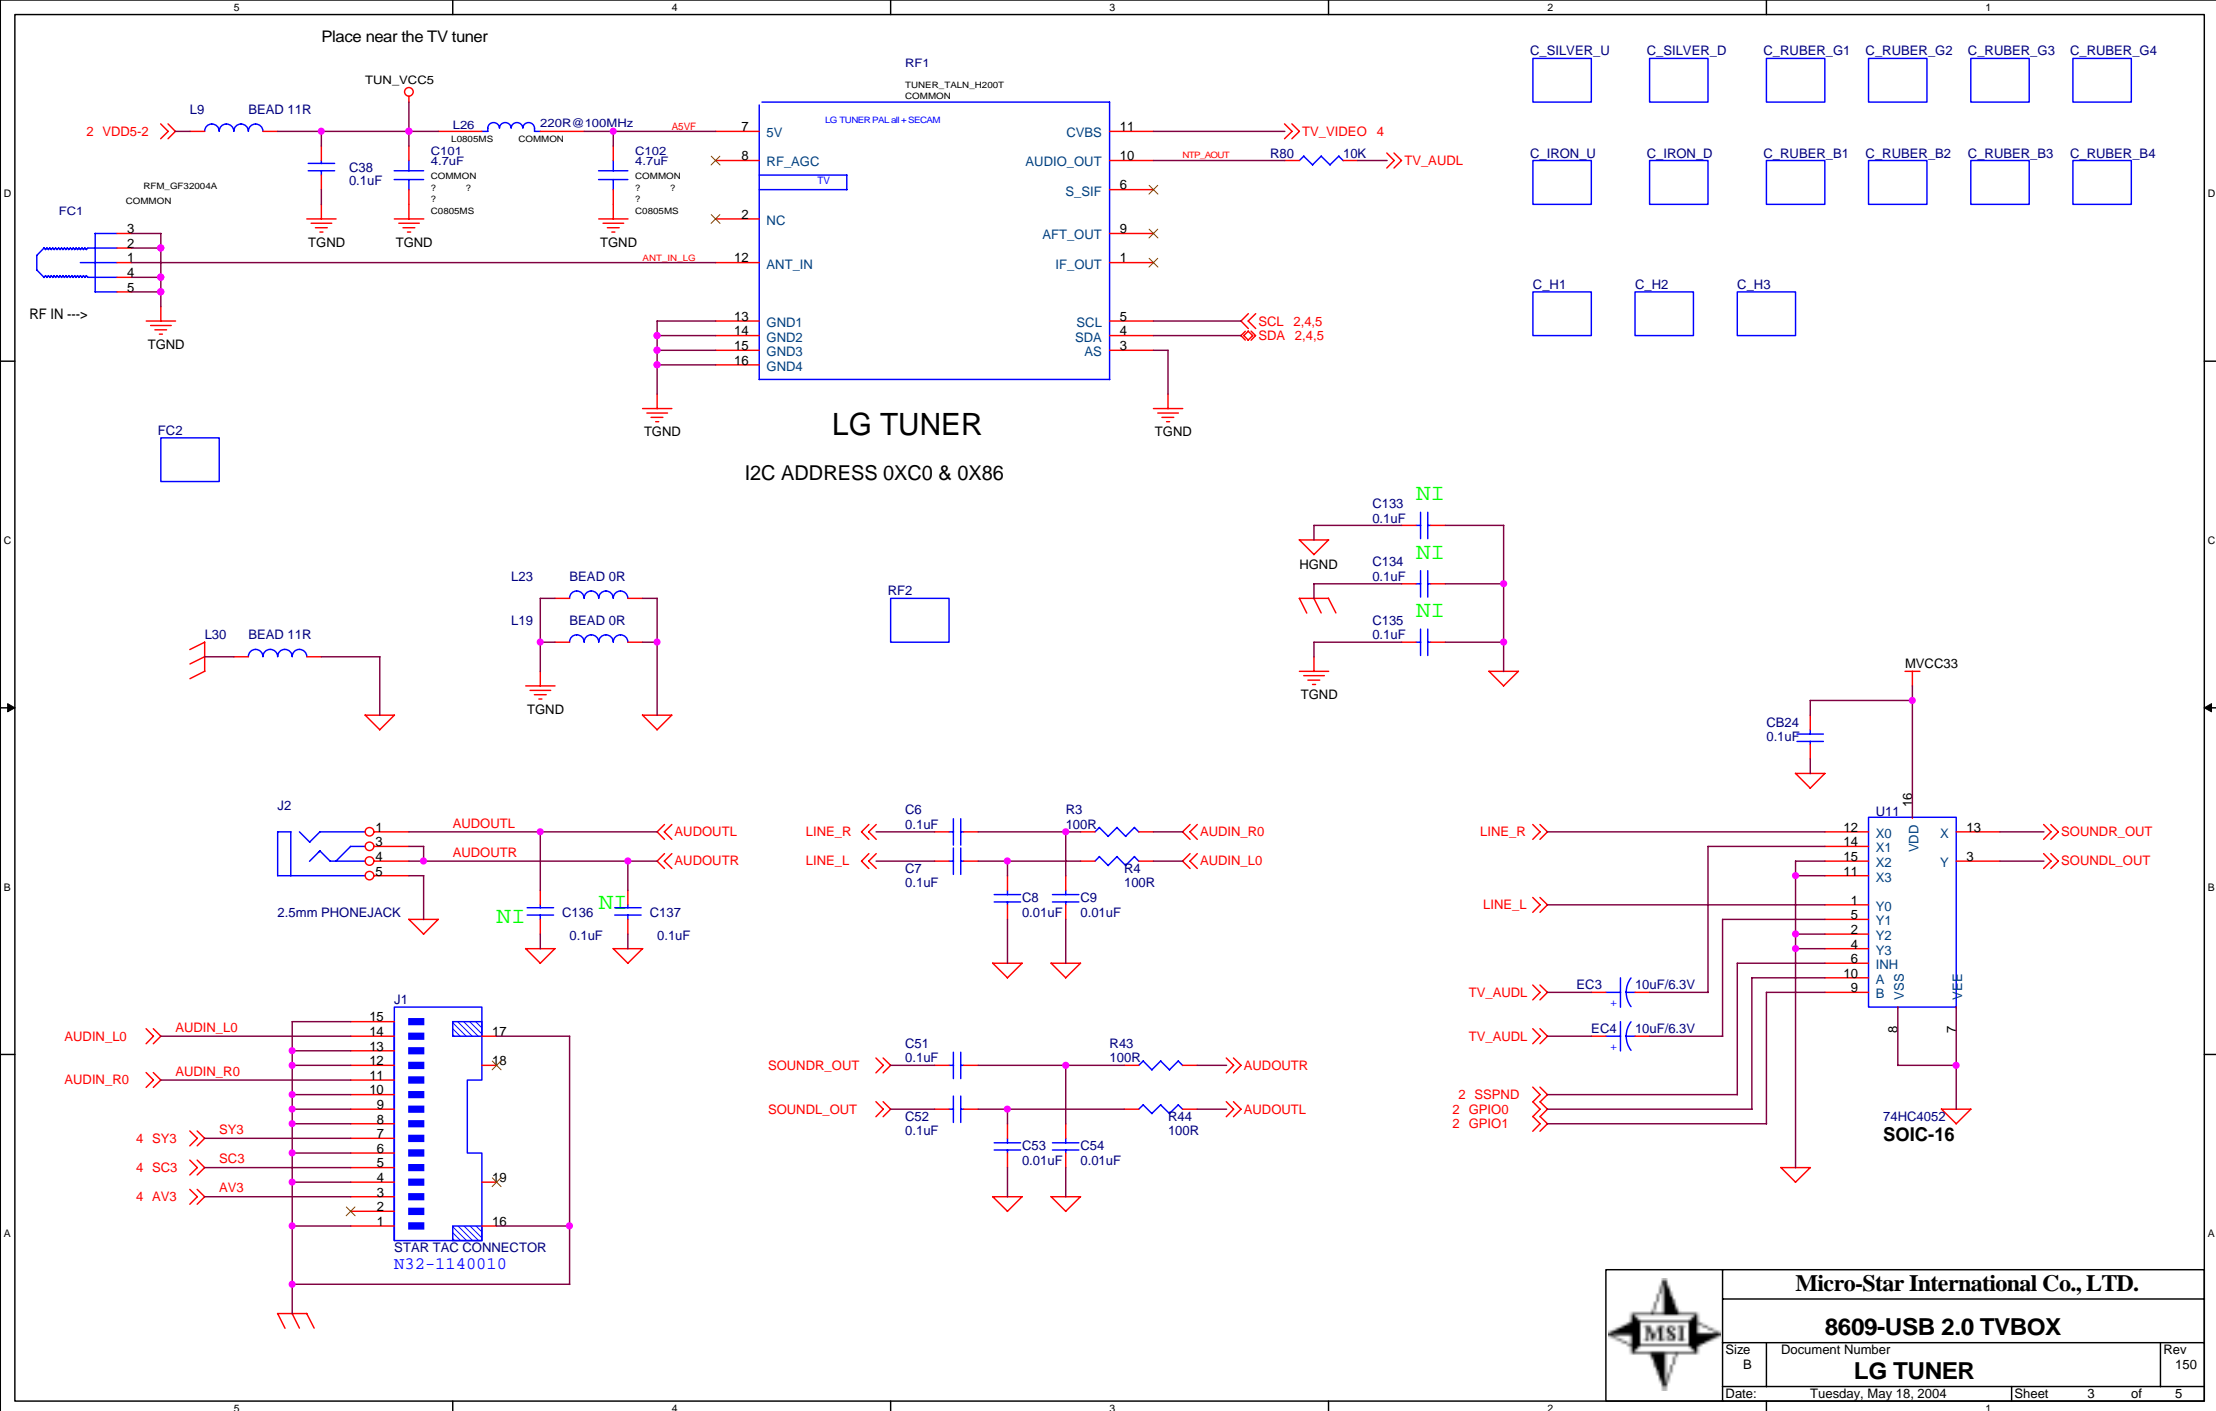

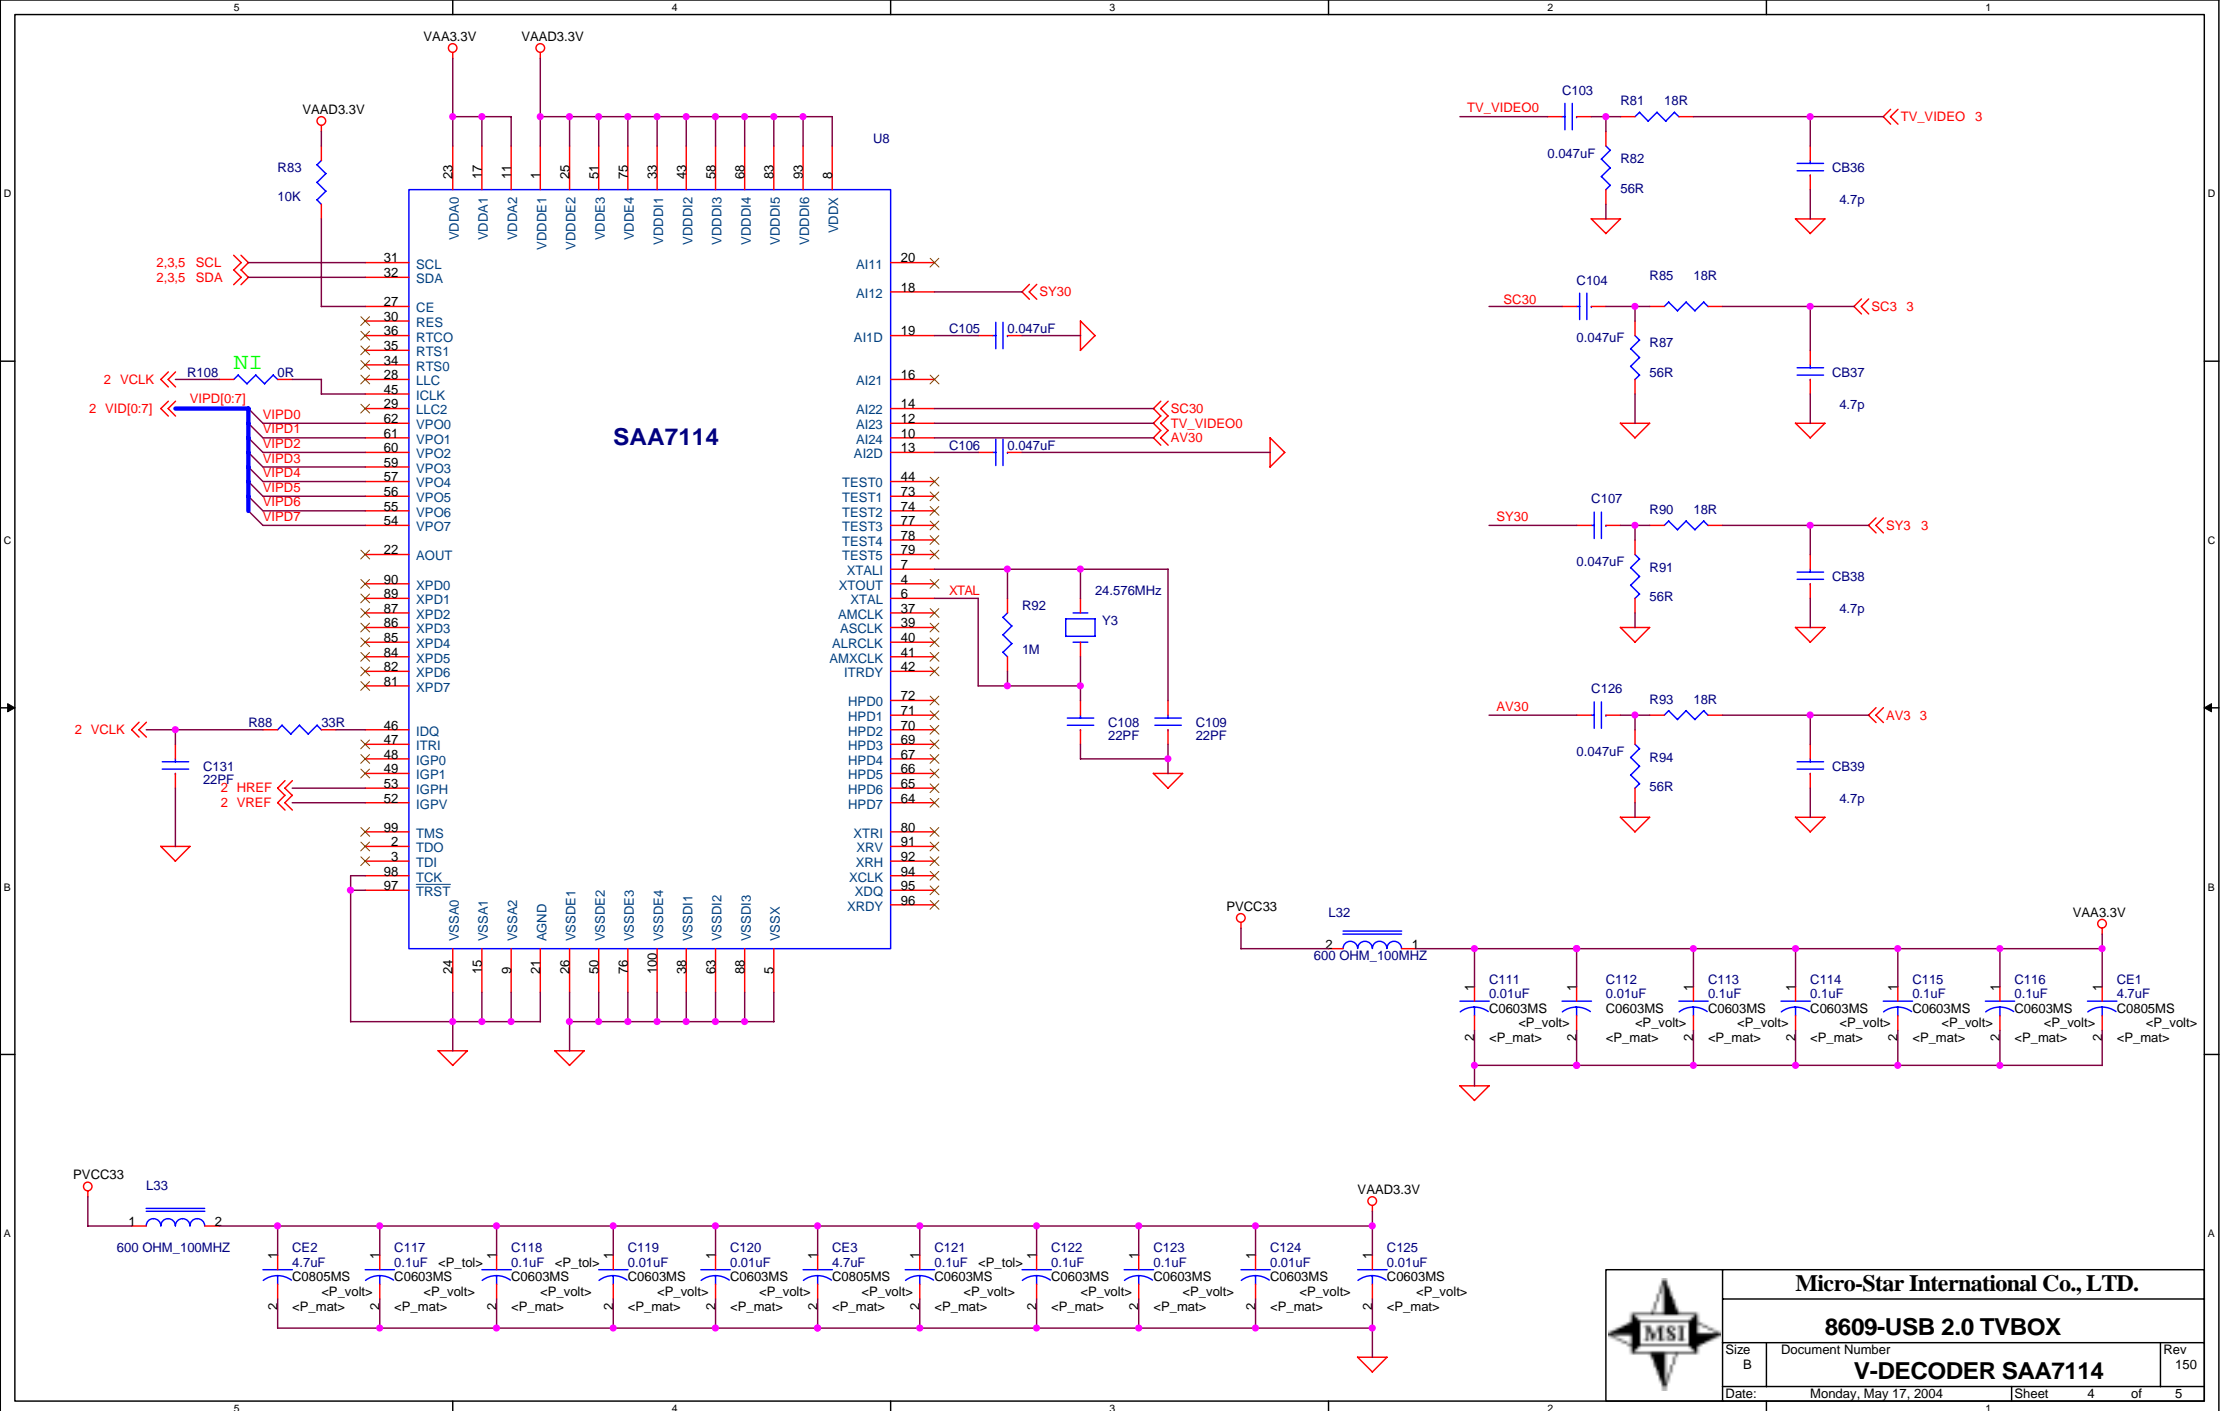

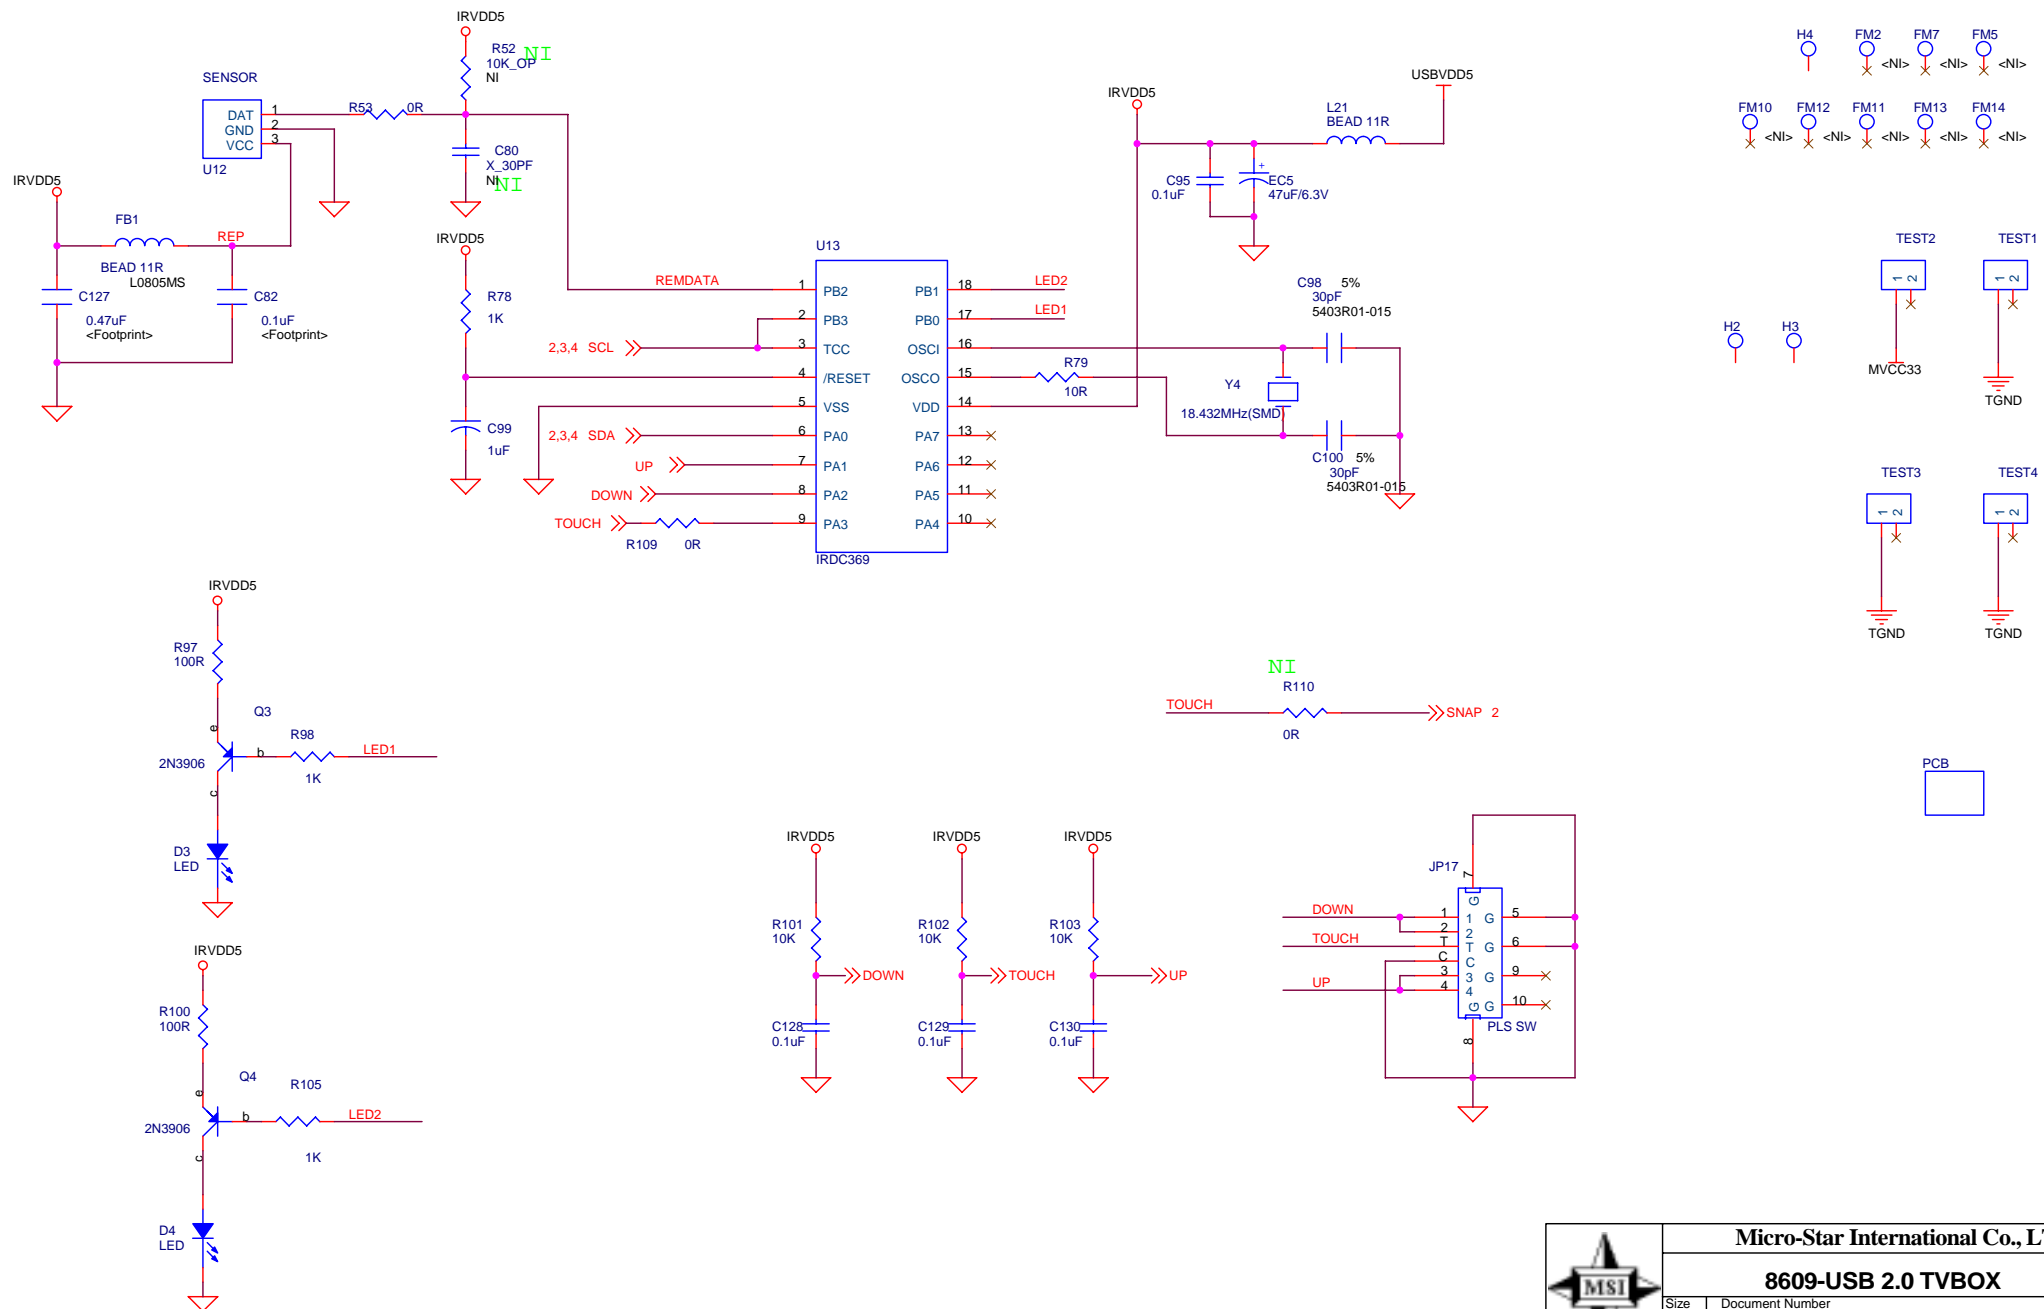

Micro-Star International Co., LTD.

8609-USB 2.0 TVBOX

Size B	Document Number REMOTE IRDC369	Rev 150
Date:	Friday, May 21, 2004	Sheet 5 of 5