



BTB Connector

Ground protected separately each lane
80Ohm Differential impedance

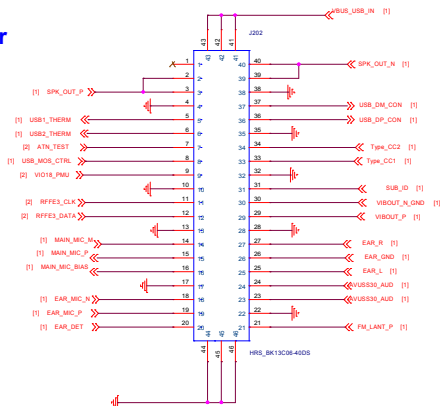


USB

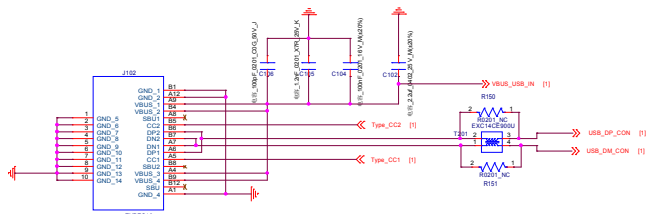

此线宽要求最小0.5mm

AUDIO JACK

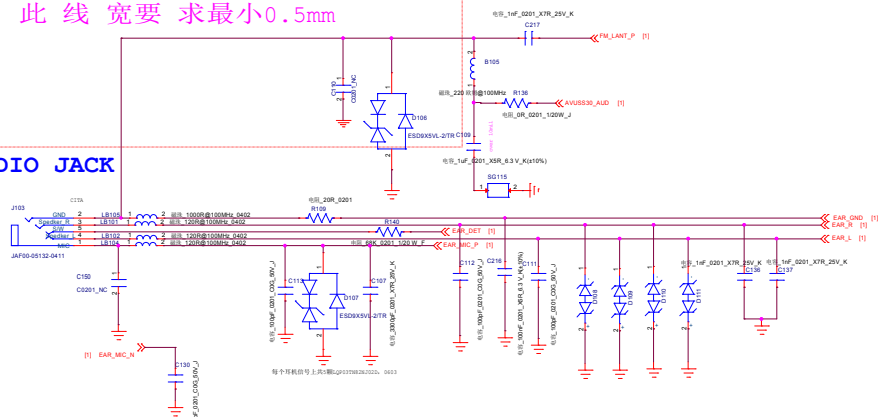


C130 close to audio jack
EAR_MIC_P和 EAR_MIC_N 走差分

光学定位孔




主MIC

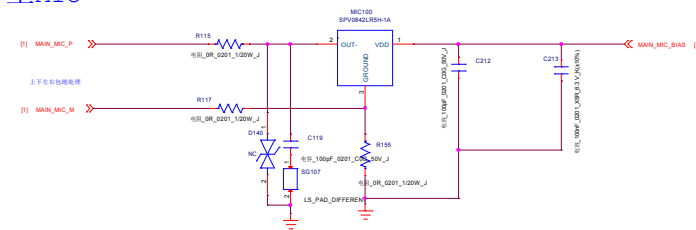


KB_ID

SUB_ID [1] MIC SHIELDING




KB_THERMAL1 KB_THERMAL2


TR100 TR101 贴片 NTC 电阻



SPK

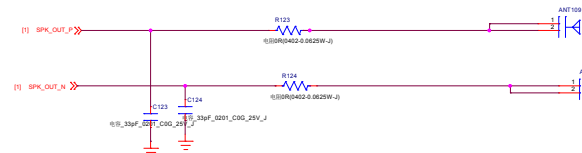

MOTOR

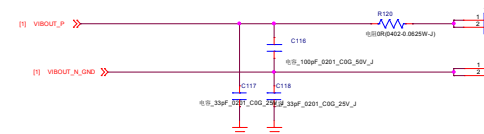

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title
1.B2B_CON


Size
D Project
SODA_KB_V1

Rev
V1.0

Date: Wednesday, July 01, 2020

Sheet 1 of 2

ANT

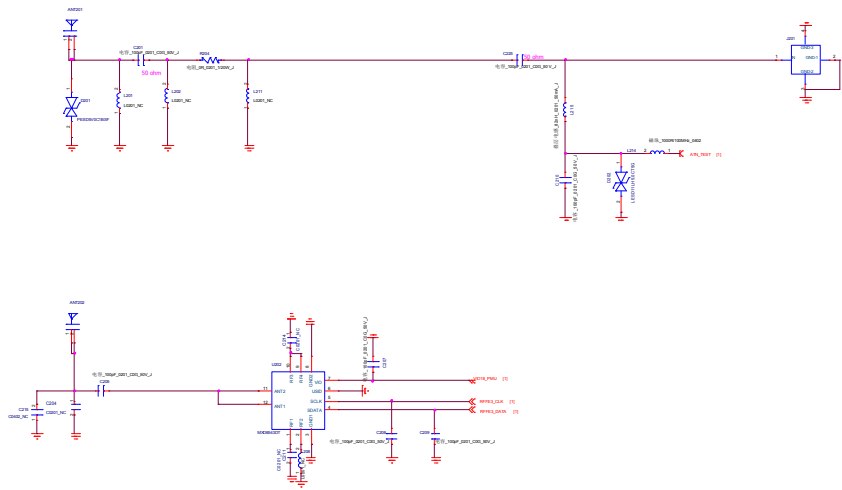

Spring for GND

