


③ BRACKET SHOWN IN FINAL POSTION.


~~④ REMOVE BREAKAWAY TAB AFTER ASSEMBLY.~~

③ INSERT THUMBSCREWS (2X) AS SHOWN.
TIGHTEN USING CALIBRATED TORQUE SCREWDRIVER.
SET TORQUE TO 4.8 - 6.0 KGf/CM.

©1998-2016 NVIDIA CORPORATION DO NOT DUPLICATE

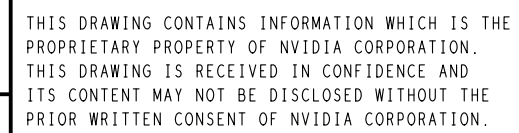


SIZE C	FSCM NO	DWG NO 608-1G110-1000	REV A00
SCALE - NONE	ALLEGRO, DRASE	SHT. 1 OF 14	

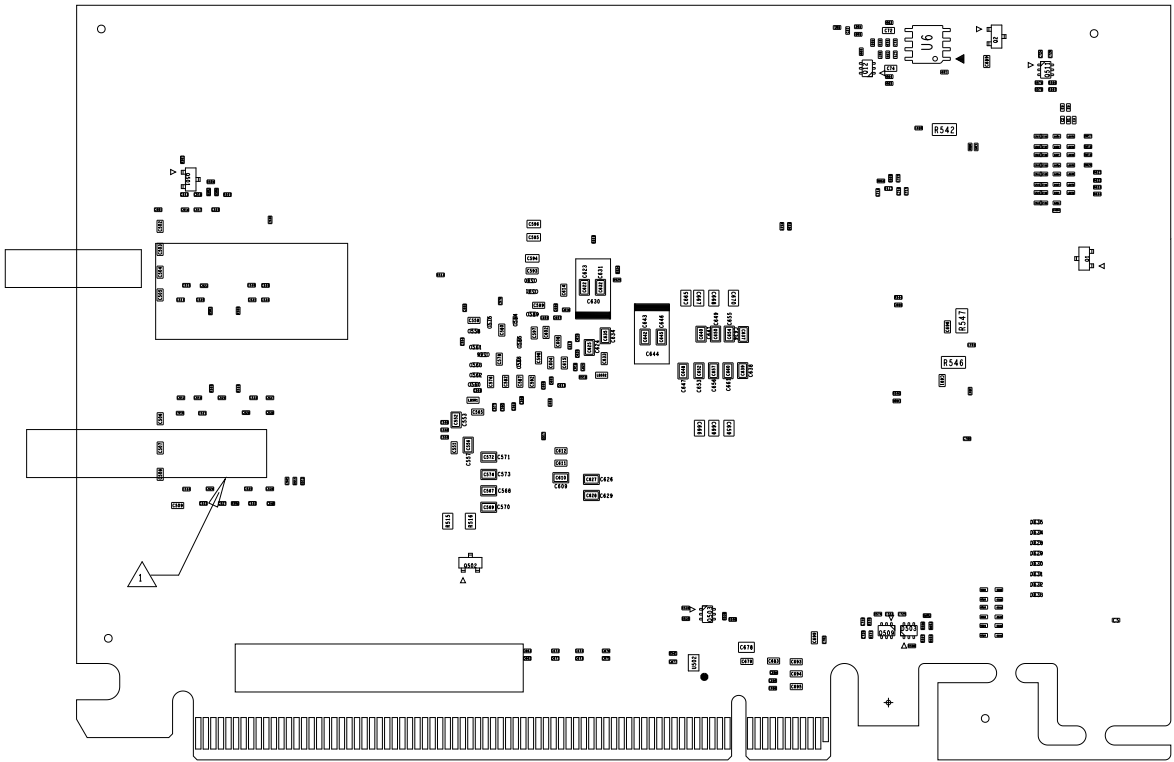

NOTES UNLESS OTHERWISE SPECIFIED:

△ PLACE PCA BAR CODE APPROX. WHERE SHOWN.

△ REMOVE BREAKAWAY TAB AFTER ASSEMBLY.

 NVIDIA.	QTY	PART NUMBER	DESCRIPTION			MATERIAL SPECIFICATION			
	PARTS LIST								
	MATERIAL		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .X ±.2 .XX ±.13			NVIDIA Corporation 2701 San Tomas Expy., Santa Clara CA 95050 USA ASSEMBLY DRAWING BOTTOM PG110			
	FINISH								
©1998-2016 NVIDIA CORPORATION DO NOT DUPLICATE	NEXT ASSEMBLY		USED ON			SIZE C	FSCM NO	DWG NO	REV
	APPLICATION			DO NOT SCALE DRAWING			SCALE: NONE	ALLEGRO DBASE	SHT 12 OF 14
							608-1G110-1000 A00		