

A

B

C

D

E

F

A

B


C

D

E

F

2.4G/5G WIFI

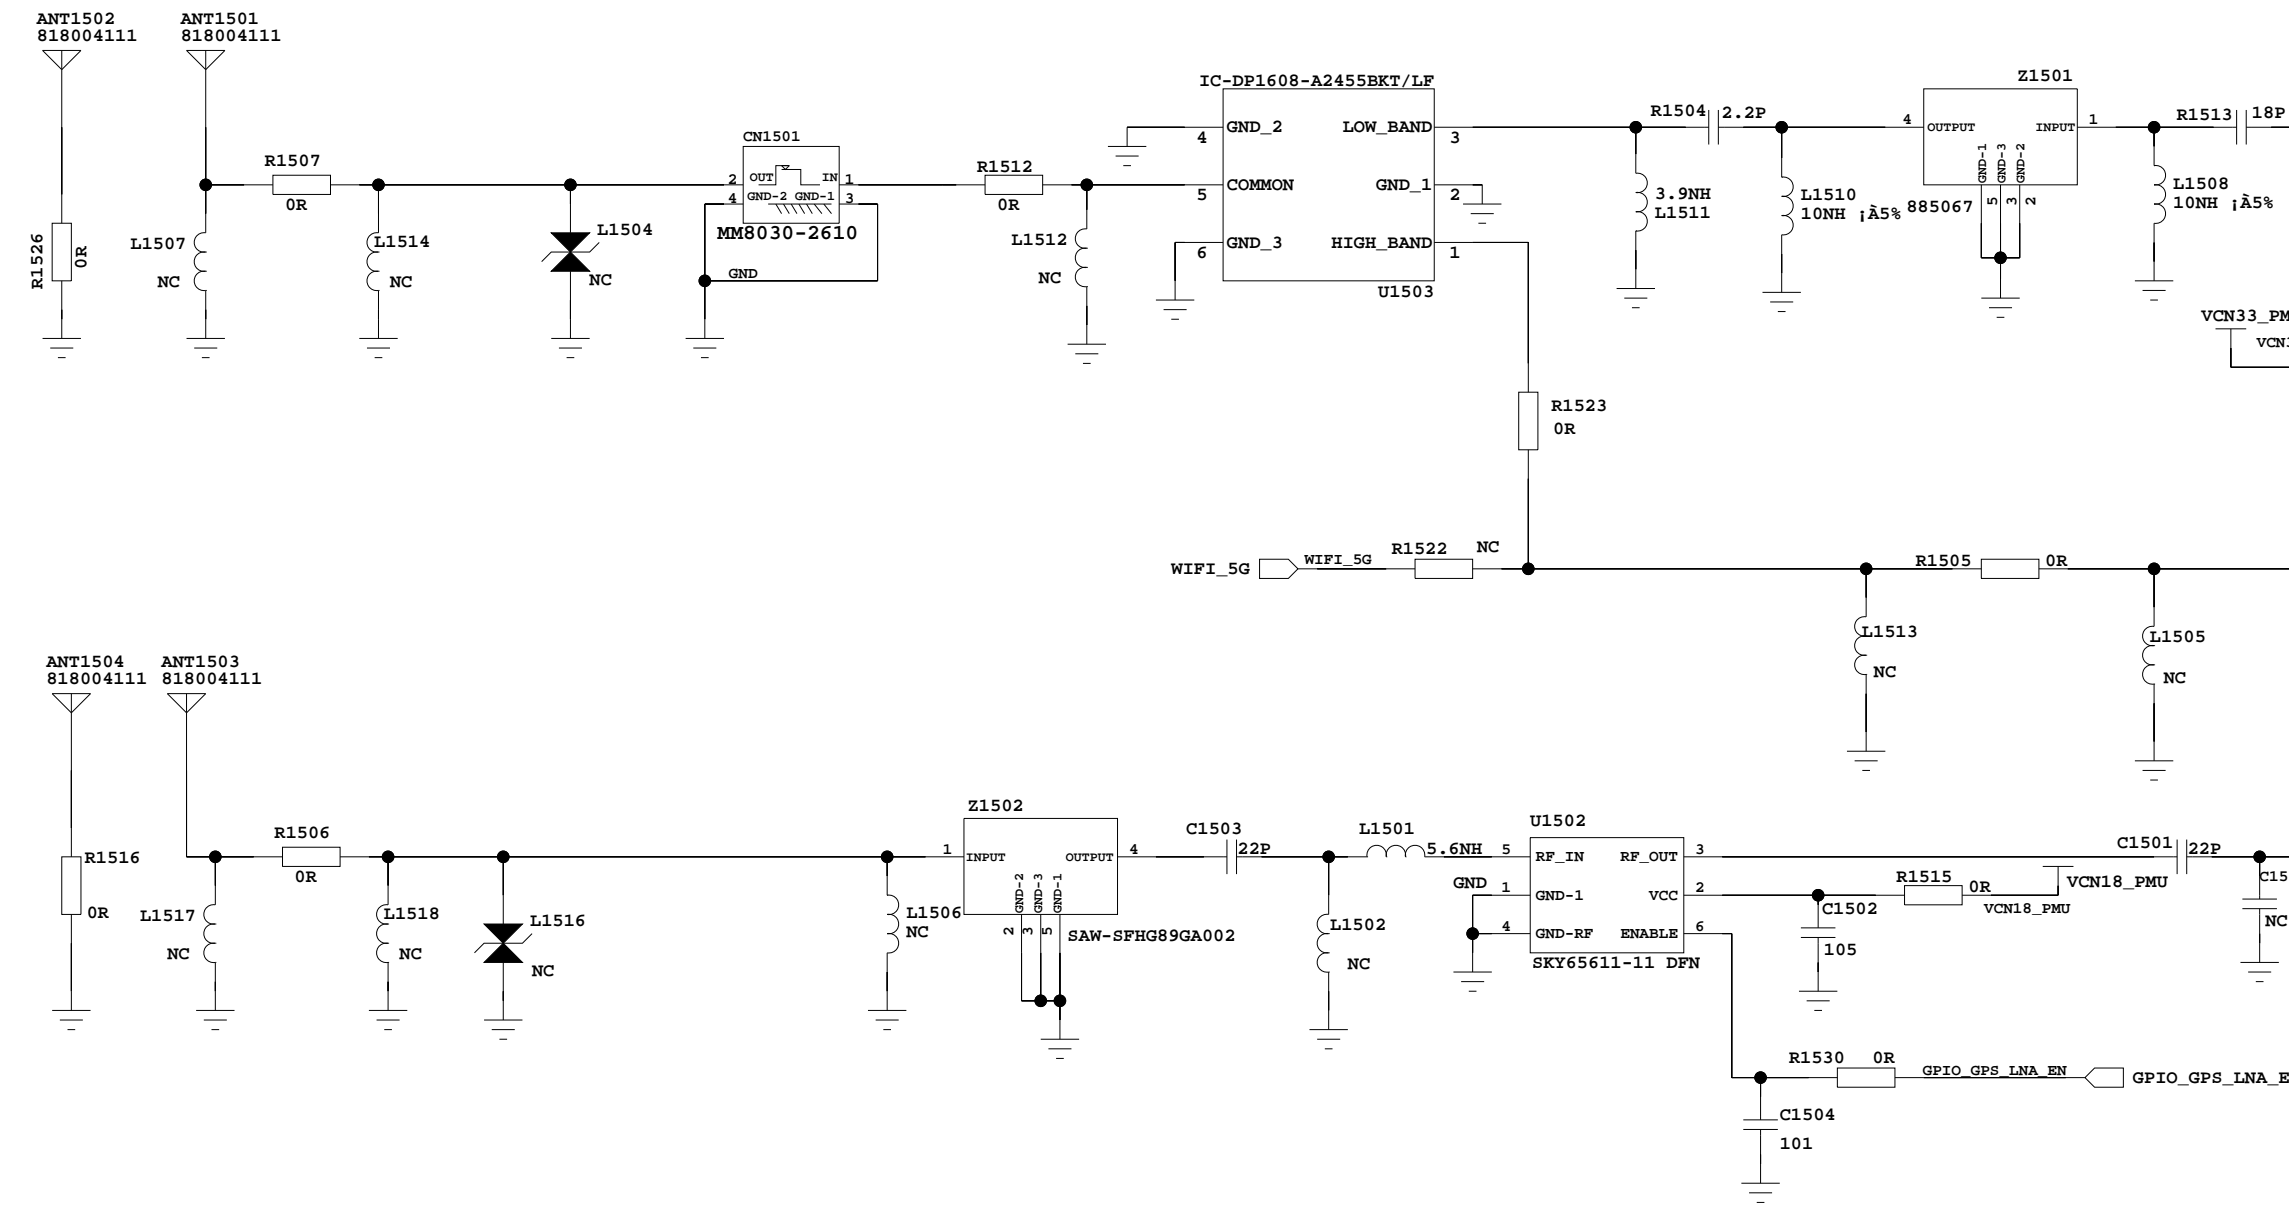

2.4G/5G WIFI



- GPS_AVDD18 20mA ± 10mil
- WB_AVDD18 50mA ± 12mil
- VCN18_PMU 80mA ± 15mil
- VCN33_PMU 300mA ± 25mil
- VCN28_PMU 20mA ± 10mil


1QI33E¶Ô°üμ0£¬£"7£¬40£©mm


VCN33ÐèÒª20mil;í£¬³α;í±ÈÐ;ÓÚ310£¬¹ÿ;×Á½, öÒÔÉİ


VCN33ÐèÒª°´ÕÕ300mA PeakμçÁ÷À´ÆÀ¹À

VCN33μçÔ´;í¶È²»Âú×ãÒªÇó»á¼ÖÂWIFI TX POWER²»×¼or EVM¶ñ»

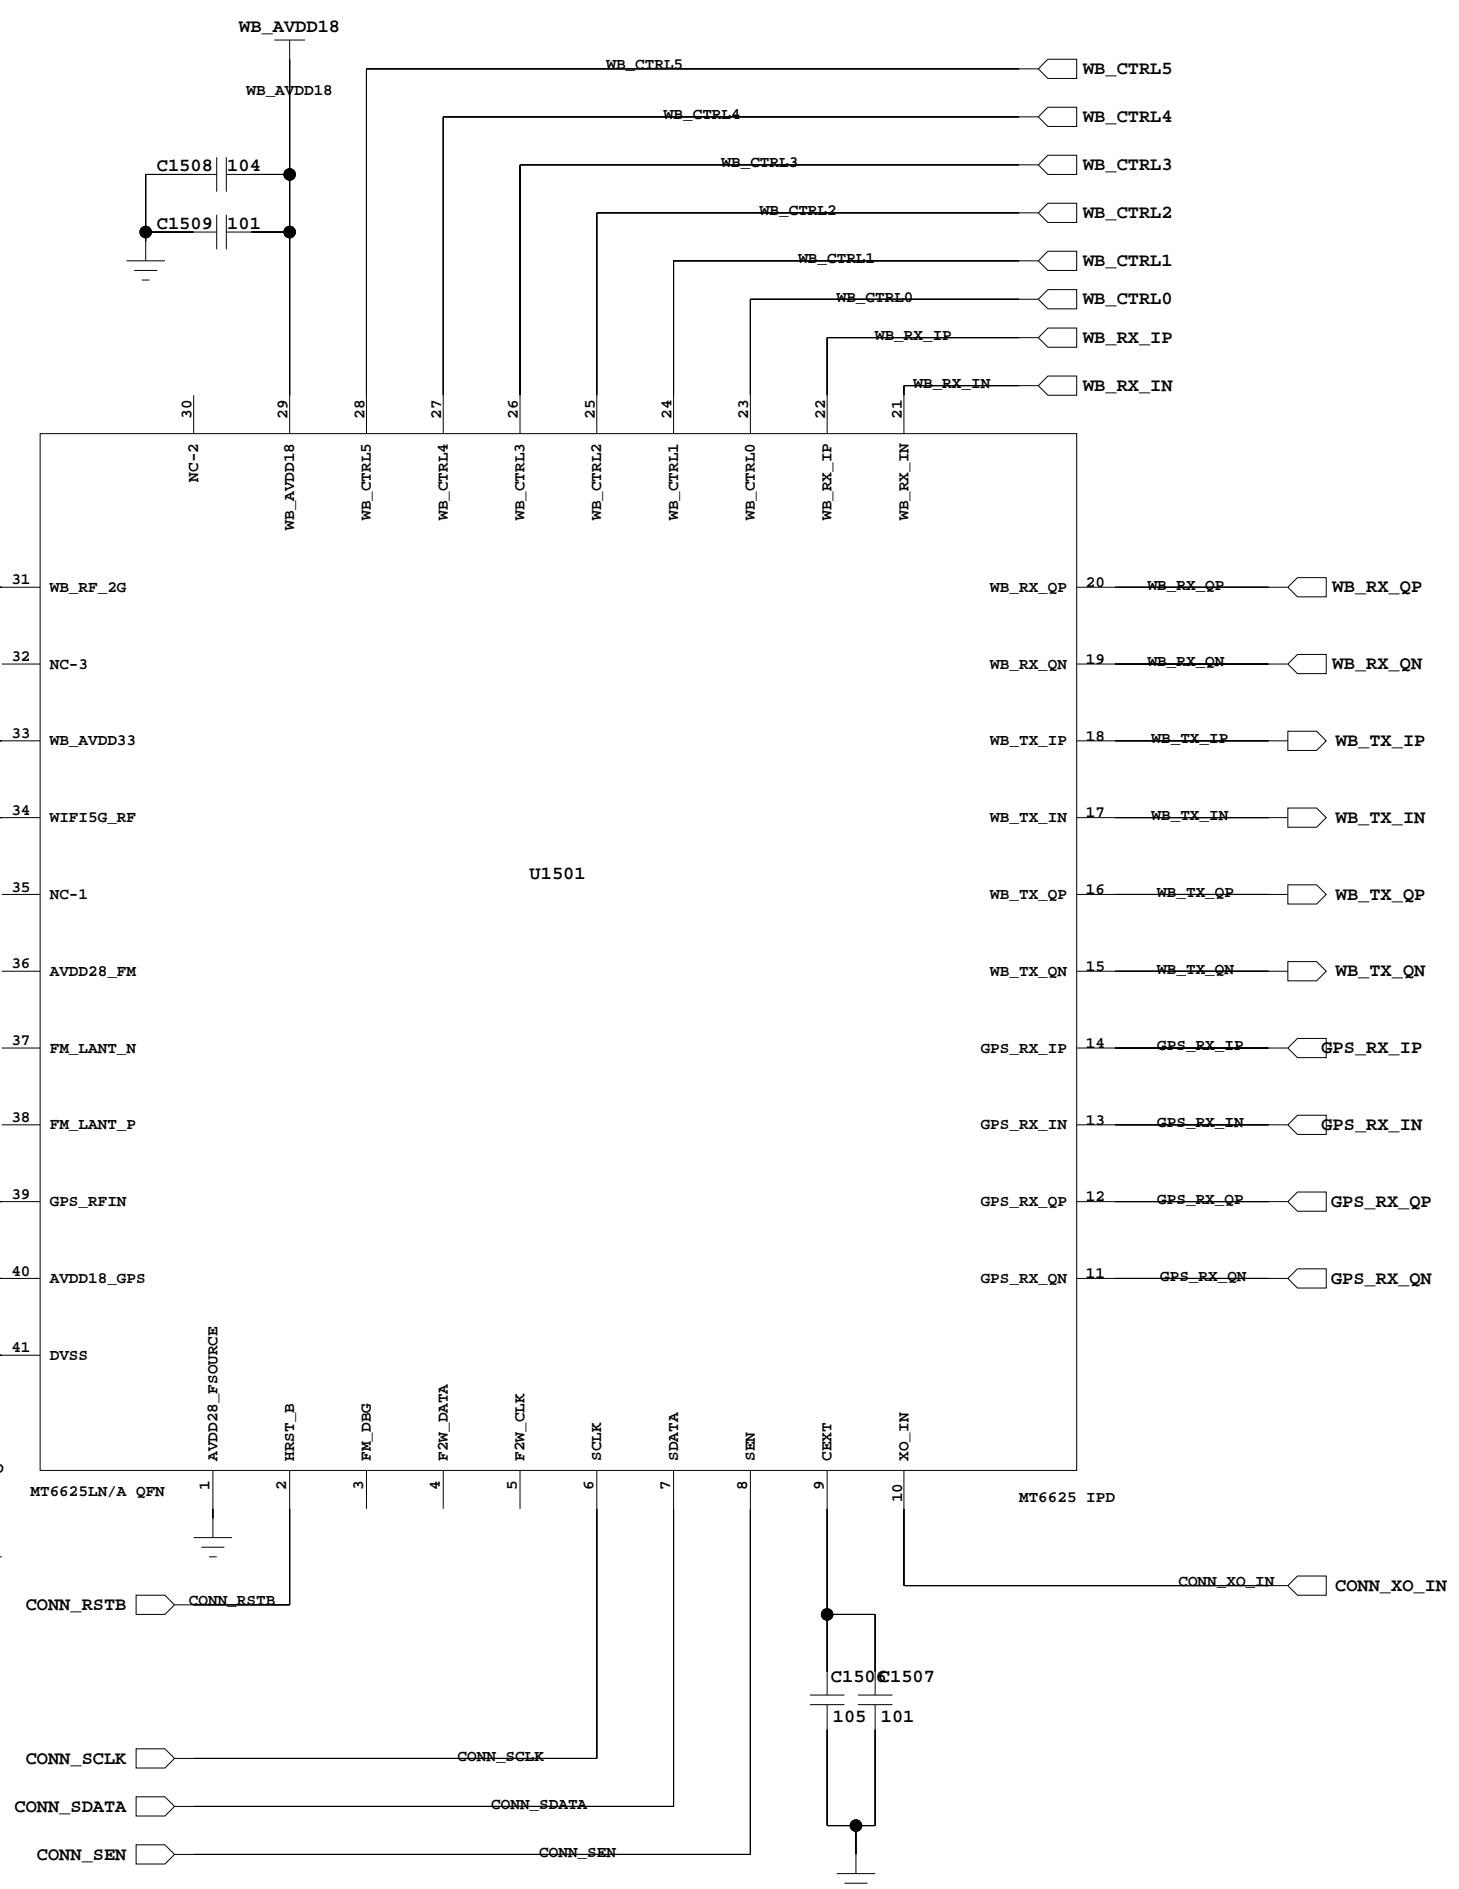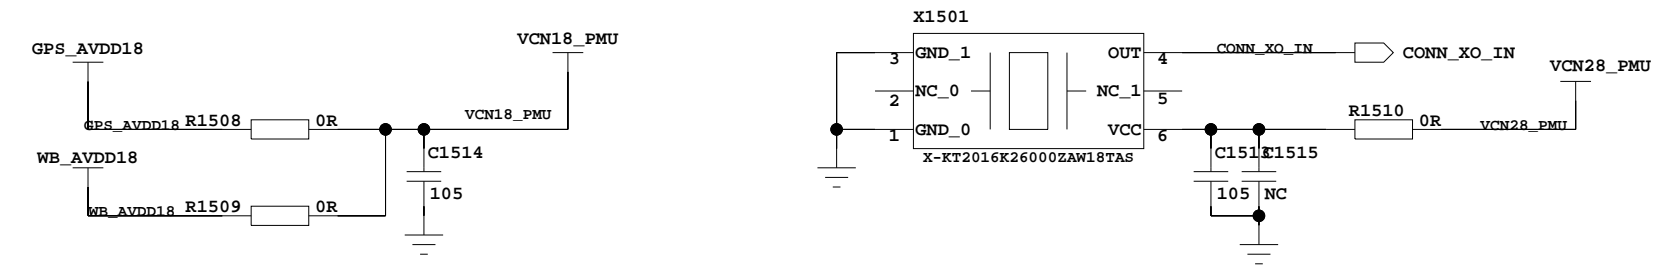


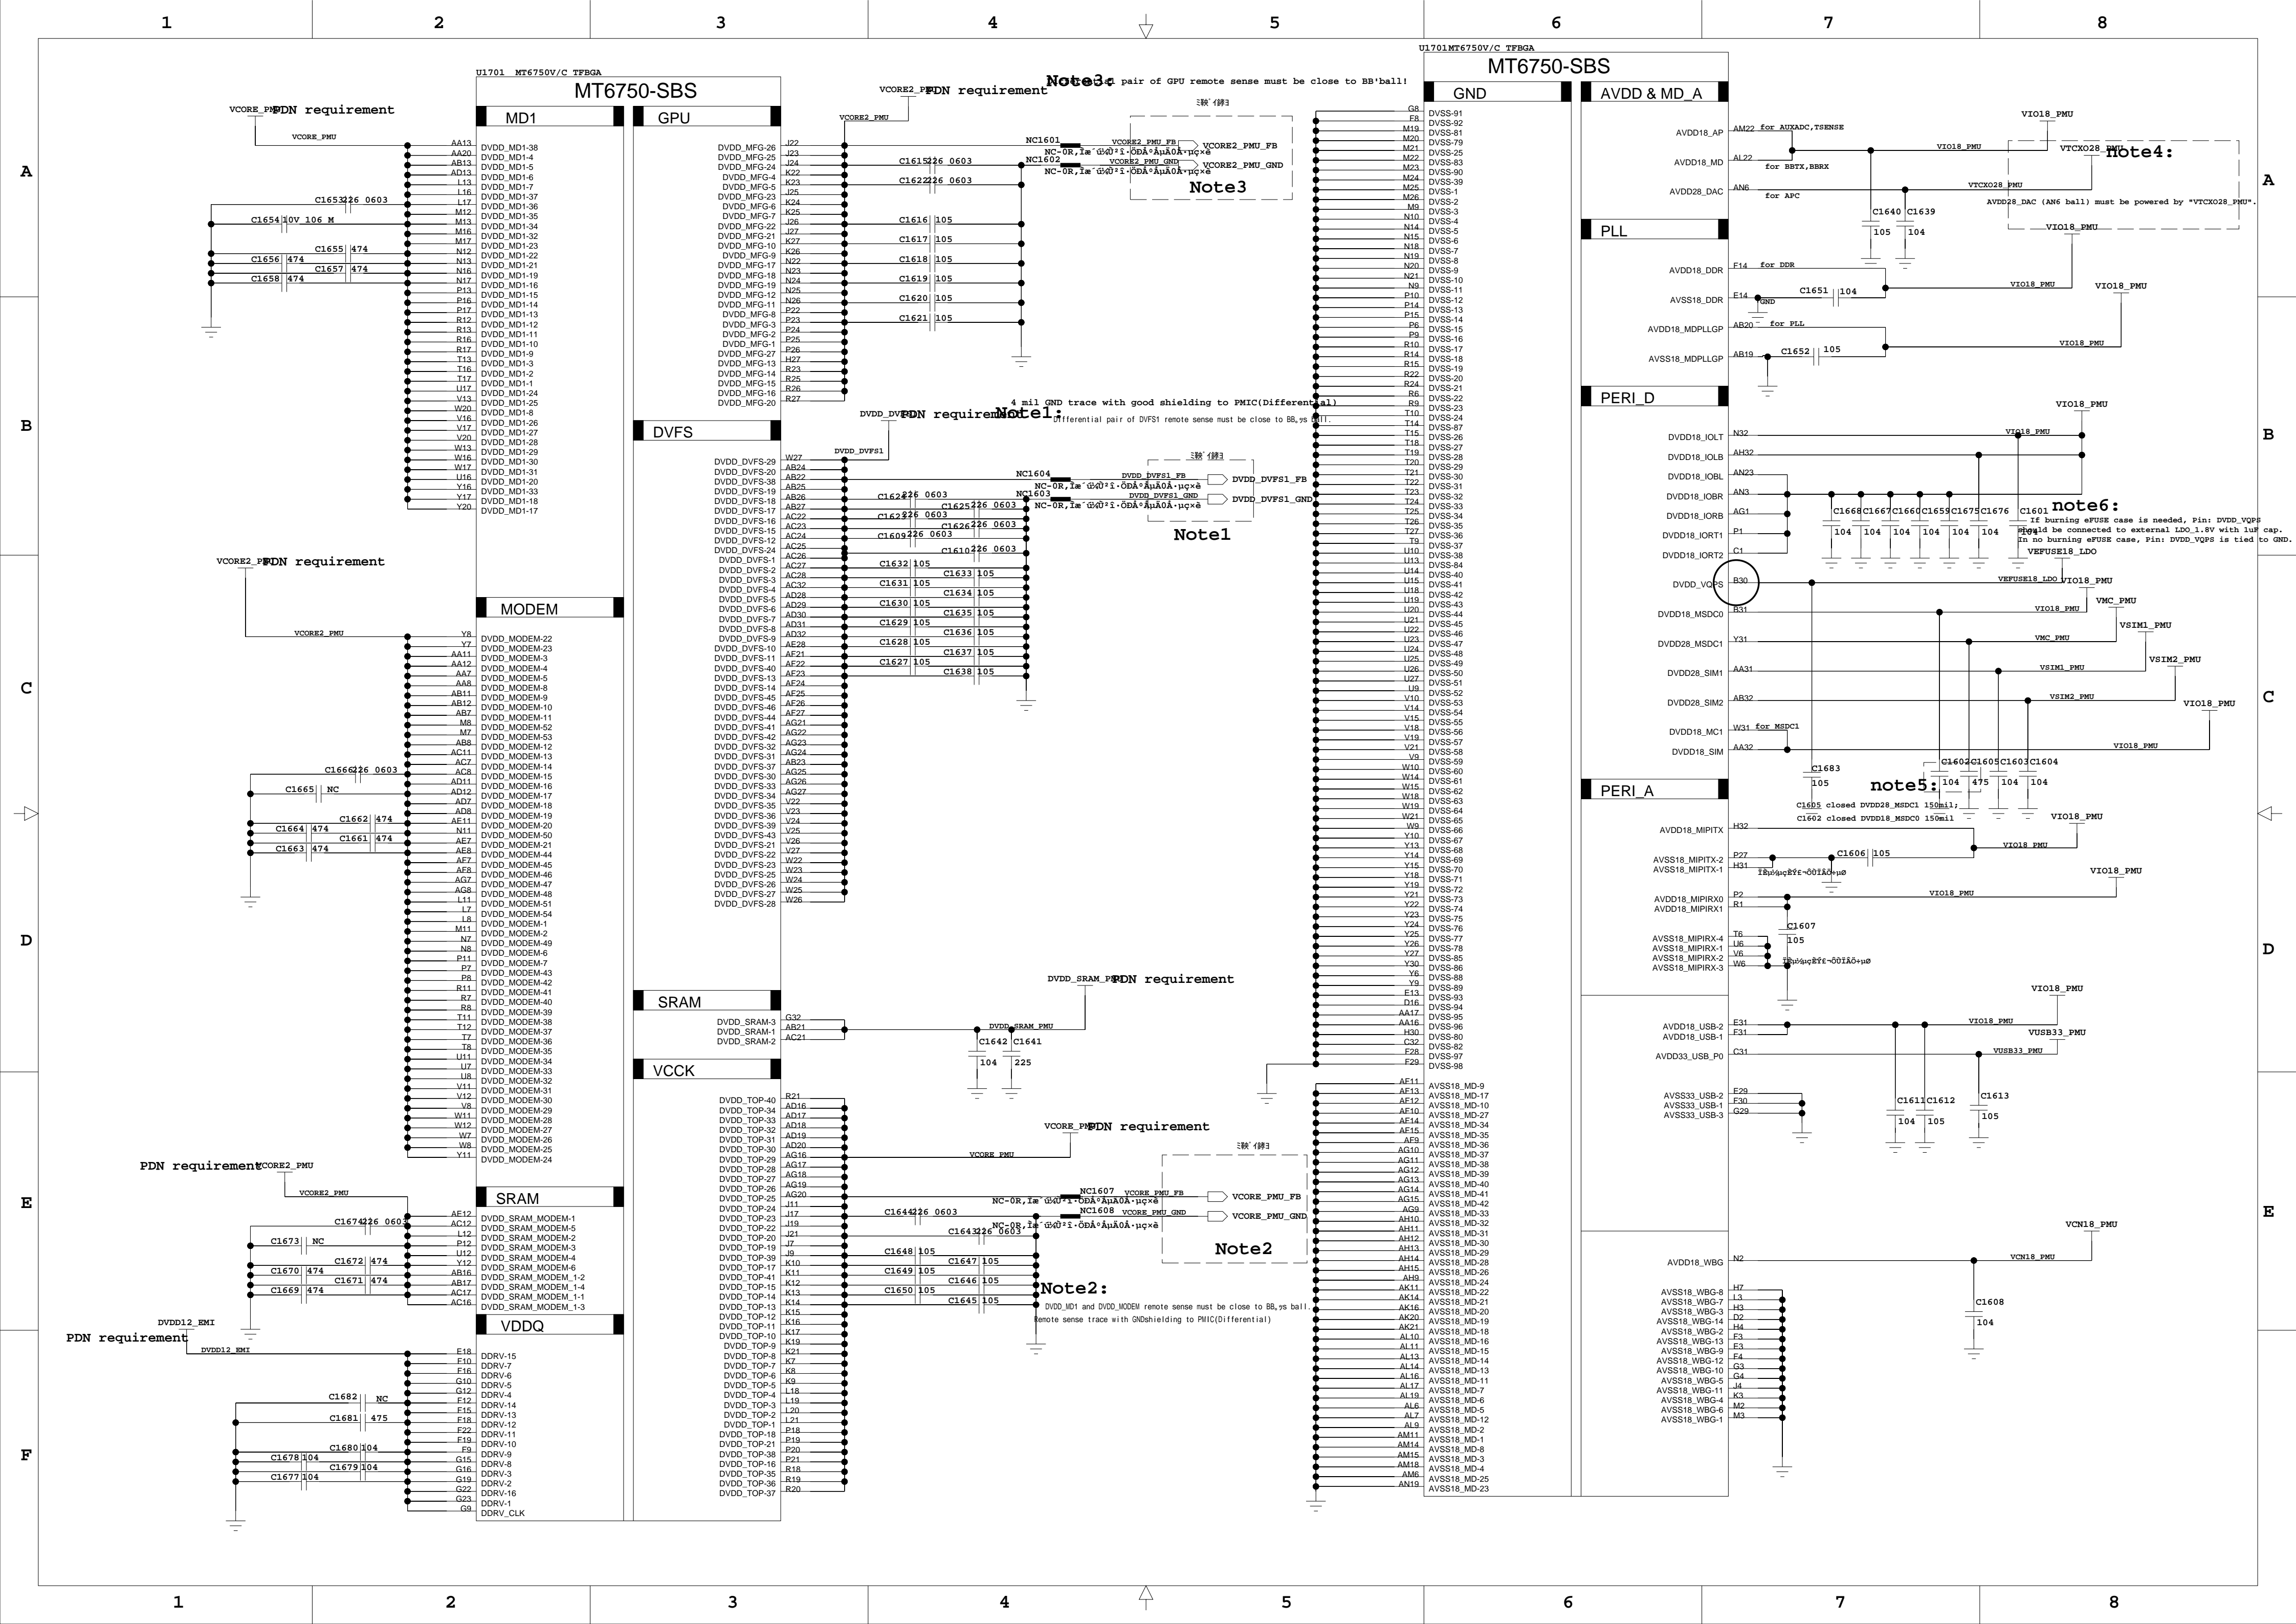

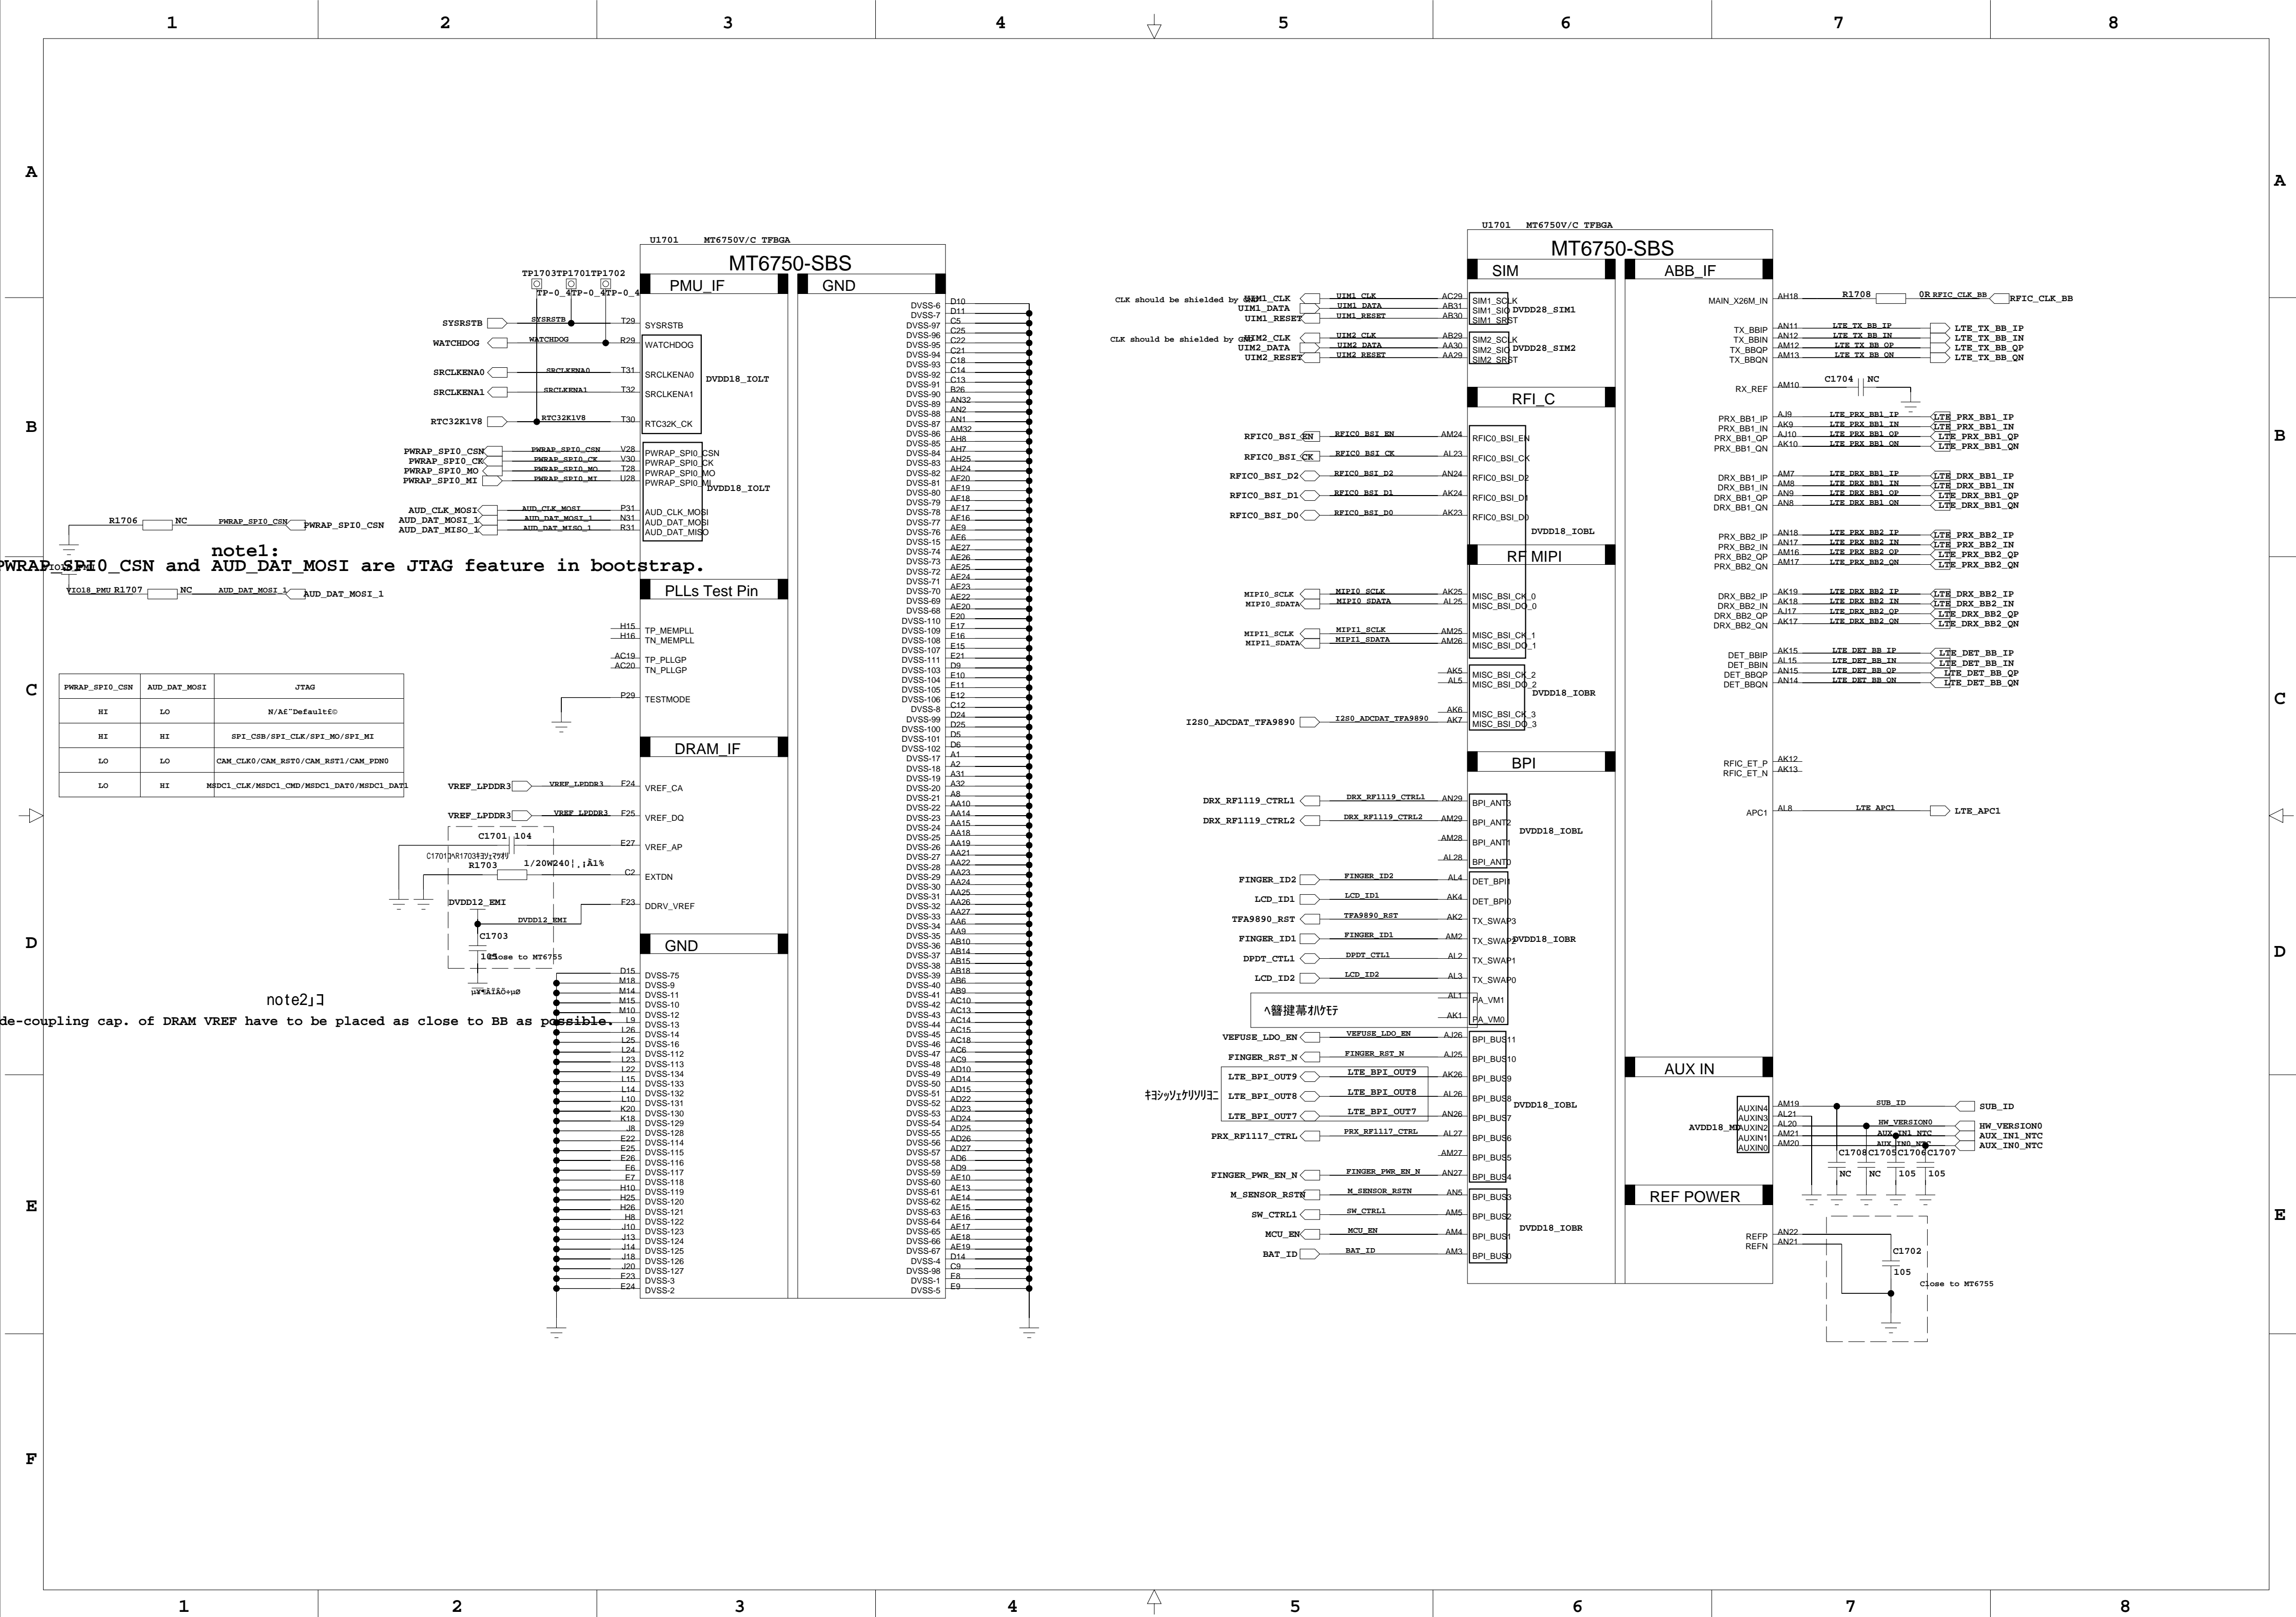

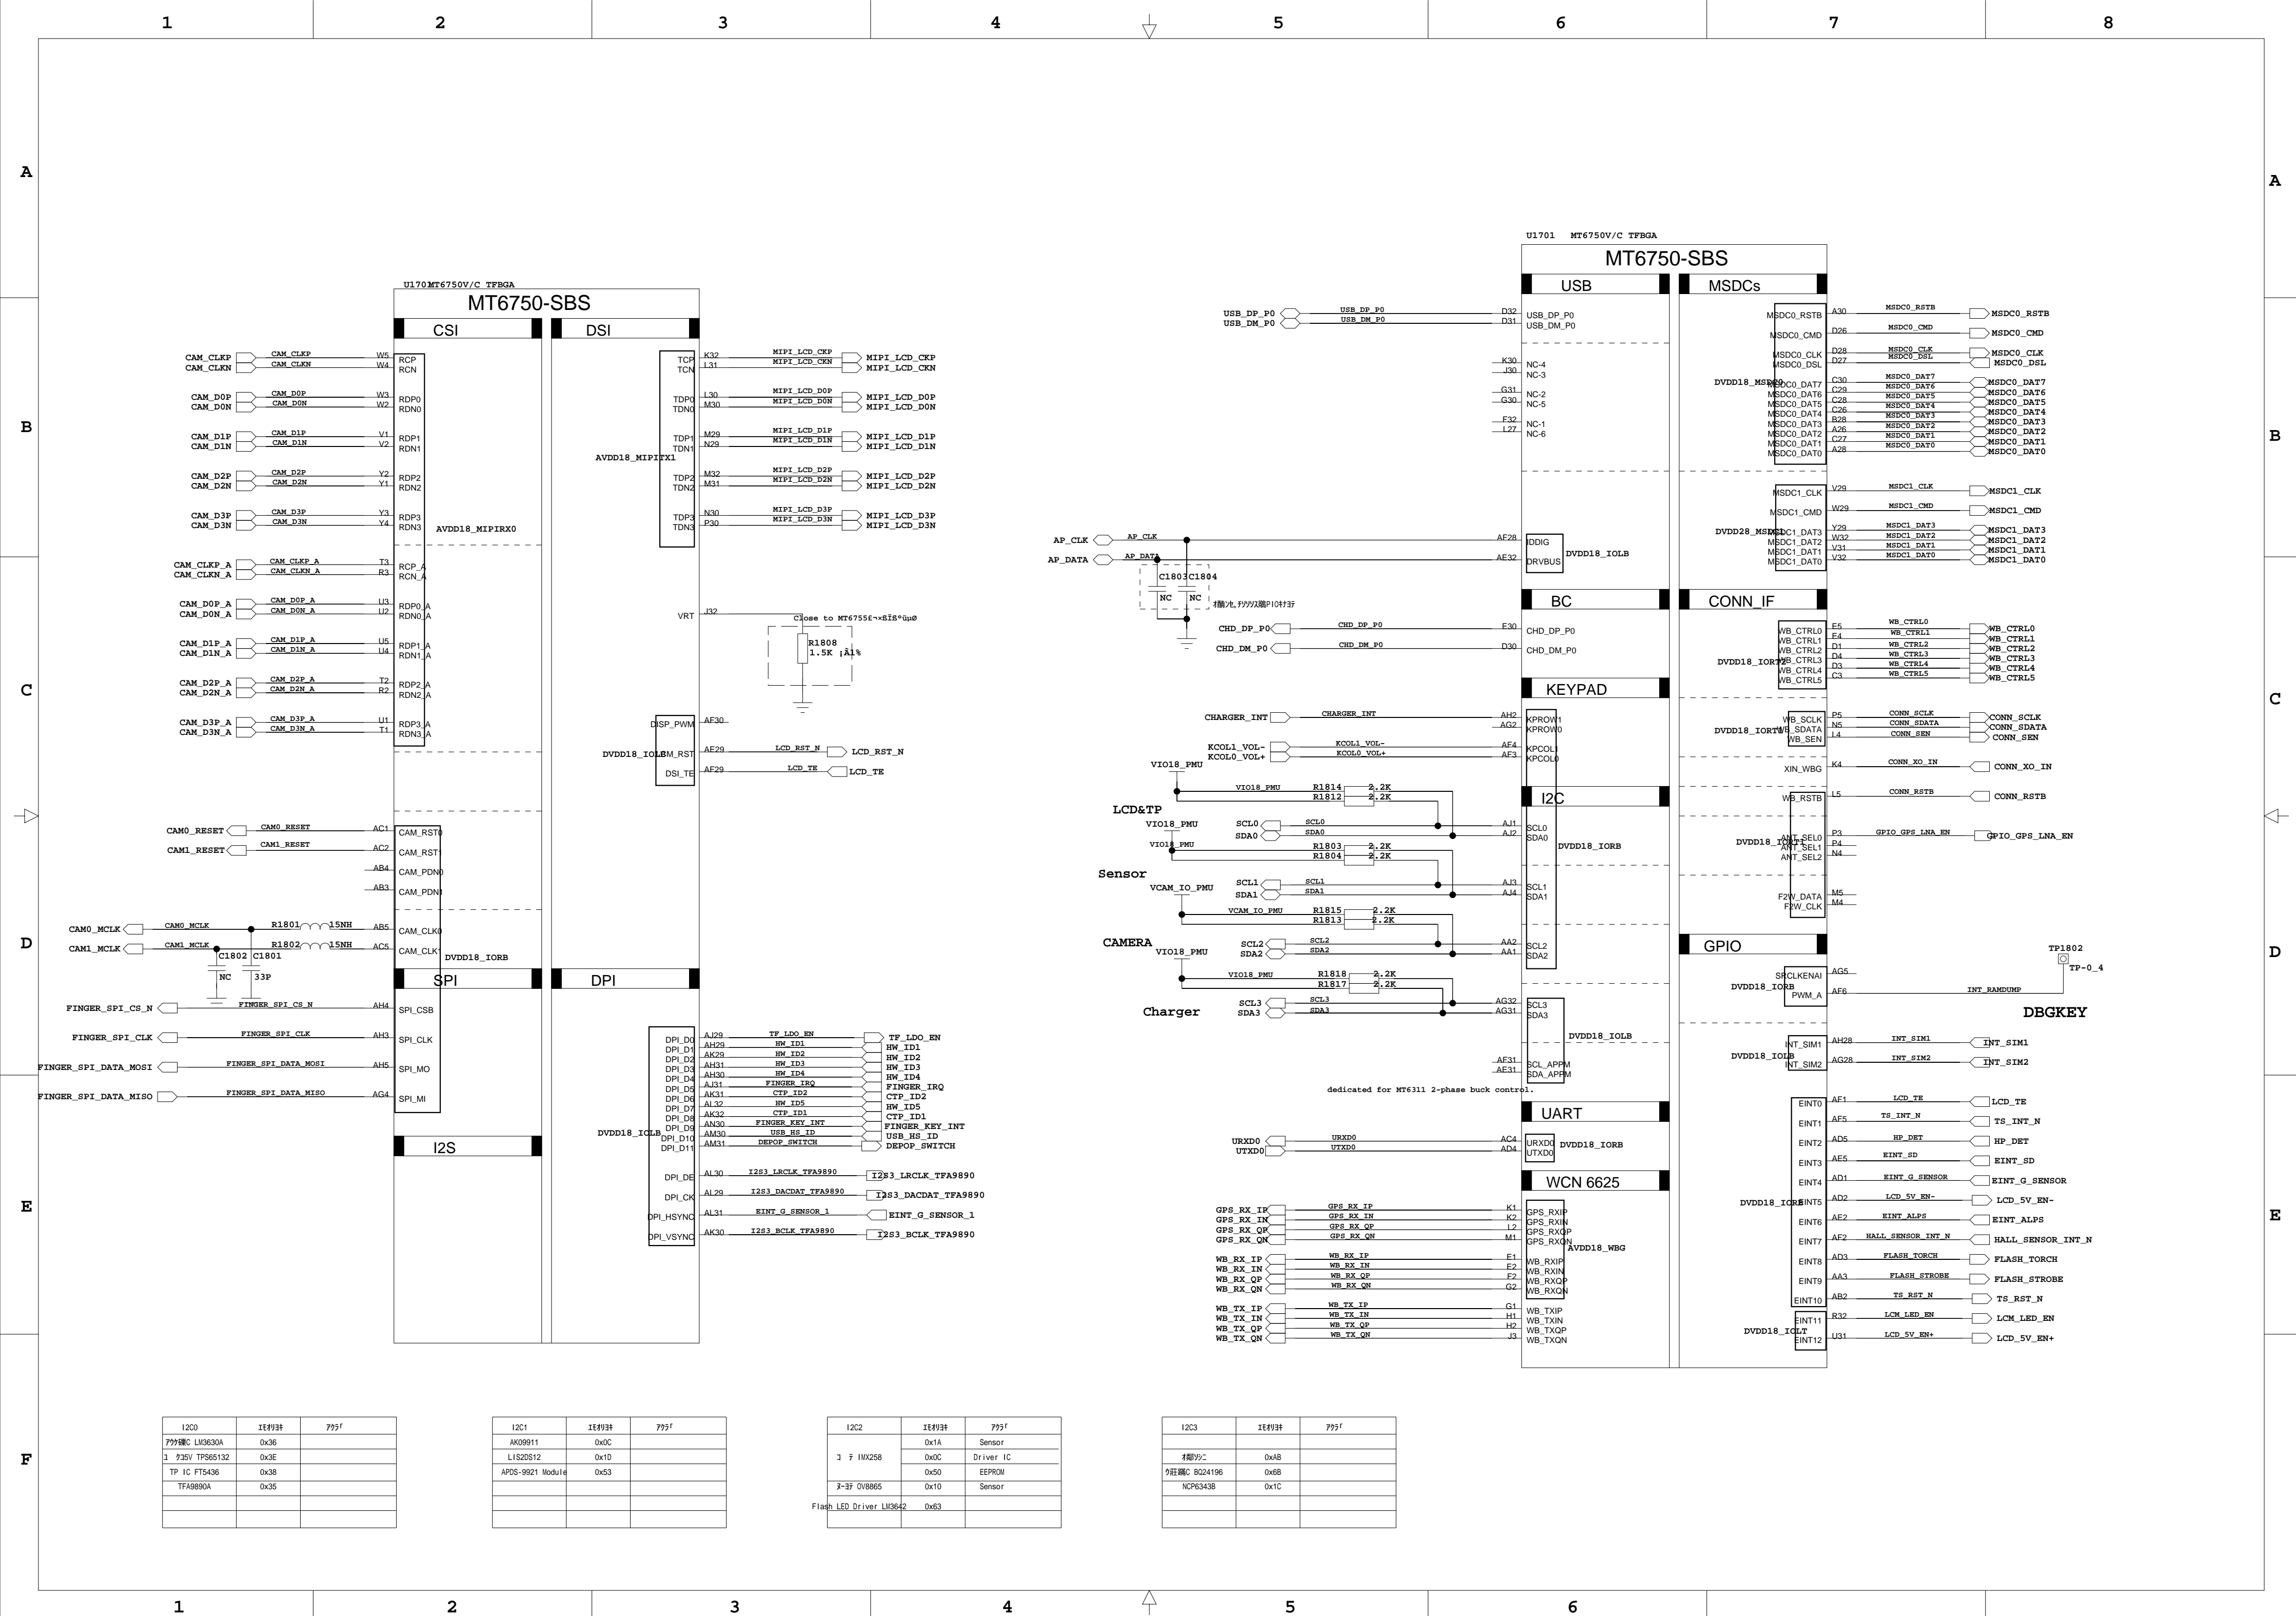


MT6353 HS KEEP

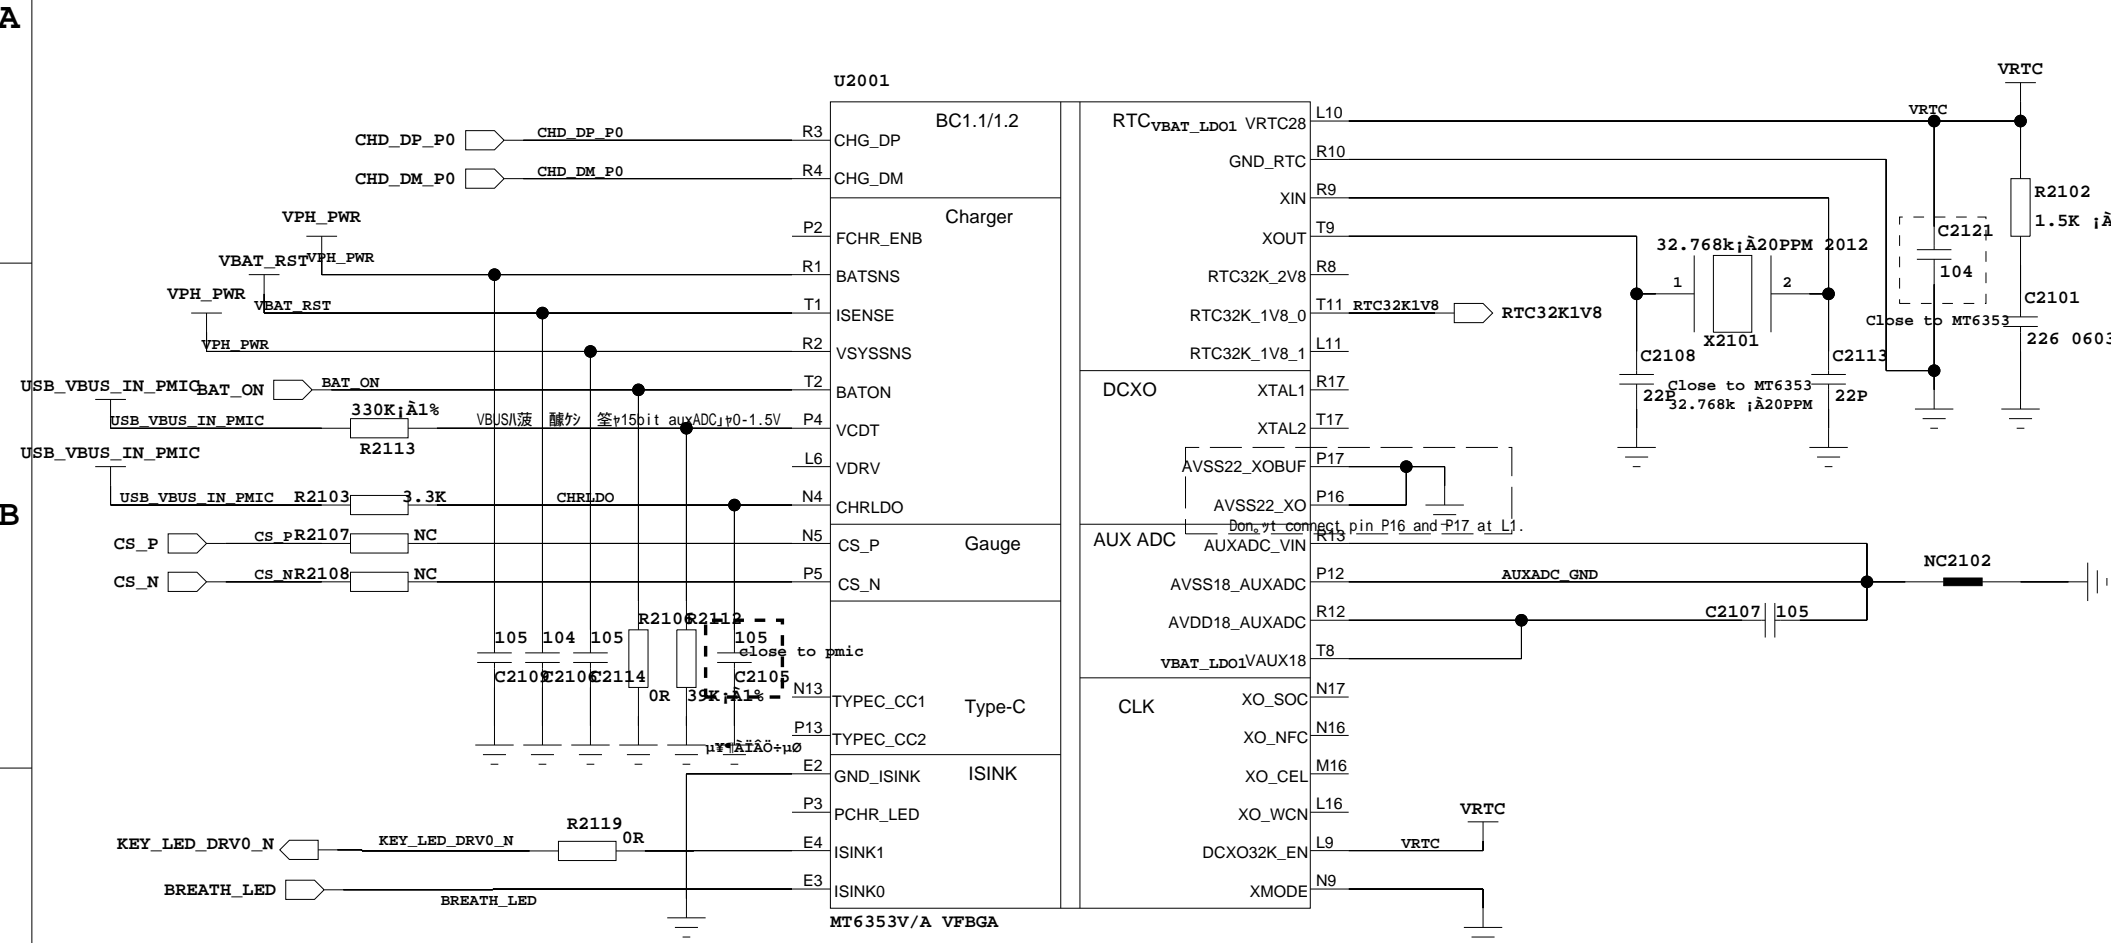


Charger	R2103
Ext. Switching Charger	3.3K
5V charger + MTK Pump Express	5K

DCXO32K_EN	XMODE	CLKOUT
1	0	VTCXO on MT6176 OFF XO in MT6353



DCX032K_EN	XMODE	CLK OUT
0	0	TCXO on MT6353
1	0	VTXCO on MT6176 (OFF XO in MT6353)
0	1	TSX on MT6353, w/ RTC
1	1	TSX on MT6353, w/o RTC

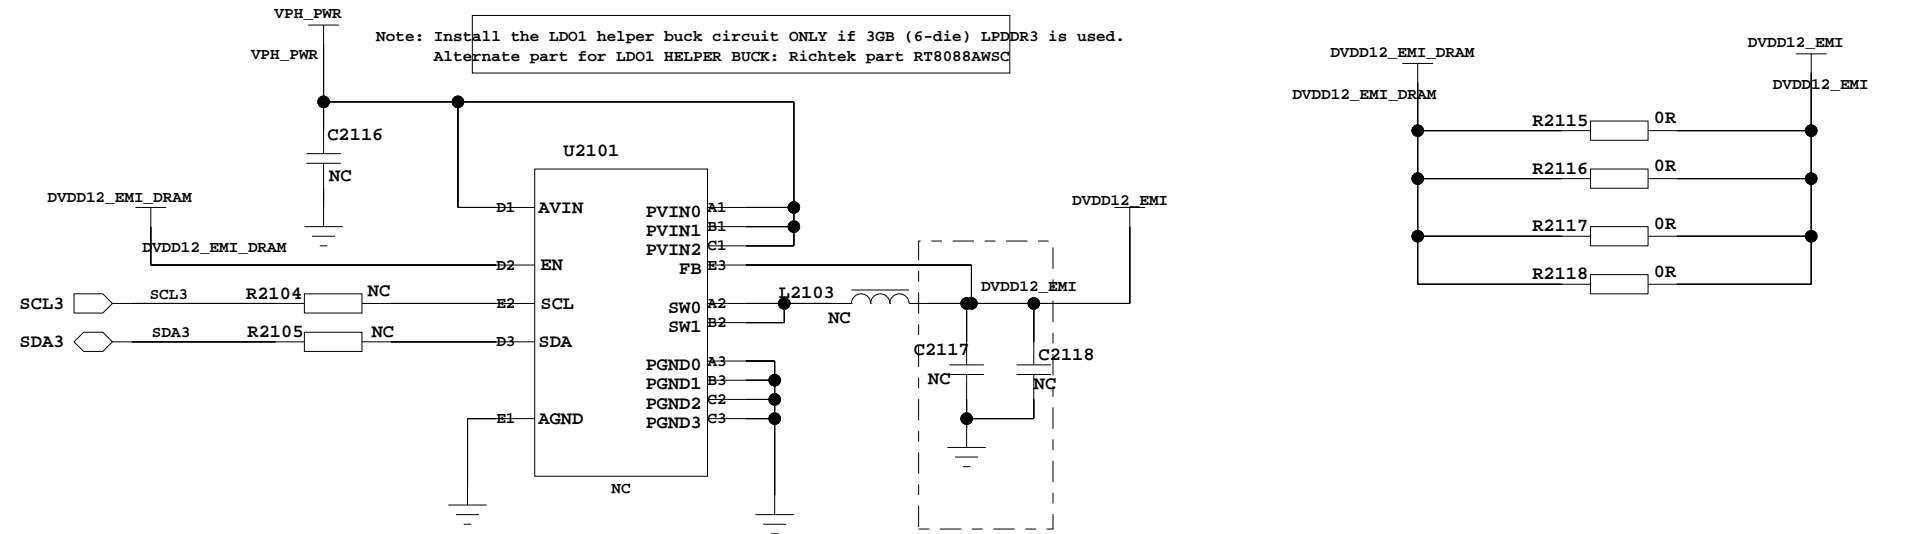


NCP6343B slave Address is 0x1C

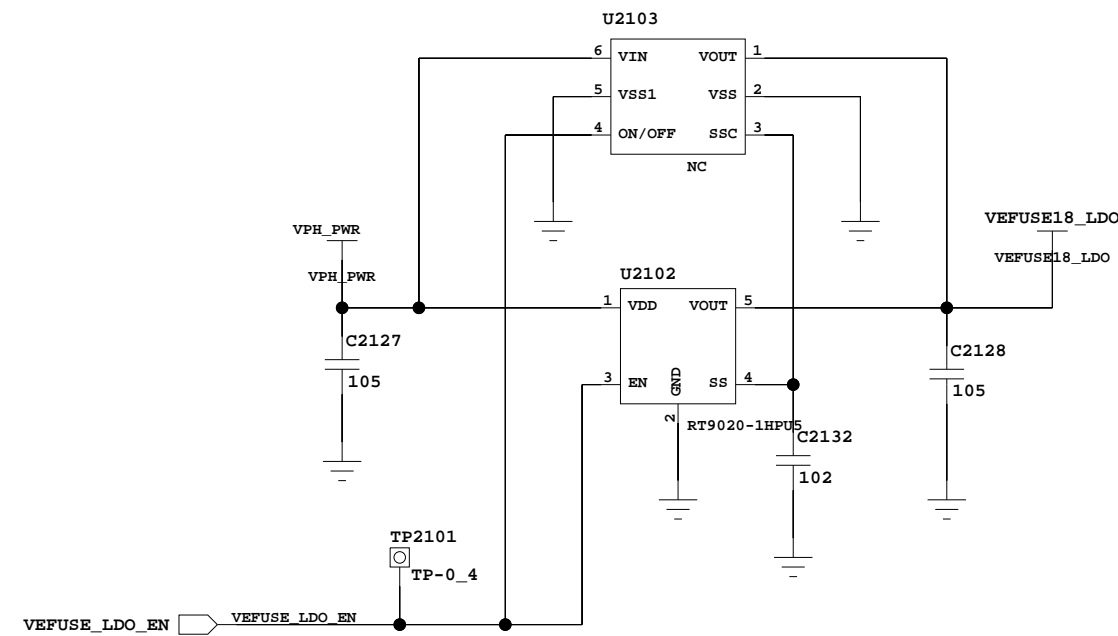

MT6353 Audio

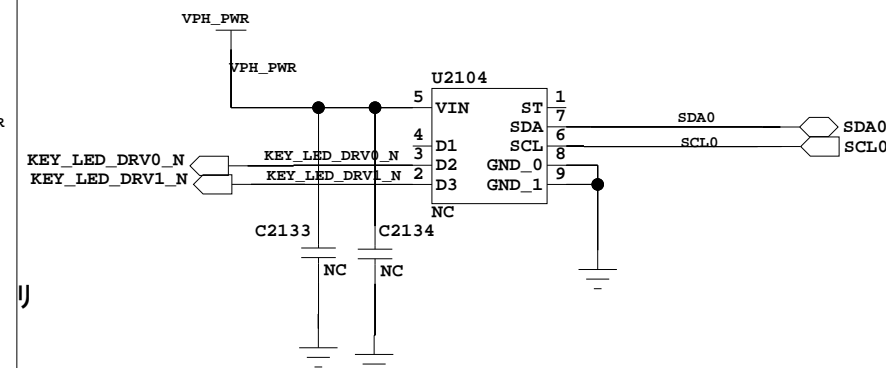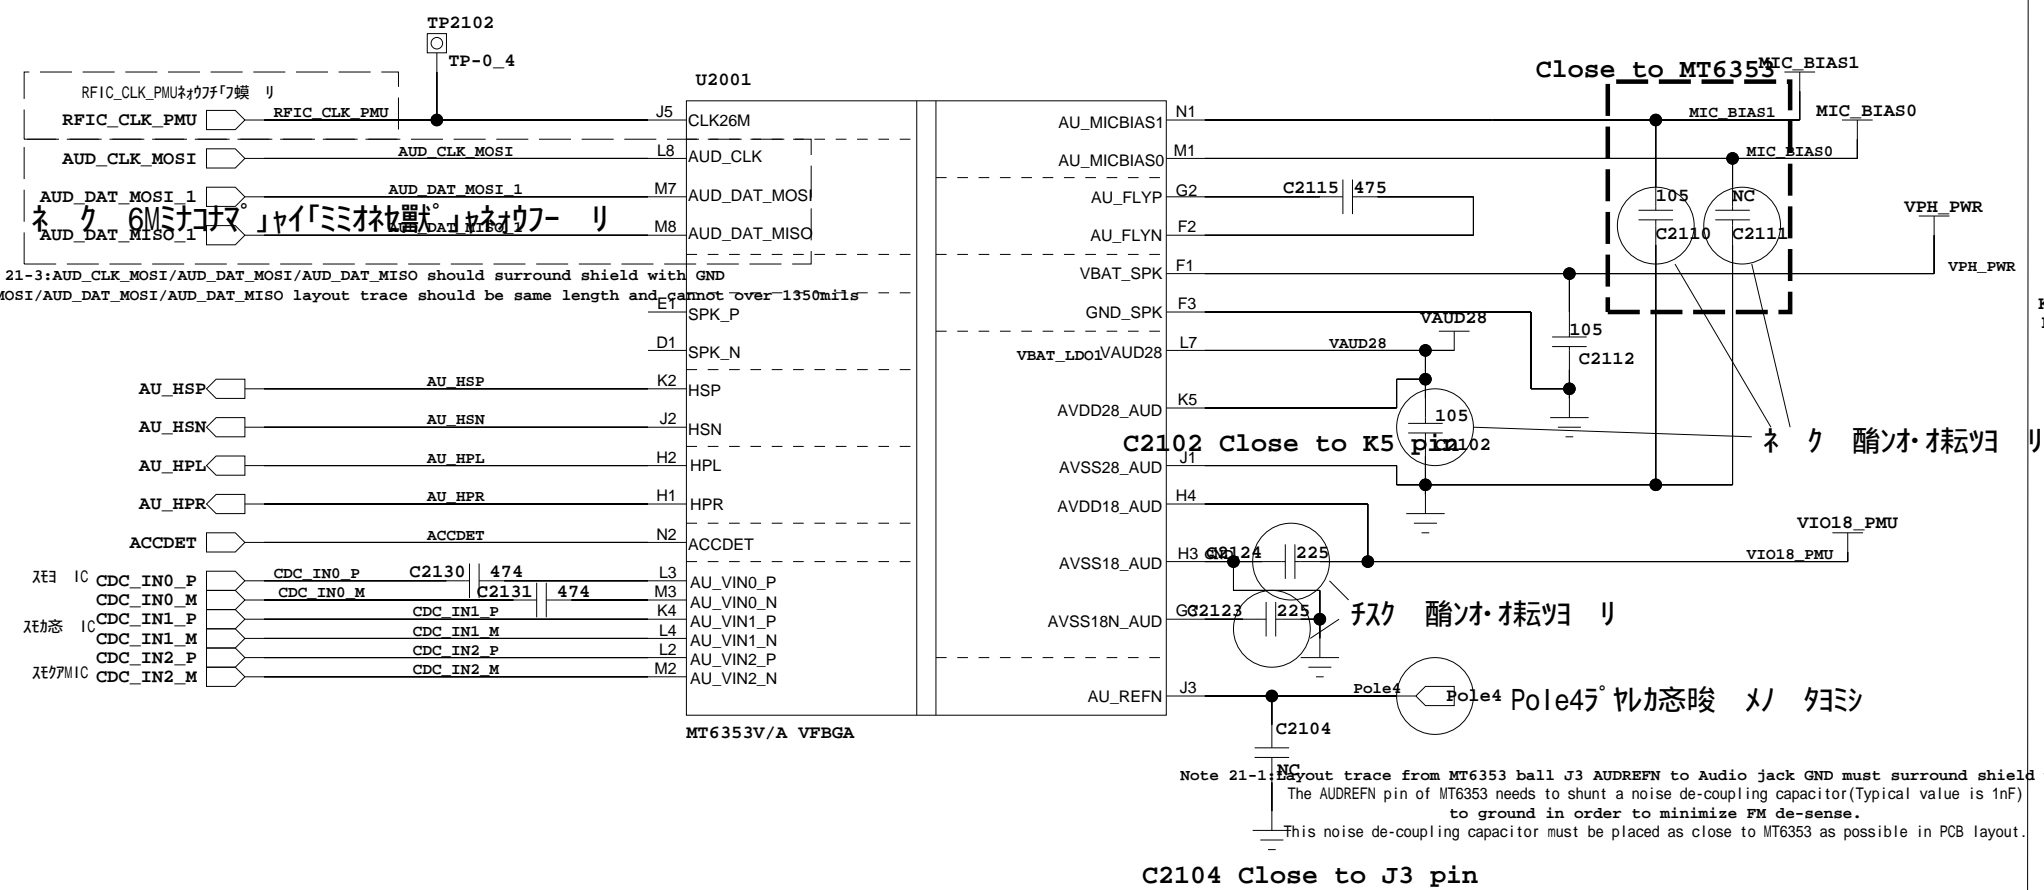

I2Cアドレス: 0x30h

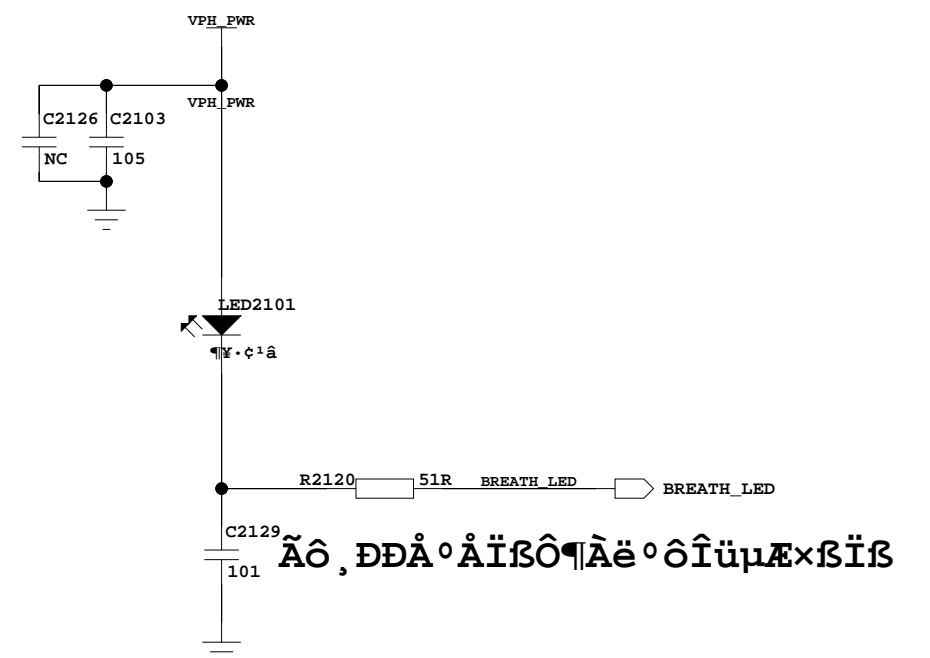

LCM Connector

A


B

C


D

E

F

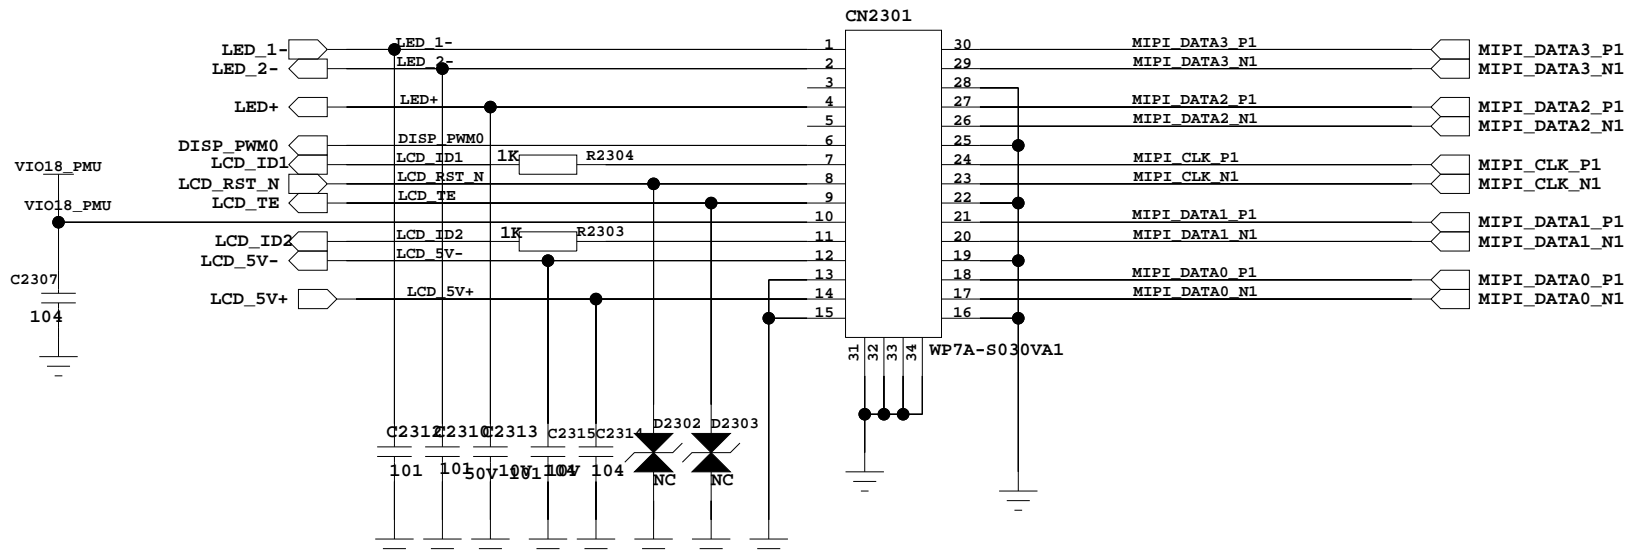

DSI CMF

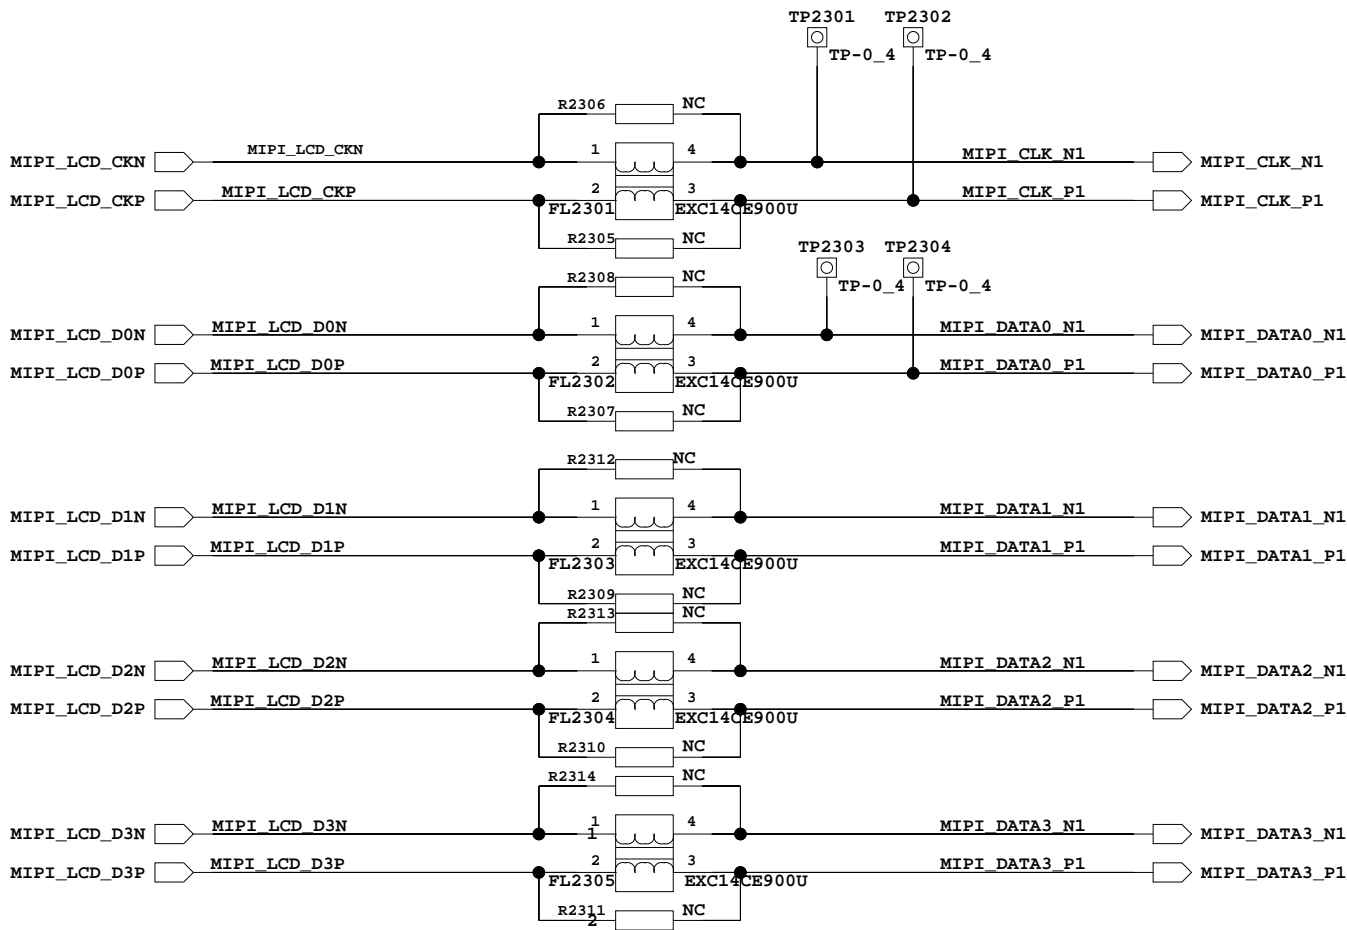

A

B

C


D

E

F

LCD 0.75V Driver


ツ贏アIC」ヤラ「メ筈シヨホサヨモヲヲ

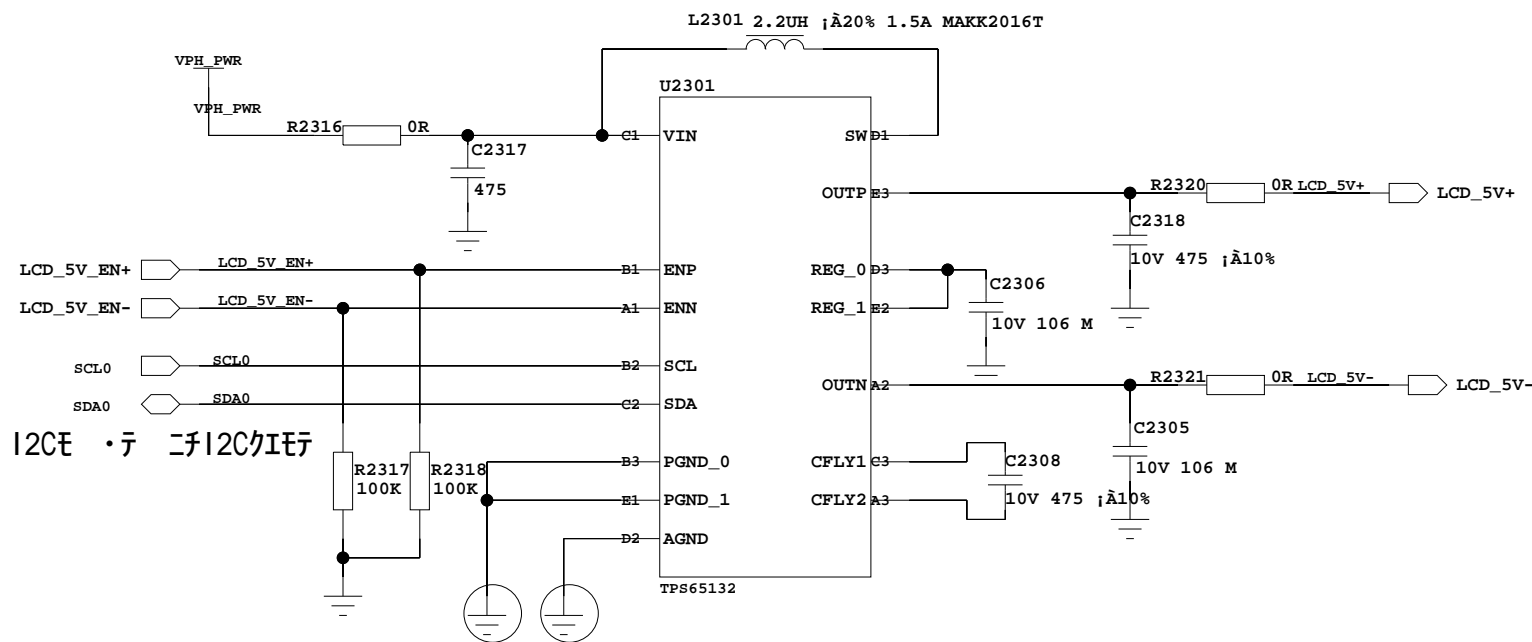


リ tps65132 slave address 0X3E

LCD BL

ツ贏アIC」ヤラ「メ筈シヨホサヨモヲヲ

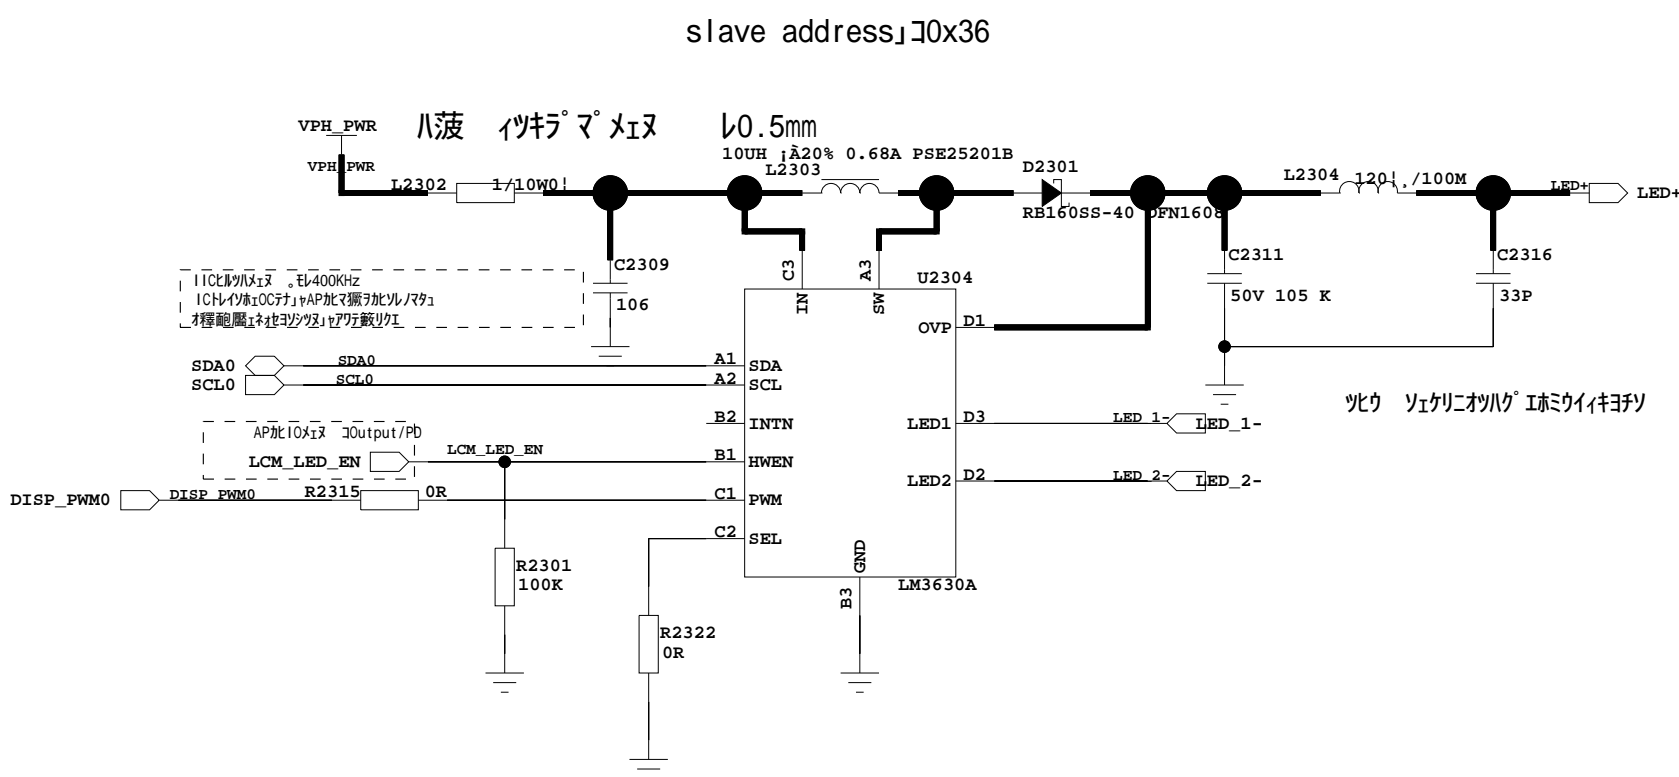


G-Sensor

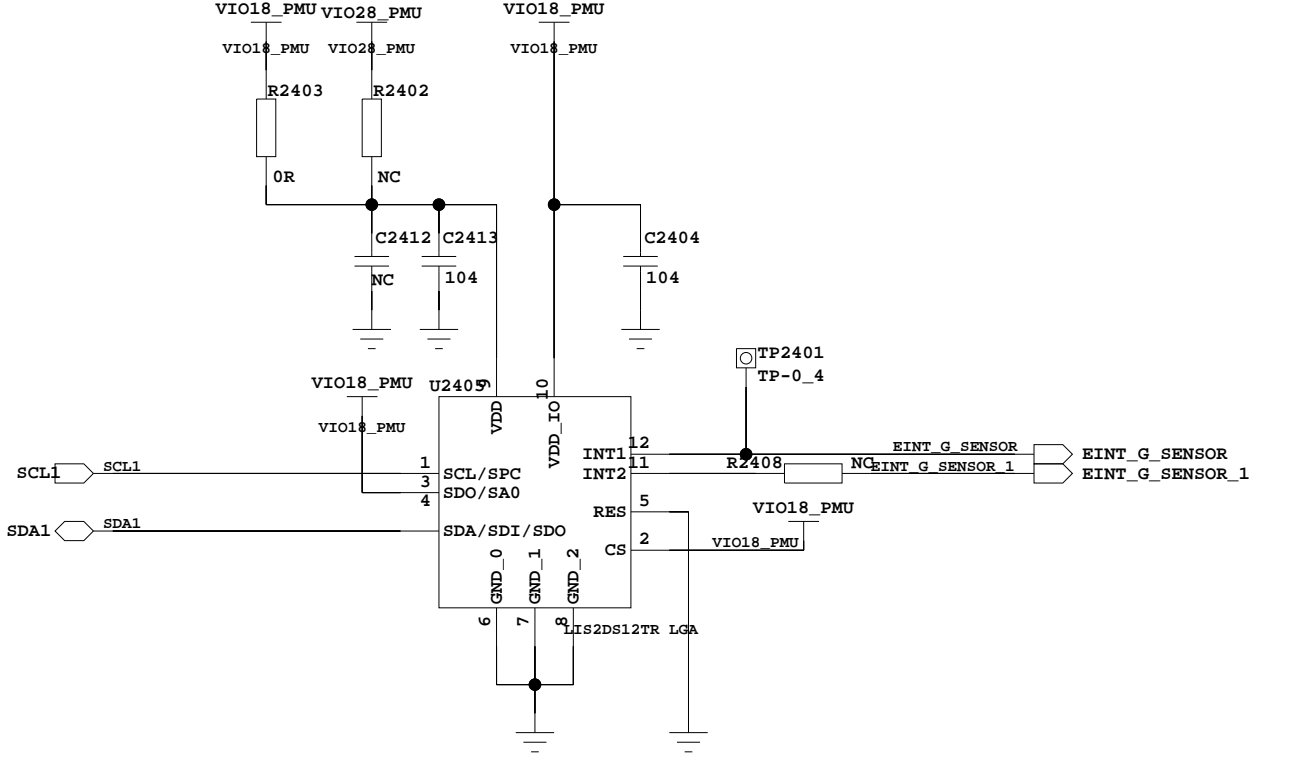

I2C slave Address is 0x1D


SA0	slave ADDR
0	0x1E
1(VDD)	0x1D

A.L.S.+P.S sensor

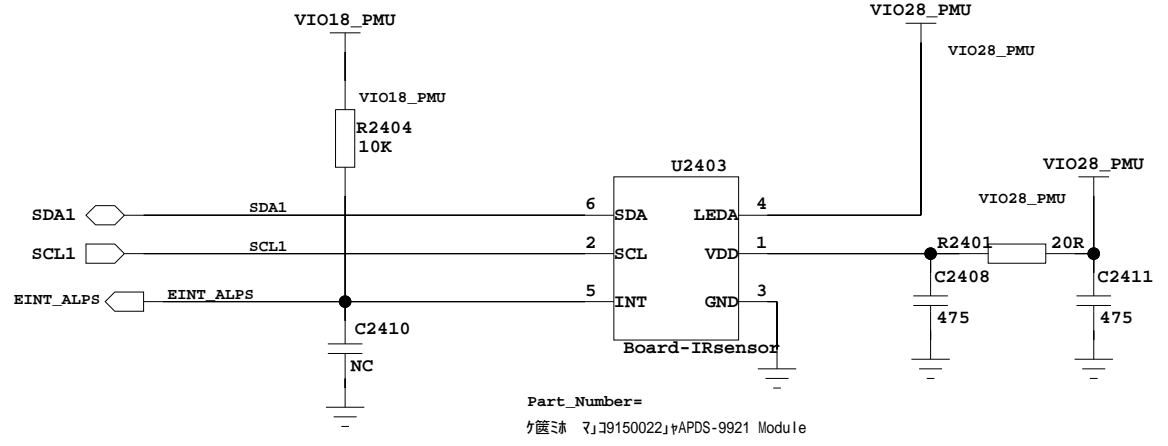


APDS9921 slave Address is 0x53

Hall sensor

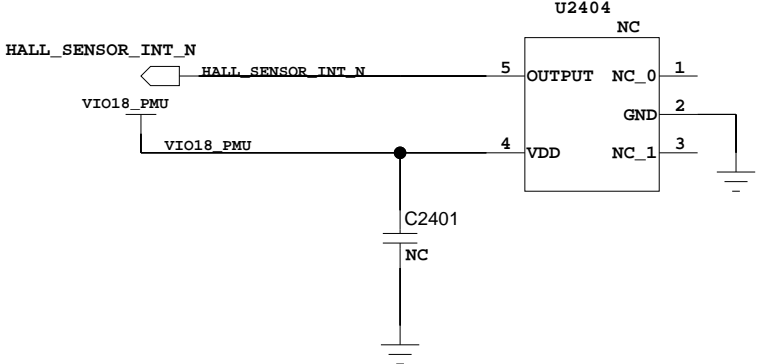


M Sensor

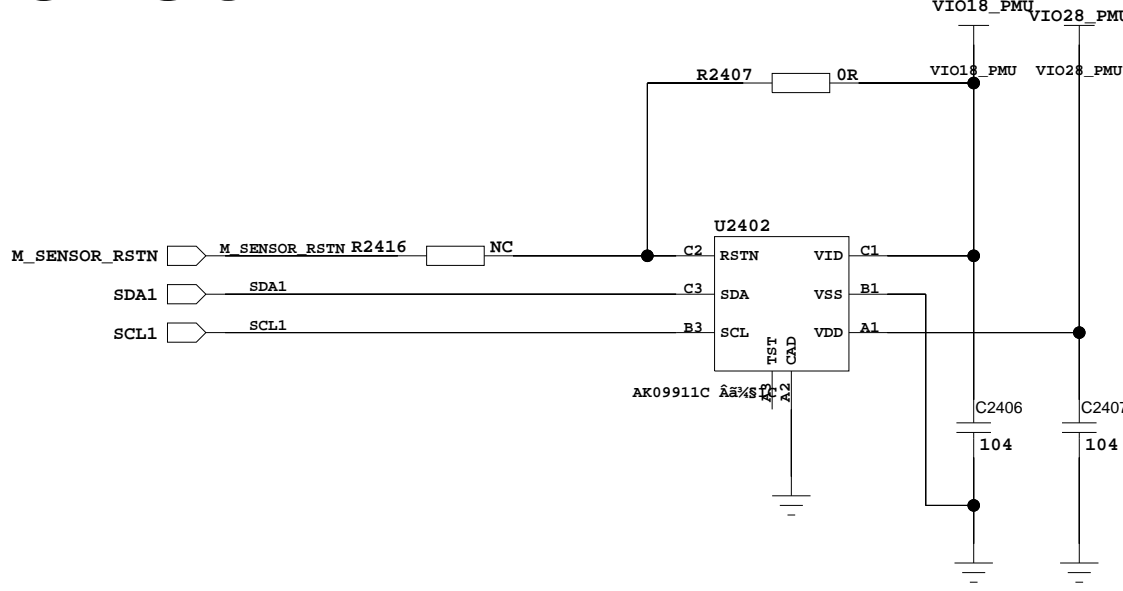


AK09911 slave Address is 0x0C

CAD	slave ADDR
0	0x0C
1(VDD)	0x0D


SIM1 Card

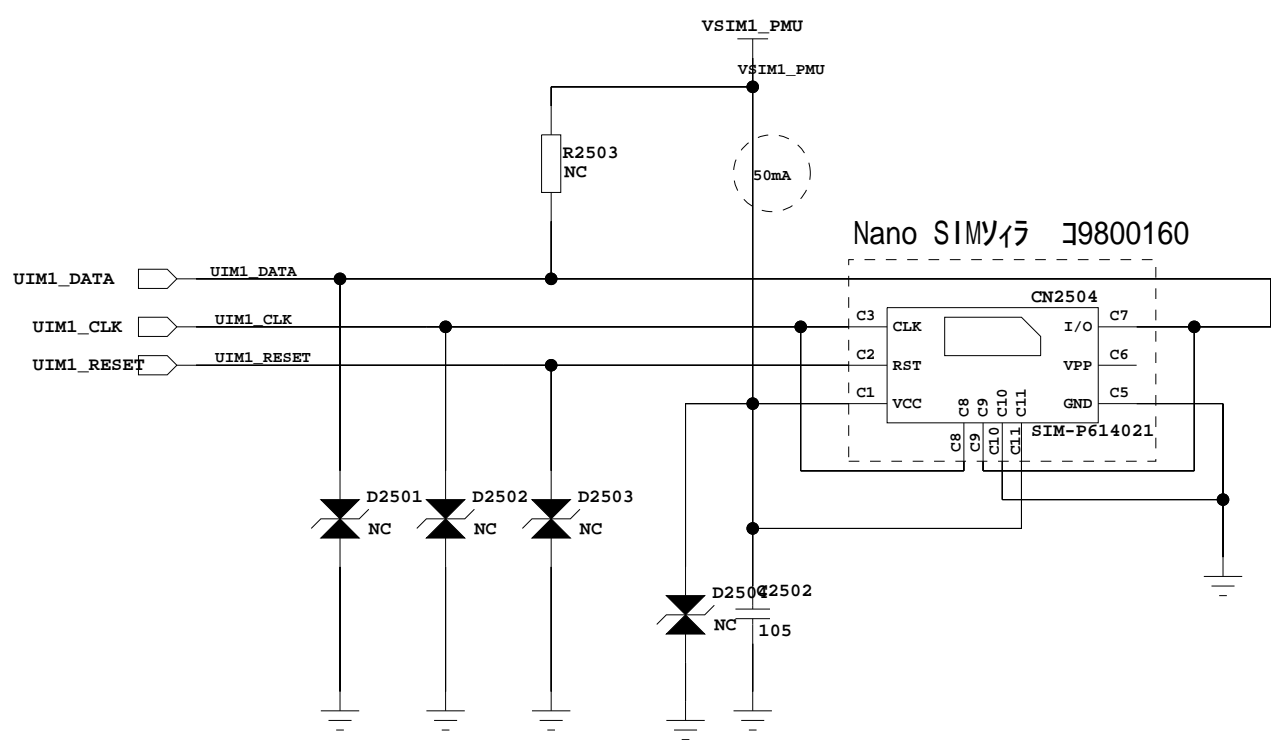


SIM2 Card

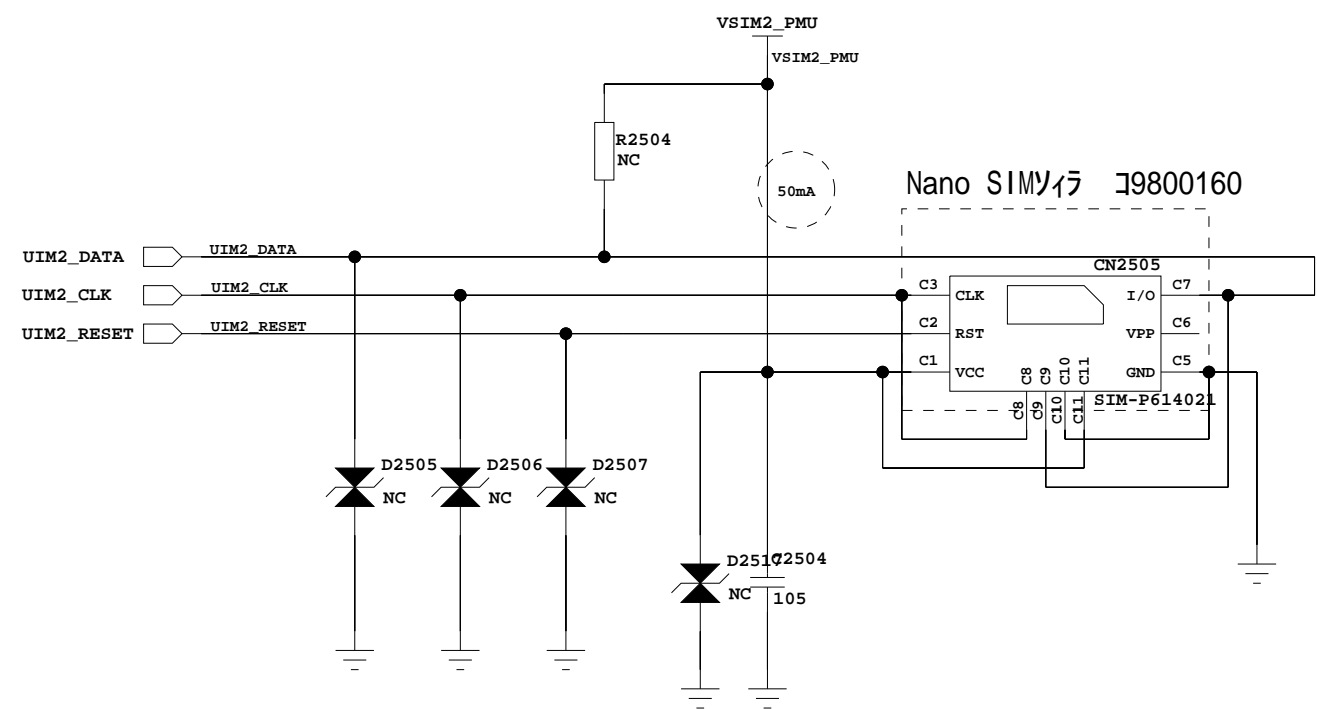

TF_CARD

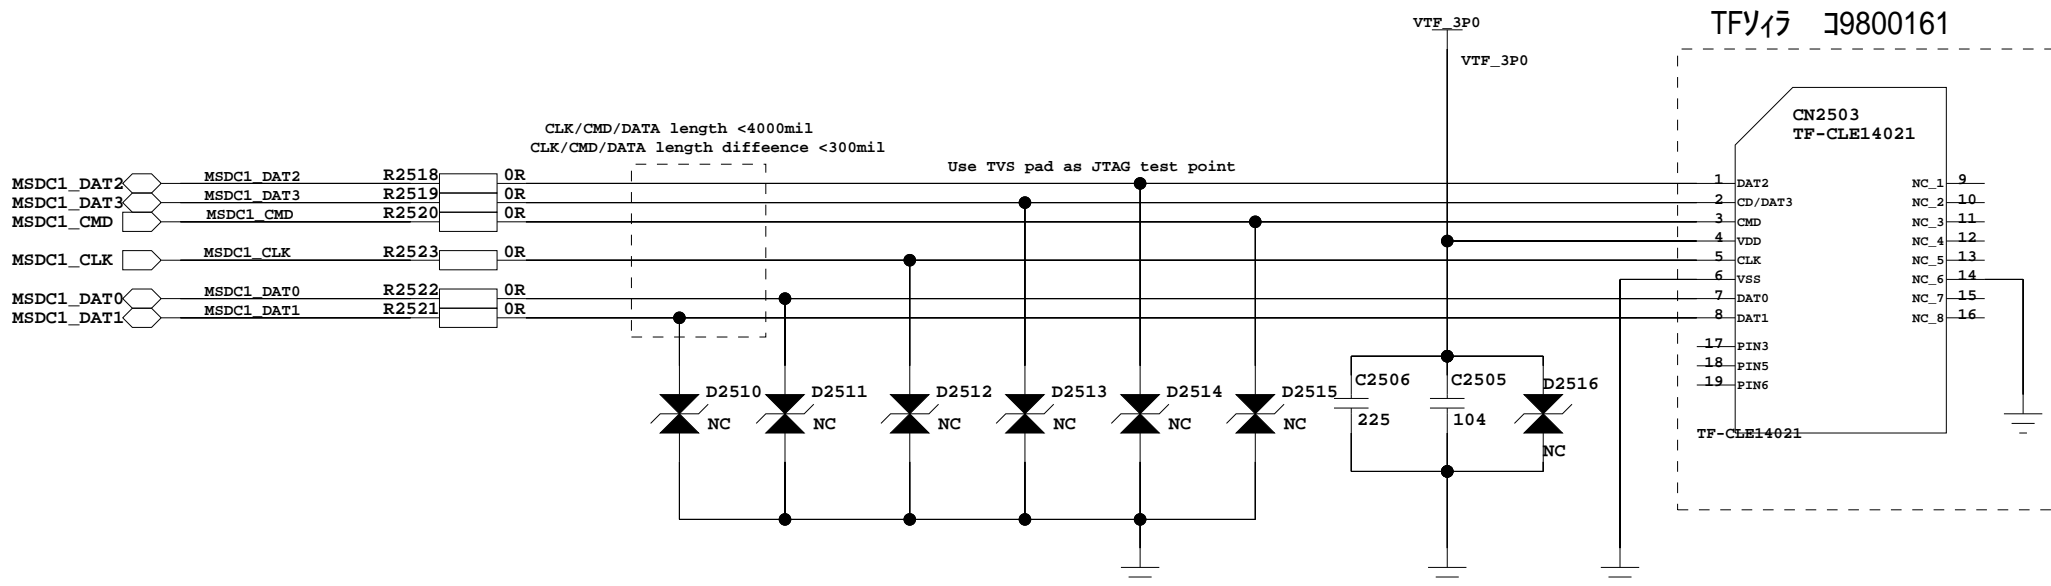


Hot plug: Ext 2.95V supply

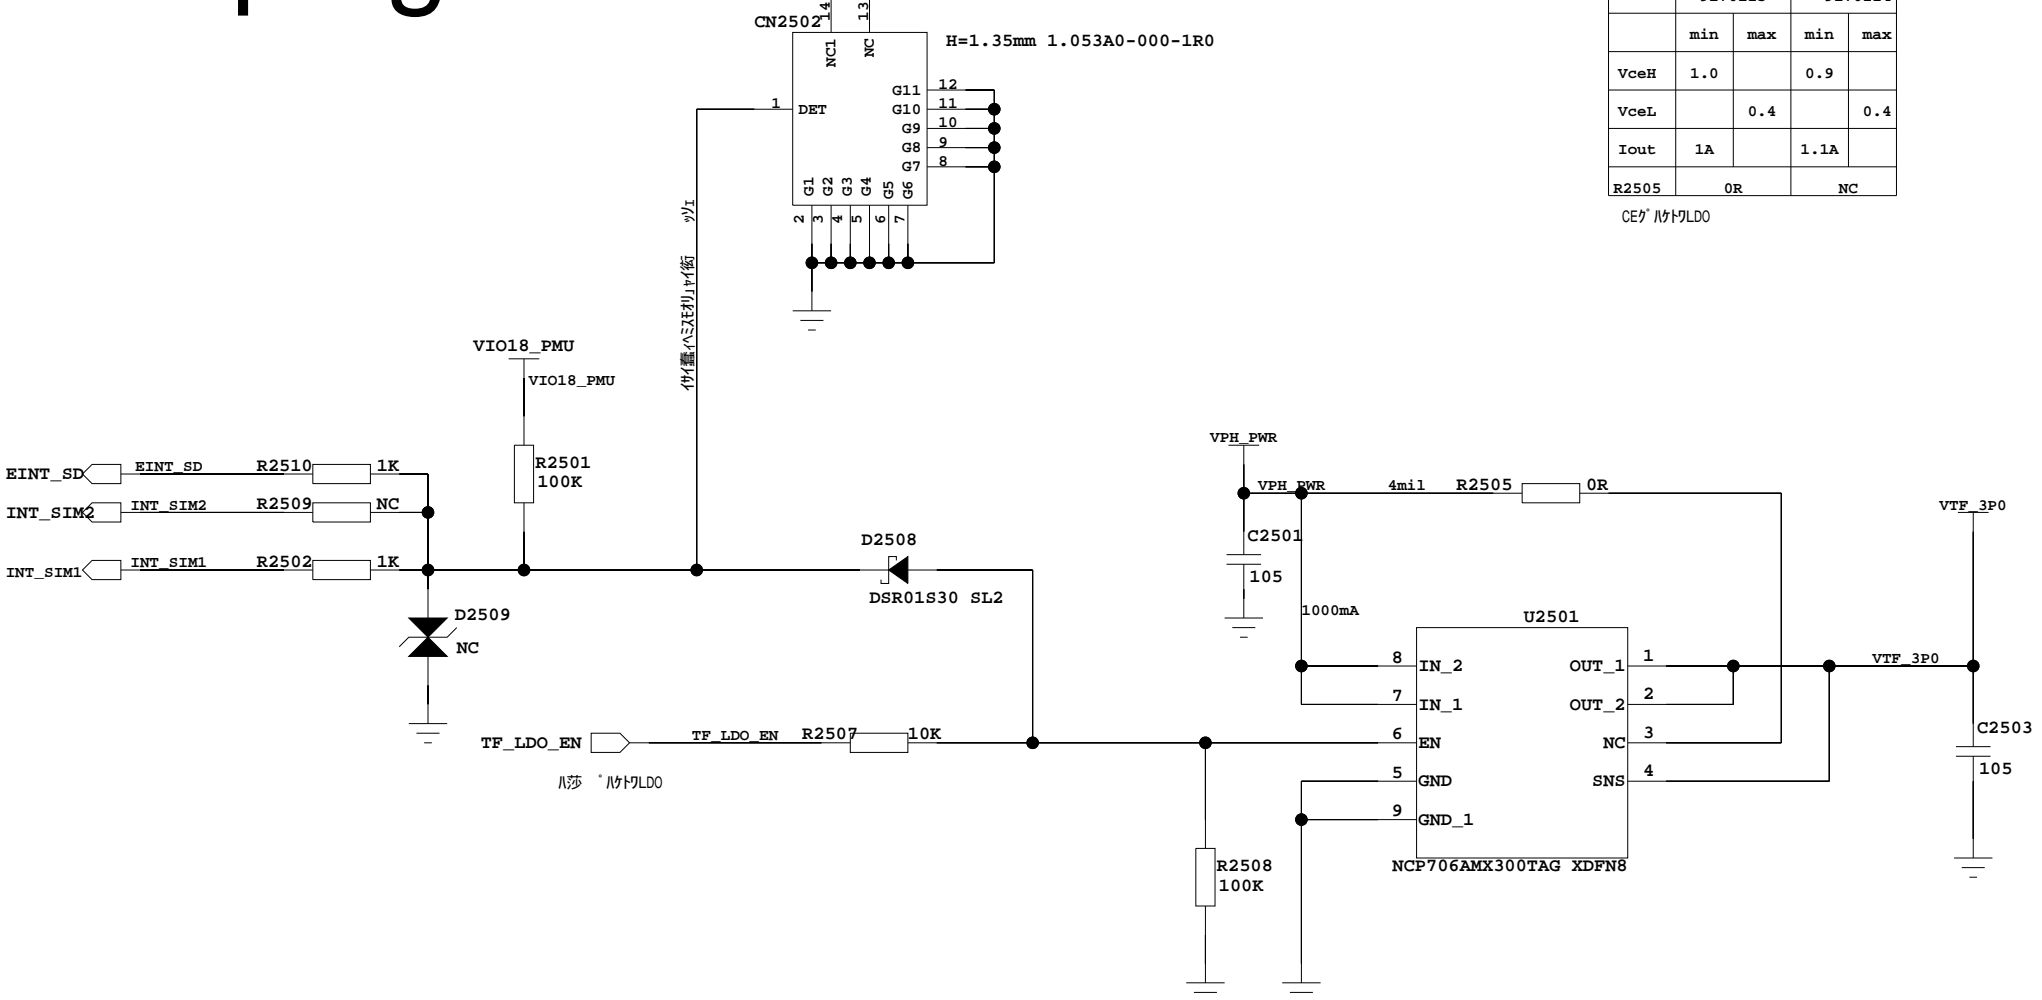


	RP115L301D 9170125		NCP706A 9170224	
	min	max	min	max
VceH	1.0		0.9	
VceL		0.4		0.4
Iout	1A		1.1A	
R2505	OR		NC	


Main CAMERA

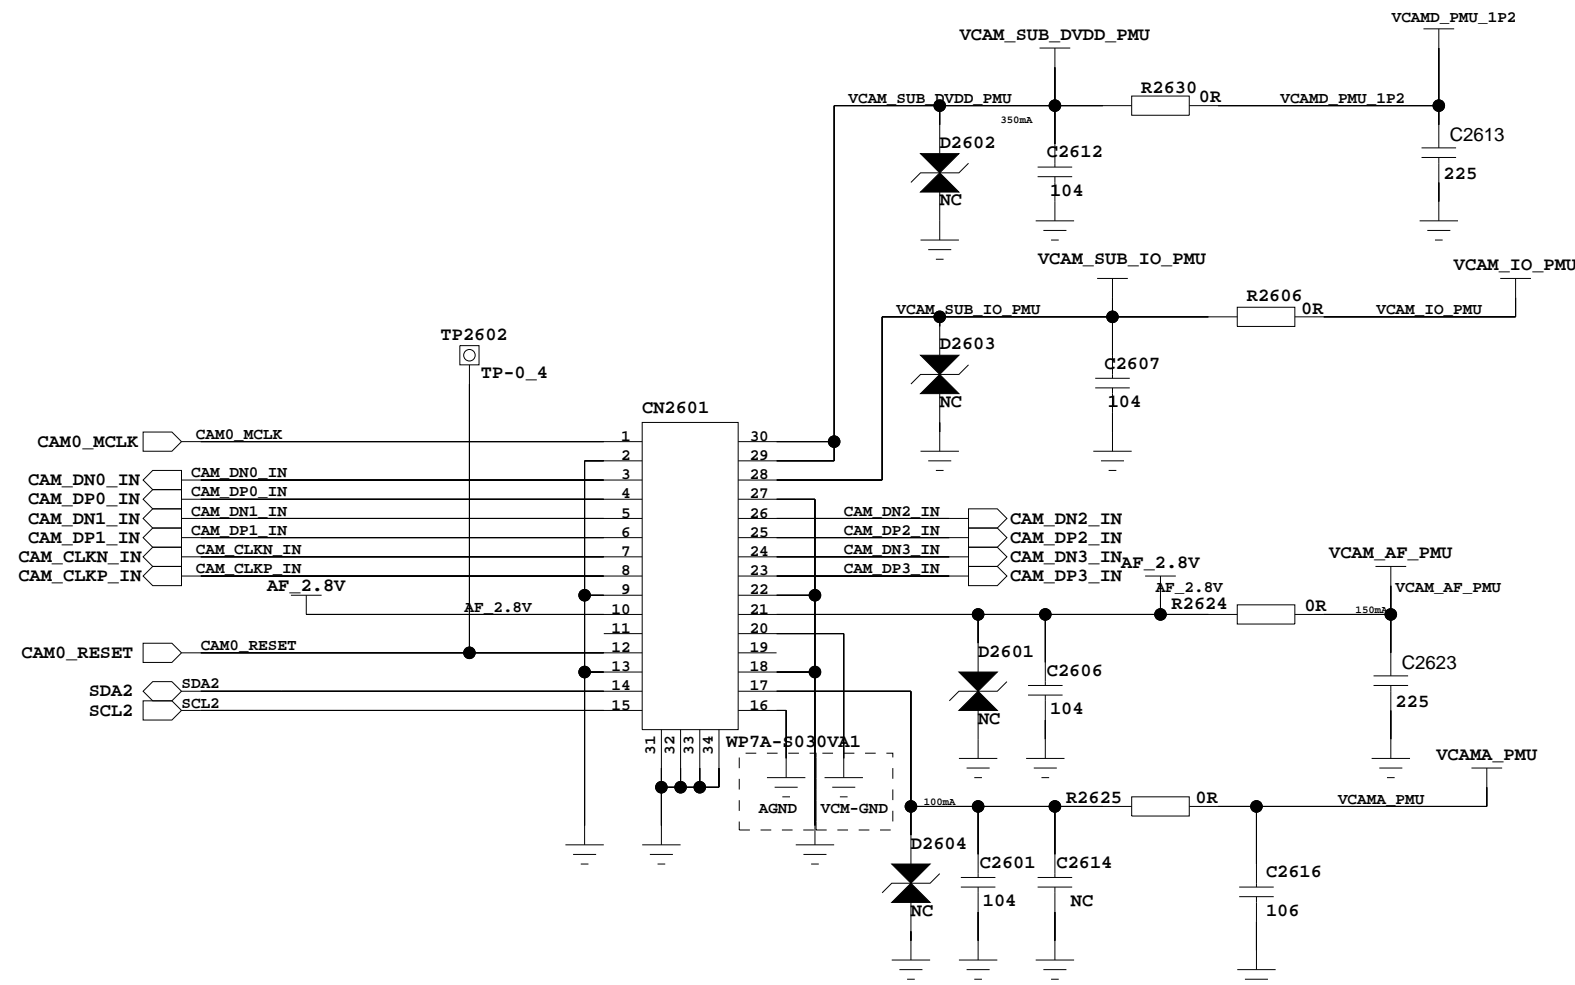

SUB_Camera

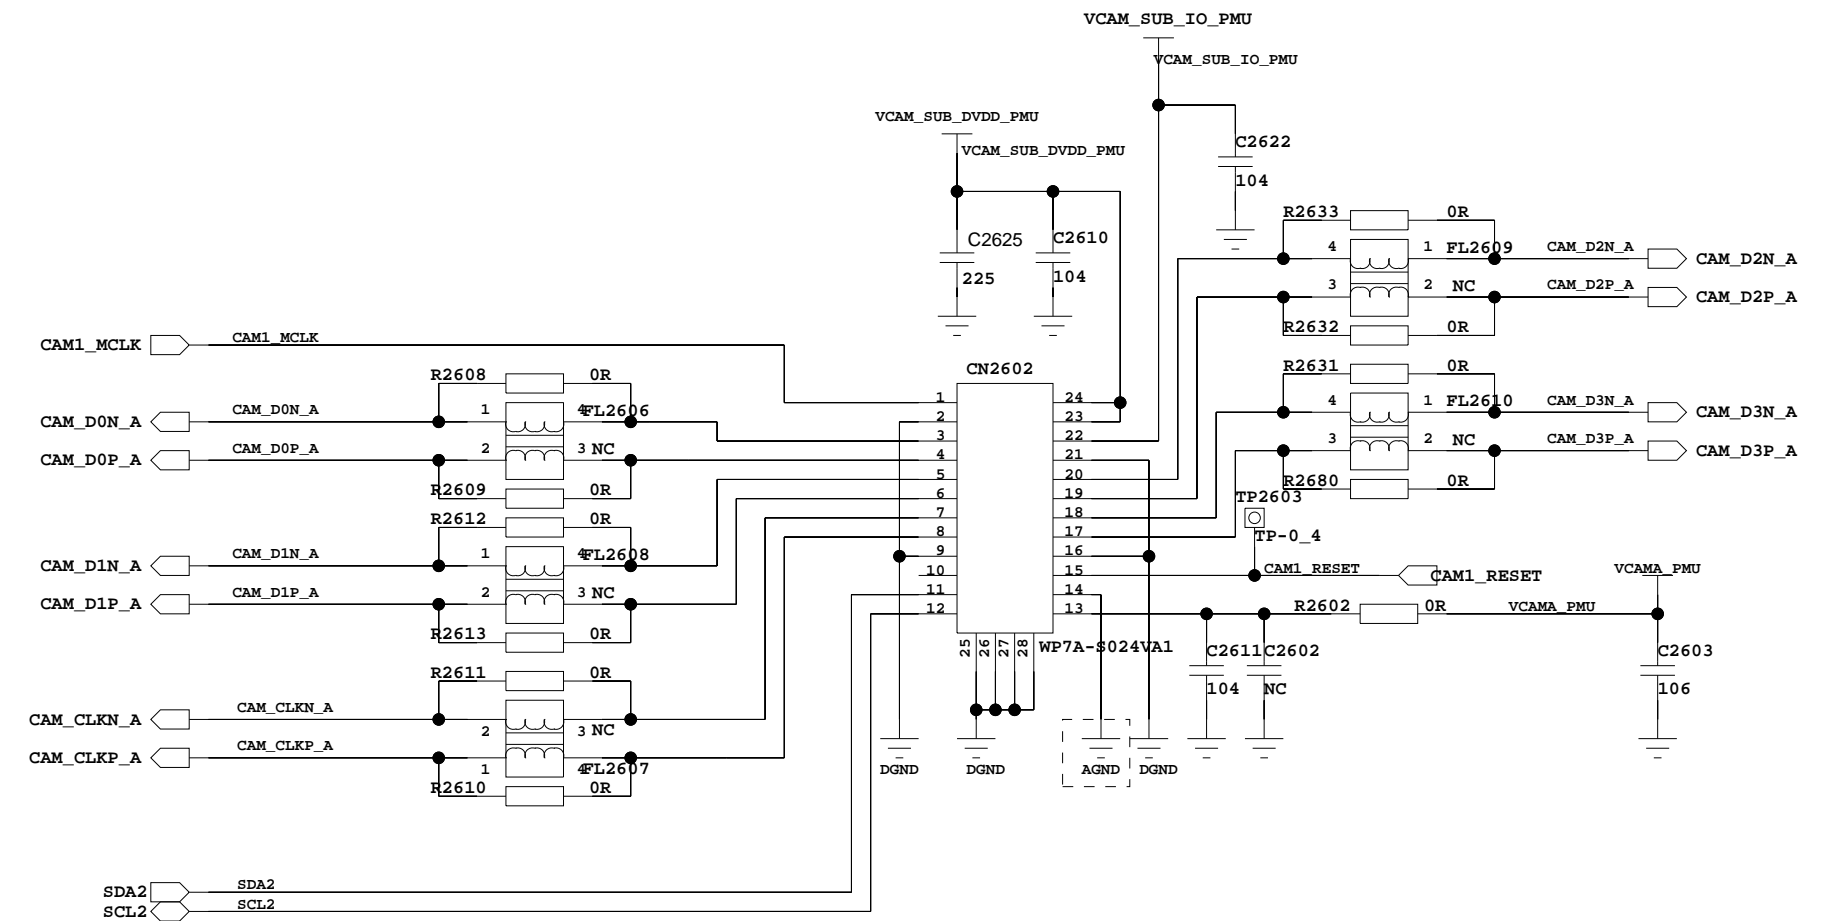


CSI CMF

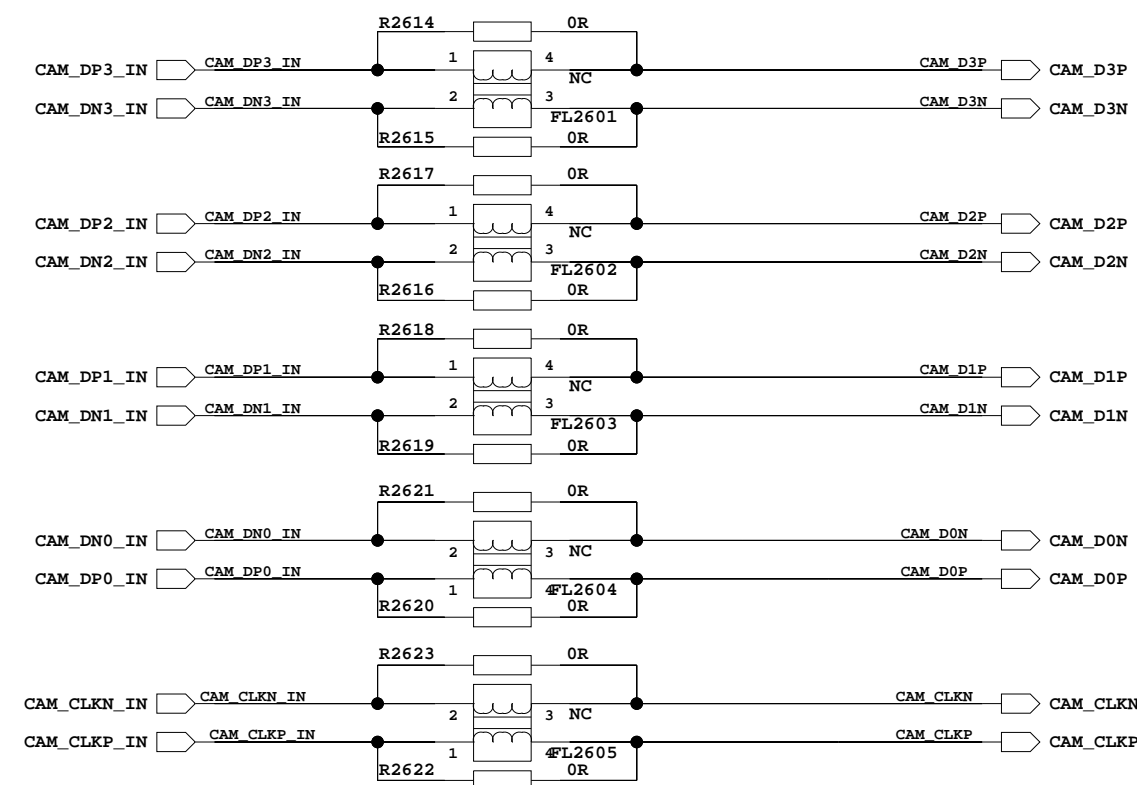

ケイト」ツヒイニ VTや、チ ャム鰻、OKコ ・オ


Flash LED Driver

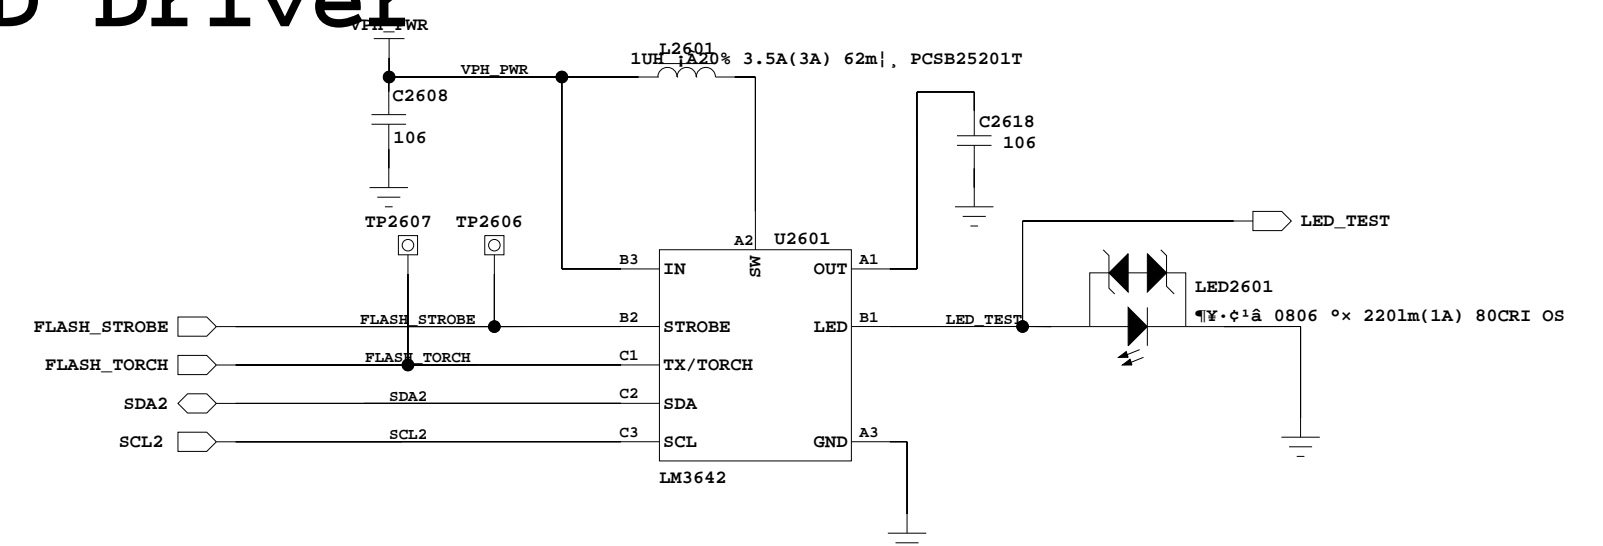


LM3642 slave Address is 0x63

CODEC

MUTE	SEL	FOUNCTION
0	0	L1=LSPKR; R1=RSPKR
0	1	L2=LSPKR; R2=RSPKR

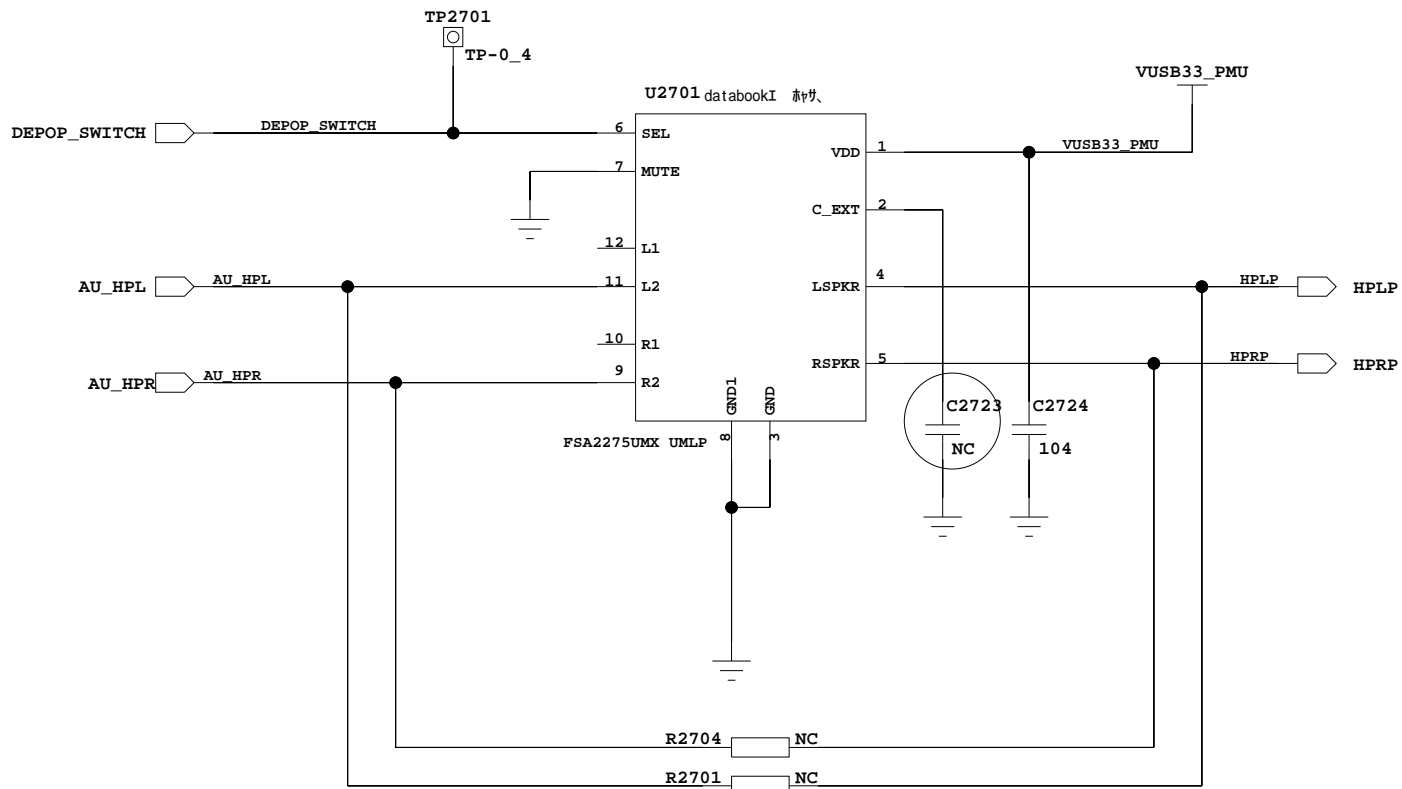


SMART PA

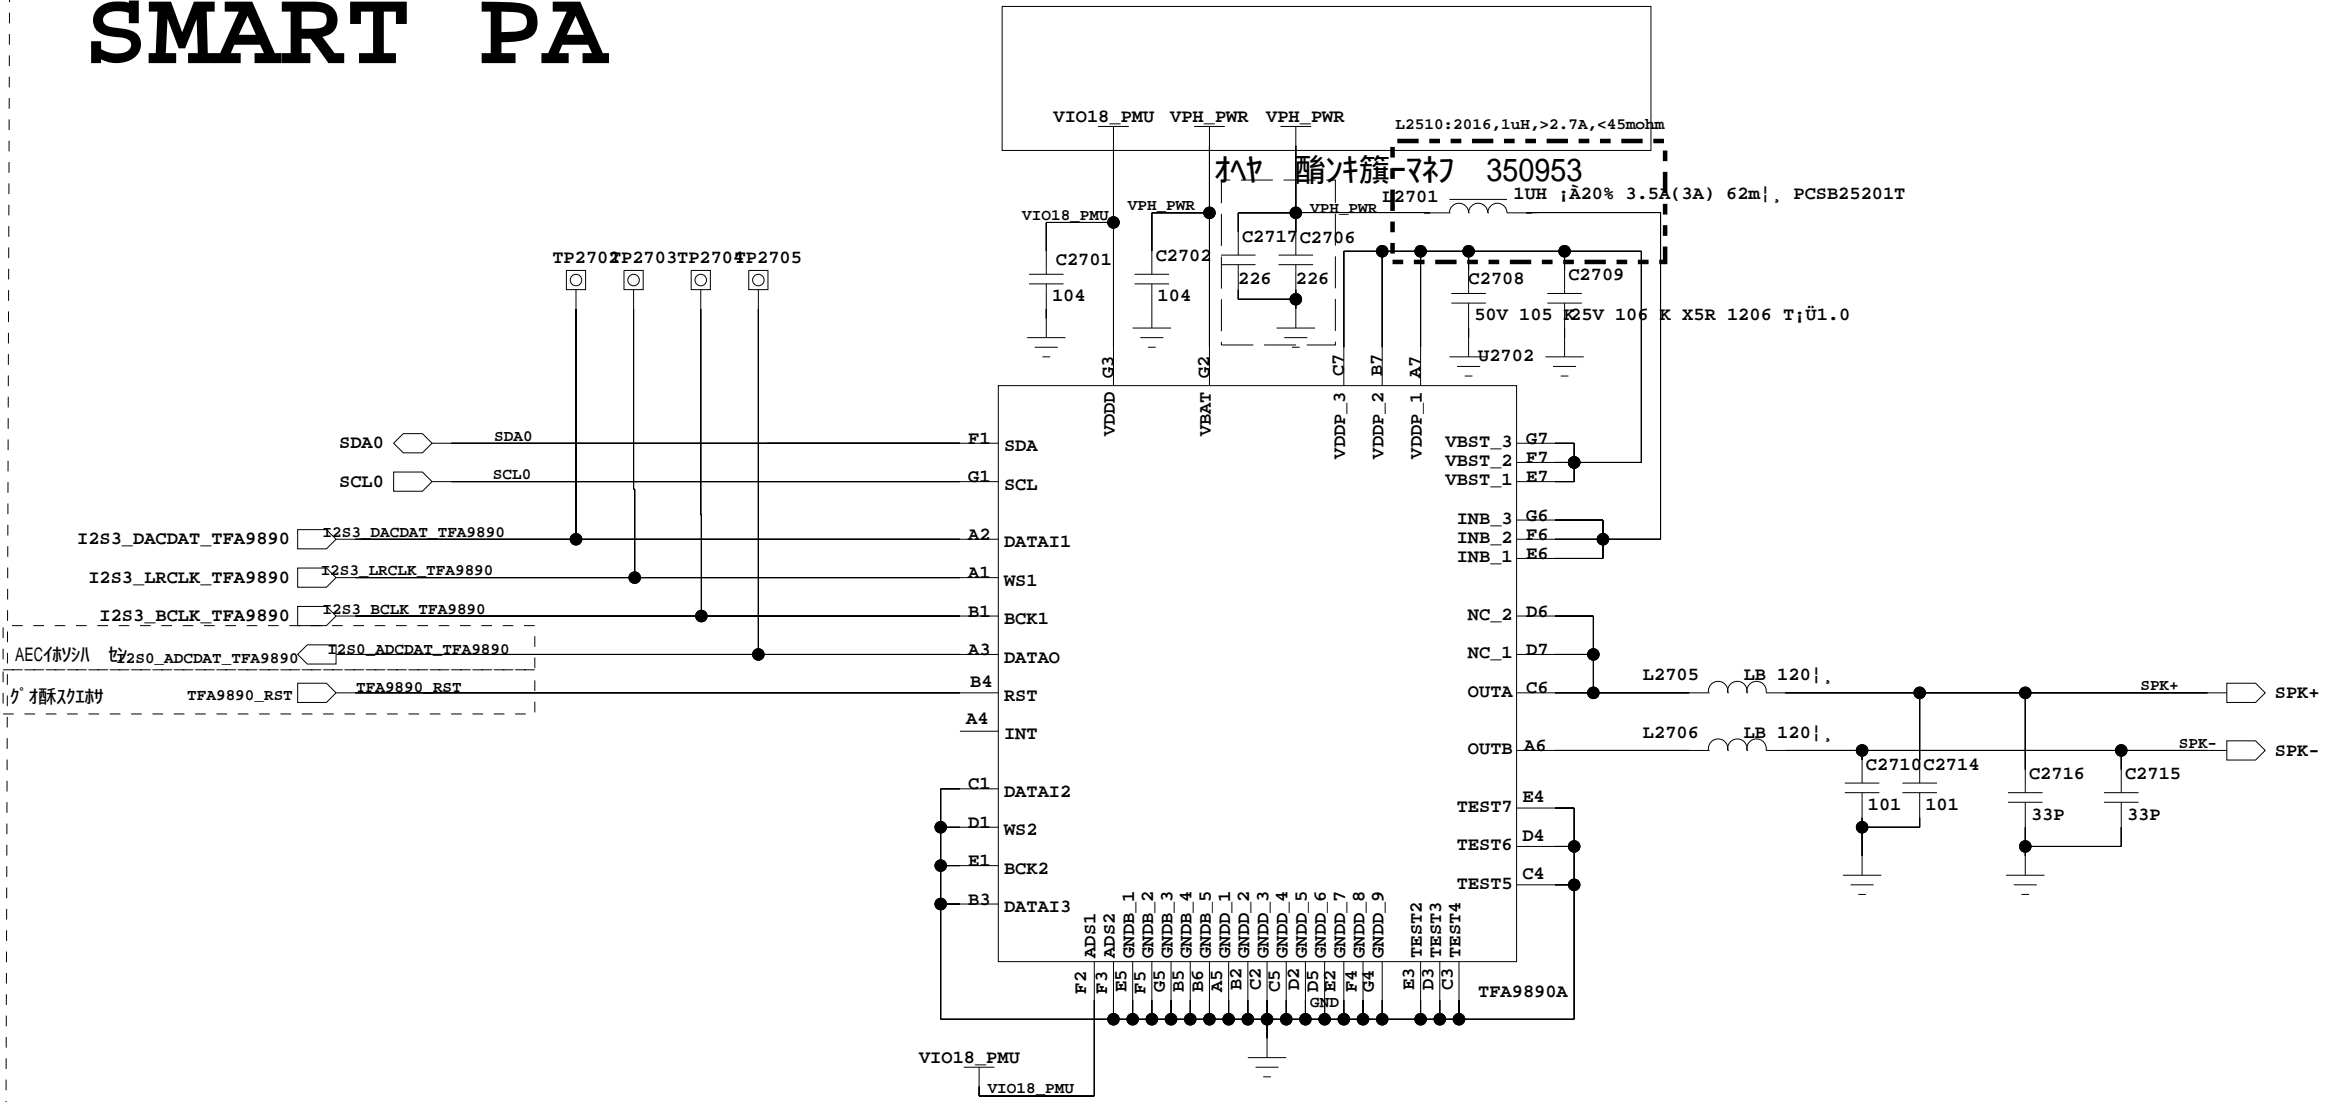


TFA9890A slave Address is 0x35

Ant-Noise MIC

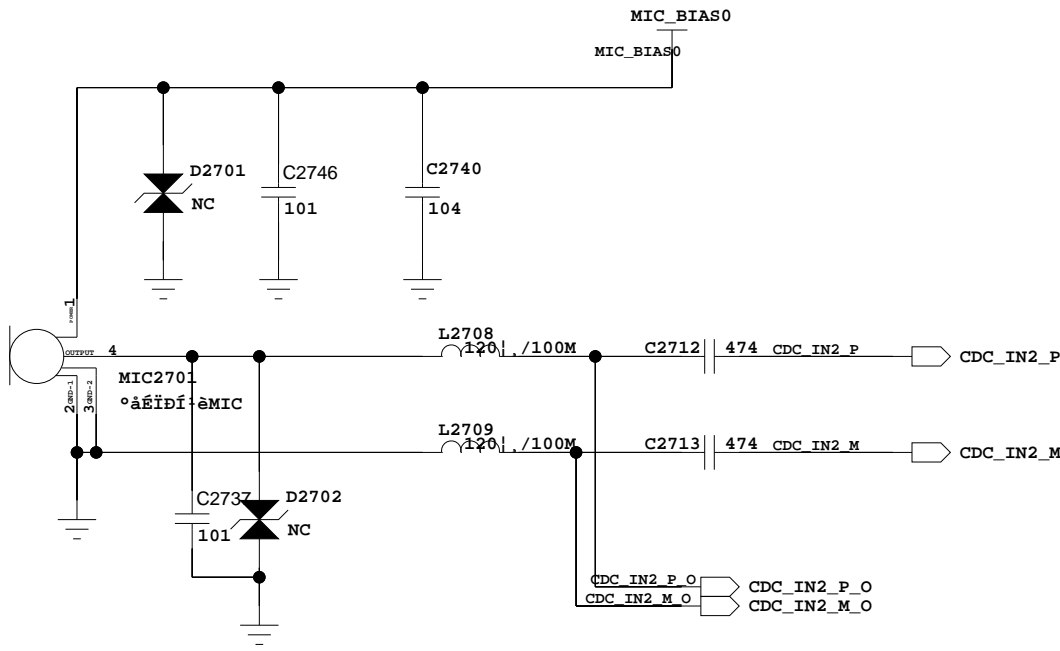

Receiver

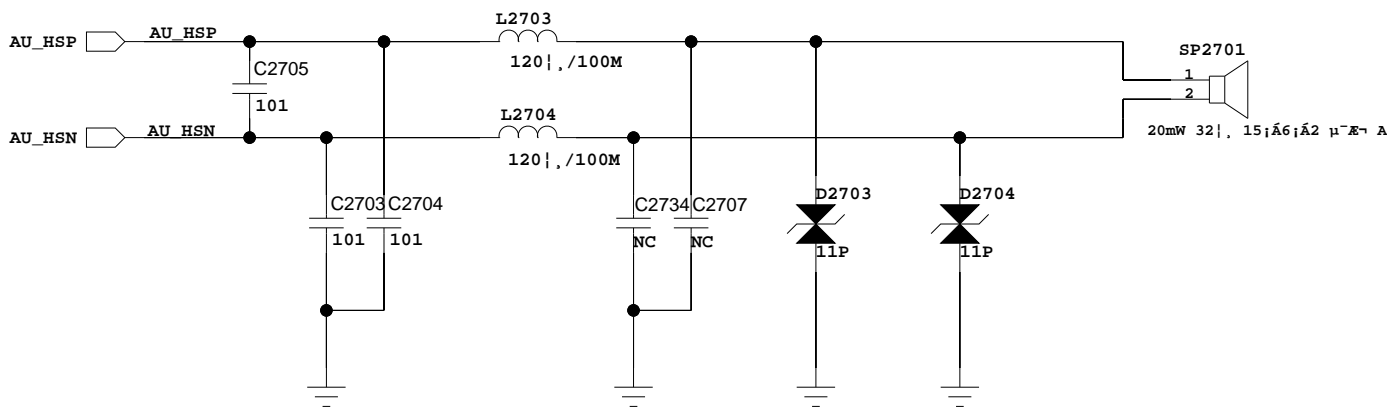

A



2

D




F




A



FAST CHARGE

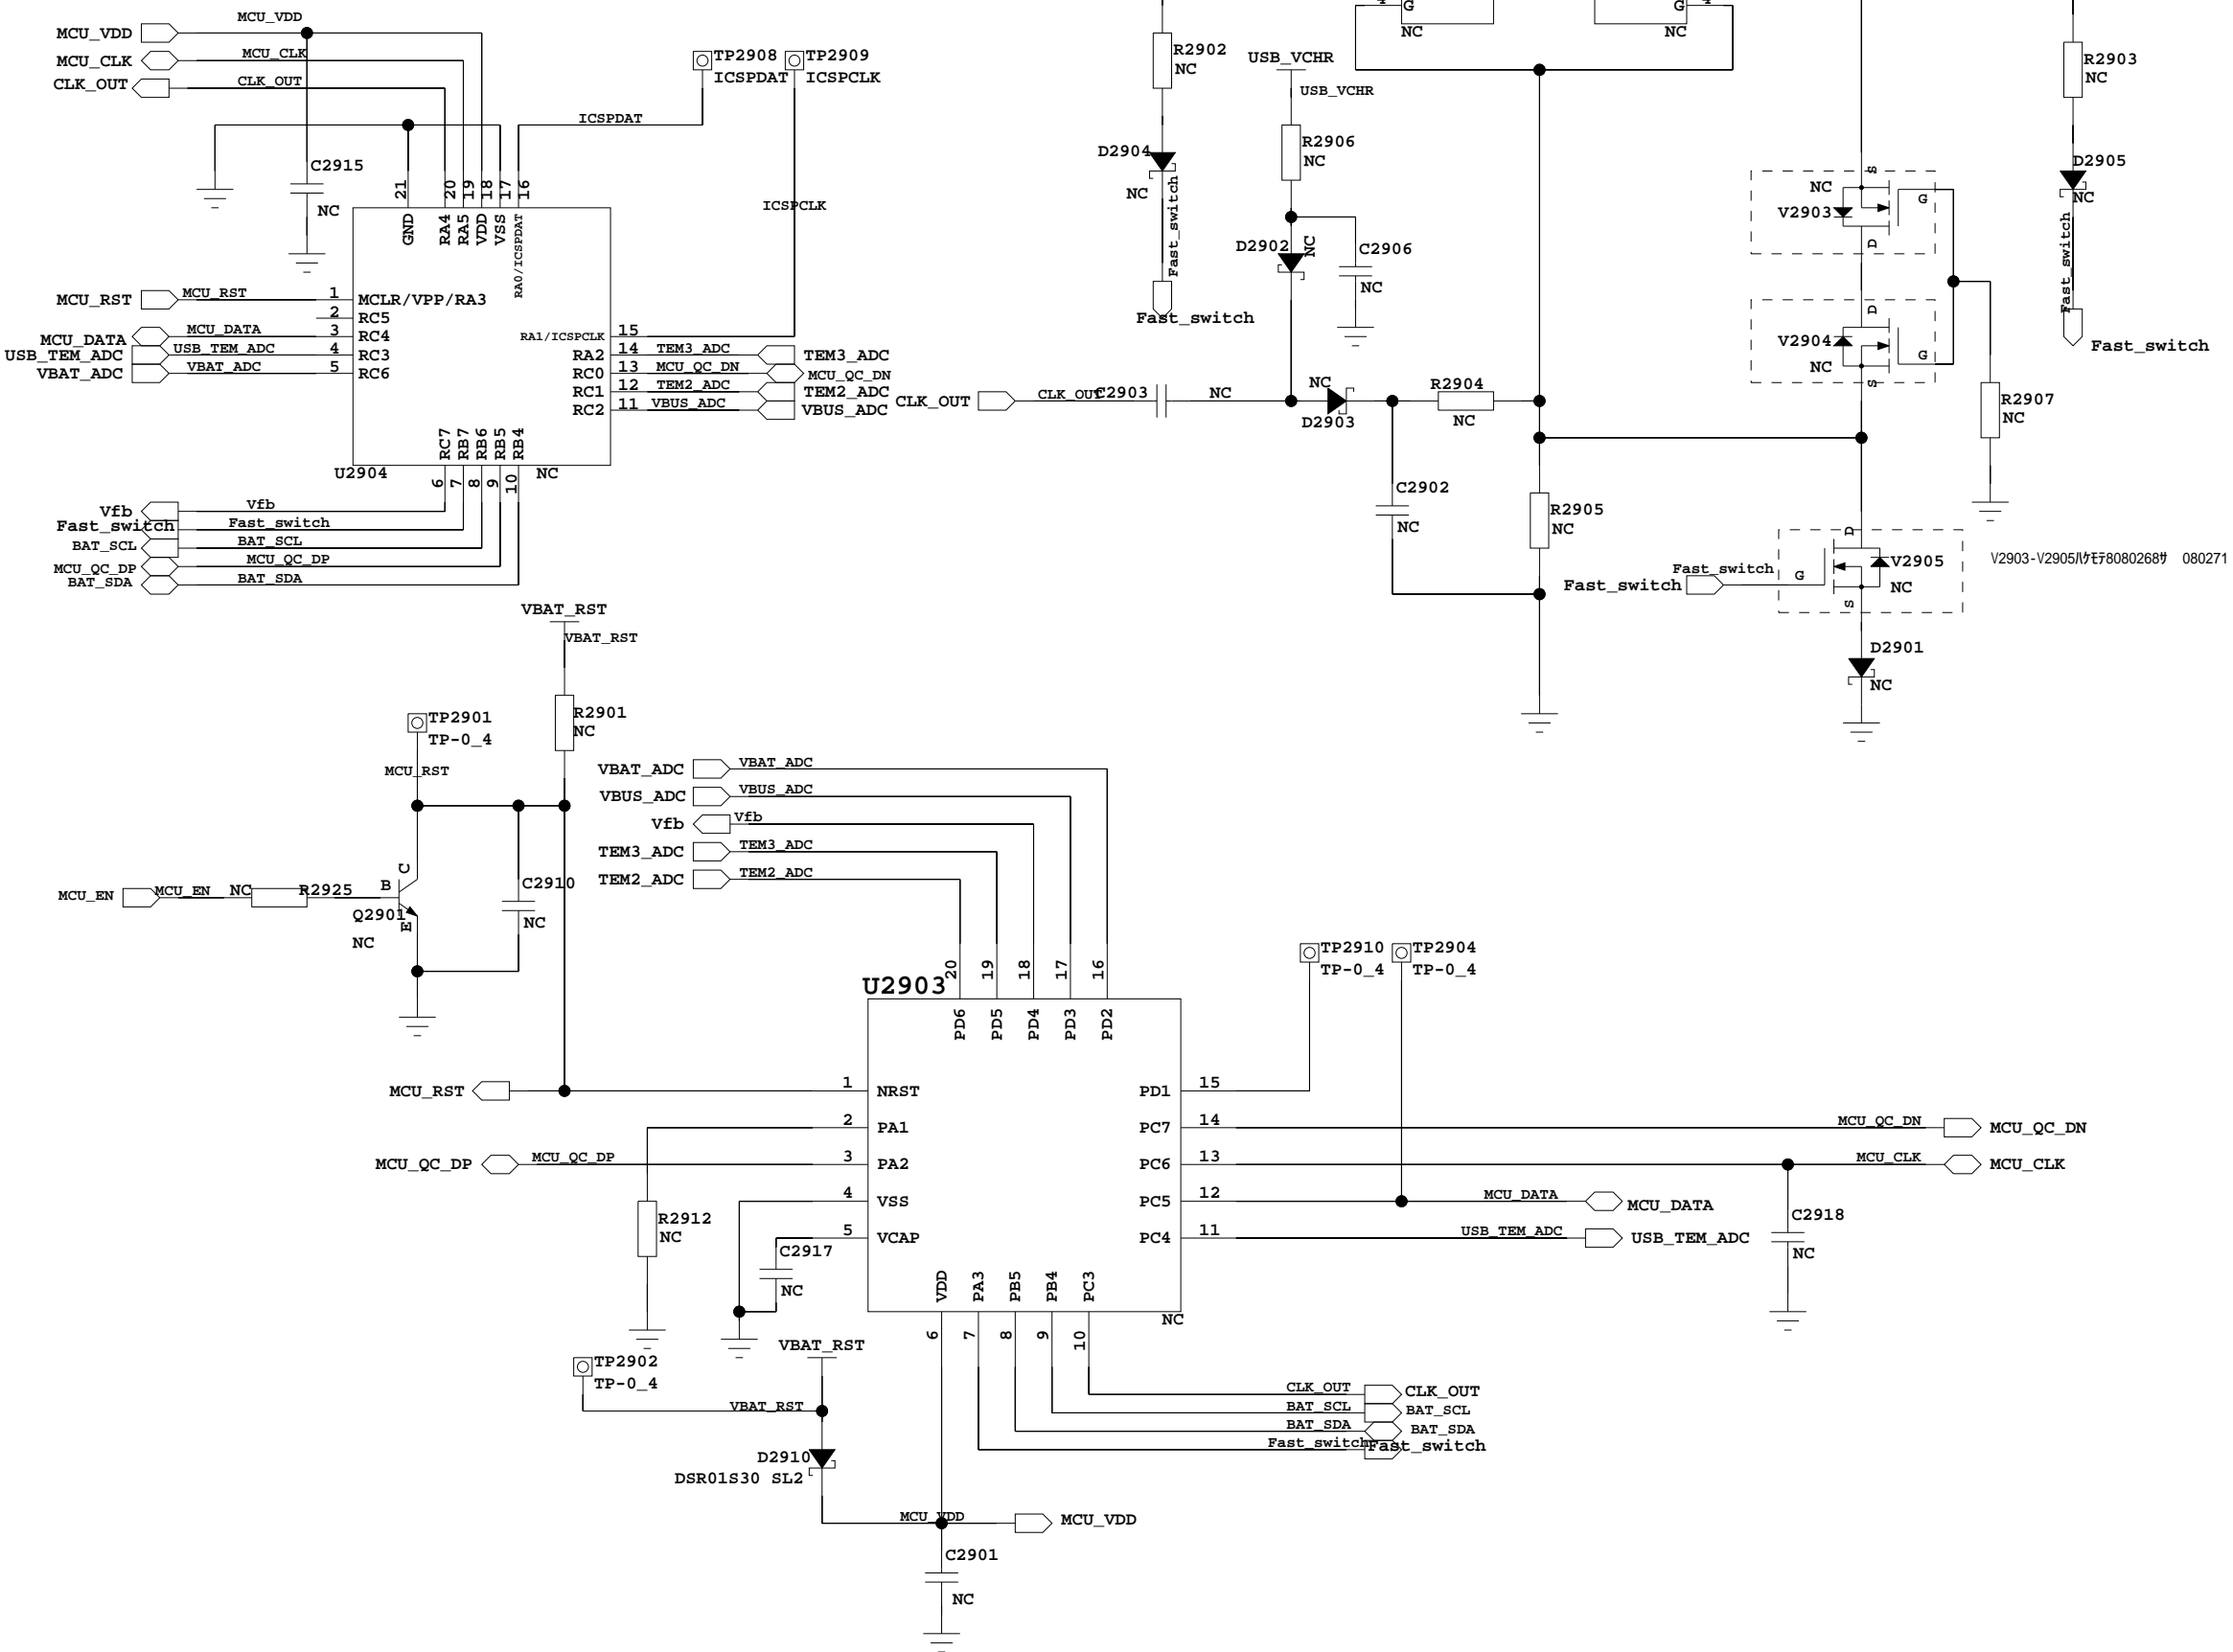


USBソケット

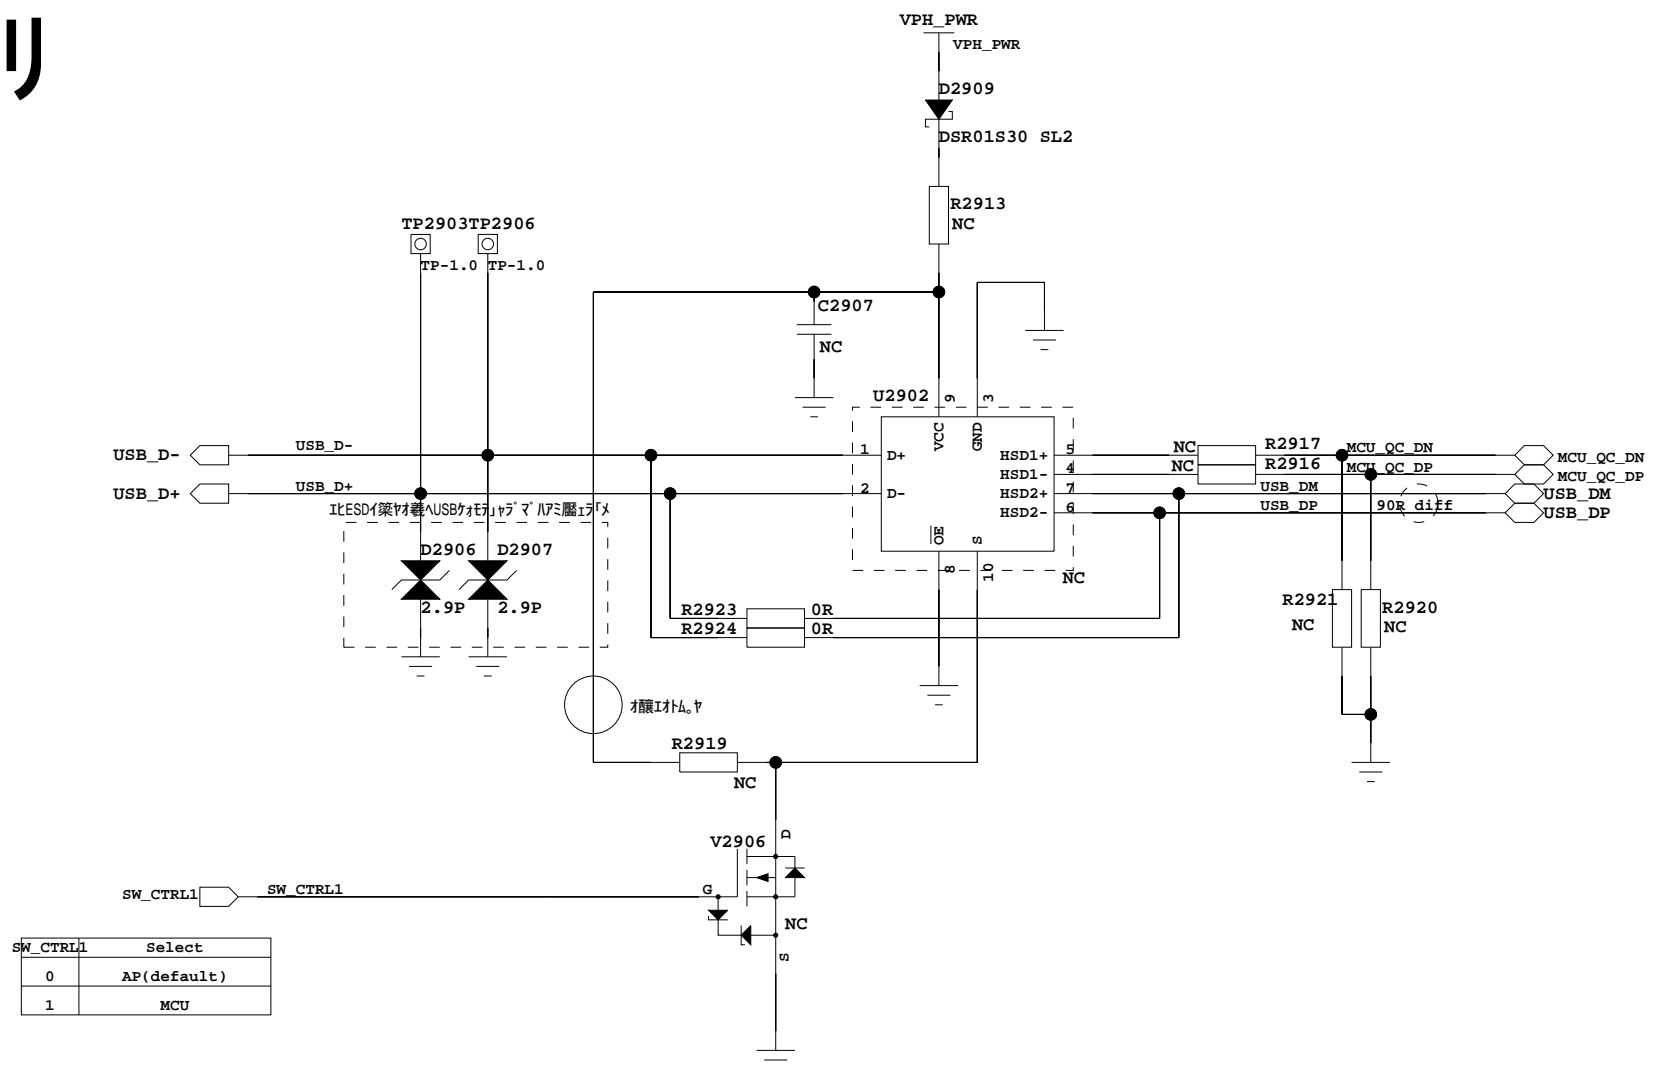


SW_CTRL1	Select
0	AP(default)
1	MCU


ADC,×βİβ×çÒâ°üμØ

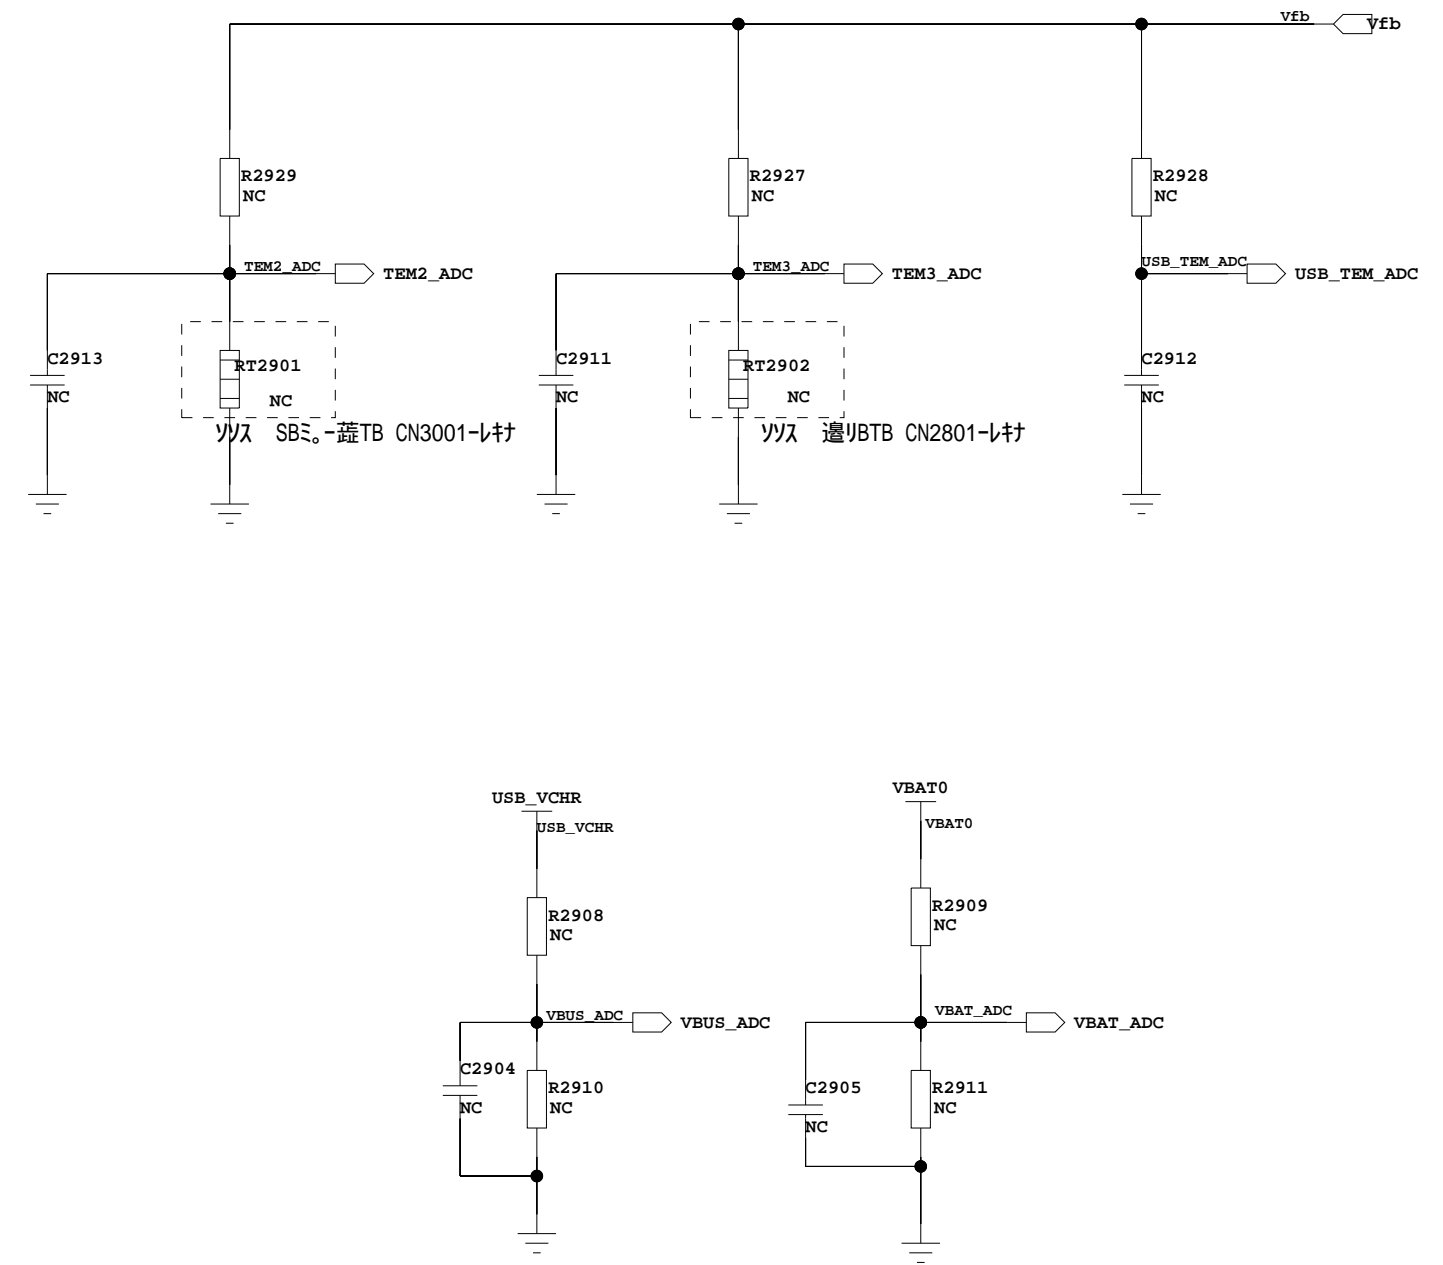


オ酥禾スラエササIC

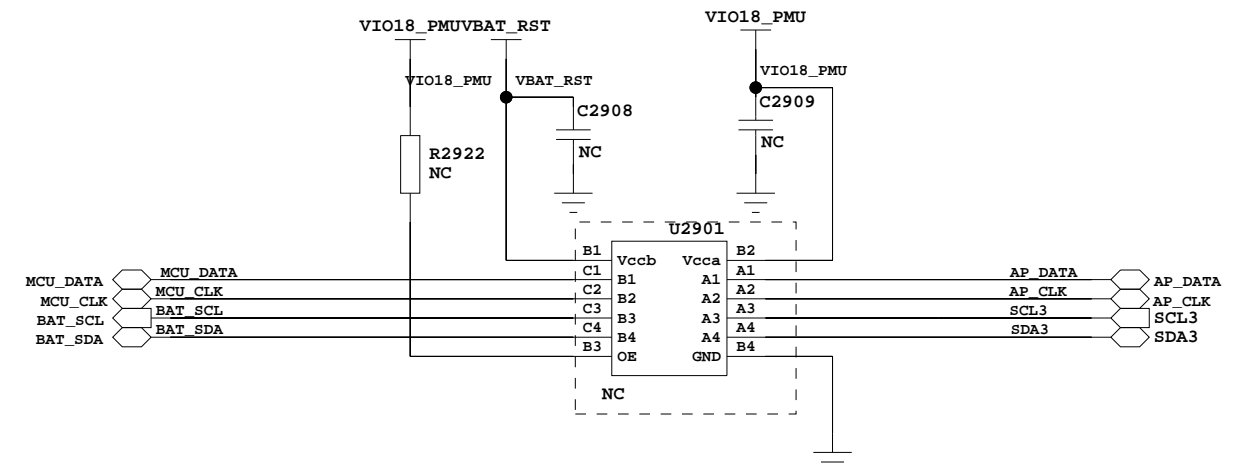


USB Switch

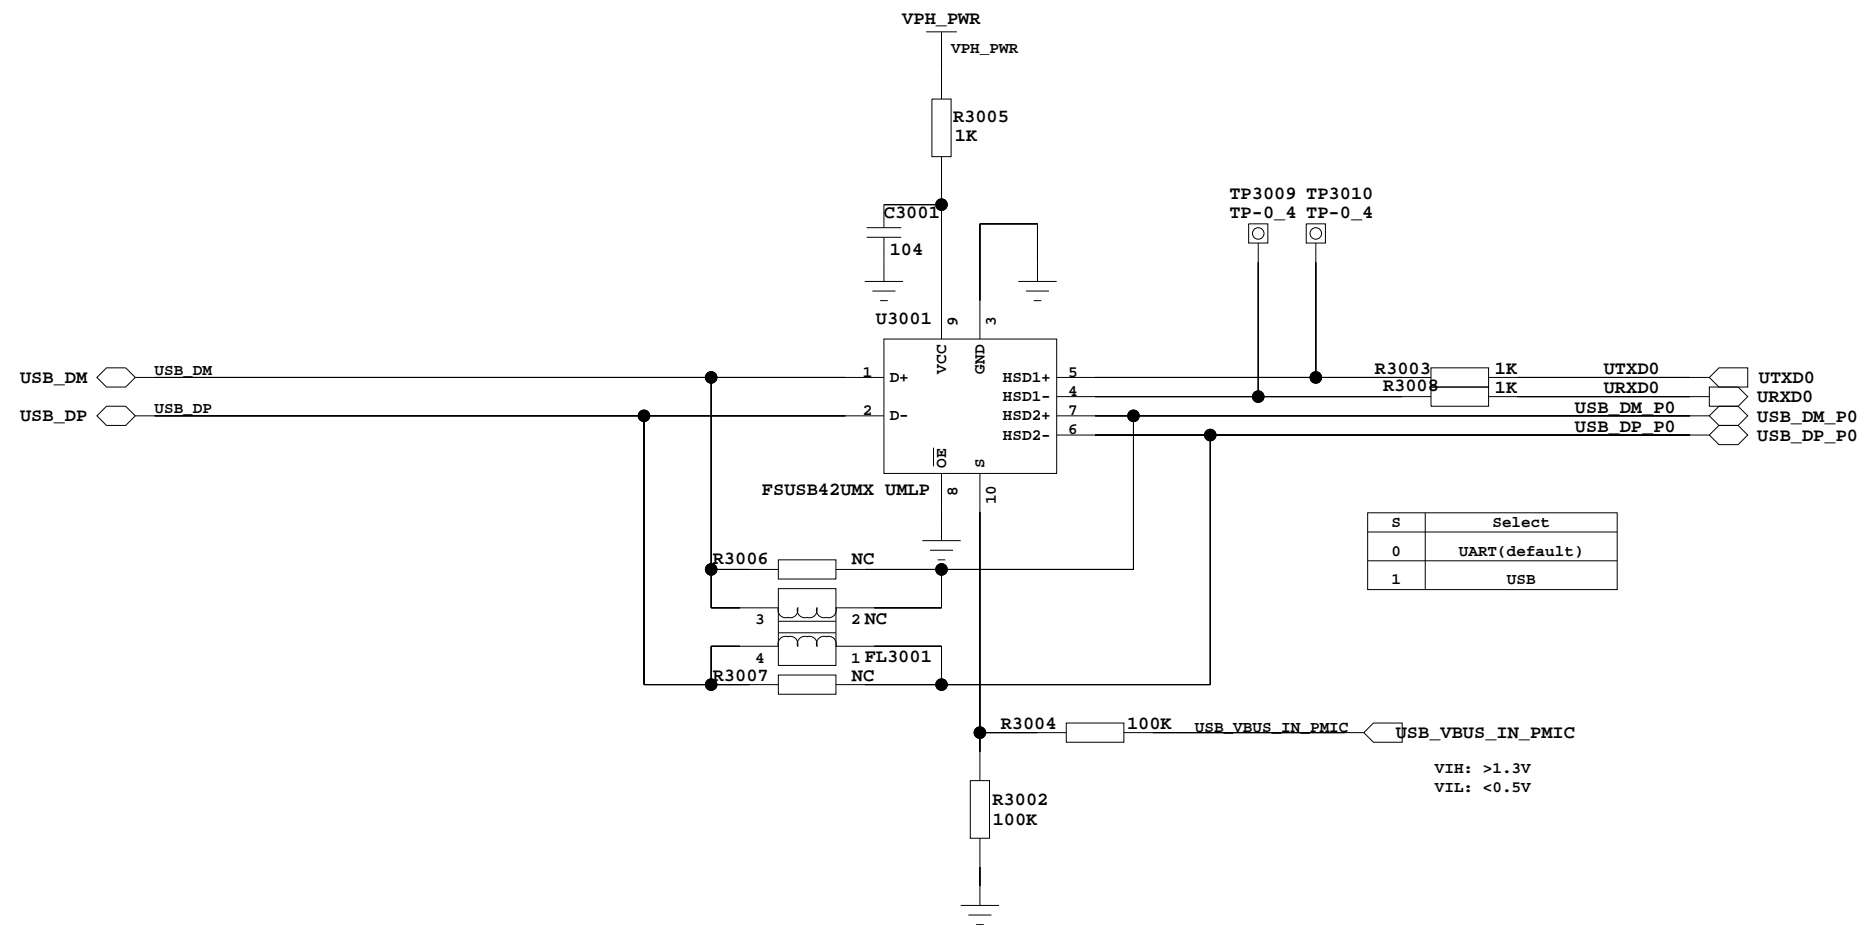


USB_BT

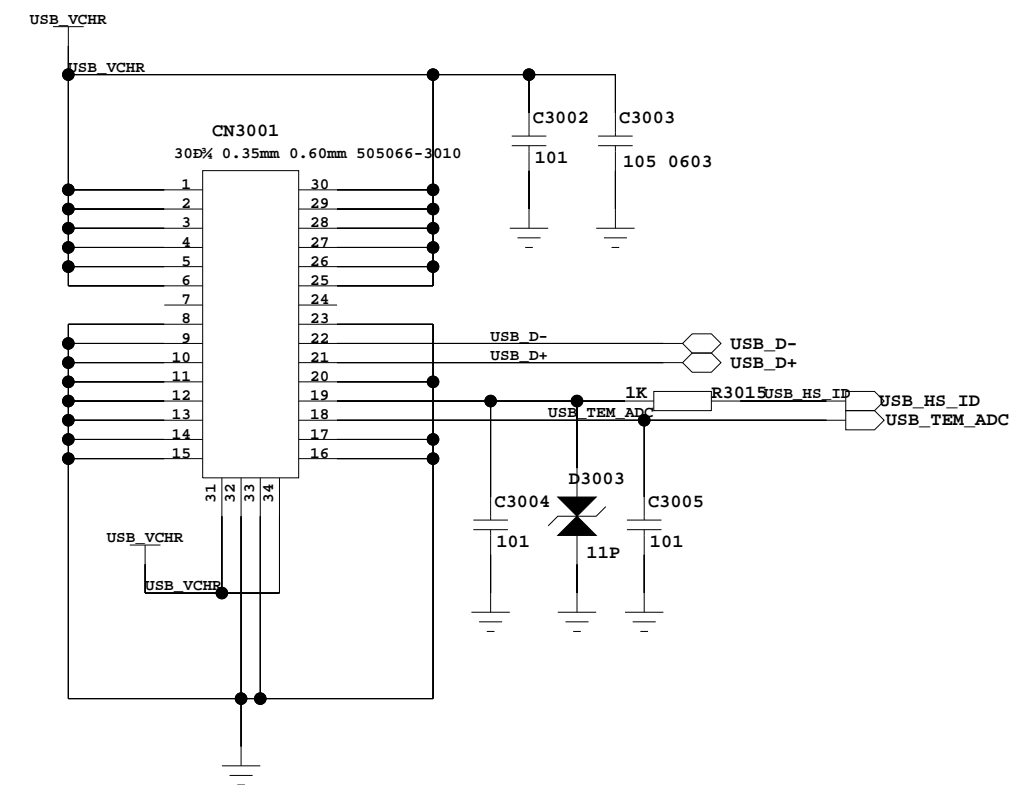


KEY PAD

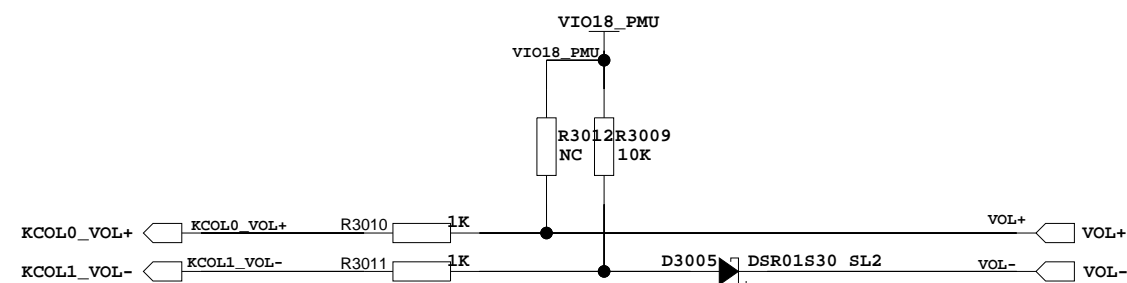


POWERKEY

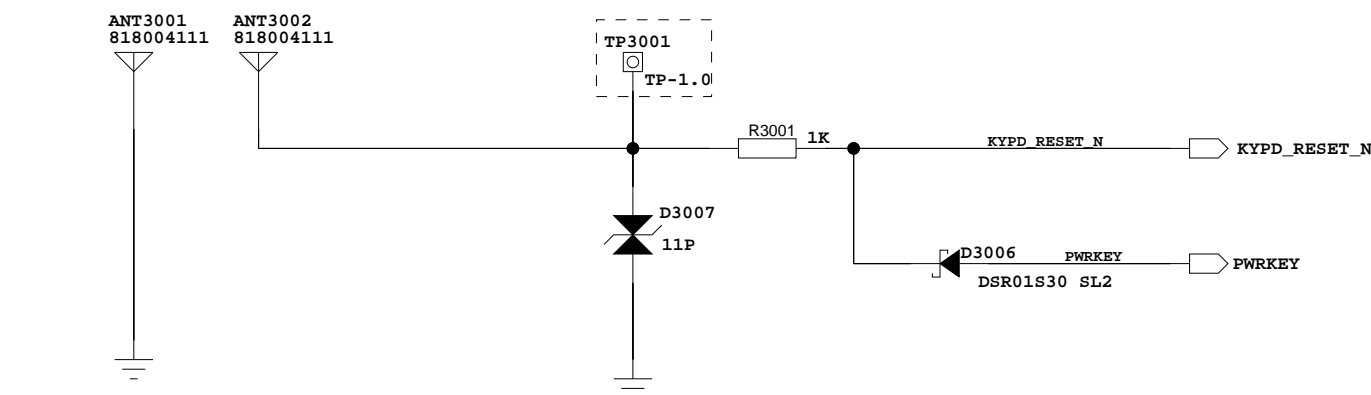


VolumeKEY

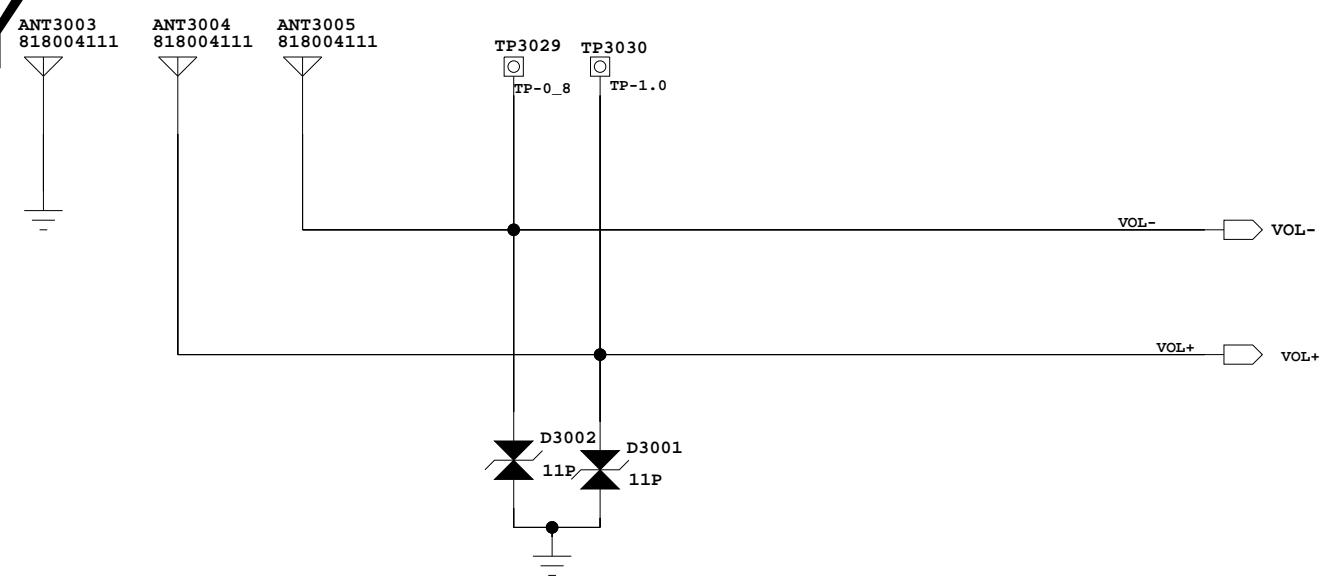




È«¹ | ÄÜ² âÊÔµã

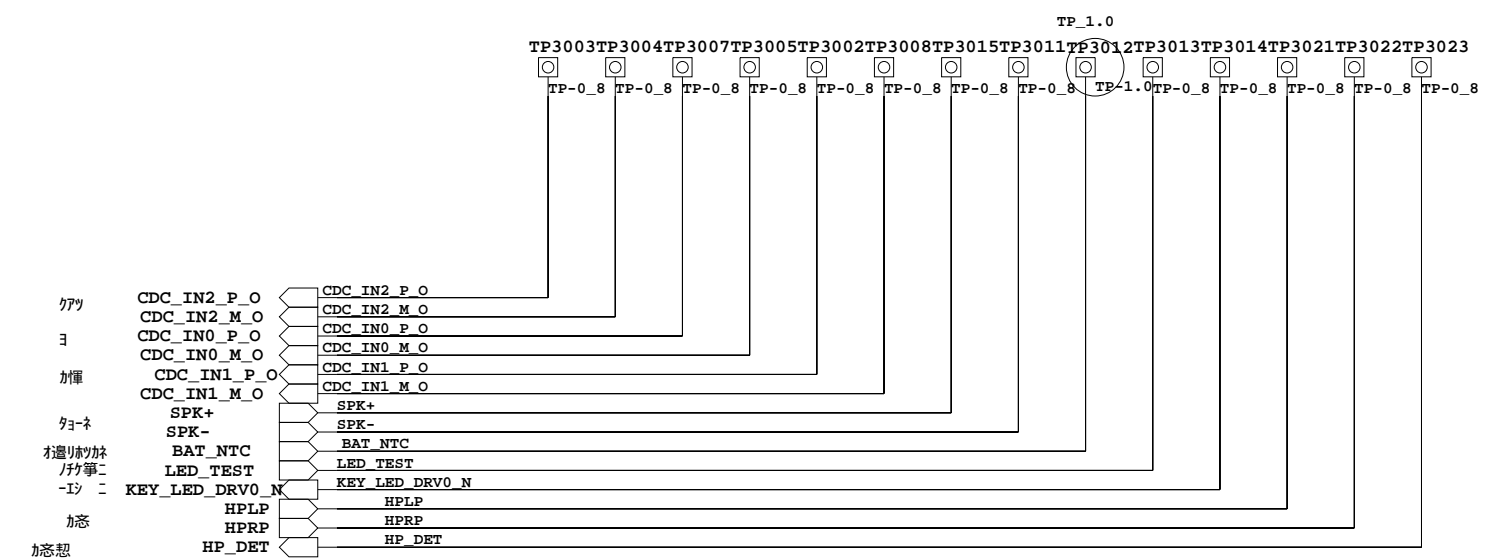

TEST POINT

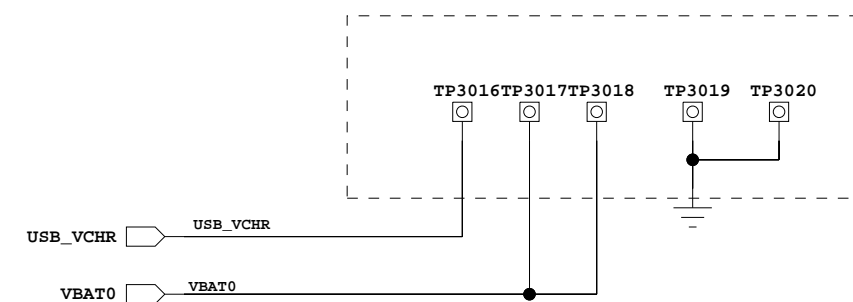

FPC CONNECT BTB

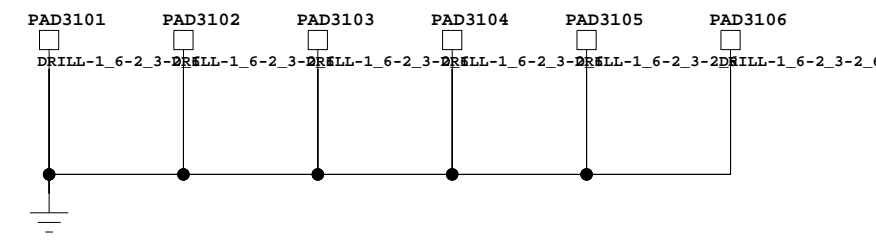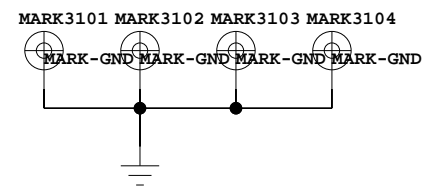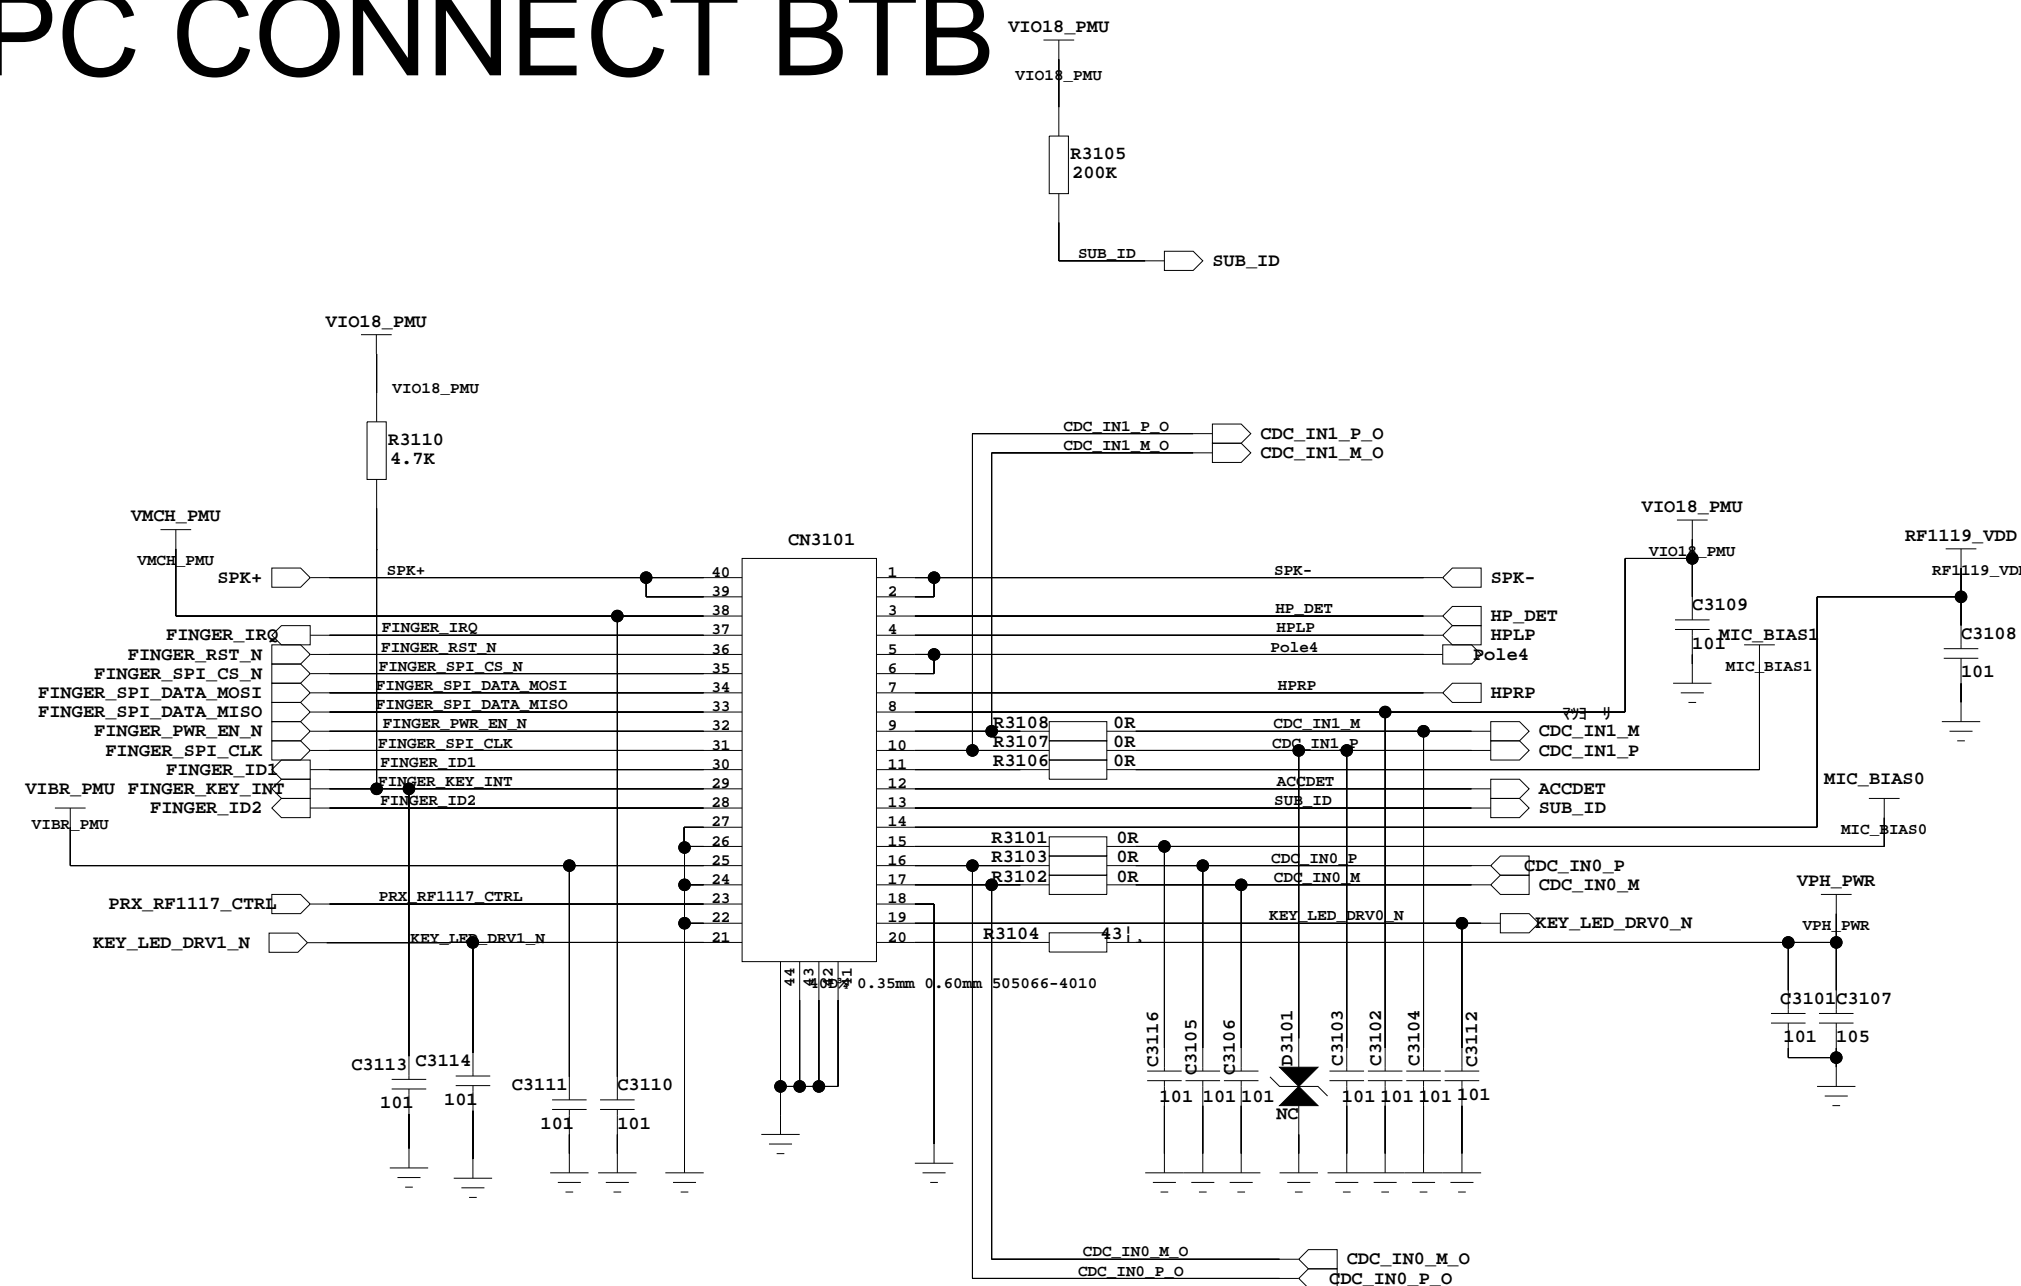

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

D

E

F

A

B

C

