

Page Index

- 1: Cover
- 2: PCI Connector
- 3: Power Supply
- 4: Analog Interface
- 5: Digital Interface and Remote
- 6: Audio Out & Power
- 7: MT2032 Tuner
- 8: Vision and Sound IF
- 9: TV Sound MTS



Micro-Star International Co., LTD.

8906-CX23881 PCI TV CARD

Size
B

Document Number

TOP PAGE

Rev
0A

Date:

Monday, February 24, 2003

Sheet


1

of

10

LAYOUT GUIDELINES




PCI Spec. 2.1 Requirement (p.154):
PCICLK trace length should be exactly 2.5".
Max trace length for all other PCI signals is
1.5" (except System, Interrupt, and JTAG
pins).

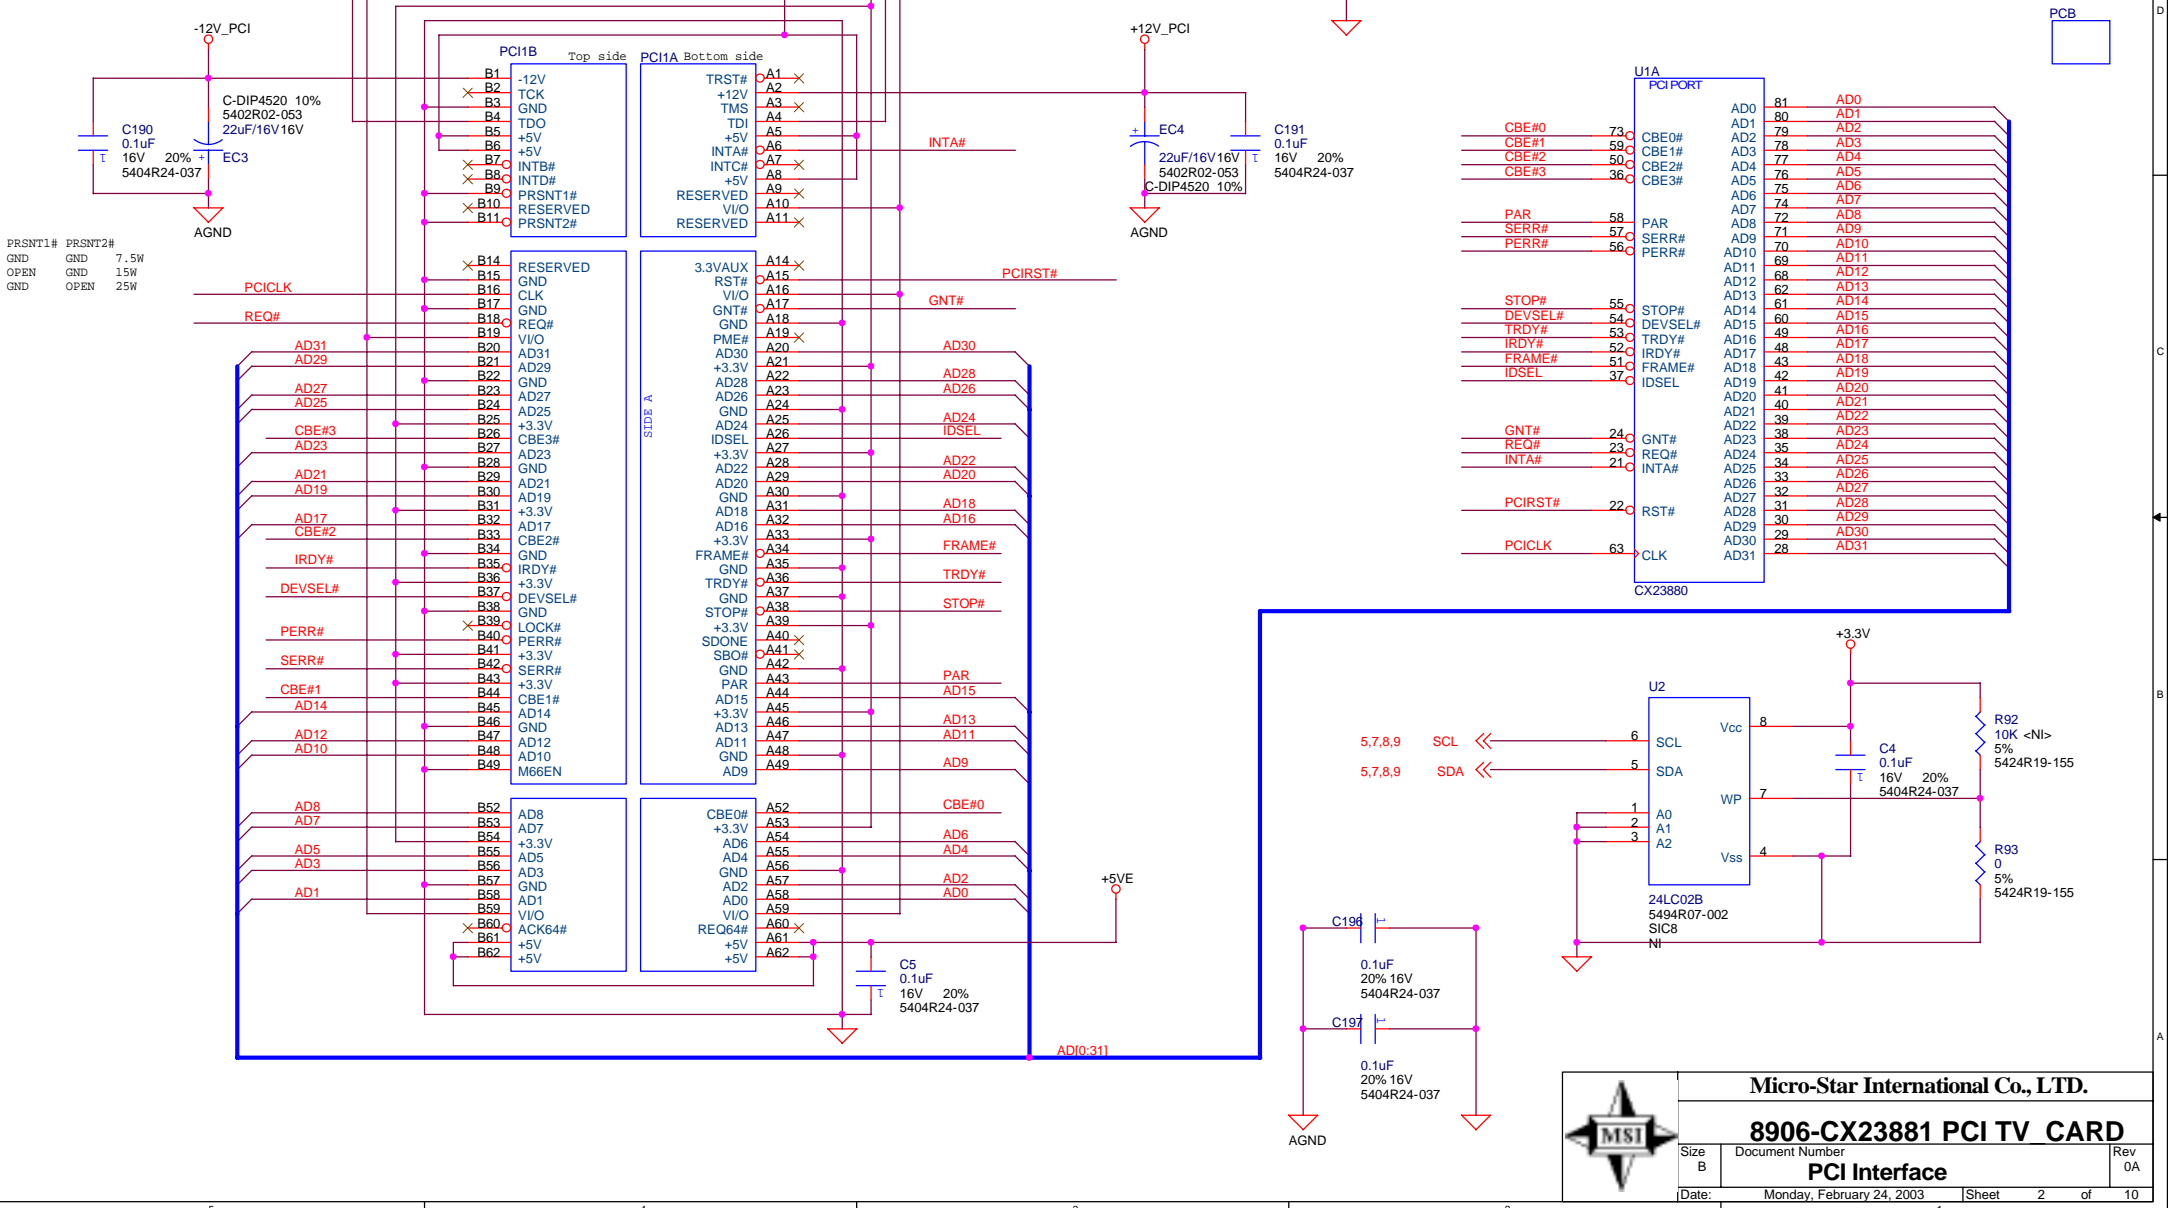

Micro-Star International Co., LTD.

8906-CX23881 PCI TV CARD

Size B	Document Number	Rev 0A
Date:	Monday, February 24, 2003	Sheet 2 of 10

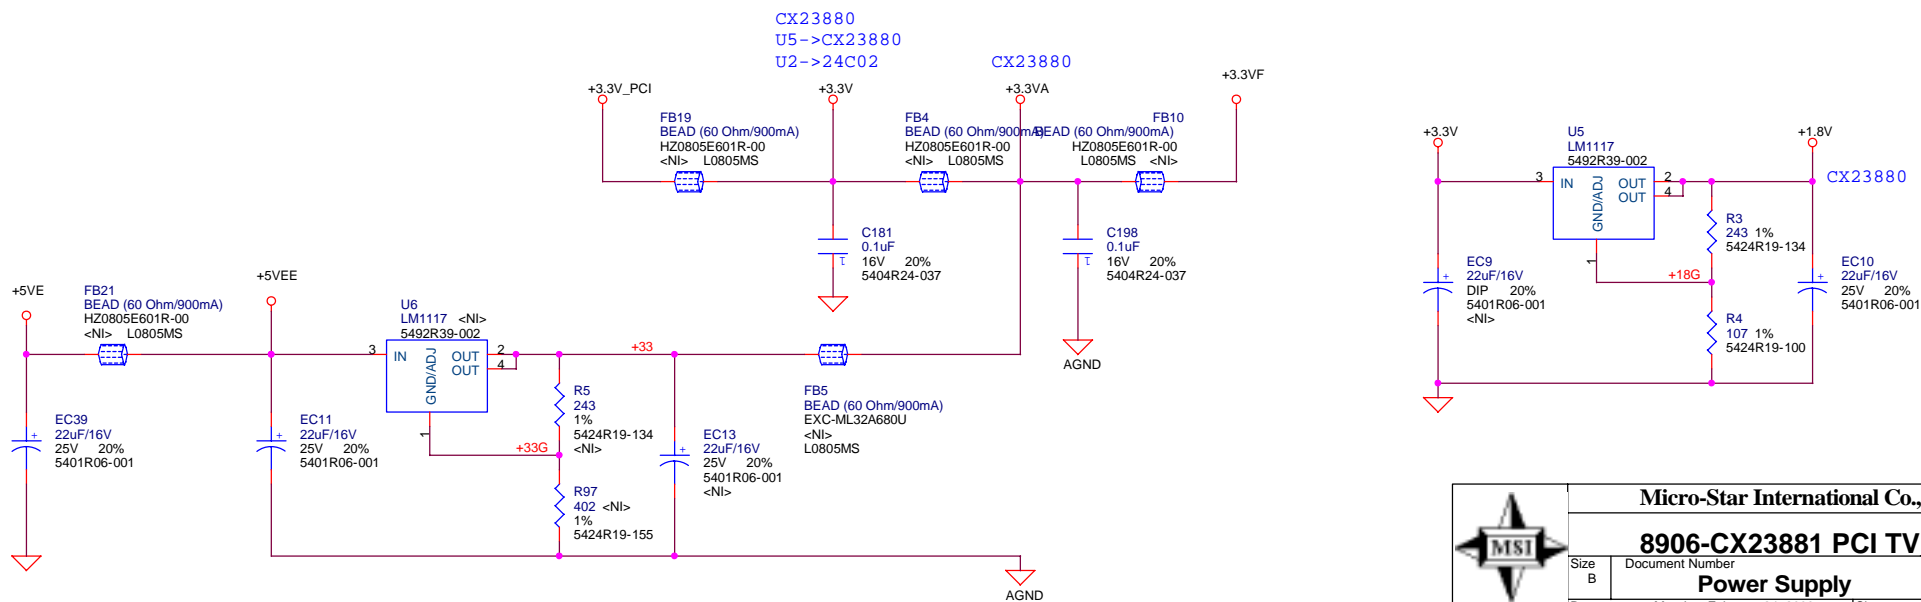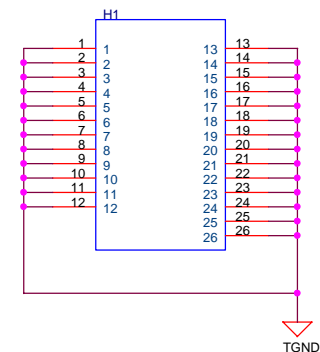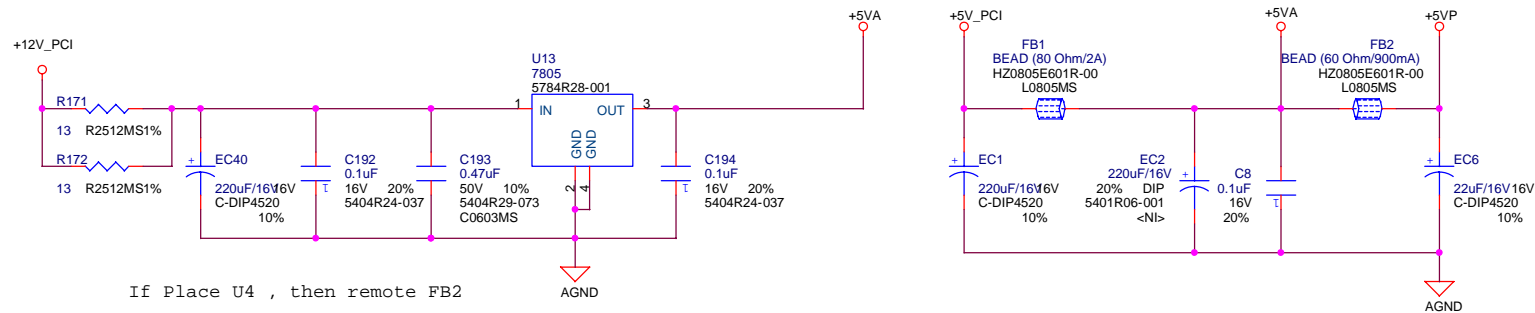


Micro-Star International Co., LTD.

8906-CX23881 PCI TV CARD




Size	Document Number	Rev
B	Power Supply	0A
Date:	Monday, February 24, 2003	Sheet 3 of 10


COMPOSITE VIDEO

NTSC Version
For PAL: C95 is 20pf and
R50 is 301 1%

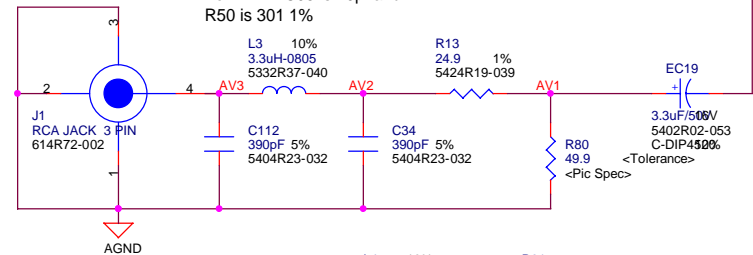

S-VIDEO

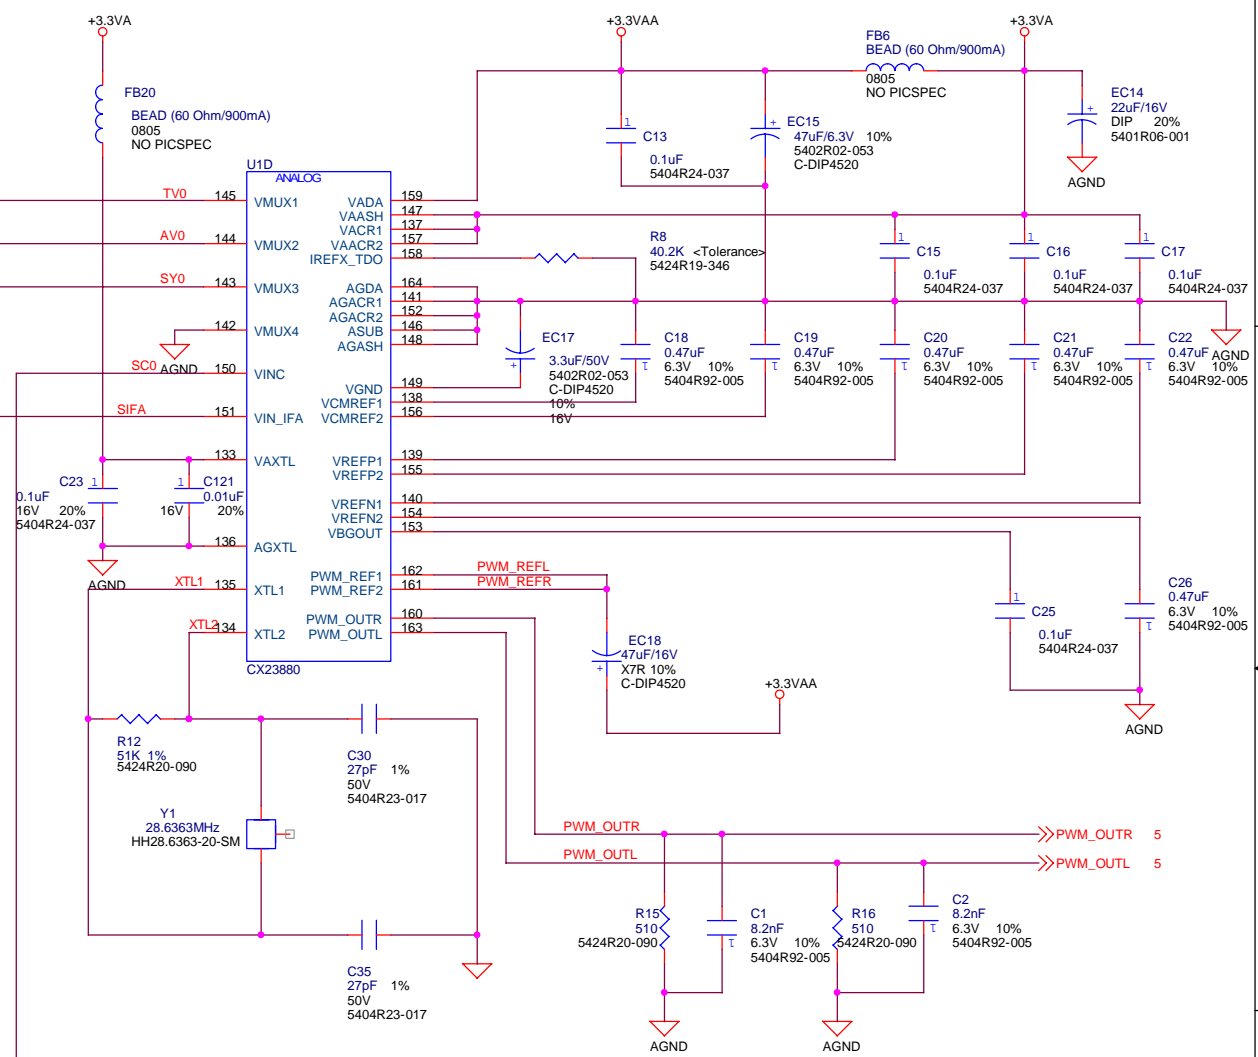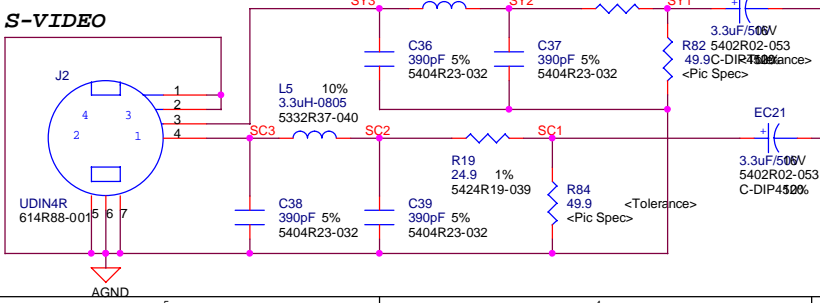





Micro-Star International Co., LTD.


8906-CX23881 PCI TV CARD


Size B Document Number Rev 0A


Date: Monday, February 24, 2003 Sheet 4 of 10

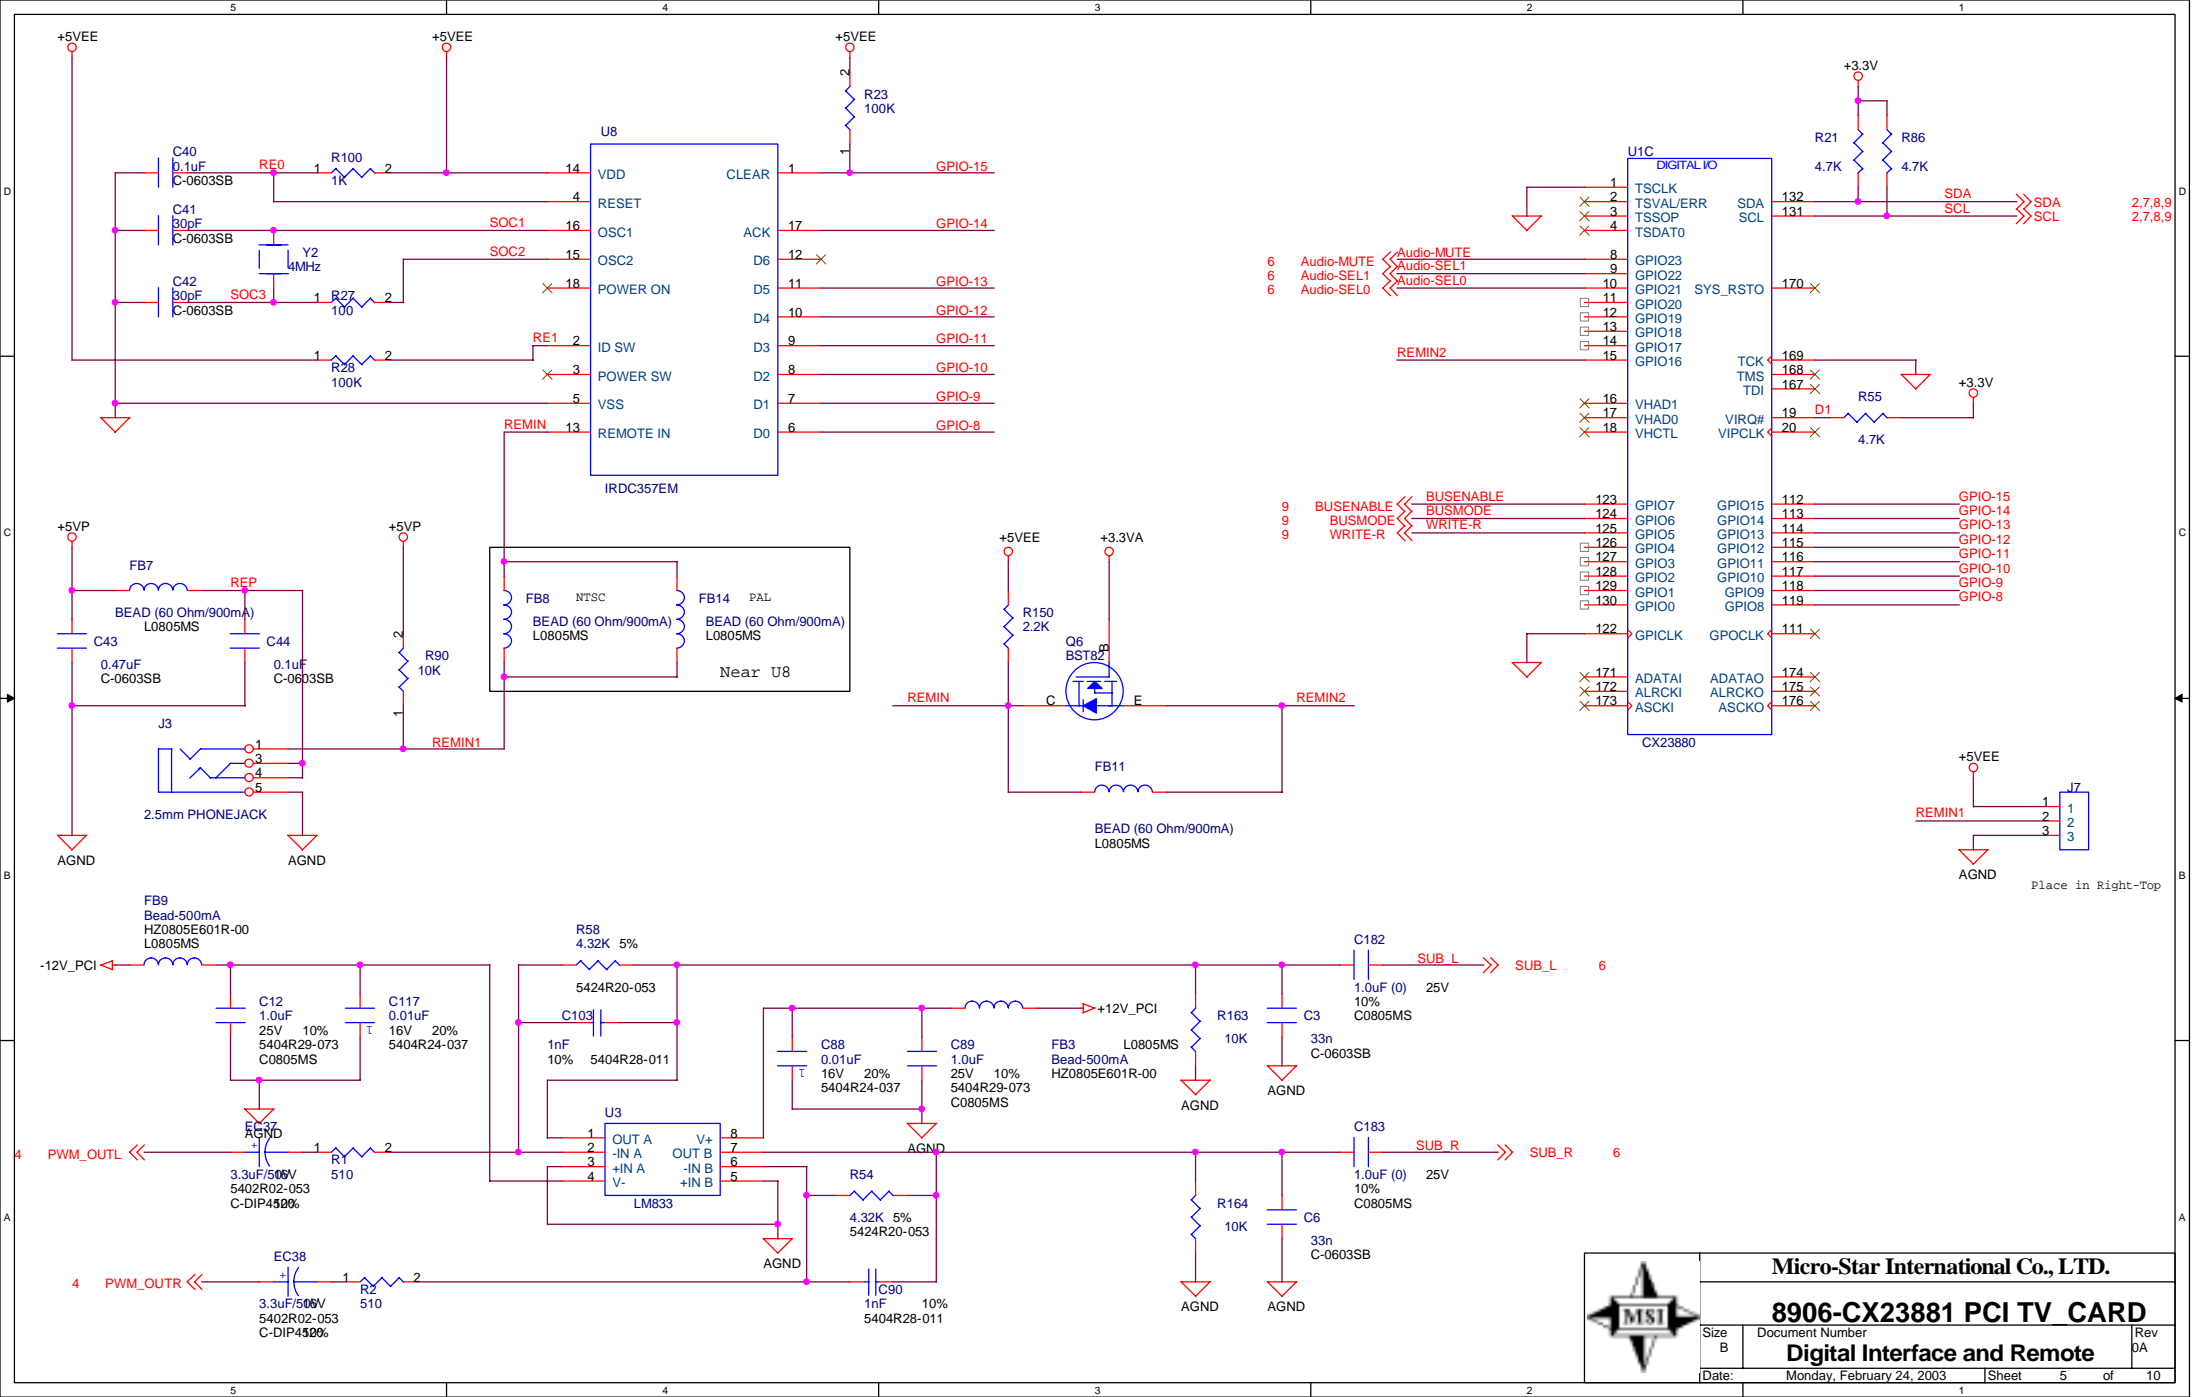




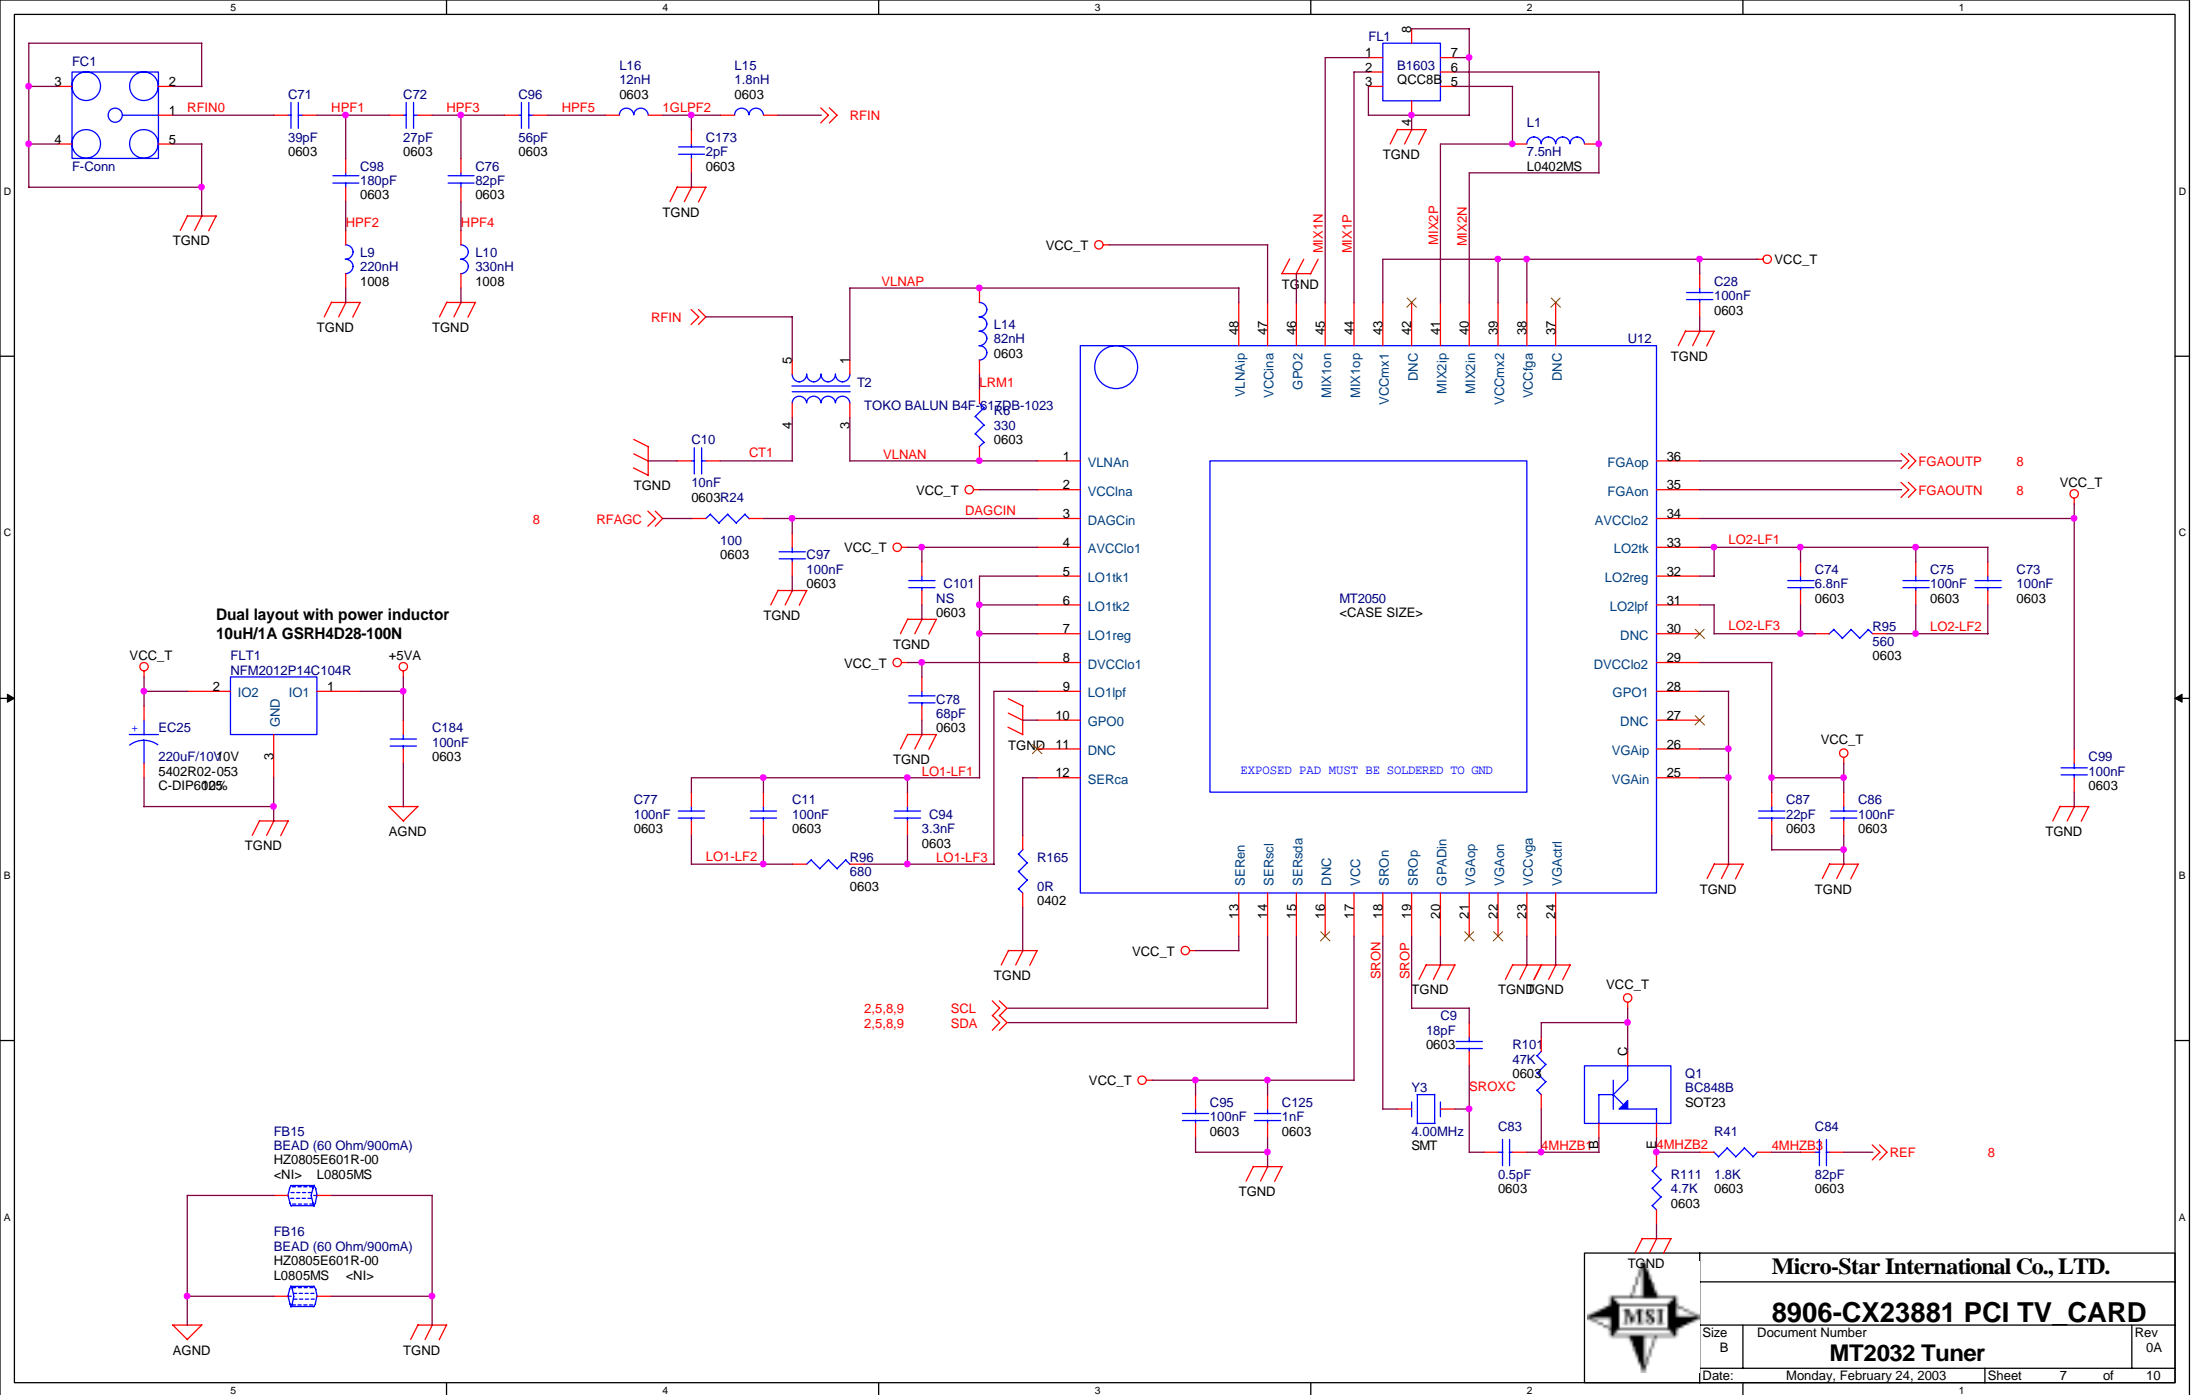

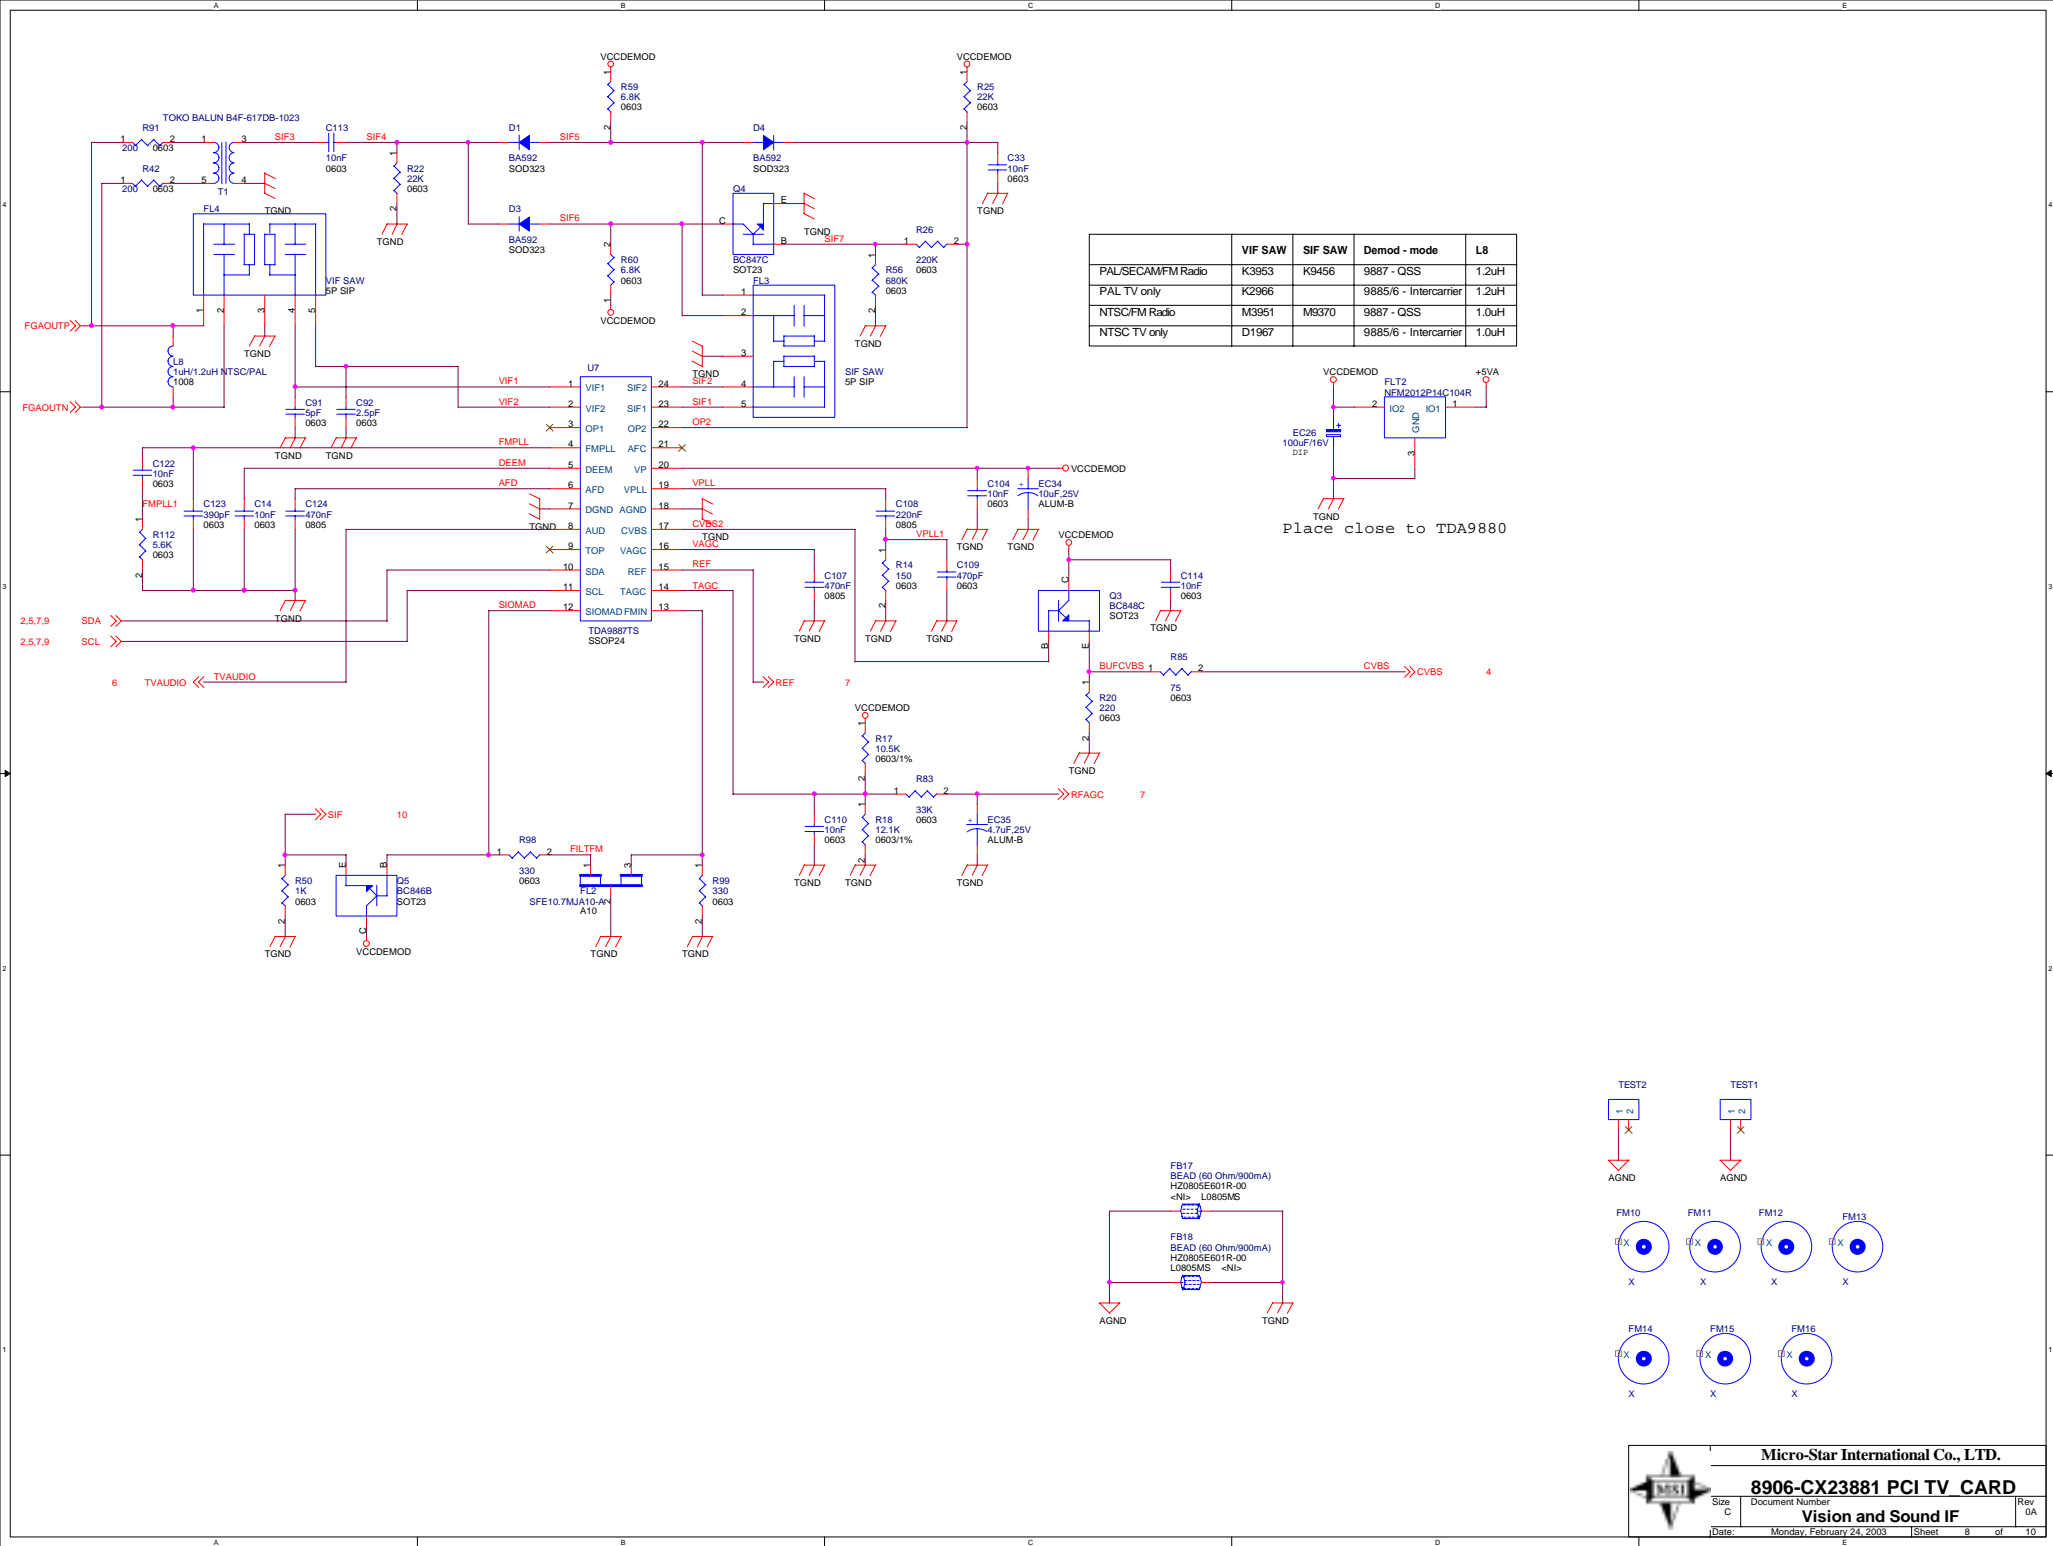


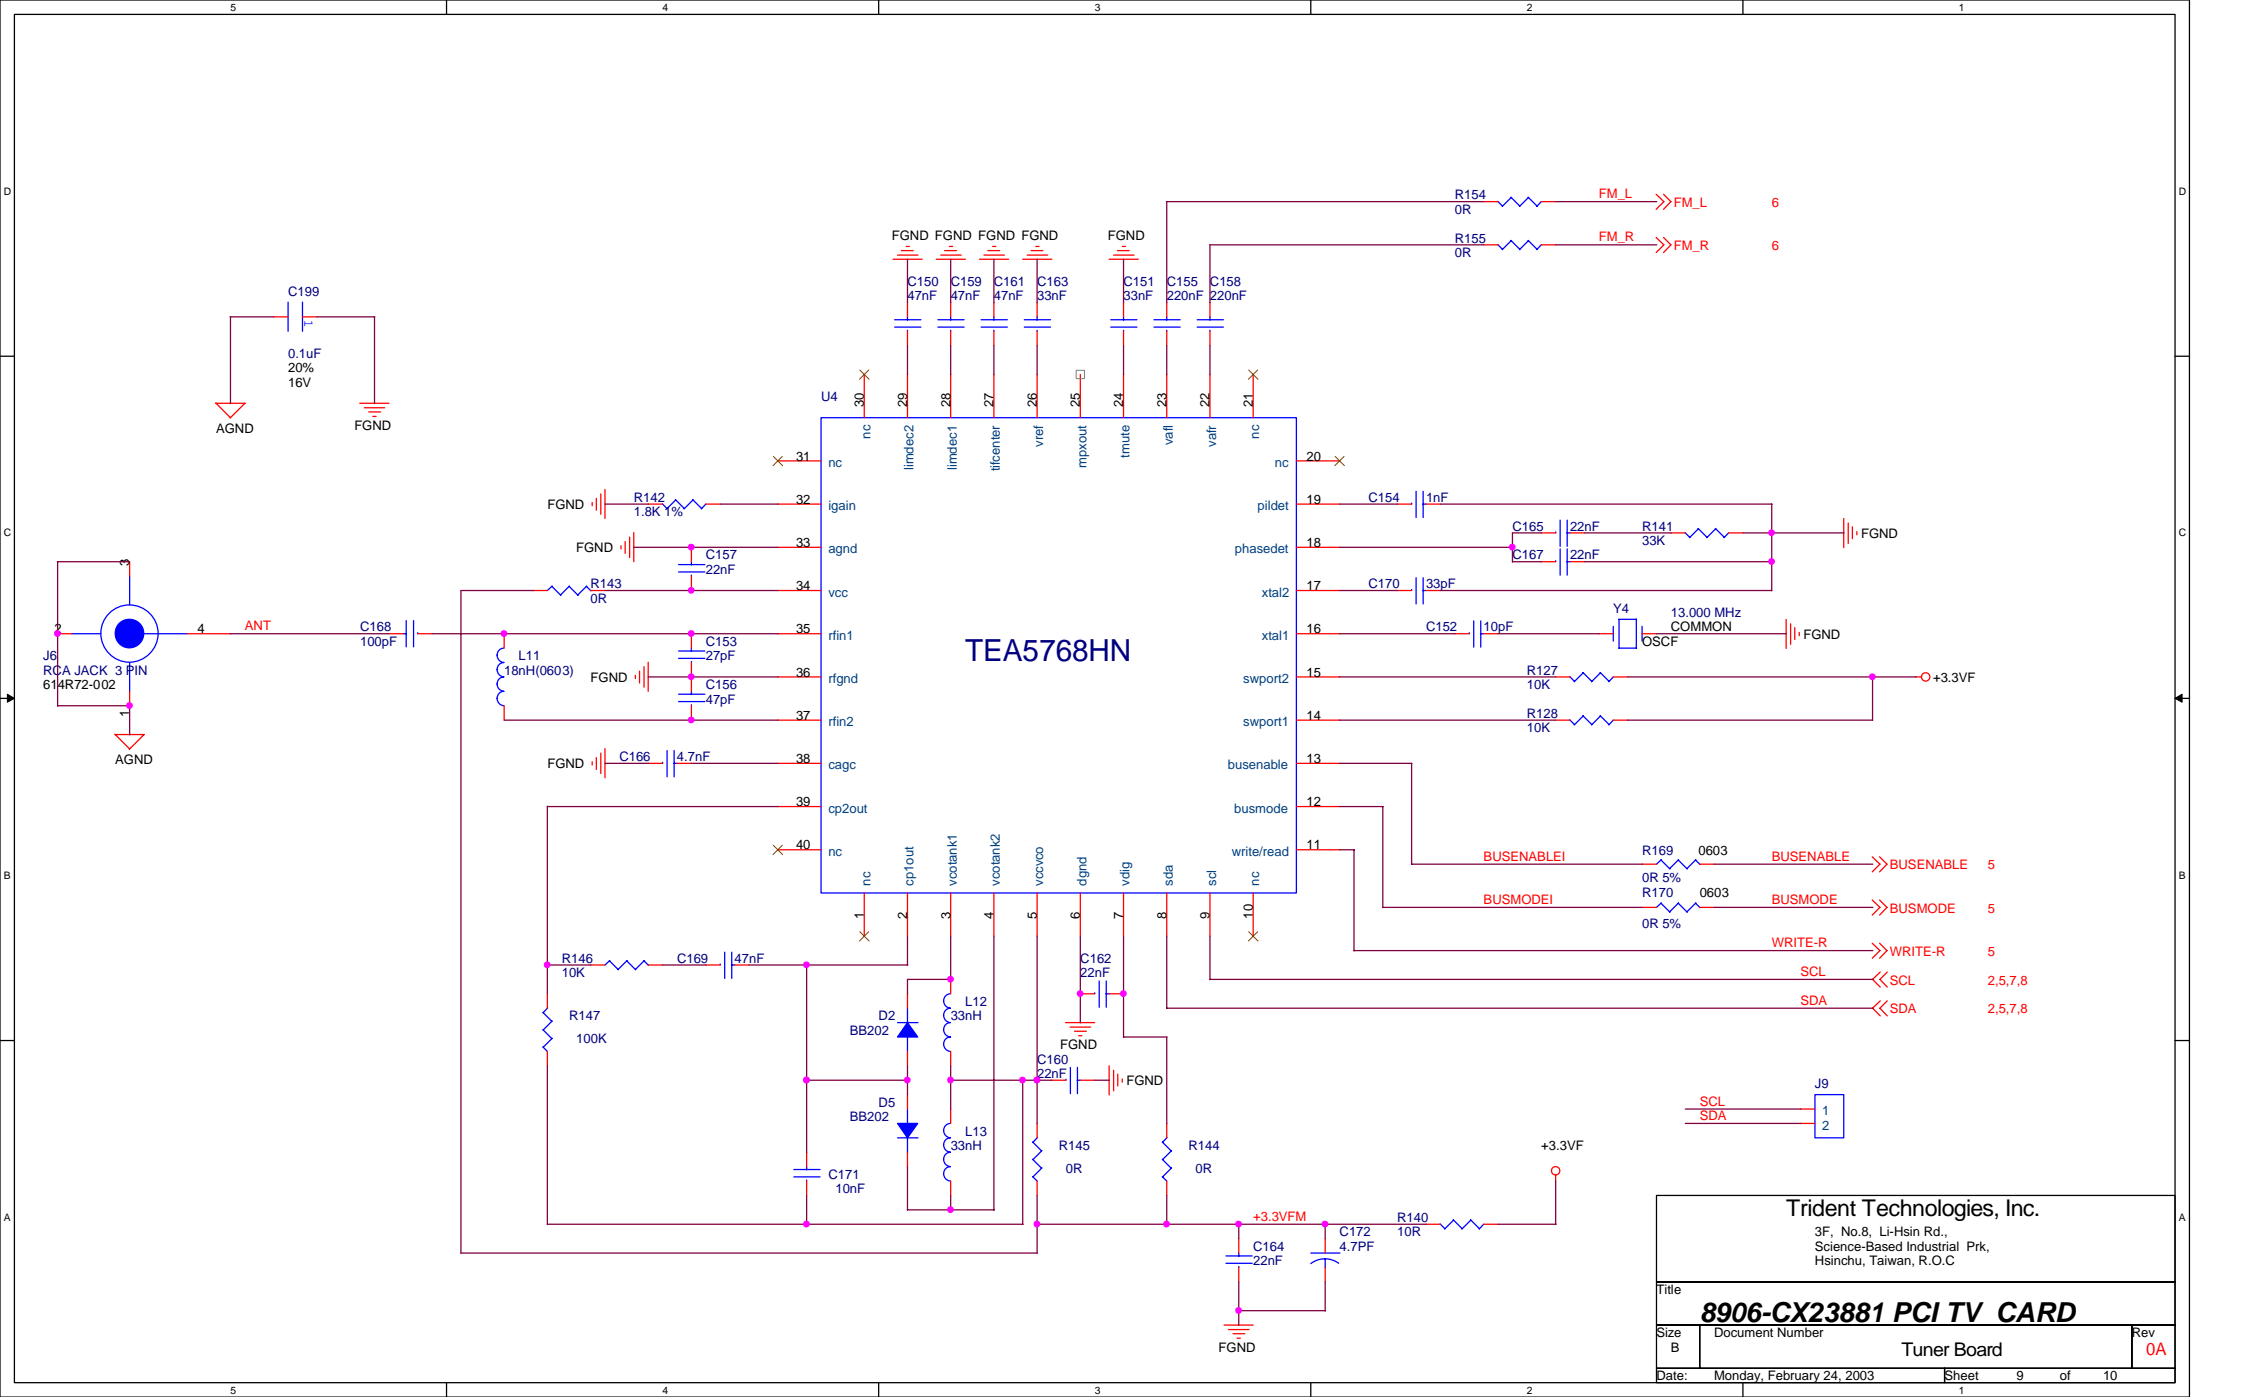

NTSC Version
For PAL: C174 is 20pf and R156 is 301 1%

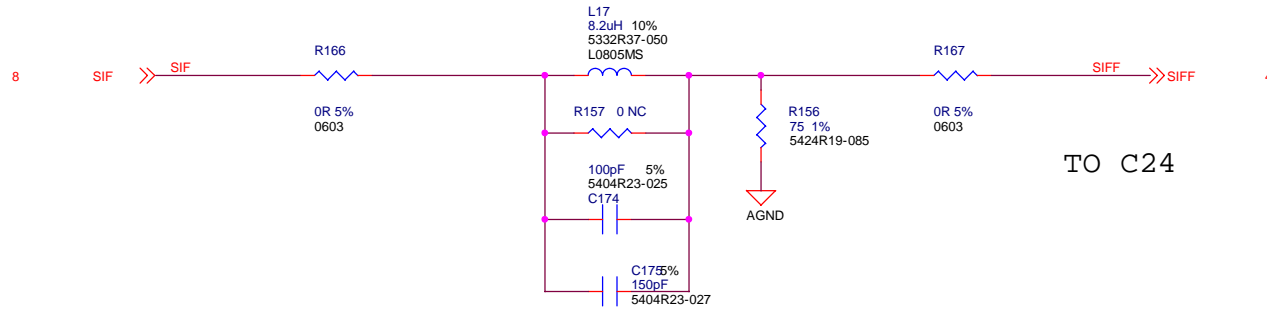

For the European market:
C177 = 910pF
C178 = 860pF
C180 = 3.9nF

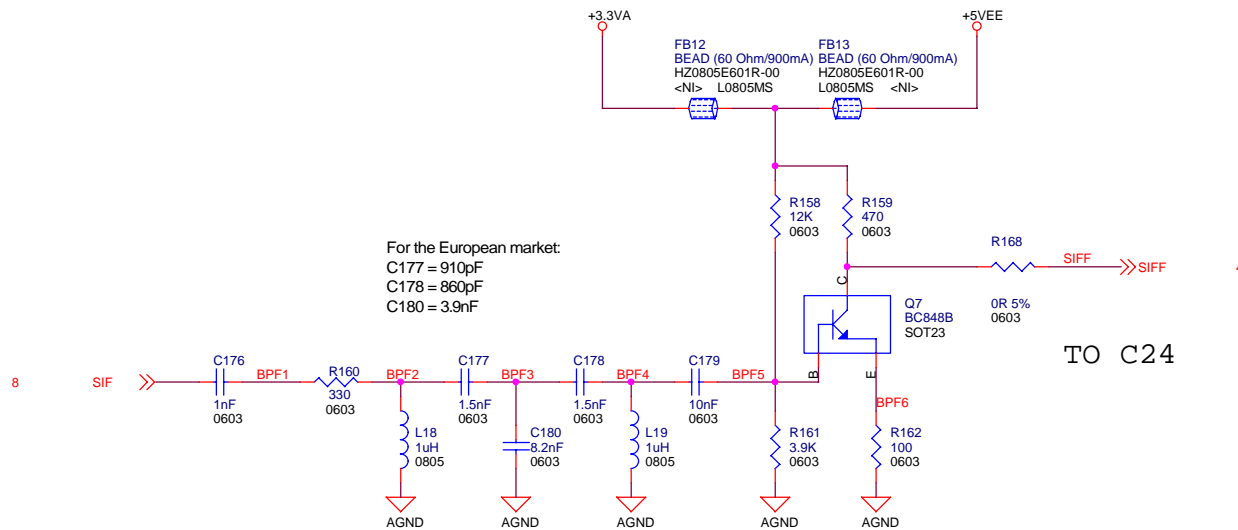

Micro-Star International Co., LTD.

Size B	Document Number SIF FILTER	Rev 0A
Date: Monday, February 24, 2003	Sheet 10	of 10