



NV11, 2MX32 SDR SDRAM, DUAL RGB, EXTERNAL DVI-I, AGP4X, TV I/F.


PCI DEVICE ID 0X0=0X110 FOR NV11.

STRAPS: AGP4X, FAST WRITE ENA, ADP BIOS, NORMAL PCIAD, 14.318MHZ
STRAP_RAM_TYPE [5:2]=0000-2MX32 SDR SDRAM



Micro-Star International Co., LTD.			
MS-8833 based on P38C01			
Size B	Document Number HISTORY		Rev 0A
Date:	Tuesday, May 22, 2001	Sheet	1 of 12




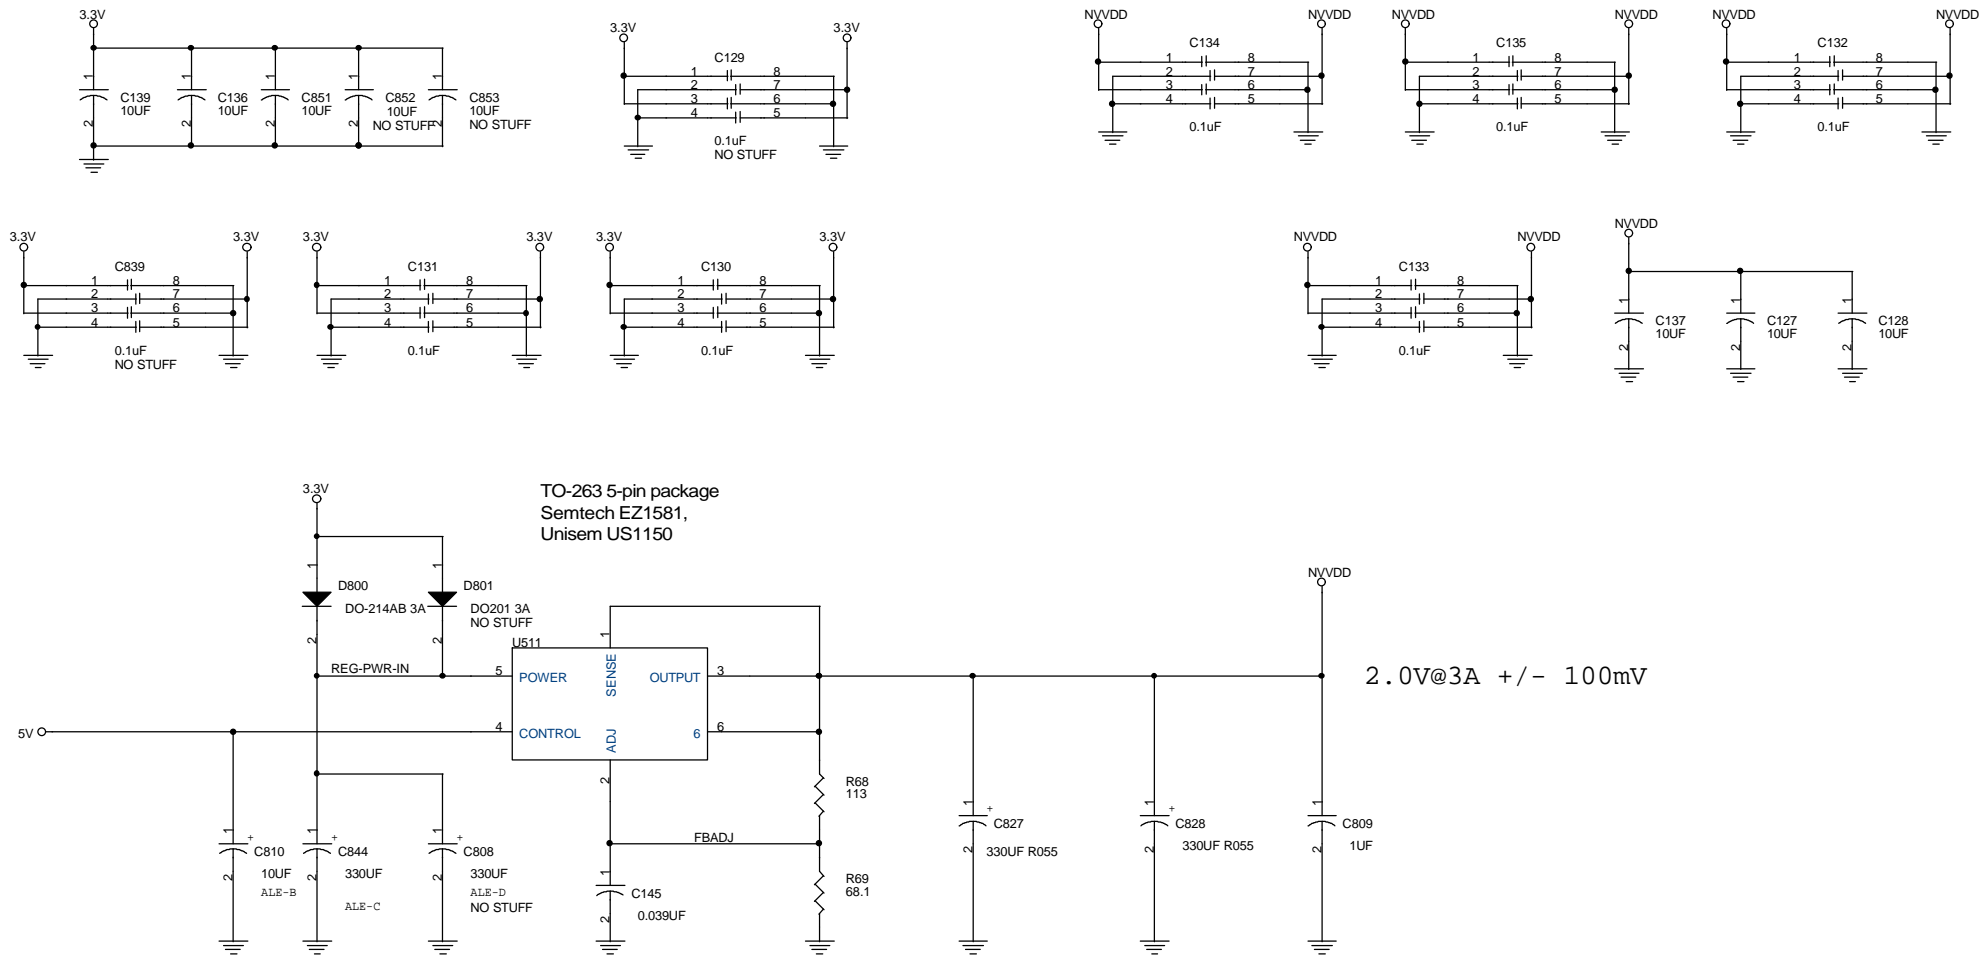



Micro-Star International Co., LTD.

MS-8833 based on P38C01

Size B	Document Number NV11 DECOUPLING	Rev 0A
Date: Tuesday, May 22, 2001	Sheet 4	of 12

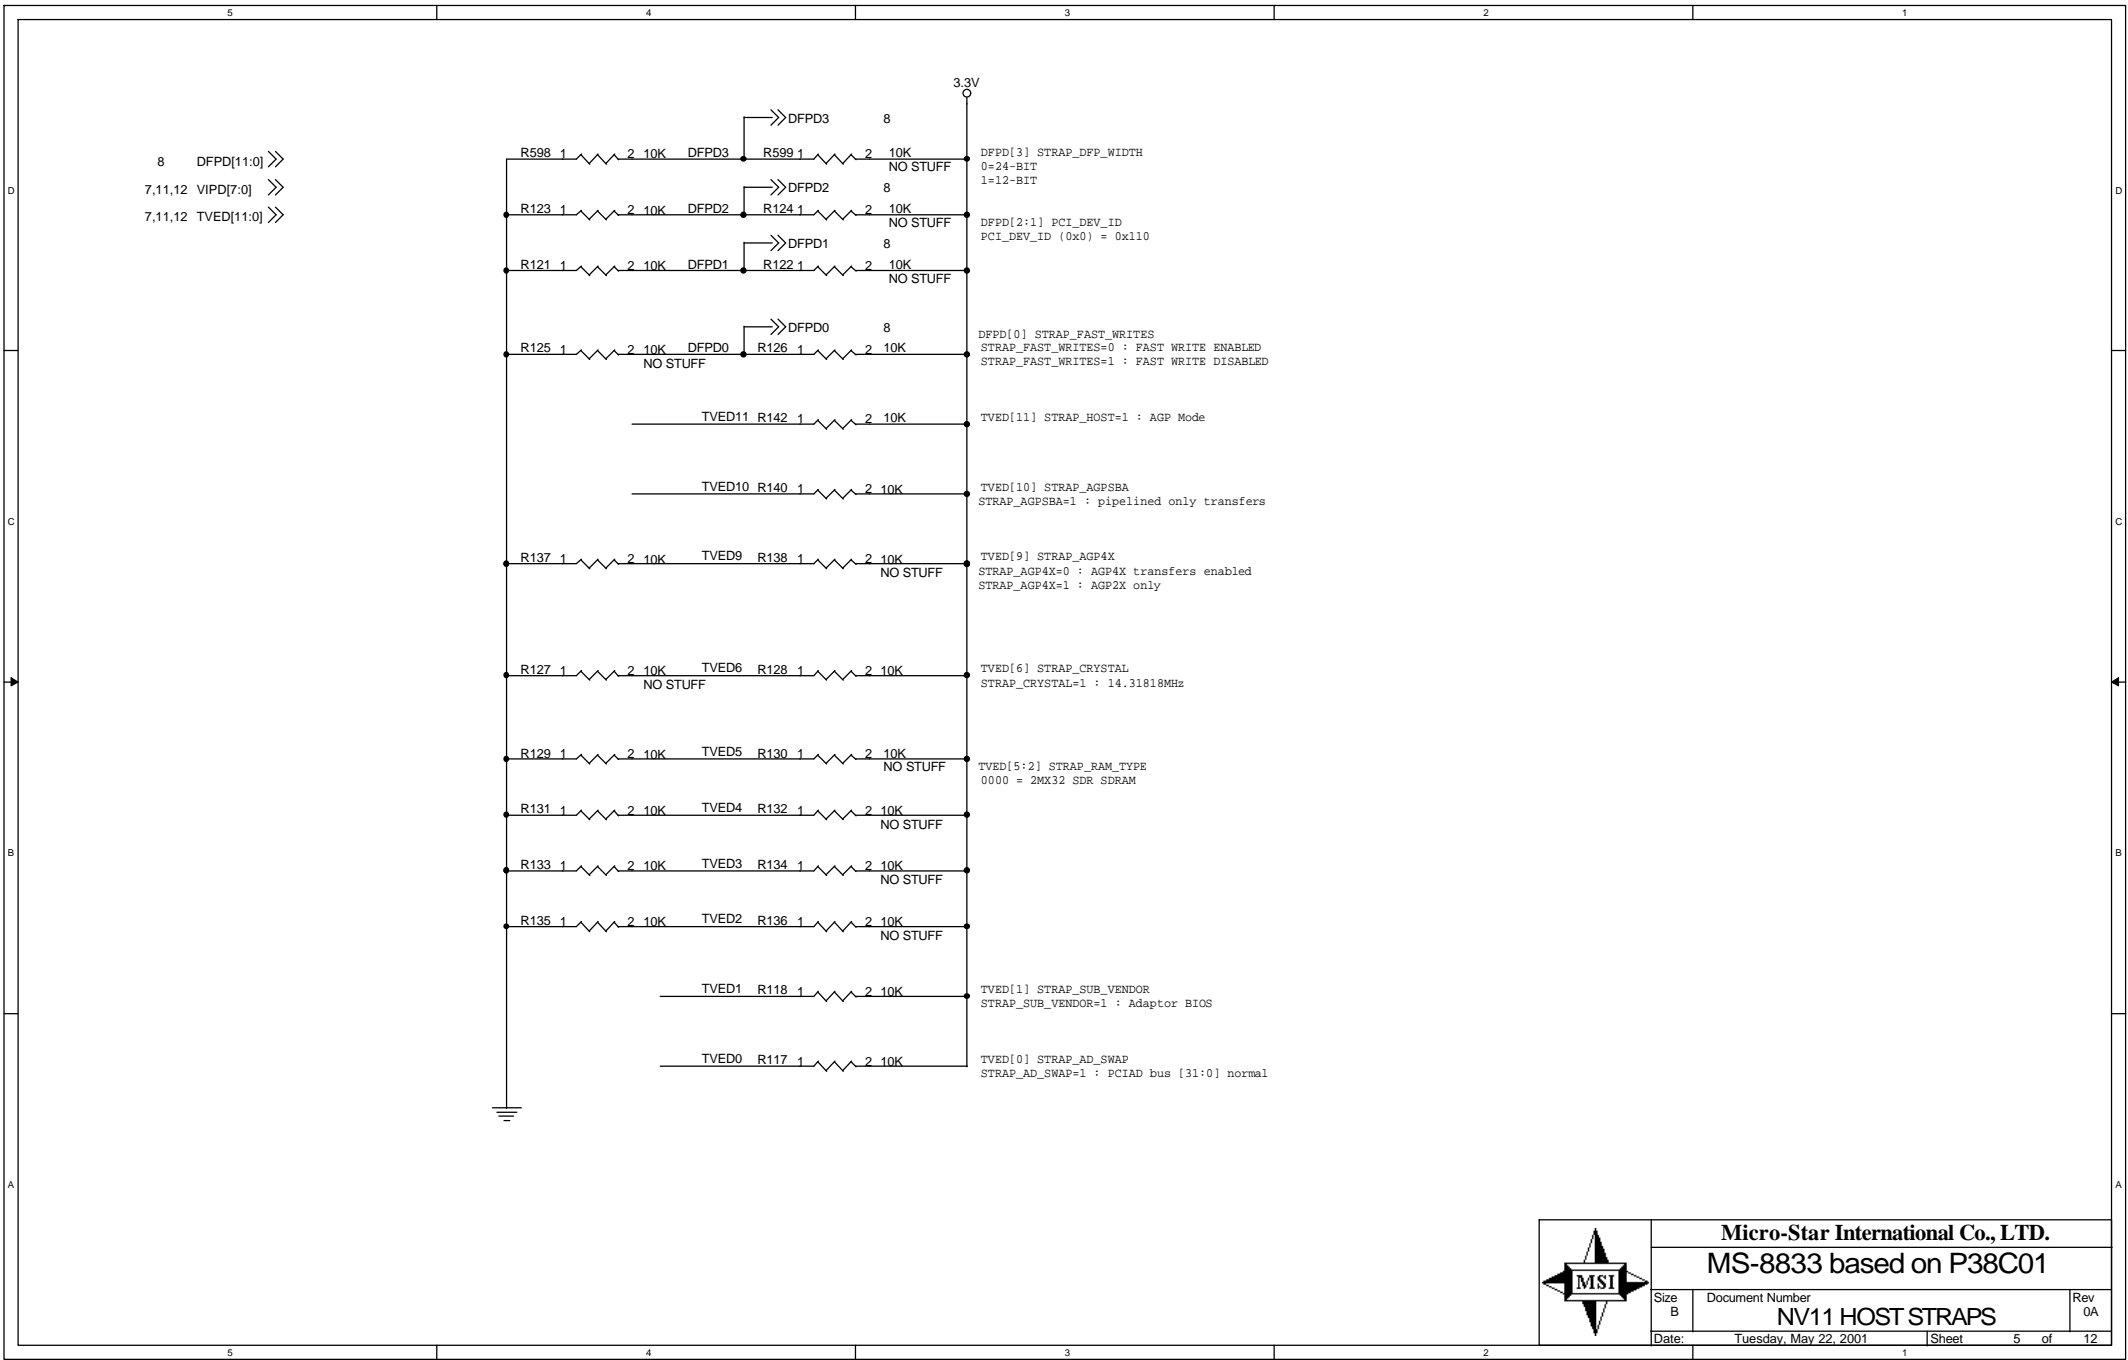

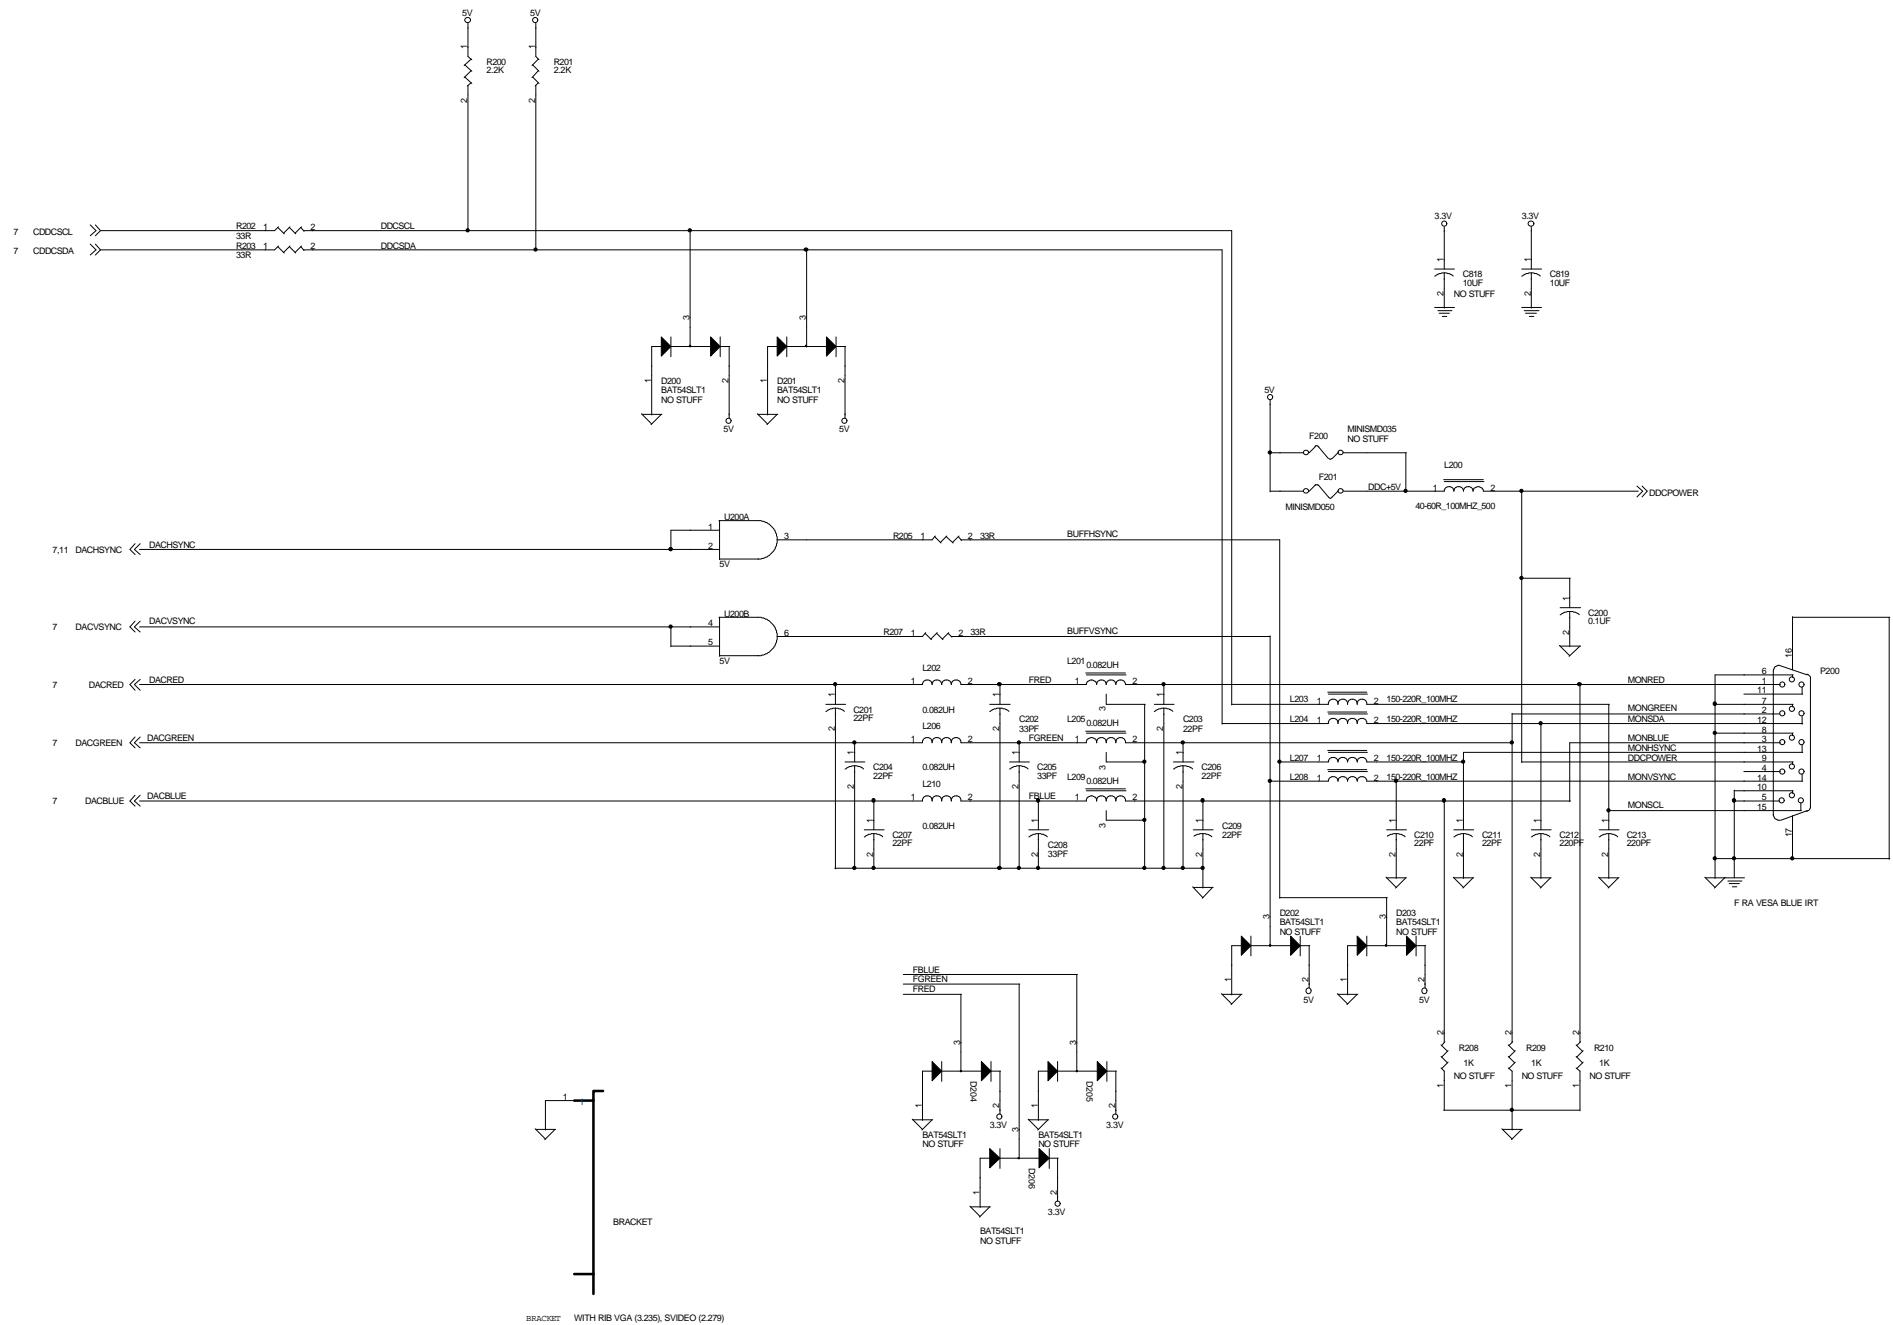



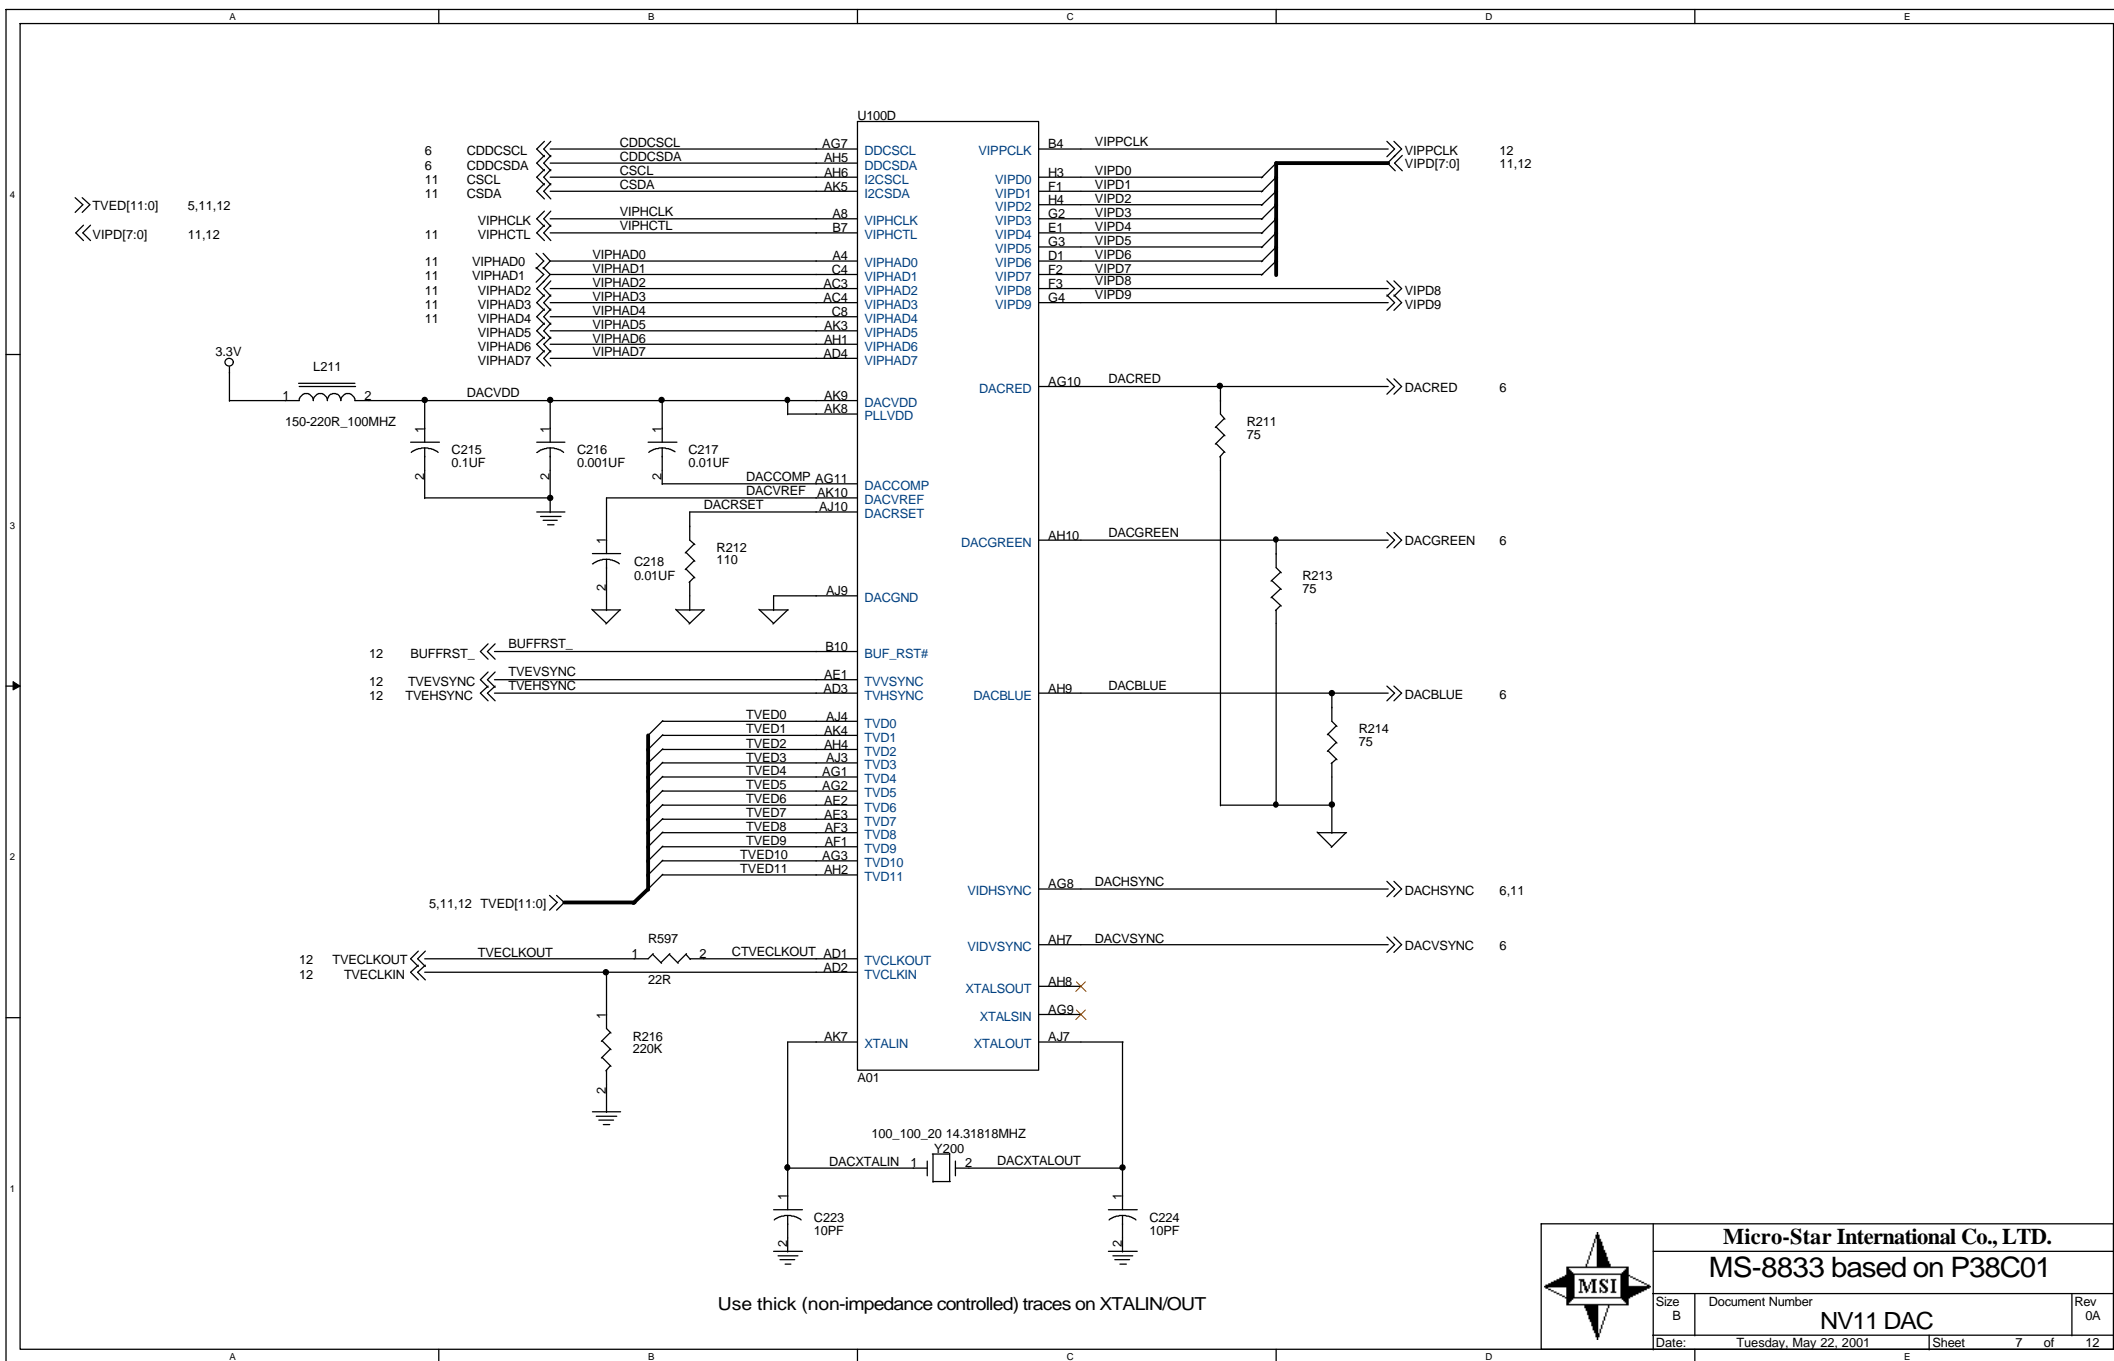


Micro-Star International Co., LTD.

MS-8833 based on P38C01



Size B	Document Number NV11 DAC	Rev 0A
Date: Tuesday, May 22, 2001	Sheet 7 of 12	

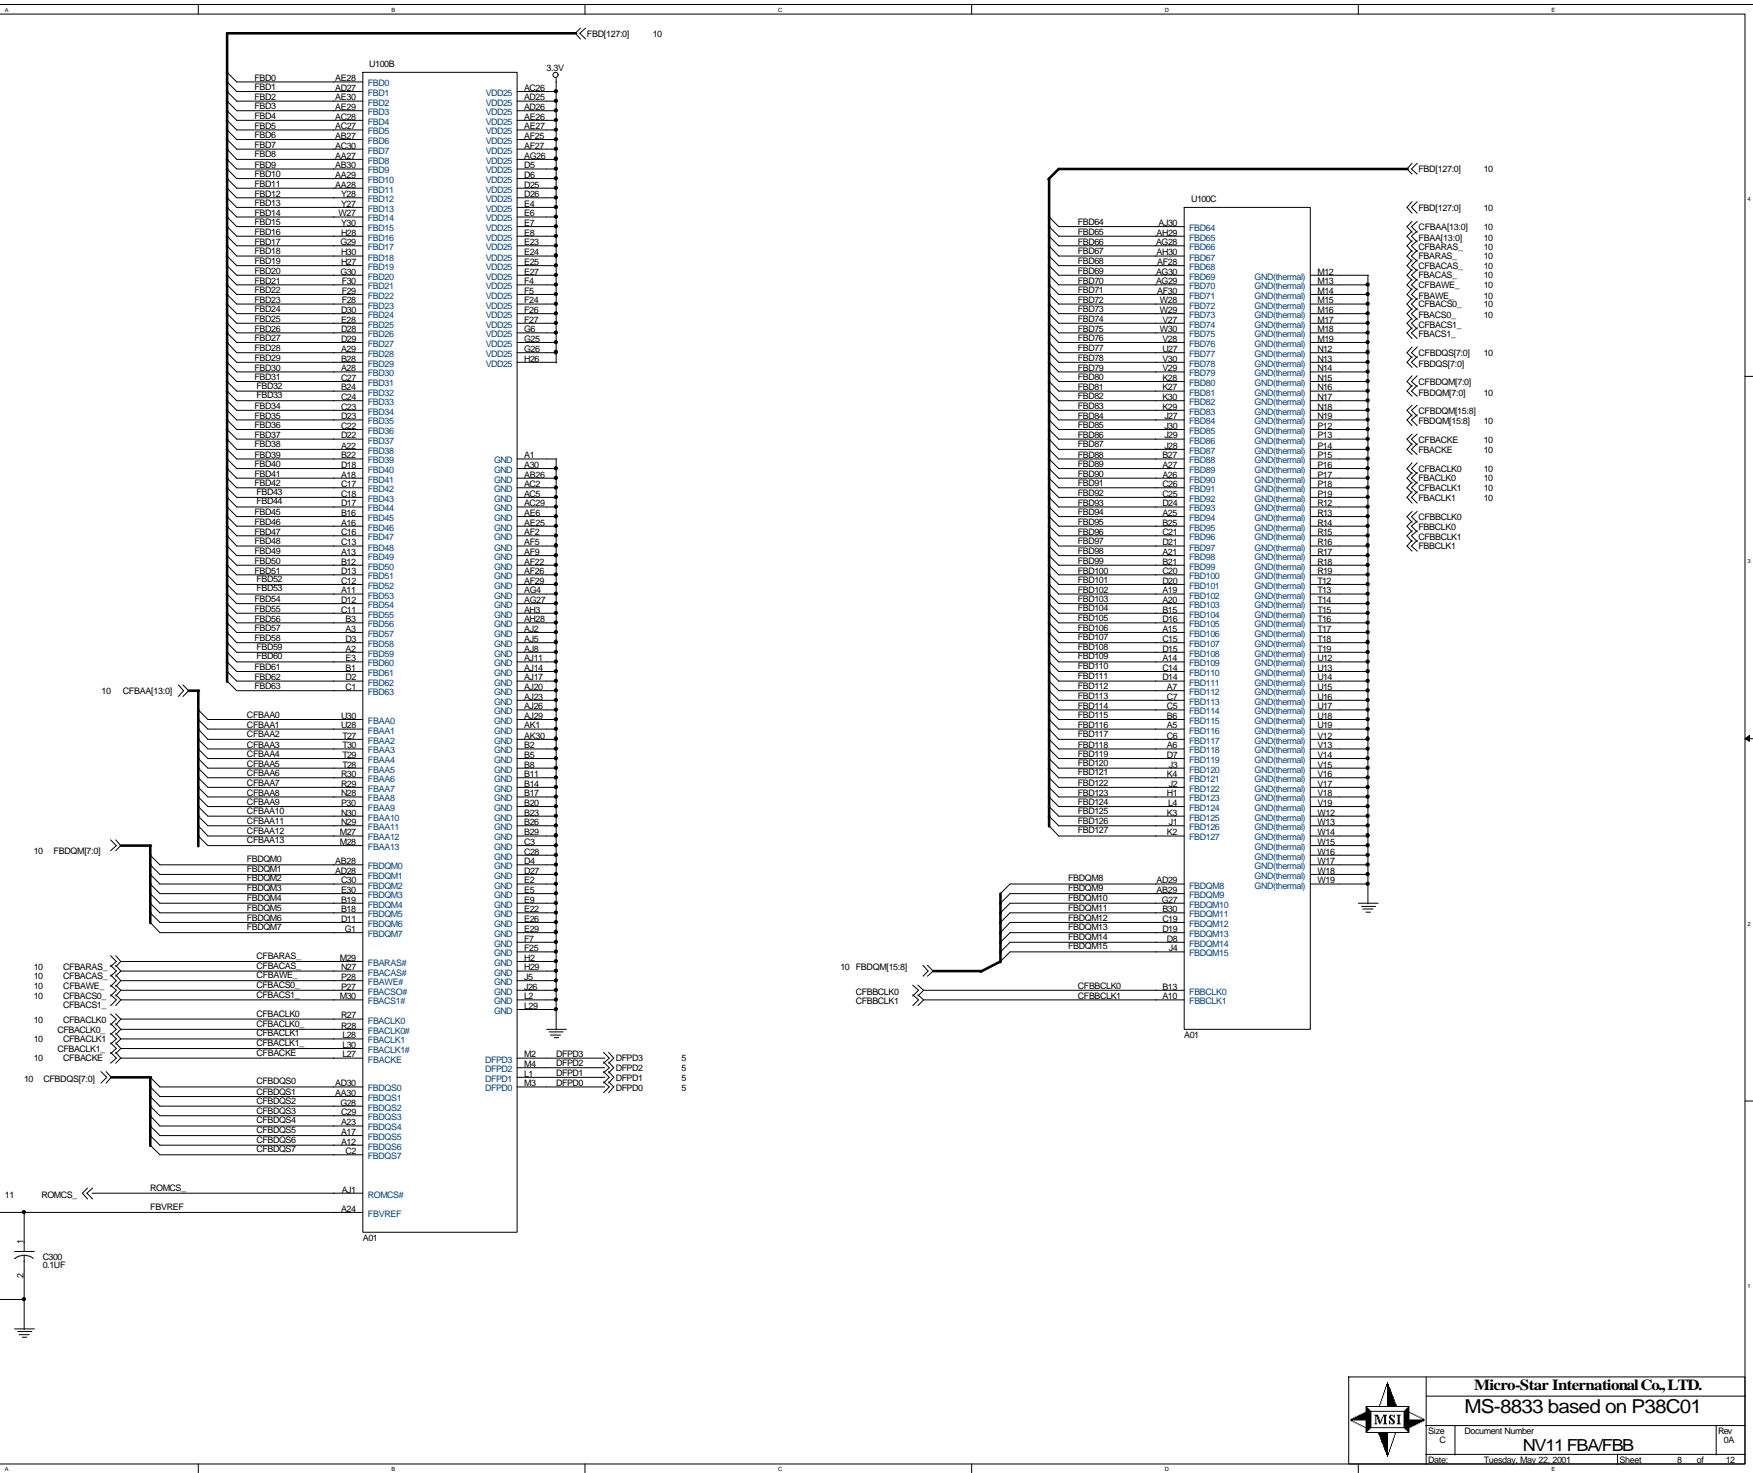


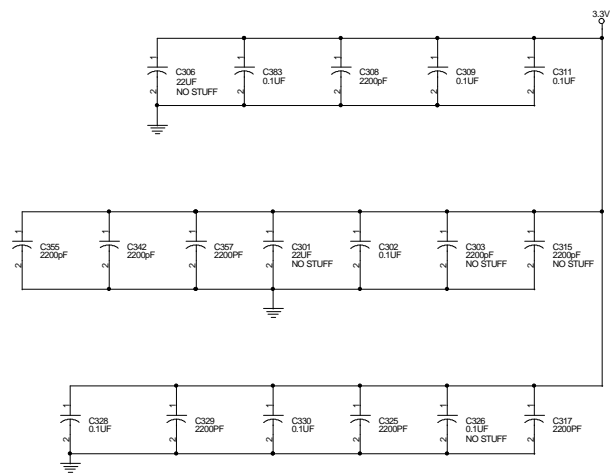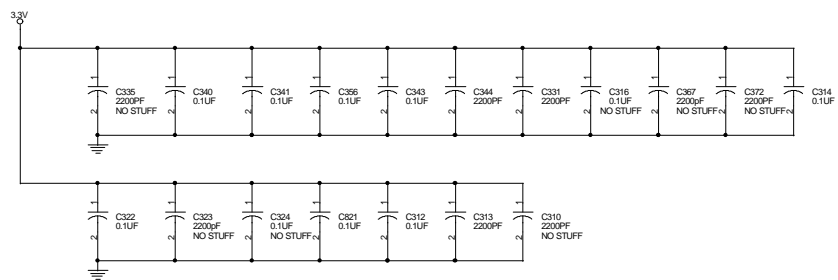


Micro-Star International Co., LTD.
MS-8833 based on P38C01

Size C Document Number FB DECOUPLING Rev 0A
Date: Tuesday, May 22, 2001 Sheet 9 of 12

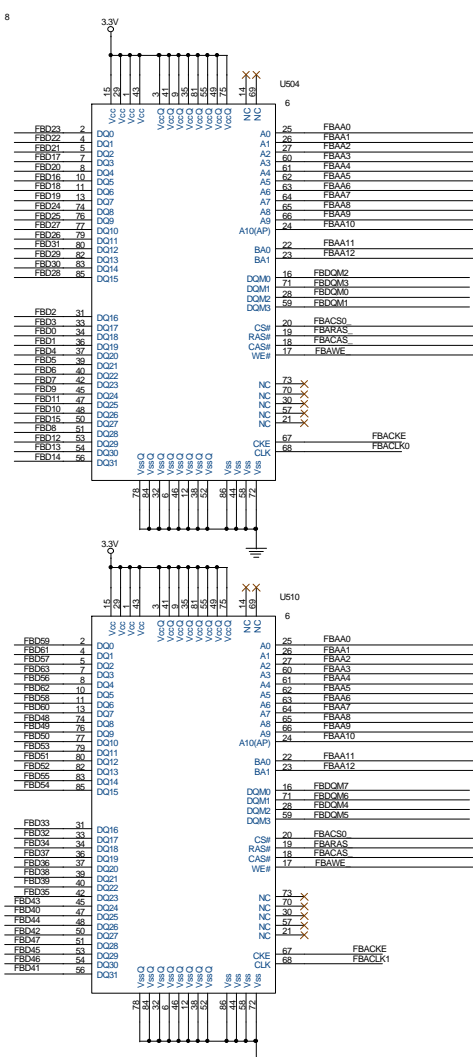

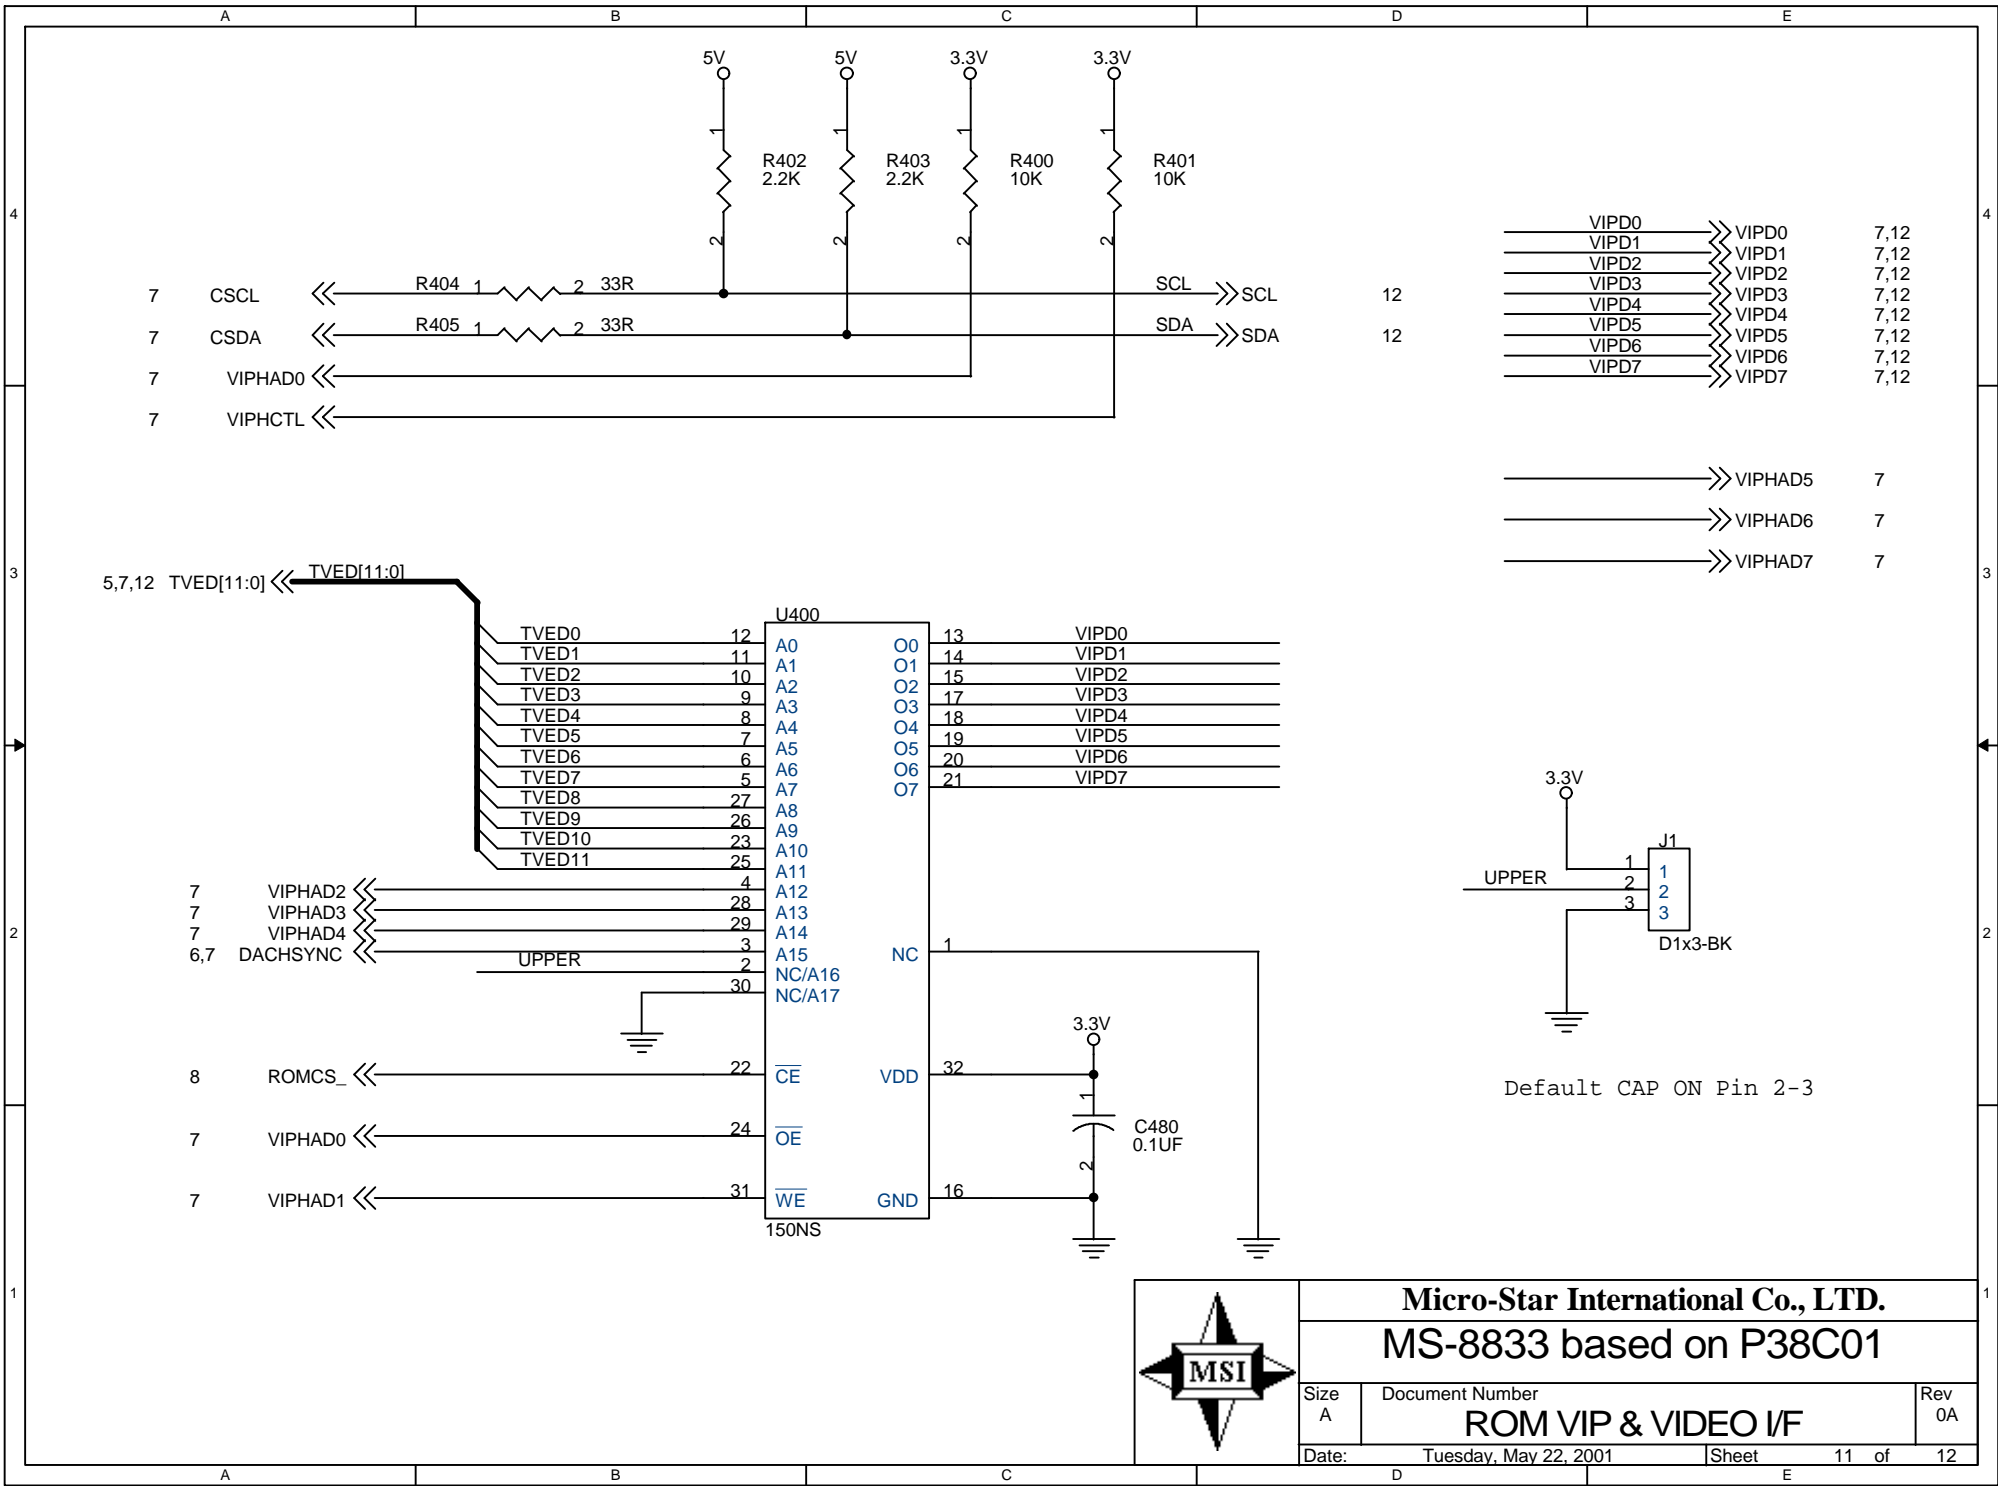

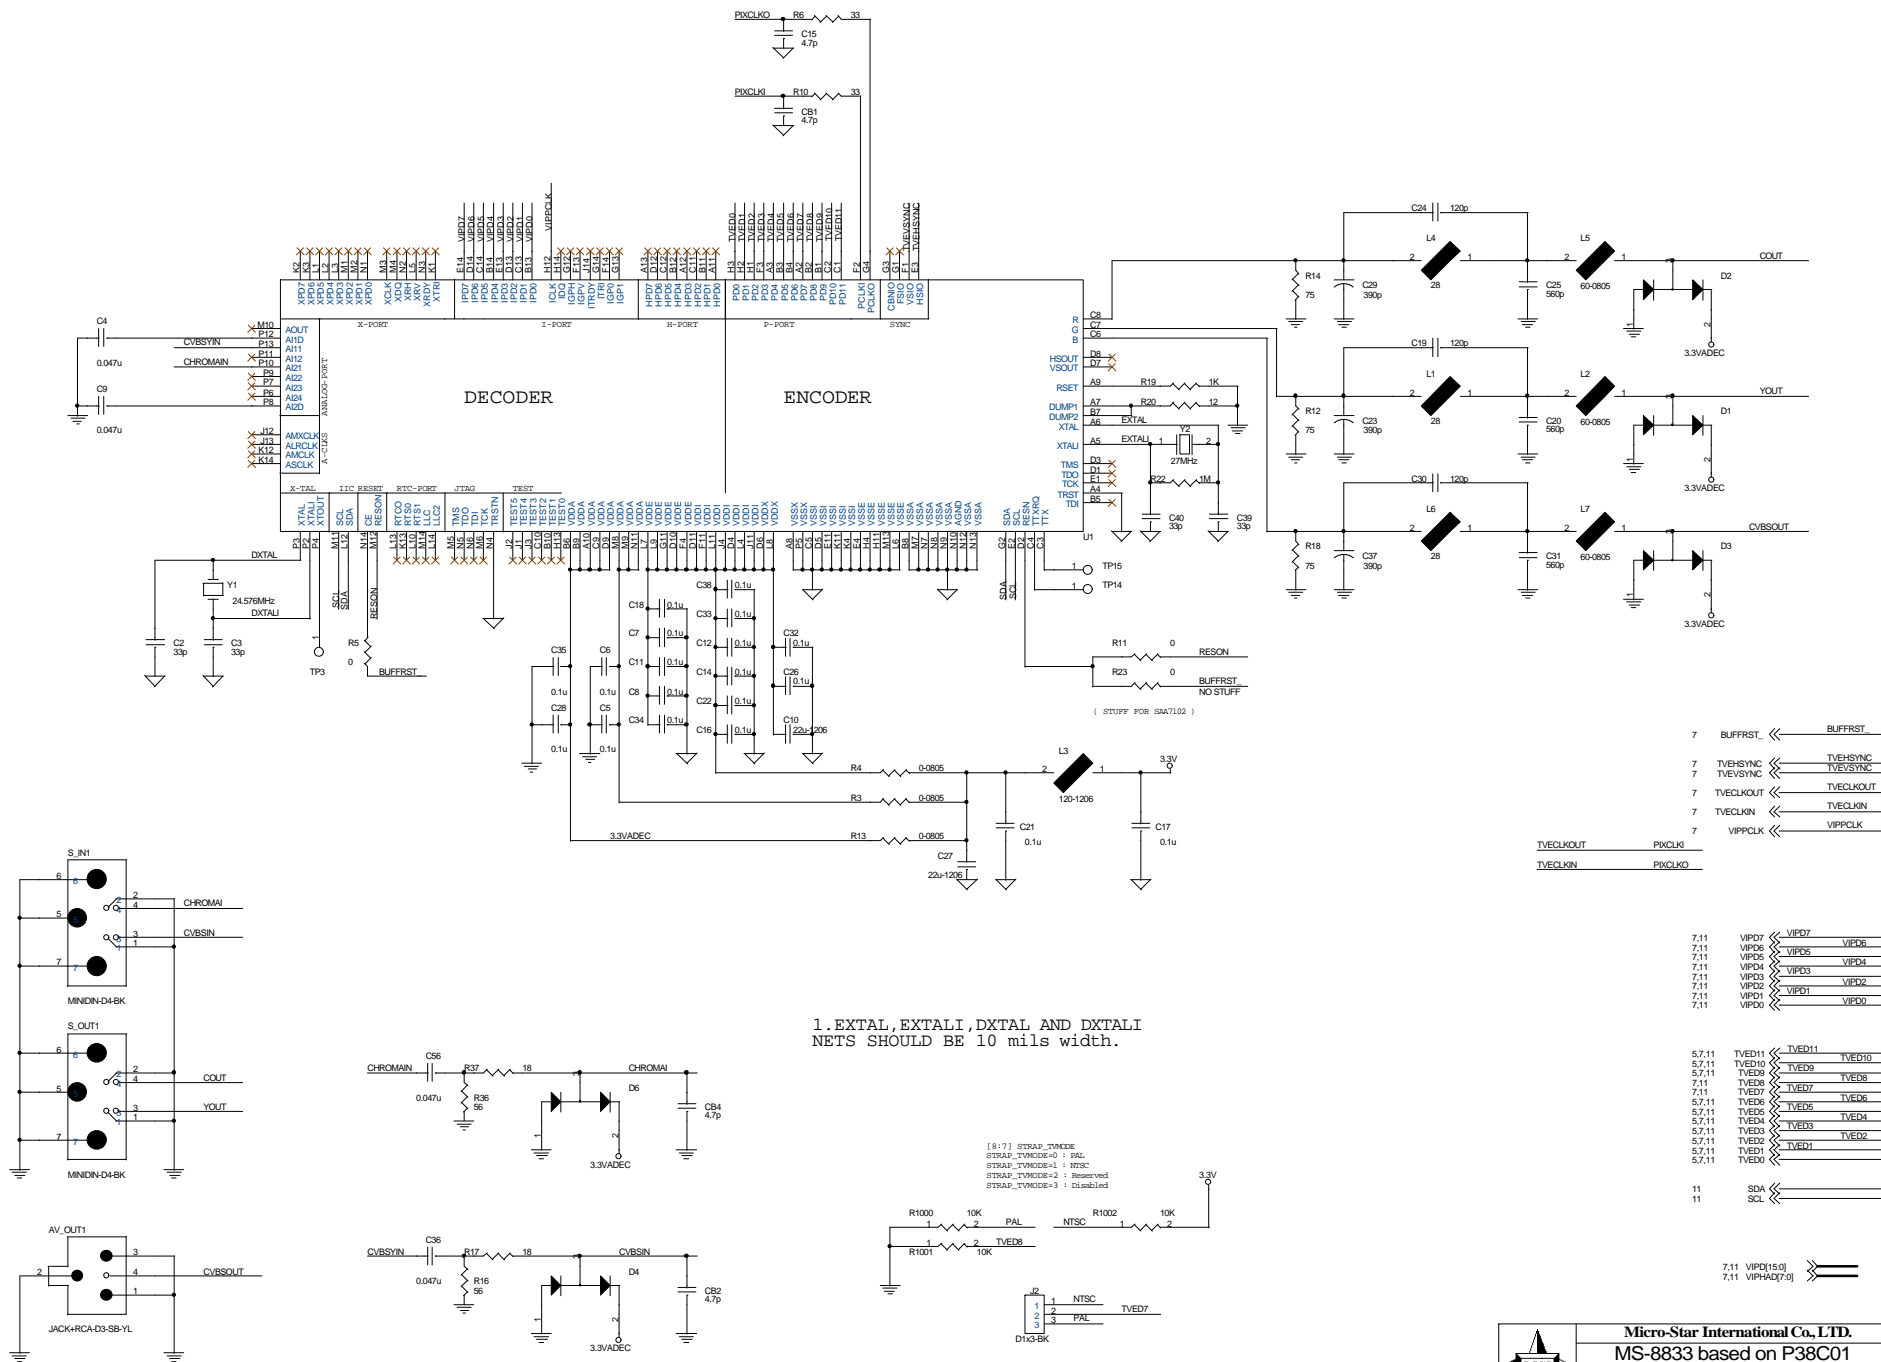

1. XTAL, EXTALI, DXTAL AND DXTALI
NETS SHOULD BE 10 MILS WIDTH.



Micro-Star International Co., Ltd.
MS-8833 based on P38C01

Size C Document Number
TV OUT & VBI Function
Date: Tuesday, May 22, 2001 Sheet 12 of 12