HD7950 Standard Operation Procedure Revision: 1.13

Doc. No:

Date: May. 22, 2012

Page: 10 Grade:

Rev	Modified Chapters	Modification Description	Issued Dept.	Issued by	Revised Date
1.00		First Release	GRMA	Ariel_wang	Feb.6,2012
1.01		Add new P/N(YV01P1-A02)	GRMA	Ariel_wang	Feb.6,2012
1.02		Add new P/N(YV01P2-A01)	GRMA	Ariel_wang	Feb.6,2012
1.03		Add new P/N(YV02B0-B03)	GRMA	Ariel_wang	Apr.19,2012
1.04		Add new P/N(YV02B1-B03)	GRMA	Ariel_wang	Apr.19,2012
1.05		Add Fan Program	GRMA	Ariel_wang	Apr.19,2012
1.06		Add new PCBA(YV01P0-A13)	GRMA	Ariel_wang	May.31,2012
1.07		Add new PCBA(YV01P2-A11)	GRMA	Ariel_wang	May.31,2012
1.08		Add new PCBA(YV02B0-B14)	GRMA	Ariel_wang	Jun.15,2012
1.09		Add new PCBA(YV02B1-B14)	GRMA	Ariel_wang	Jun.15,2012
1.10		Add new PCBA(YV02B0-B35)	GRMA	Ariel_wang	Nov.23,2012
1.11		Add new PCBA(YV02B1-B35)	GRMA	Ariel_wang	Nov.23,2012
1.12		Add new PCBA(YV02B0-B5)	GRMA	Jory_yuan	May.22.2013
1.13		Add new PCBA(YV02B1-B45)	GRMA	Jory_yuan	May.22.2013

Authorize	Review	Originator	riel
by	by	By Ar	

Form No: T2-009-01 Rev.01

HD7950

Standard Operation Procedure

Doc. No:

Date: May. 22, 2012

Rev.: 1.13 Page: 1

1.Objectives

Create test procedure.

2.Scope

Model: HD7950

PN:

YV01P0(A03)YV01P1(A02)YV01P2(A01)YV02B0(B03/B14/B35/B45) YV02B1(B03/B14/B35/B45)YV01P0(A13)YV01P2(A11)

3.Test Item

- 3.1 Diagnostic test in 64-bit Linux
- 3.2 3DMark06(contain HDMI test)
- 3.3 Temperature test
- 3.4 Fan test

4.Relevant Document

None.

5.Definition:1. If the model name contains P, please test HDCP function.

Ex: EAH***/HTDP/512M/A

- 2. If you test HDMI already, it's unnecessary to test HDCP. The HDMI contains HDCP function.
- 3. System Memory: 1GB for a single GPU test station; please add an additional 512MB of system memory for each additional GPU used for the test configuration
- 4. HD7950 Test Program in 64-bit Linux system.

HD7950 Standard Operation Procedure

Doc. No:
Date: May. 22, 2012

Rev.: 1.13 Page: 2

6. Operation Procedures:

6.1 Attention

- 6.1.1 To avoid damaging devices or M/B, please turn off A/C power then unplug VGA card.
- 6.1.2 While unplugging the card, do it in upright direction to avoid damaging slot & golden finger.
- 6.1.3 If any problem happens, please inform test supervisor. Base on ATX power specification, +5V standby voltage is existed while AC power is connecting. For safety reason, please turn off main power during break time or idling test.
- 6.1.4 Some test items should be tested under Windows environment. (Please install windows test environment by yourself).

HD7950

Standard Operation Procedure

Doc. No:

Date: May. 22, 2012

Rev.: 1.13 Page: 3


6.2 Fixture connect

- 6.2.1 Install Intel P7 CPU & CPU Fan.
- 6.2.2 Install DDR3 Memory to DIMM1~4. (a minimum memory of 2GB for Linux test)
- 6.2.3 Plug USB Mouse and PS/2 Keyboard into MB.
- 6.2.4 Plug VGA Card HD7950 into PCIEX16_1.
- 6.2.5 If this card has 6 PIN or 8 PIN of Power supply, please connect power con of VGA card & Power supply via bundled power cable.

(6 PIN of Power supply to 6 PIN of VGA card)

(8 PIN of Power supply to 8 PIN of VGA card)





6.2.6 Connect SATA HDD & SATA con via SATA cable



- 6.2.7 Plug 4PIN 12V power(a minimum power of 1200W) cable into CON12V.
- 6.2.8 Plug ATX Power on Power(a minimum power of 1200W) Connector.



HD7950

Standard Operation Procedure

Doc. No:

Date: May. 22, 2012

Rev.: 1.13 Page: 4

6.3 Certain test.

6.3.1 Diagnostic test in 64-bit LINUX system

6.3.1.1 Please connect LCD monitor & card's DVI CON via a DVI cable.



- 6.3.1.2 Press Power Switch then turn on power button.
- 6.3.1.3 Press "Del" to enter CMOS setup menu while boot screen is displaying.

EXIT -> Load Setup Defaults. BIOS SETUP UTILITY
Boot ESSE Power Advanced Main Exit Options Exit system setup Exit & Save Changes Exit & Discard Changes after saving the changes. Discard Changes F10 key can be used for this operation. Load Setup Defaults Select Screen Select Item Enter Go to Sub-screen F1 General Help F10 Save and Exit (C)Copyright 1985-2002, American Megatrends

6.3.1.4 Run test program in 64-bit linux system.

 $Path: hd7950 \setminus yv01p0a0. sh\ or\ yv01p1a0. sh\ or\ yv01p0a1. sh$

Path:hd79501\yv01p2a0.sh or yv01p2a1.sh

Path:hd79502\yv02b0b0.sh or yv02b1b0.sh or yv02b0b1.sh or yv02b1b1.sh

Path:hd79503\yv02b0b3.sh or yv02b1b3.sh

Path:hd79504\yv02b0b4.sh or yv02b1b4.sh

Please enter into the file of hd7950 enter the following command: cd./hd7950

Then, please

run ./yv01p0a0.sh ./yv01p1a0.sh ./yv01p2a0.sh ./yv02b0b0.sh ./yv02b1b0.sh ./yv01p0a1.sh ./yv01p2a1.sh ./yv02b0b1.sh ./yv02b1b1.sh or ./yv02b0b3.sh ./yv02b1b3.sh

6.3.1.5 Memory test

If you want to test memory, please run ./tserver -test=memfa

Path:hd7950\

Path:hd79501\

Path:hd79502\

Path:hd79503\

Path:hd79504\

6.3.1.6 BIOS Version

If you want to see the version of bios, please run ./atiflash -ai 0 or ./BIOSinfo2_08.

Path:hd7950\

Path:hd79501\

Path:hd79502\

HD7950

Standard Operation Procedure

Doc. No:

Date: May. 22, 2012

Rev.: 1.13 Page: 5

Path:hd79503\

Path:hd79504\

6.3.1.7 BIOS flash

Please use the following command to flash bios and notice the size of character.

 $Path:hd7950\backslash (U2/U3)$

Path:hd79501\(U2/U3)

Path:hd79502\(U3 near GPU)

Path:hd79503\ Path:hd79504\

For YV02B0-B03/B14&60YV02B1-VG0B03/B14, please set the switch on U3 (near GPU) to flash VBIOS, and you can not flash BIOS set the switch on U2 (near IO).

Command:./atiflash -p -f 0 xxx.rom

Notice:

If you can not flash bios because of the bios locked, please use ./atiflash –unlockrom 0 to unlock bios. And then, please use ./atiflash –lockrom 0 to lock bios after updating latest bios.

6.3.1.8 FAN Test

If you want to test FAN, please run ./aftsi111

Path: Path:hd7950\aftsi111

Notice:

./aftsi111 apply the following Part Number

YV01P0(A03)YV01P1(A02)YV01P2(A01)YV02B0(B03/B14)YV02B1(B03/B14)

YV01P0(A13)YV01P1(A11)

Path: Path:hd79503\aftsi111

Notice:

./aftsi111 apply the following Part Number

YV02B0(B35)YV02B1(B35)

6.3.1.9 After finishing 64-bit Linux testing, please enter Windows environment to test 3DMark.

6.3.2 3DMark test(contain HDMI test)

- 6.3.2.1 Please install 3DMark program by yourself.
- 6.3.2.2 Please connect VGA card to LCD via HDMI cable or MINI Display Port to HDMI cable or Display port cable.



MINI Display Port CON(*2)

HD7950 Standard Operation Procedure


Doc. No:

Date: May. 22, 2012 Rev.: 1.13 Page: 6



Display Port CON

- 6.3.2.3 Please install VGA card driver in Windows(You must use individual driver of this card).
- 6.3.2.4 Please run 3DMark06 base on this card (please test 1 cycle).
- 6.3.2.5 Press "Select" to enter Select test menu. You can choose "HDR1" for default setting.

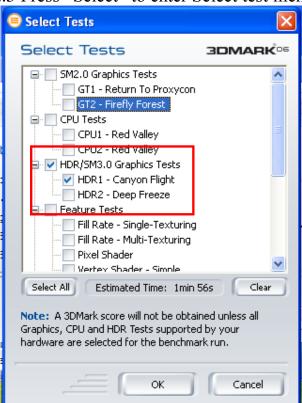


6.3.2.6 Press "Demo" to enter Demo menu. You can choose "Sounds" for default setting.

HD7950 Standard Operation Procedure

Doc. No:

Date: May. 22, 2012 Rev.: 1.13 Page: 7

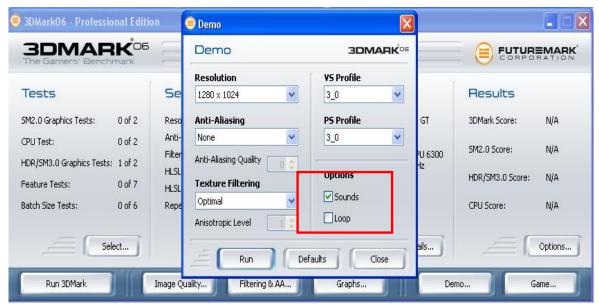

- 6.3.2.7 Please pay attention to check if there is flickering, discolor, crash and so on. If there's no problem, it can be judged OK!
- 6.3.2.8 Please listen to voice carefully to check whether it outputs sounds. If not, HDMI test fail.



6. 3.2.9 If test OK, please test temperature test.


6.4 Temperature test

- 6.4.1 Please copy Thermaltool(1.0.05) to Windows by yourself.
- 6.4.2 Please run ThermalTest.exe.


HD7950 Standard Operation Procedure

Doc. No:


Date: May. 22, 2012 Rev.: 1.13 Page: 8



6.4.3 If test ok, show pass.

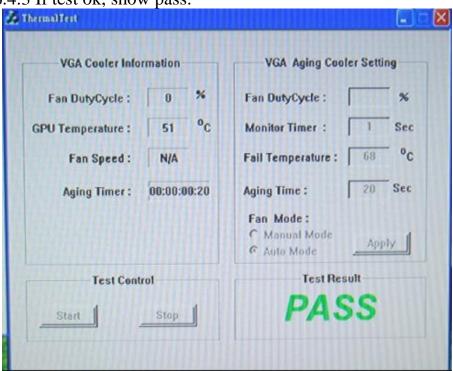

6.4.4 If test fail, show fail.

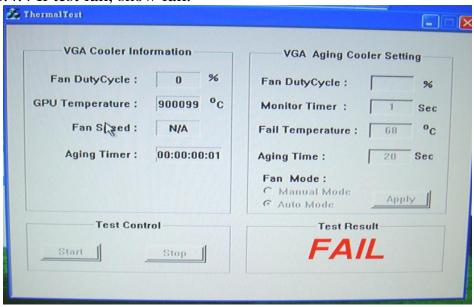

6.4.5 If test OK, please NTF test.

HD7950 Standard Operation Procedure Doc. No:

Date: May. 22, 2012

Rev.: 1.13 Page: 9

7.Appendix

-				T	
NO#	Equipment Description	ASUS Part#	Supplier	Quantity	Remarks
1	Dell 30 inches (3008WFP) (Buying a local LCD by yourself)			1	Poets.
2	USB MOUSE			1	
3	PS/2 KEYBOARD			1	
4	ATX POWER SUPPLY(a minimum power of 500W)			1	
5	Intel CPU Intel(R) Core(TM)2 CPU		local	1	E1100
6	Heat sink + FAN	22-240000160		1	
7	DDR3 1333 2G	20-TT2605618	local	4	E PARTE
8	TEST HDD			1	
9	SATA HDD Cable	14-000107070	ASUS	1	
10	PCIEX16 VGA CARD			1	
11	Dual link DVI cable (Buying a local DVI cable by yourself)			1	
12	HDMI extend cable (Buying a local HDMI cable by yourself)			1	
13	P7H55-M/USB3 MB	80- MIBBKA-*		1	
14	Mini Display port to HDMI cable (Buying a local Mini Display port to HDMI cable by yourself)			1	
15	Display port cable (Buying a local Display port cable by yourself)			1	