TUF3-GTX1660TI-6G-GAMING(CG161P)

Repair Guide

Model List

| Model name | 60PN | GPU | Date | | |
|--------------------|--------|--------|----------|--|--|
| TUF3-GTX1660TI-6G- | YV0CR7 | CG161P | 2019/8/2 | | |
| GAMING | | | | | |


STANDARD APPEARANCE

TUF3-GTX1660TI-6G-GAMING






BLOCK DIAGRAM

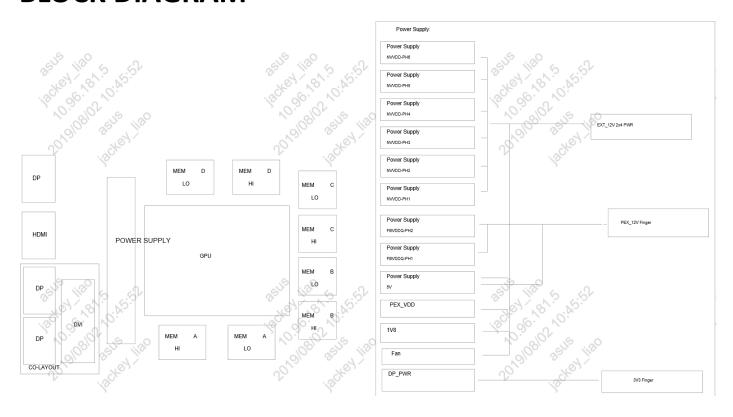


POWER FLOW

─ Power flow

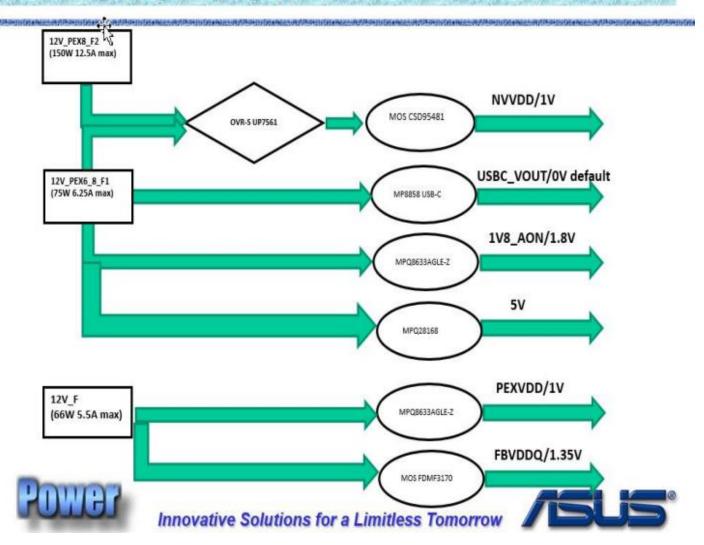

VOLTAGE MEASURE POINT

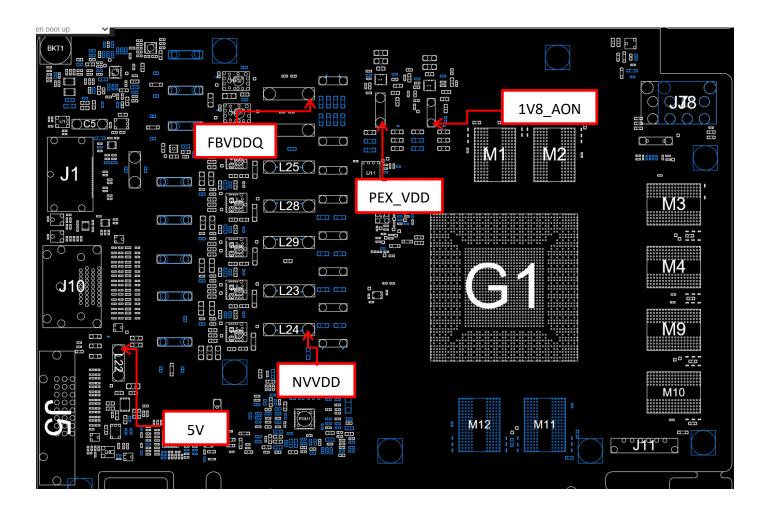

BGA REFLOW PROFILE

| Setpoints (Ce | isius | | - | | | | _ | | | |
|---------------|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Zone | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| Тор | 100 | 125 | 150 | 170 | 190 | 215 | 235 | 250 | 255 | 200 |
| Bottom | 100 | 125 | 150 | 170 | 190 | 215 | 235 | 250 | 255 | 200 |
| Conveyor Sp | onveyor Speed (inch/min): | | | | | | | | | |



| PWI= 95% | Max Rising Slope | | Max Falling Slope | | Preheat 130-220C | | Reflow Time /220C | | Peak Temp | | Tot Time /230C | |
|------------|------------------|-----------|-------------------|-----------|------------------|---------|-------------------|-----------|-----------|--------|----------------|--------|
| U4 CEN - 1 | 1.80 | -28% | -2.69 | 10% | 116.36 | 71% | 86.97 | 84% | 243.84 | 38% | 67.38 | 43% |
| M2 - 1 | 2.07 | -17% | -3.28 | -13% | 120.00 | 78% | 86.84 | 83% | 245.08 | 61% | 68.78 | 47% |
| J7 - 2 | 2.15 | -14% | -3.41 | -21% | 121.51 | 80% | 84.73 | 78% | 245.34 | 53% | 68.12 | 46% |
| 17-2 | 2.35 | -8% | -3.76 | -38% | 115.18 | 71% | 89.37 | 96% | 248.28 | 83% | 63,36 | 68% |
| Delta | 0.66 | 107/4/47/ | 1.06 | VA 1.02.1 | 8.35 | 140.004 | 4.85 | 1.5386201 | 4,44 | 110000 | 8.00 | 123302 |