




Page Index

1:	Cover
2:	PCI Connector
3:	Power Supply
4:	Analog Interface
5:	Digital Interface and Remote
6:	Audio Out & Power
7:	MT2032 Tuner
8:	Vision and Sound IF
9:	TV Sound MTS







B300
BRACKET:BRACKET-VGA
151-10000-0021-000:151-10000-0022-000
<Assembly>

LAYOUT GUIDELINES

PCI Spec. 2.1 Requirement (p.154):
PCICLK trace length should be exactly 2.5".
Max trace length for all other PCI signals is
1.5" (except System, Interrupt, and JTAG
pins).

PRSENT1# PRSENT2#
GND GND 7.5W
OPEN GND 15W
GND OPEN 25W

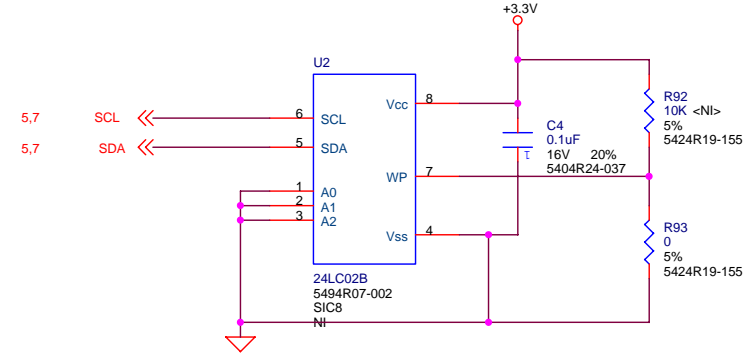
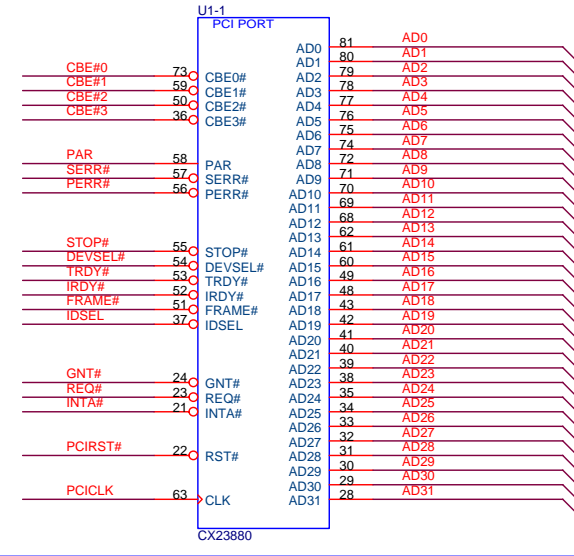
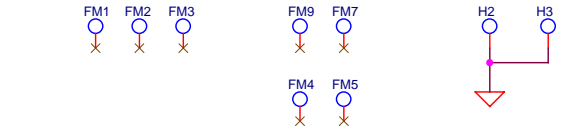
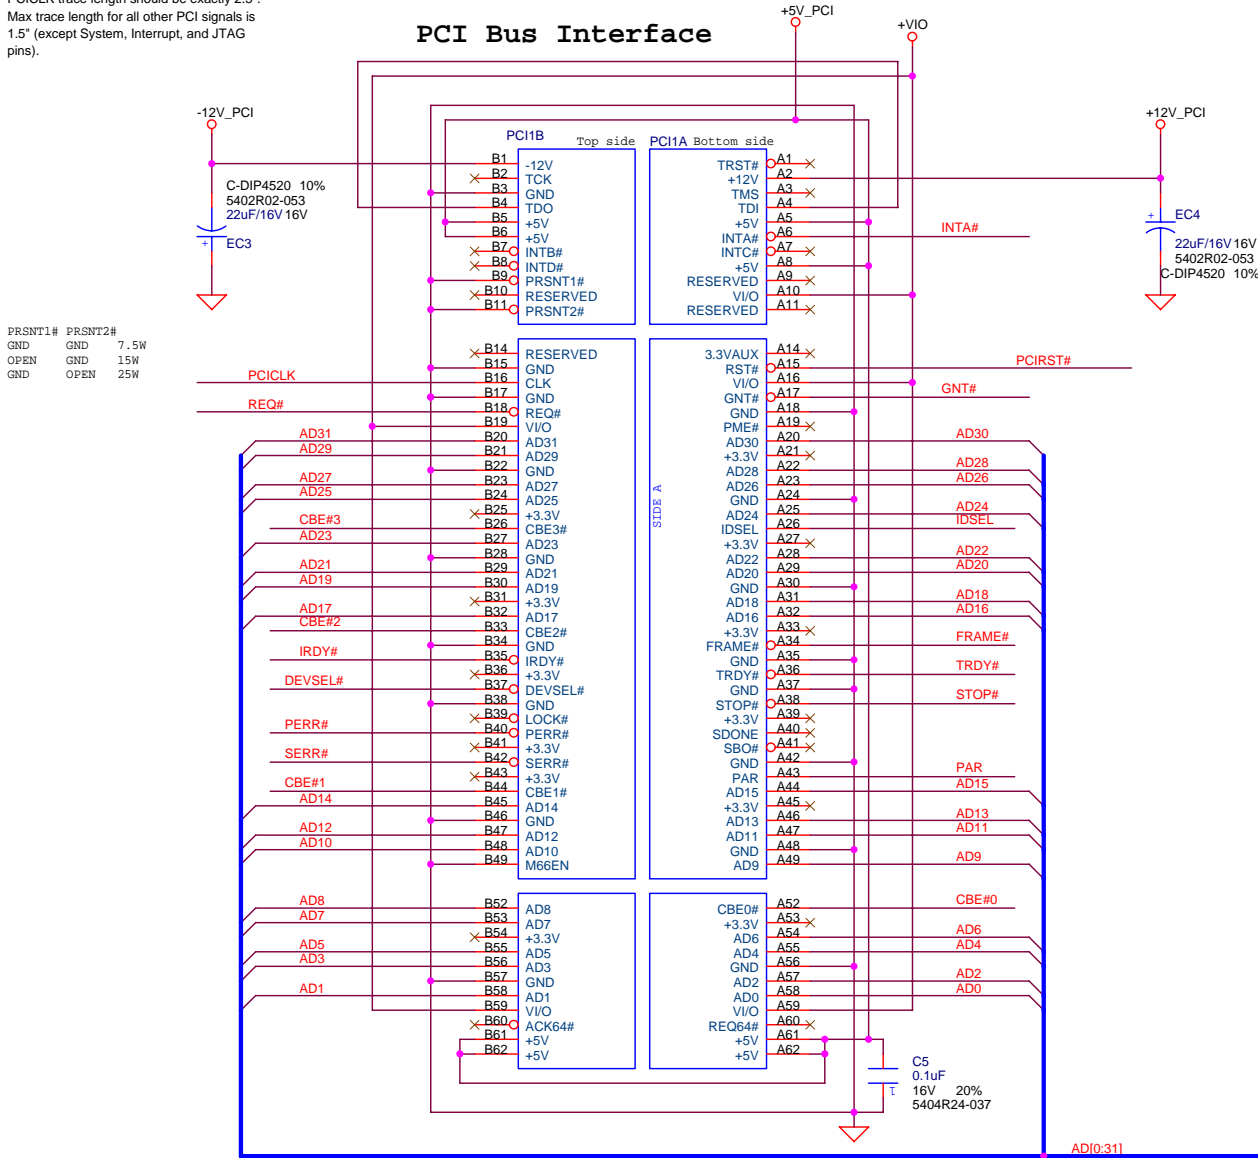


Micro-Star International Co., LTD.

8876-CX23880 PCI TV CARD

Size B Document Number PCI Interface Rev 0C

Date: Monday, November 11, 2002 Sheet 2 of 9

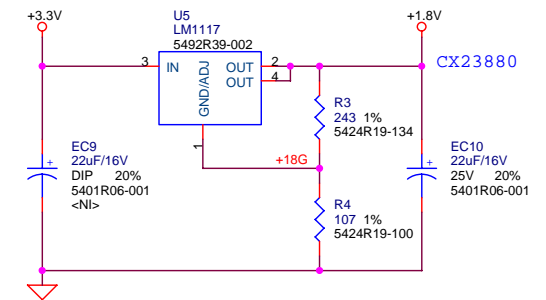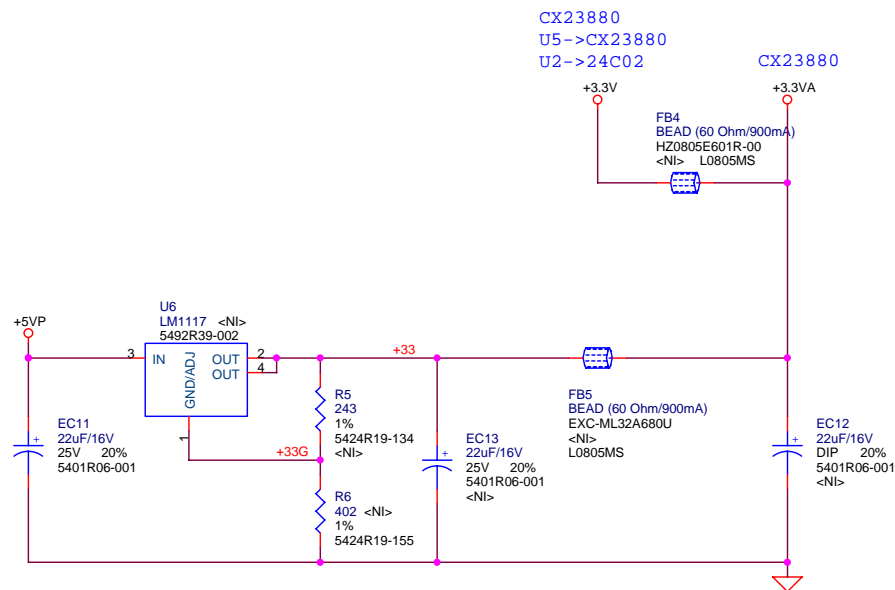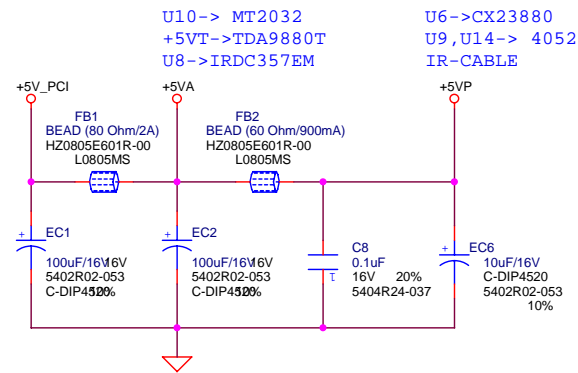


Micro-Star International Co., LTD.

8876-CX23880 PCI TV CARD



Size	Document Number	Rev
B	Power Supply	0C
Date:	Monday, November 11, 2002	Sheet 3 of 9

COMPOSITE VIDEO

NTSC Version
For PAL: C95 is 20pf and
R50 is 301 1%

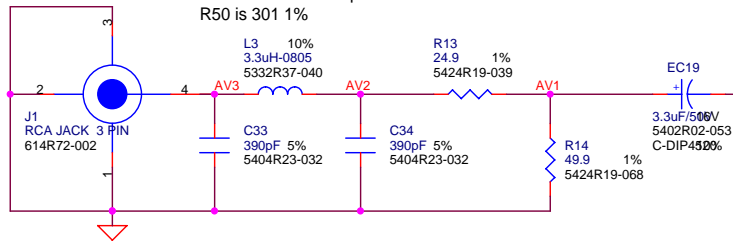


S-VIDEO

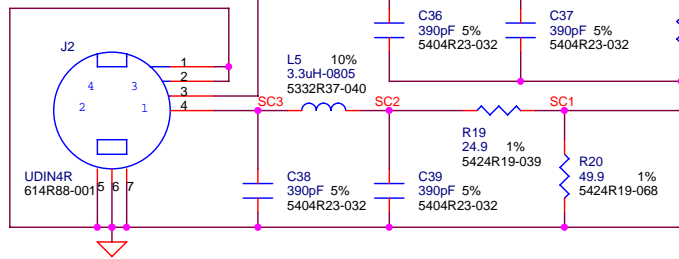


Micro-Star International Co., LTD.



8876-CX23880 PCI TV CARD

Size	Document Number	Rev
B	Analog Interface	0C
Date:	Monday, November 11, 2002	Sheet 4 of 9

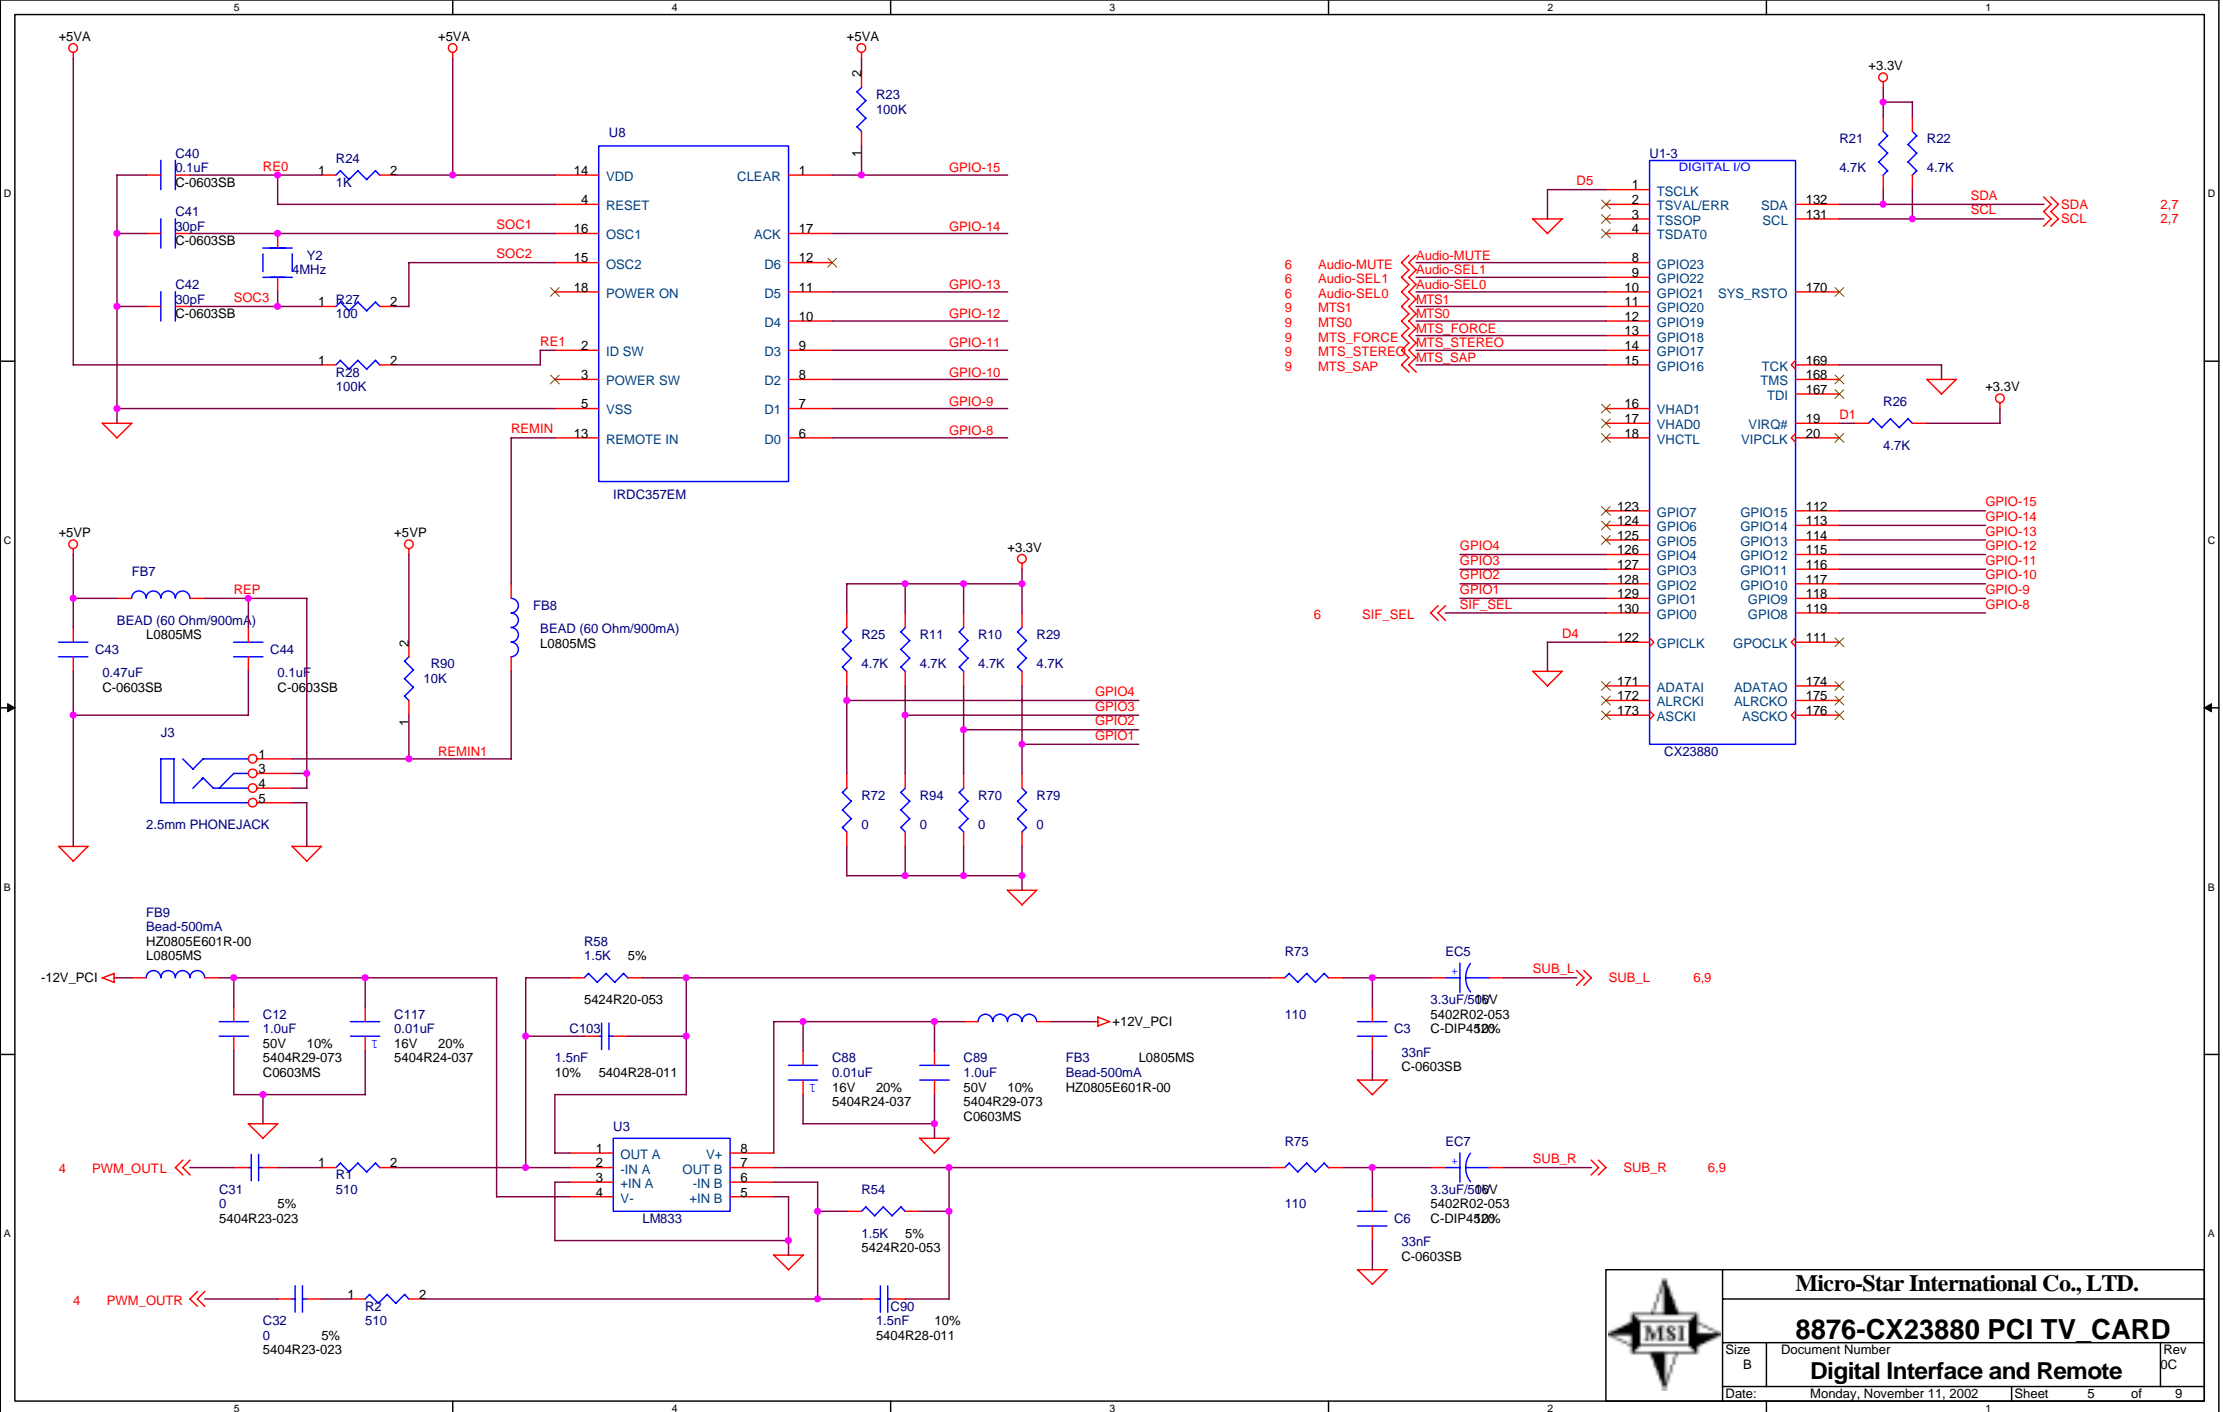

Micro-Star International Co., LTD.		
8876-CX23880 PCI TV CARD		
Size B	Document Number	Rev 0C
Date:	Monday, November 11, 2002	Sheet 5 of 9

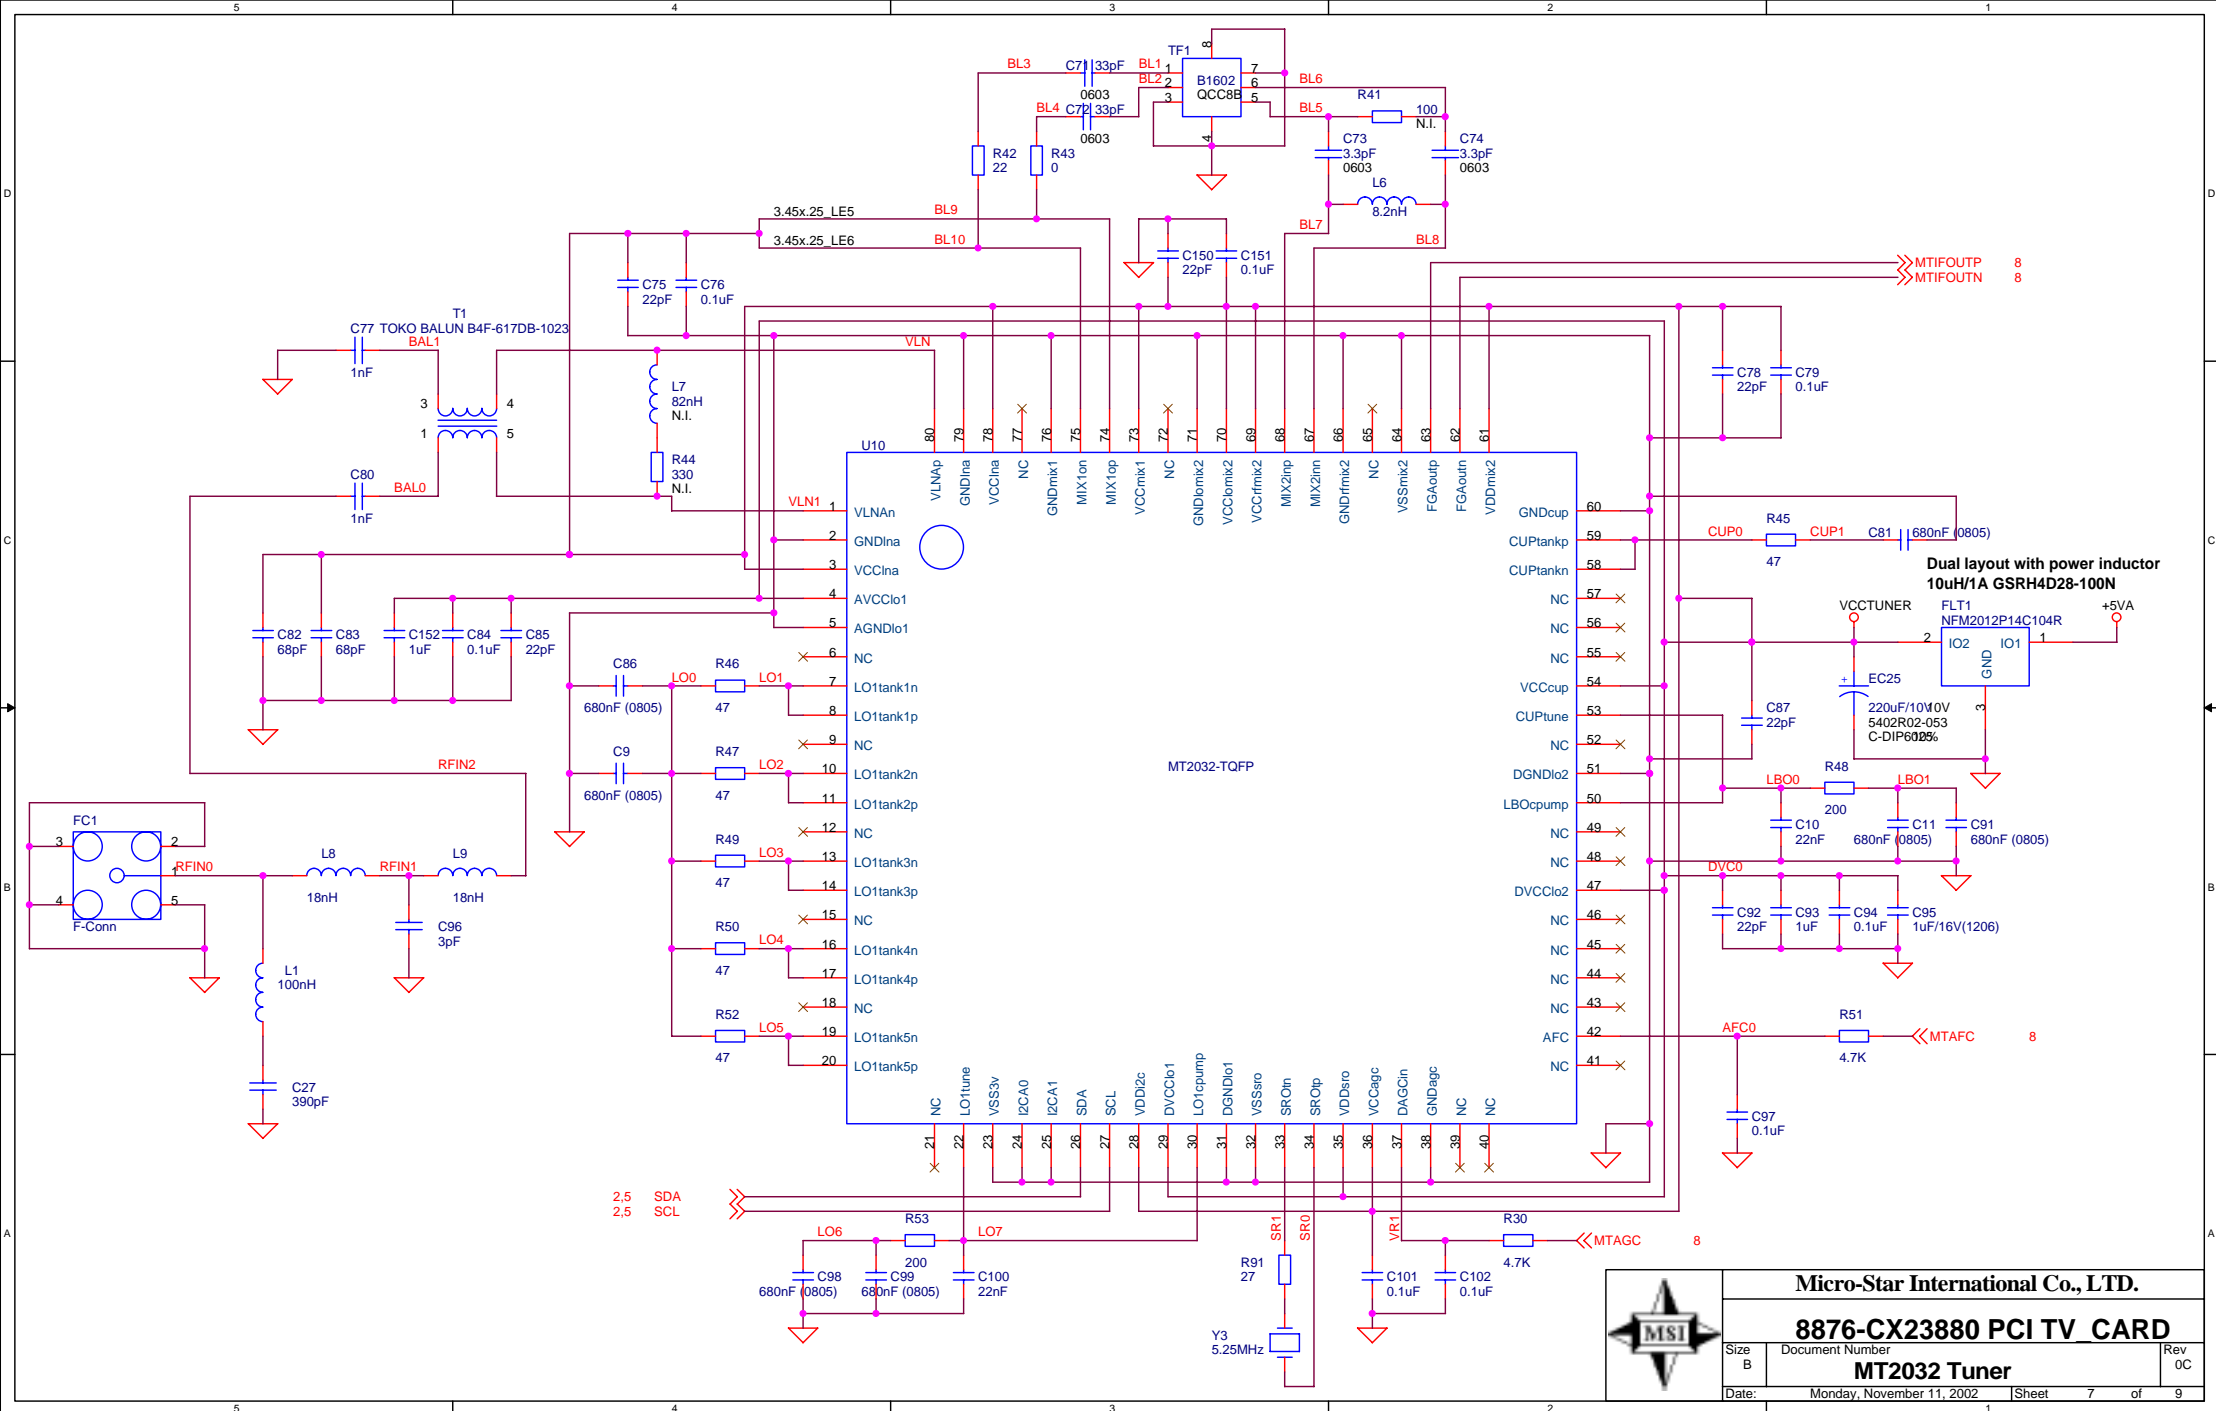

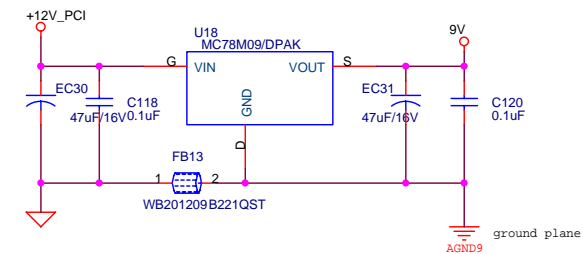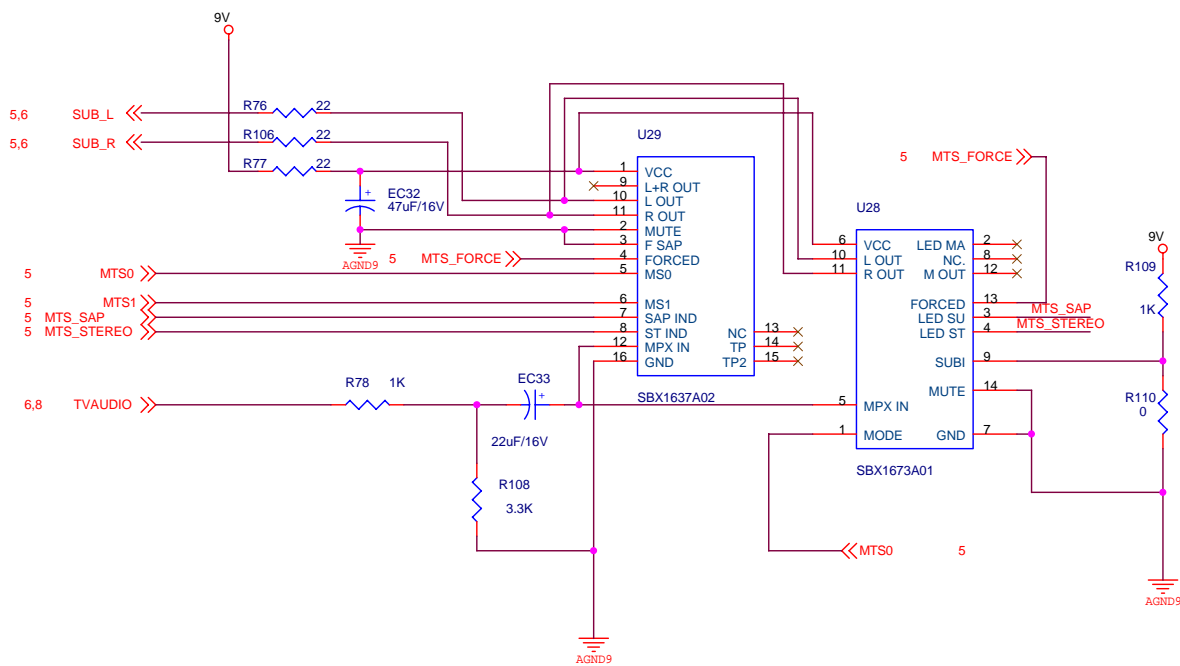

Trident Technologies, Inc.

3F, No.8, Li-Hsin Rd.,
Science-Based Industrial Prk,
Hsinchu, Taiwan, R.O.C

Title		MicroStar Reference	
Size	B	Document Number	Rev
		Tuner Board	0C
Date:	Monday, November 11, 2002		Sheet 9 of 9