

Page Index

- 1: Cover
- 2: PCI Connector
- 3: Power Supply
- 4: Analog Interface
- 5: Digital Interface and Remote
- 6: Audio Out & Power
- 7: MT2032 Tuner
- 8: Vision and Sound IF
- 9: TV Sound MTS



Micro-Star International Co., LTD.

8906-CX23881 PCI TV CARD

Size
B

Document Number

TOP PAGE

Rev
0A

Date:

Monday, January 13, 2003


Sheet

1

of





10

PCI Spec. 2.1 Requirement (p.154):
PCICLK trace length should be exactly 2.5".
Max trace length for all other PCI signals is
1.5" (except System, Interrupt, and JTAG
pins).

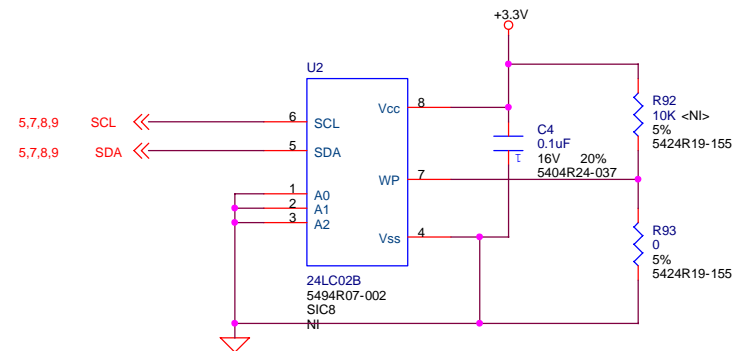


Size B	Document Number PCI Interface	Rev 0A
-----------	---	-----------

Date:	Monday, January 13, 2003	Sheet	2	of	10
-------	--------------------------	-------	---	----	----

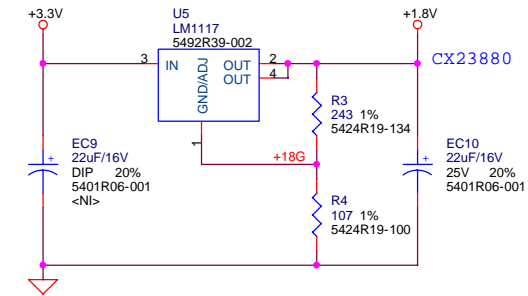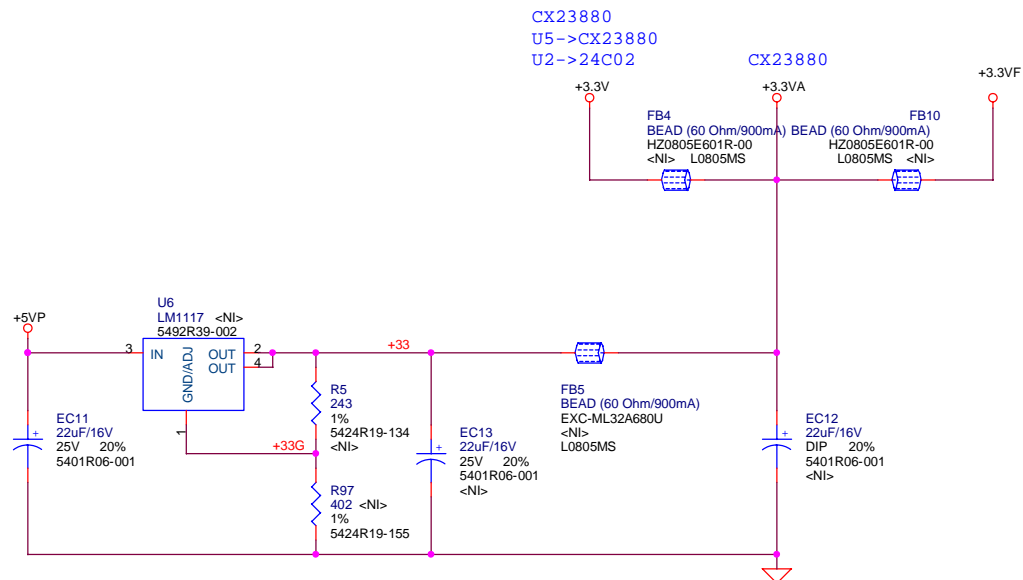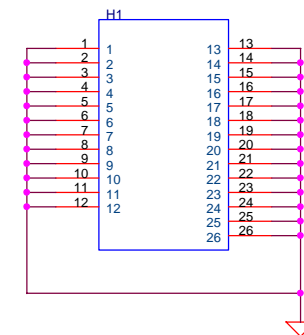
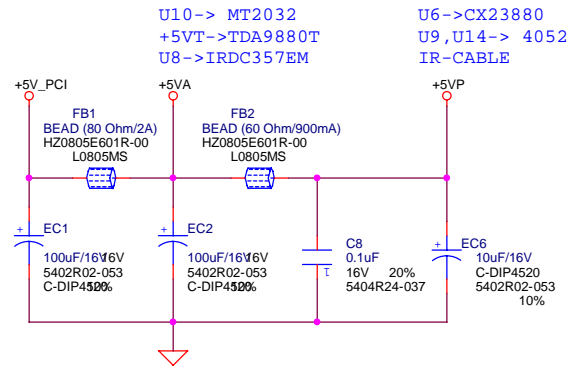



COMPOSITE VIDEO


NTSC Version
For PAL: C95 is 20pf and
R50 is 301 1%


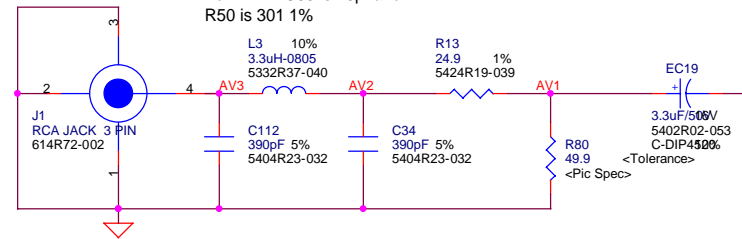



S-VIDEO

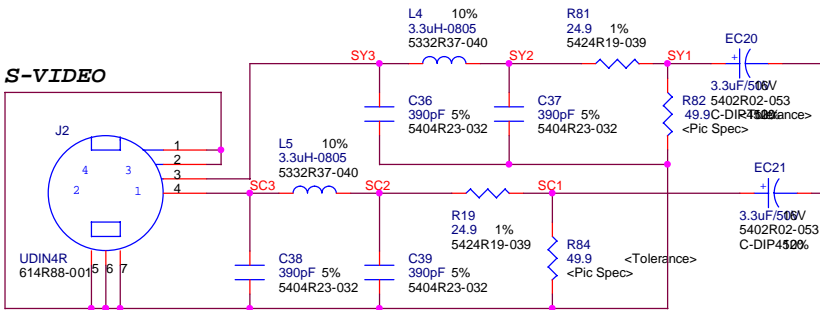


			
Micro-Star International Co., LTD.			
8906-CX23881 PCI TV CARD			
Size B	Document Number	Rev 0A	
Date:	Monday, January 13, 2003	Sheet	4 of 10


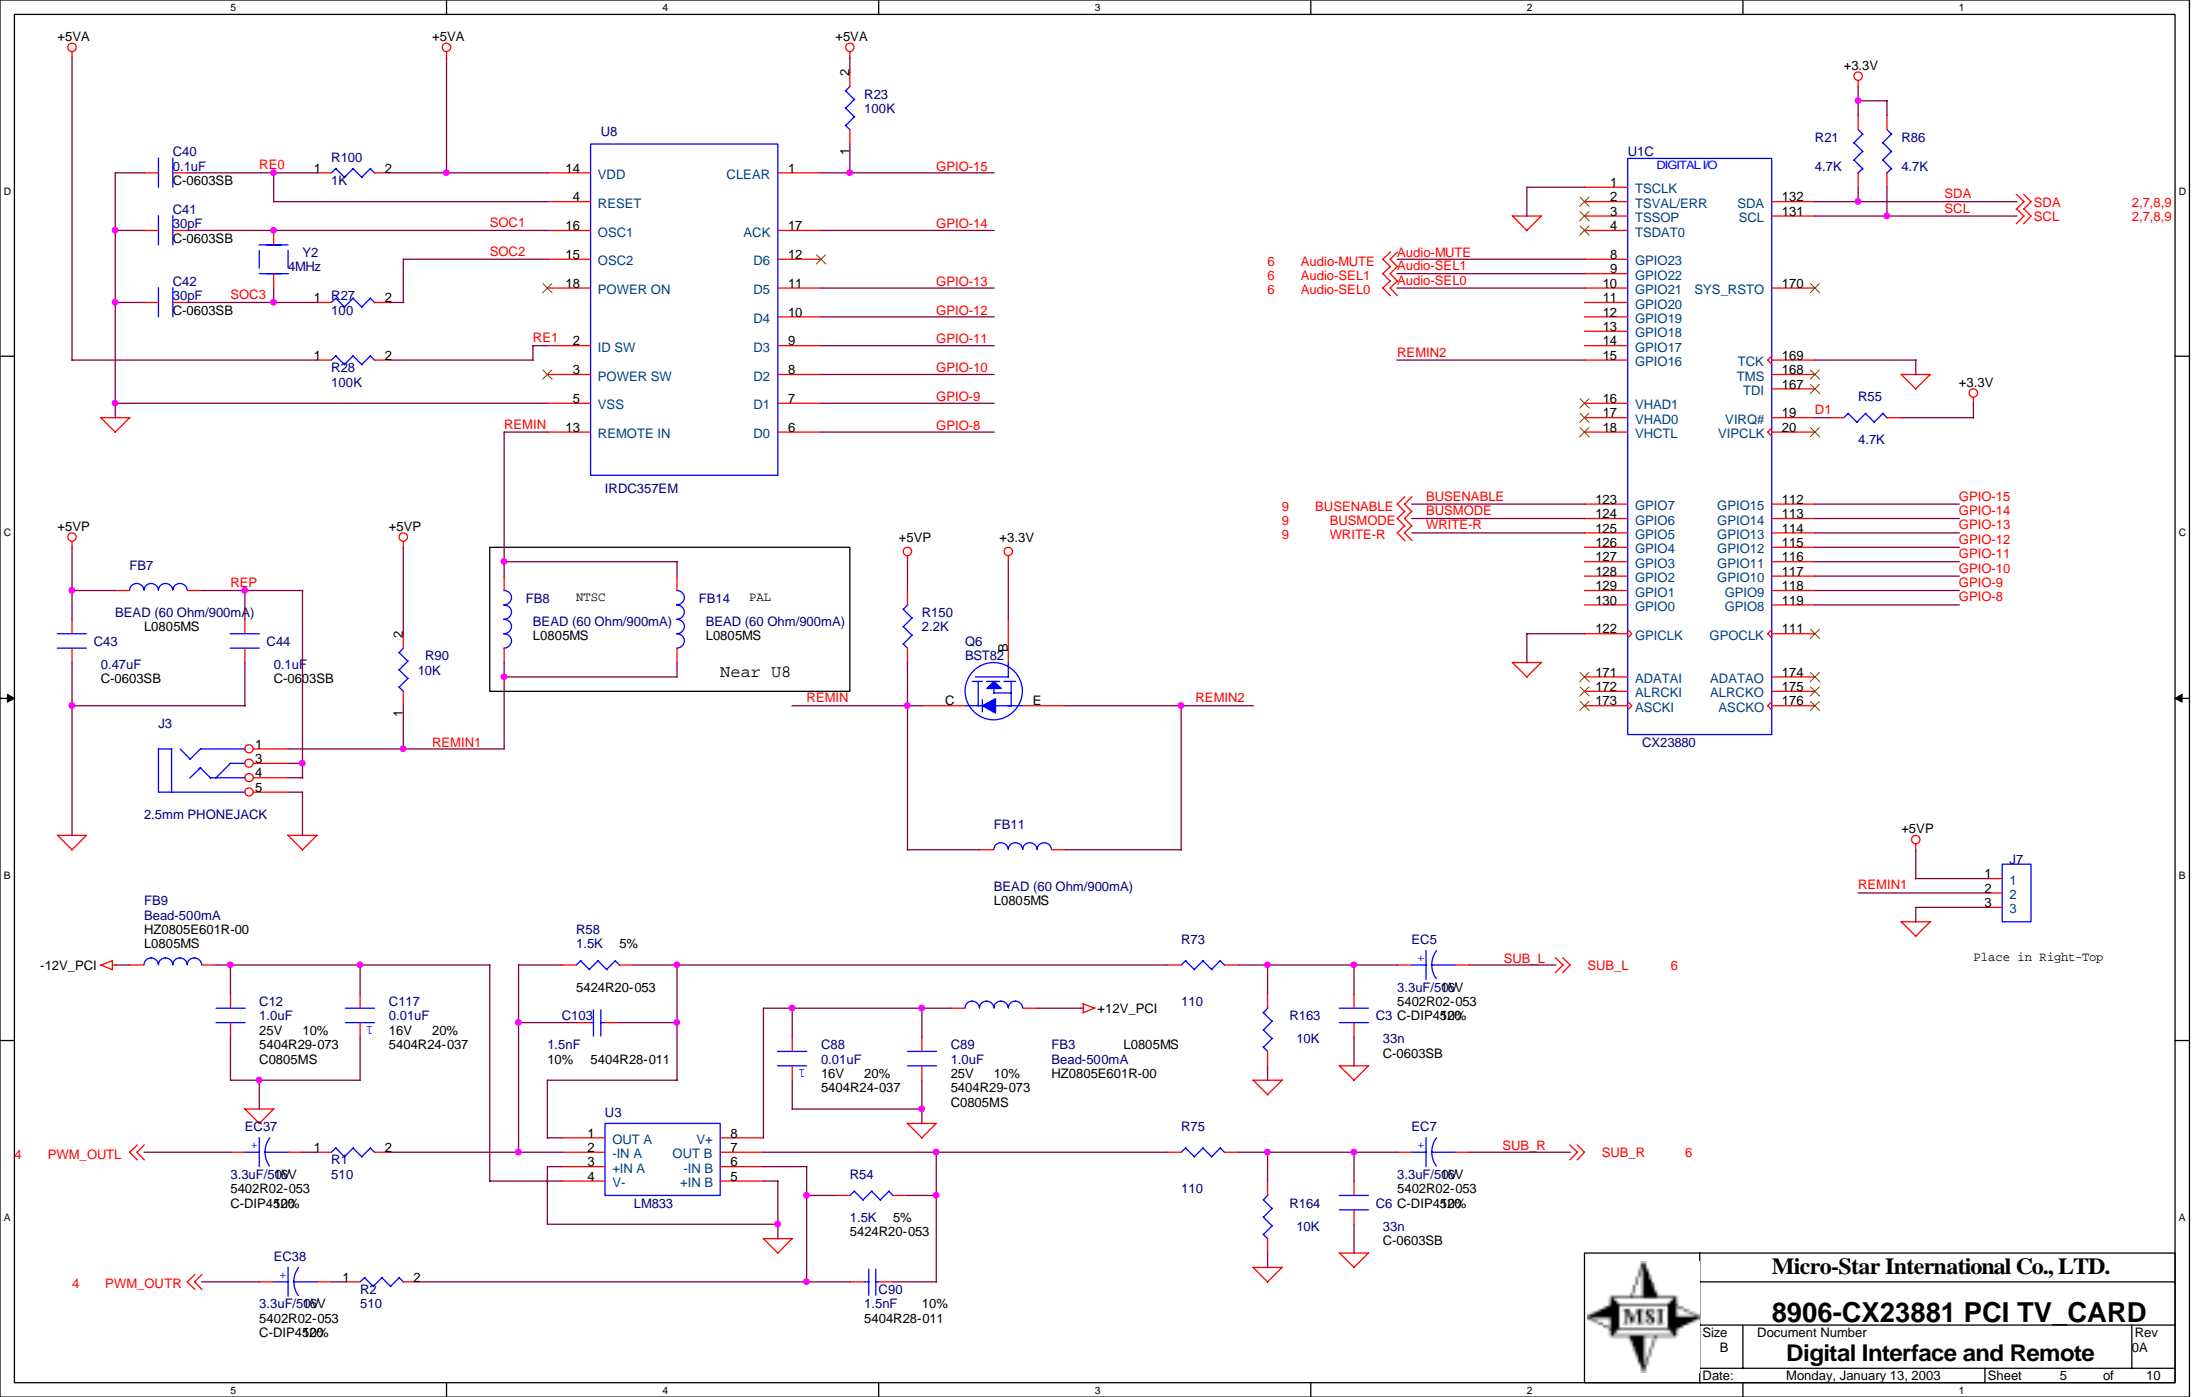


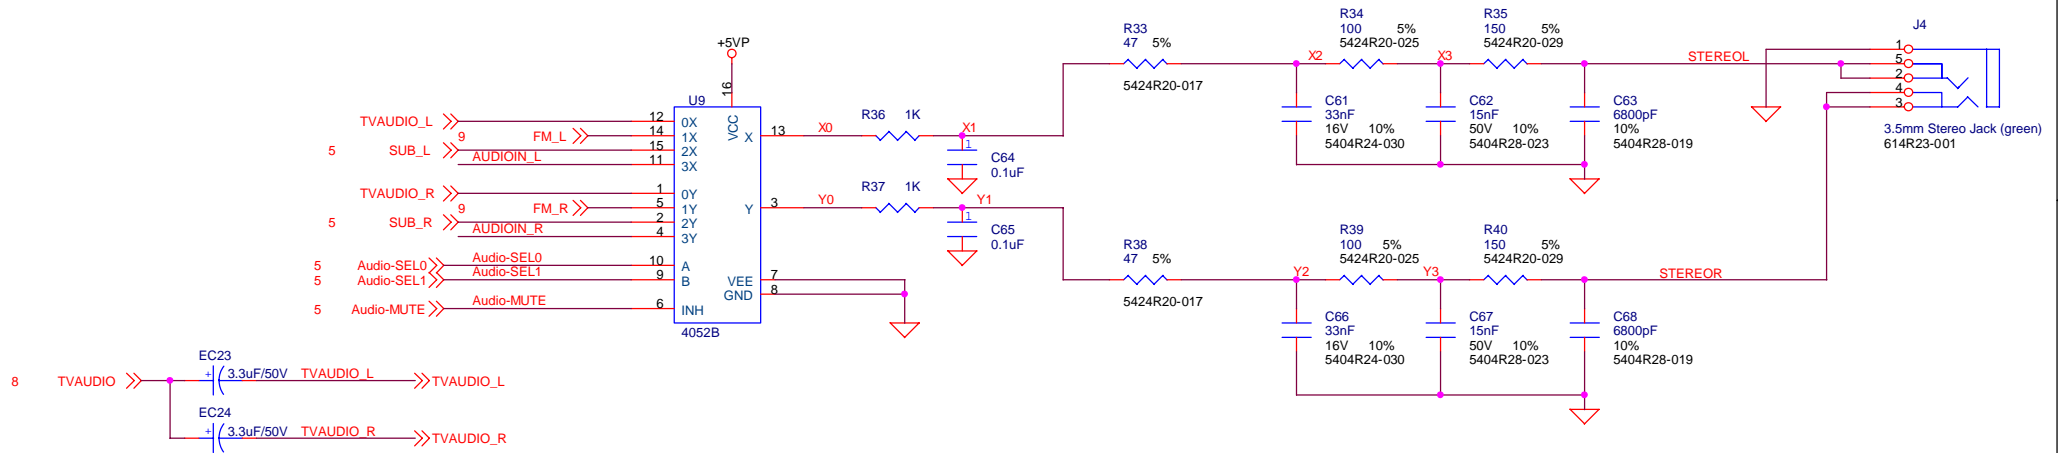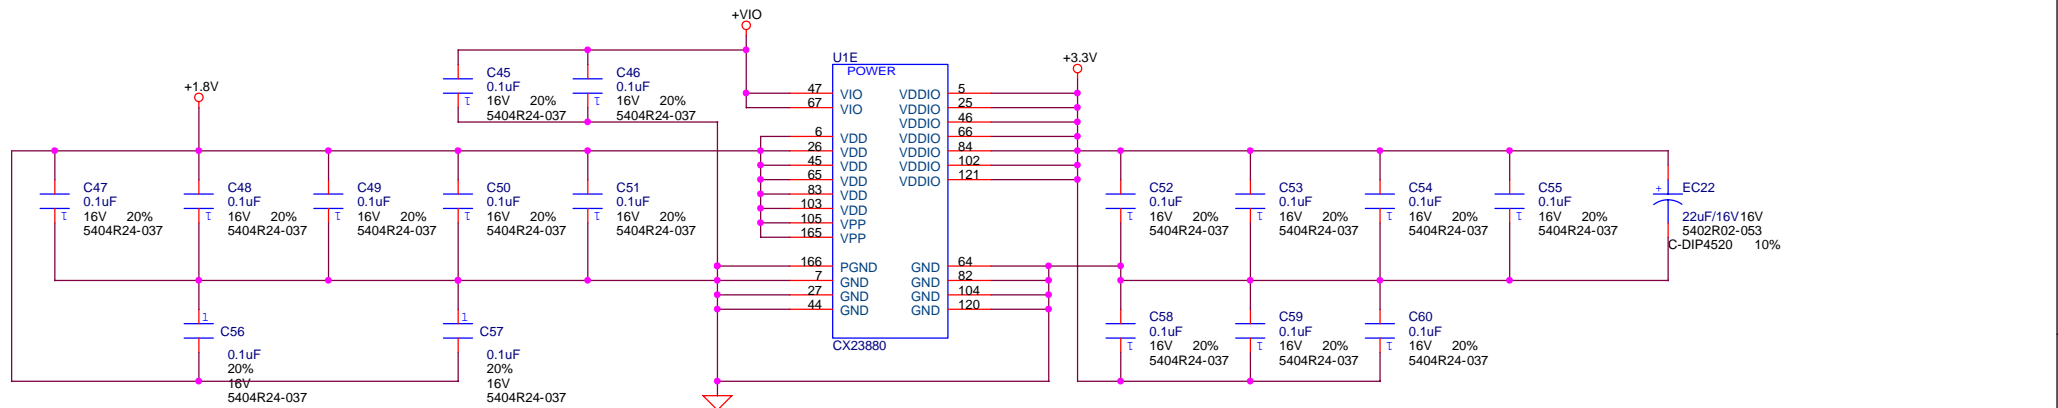


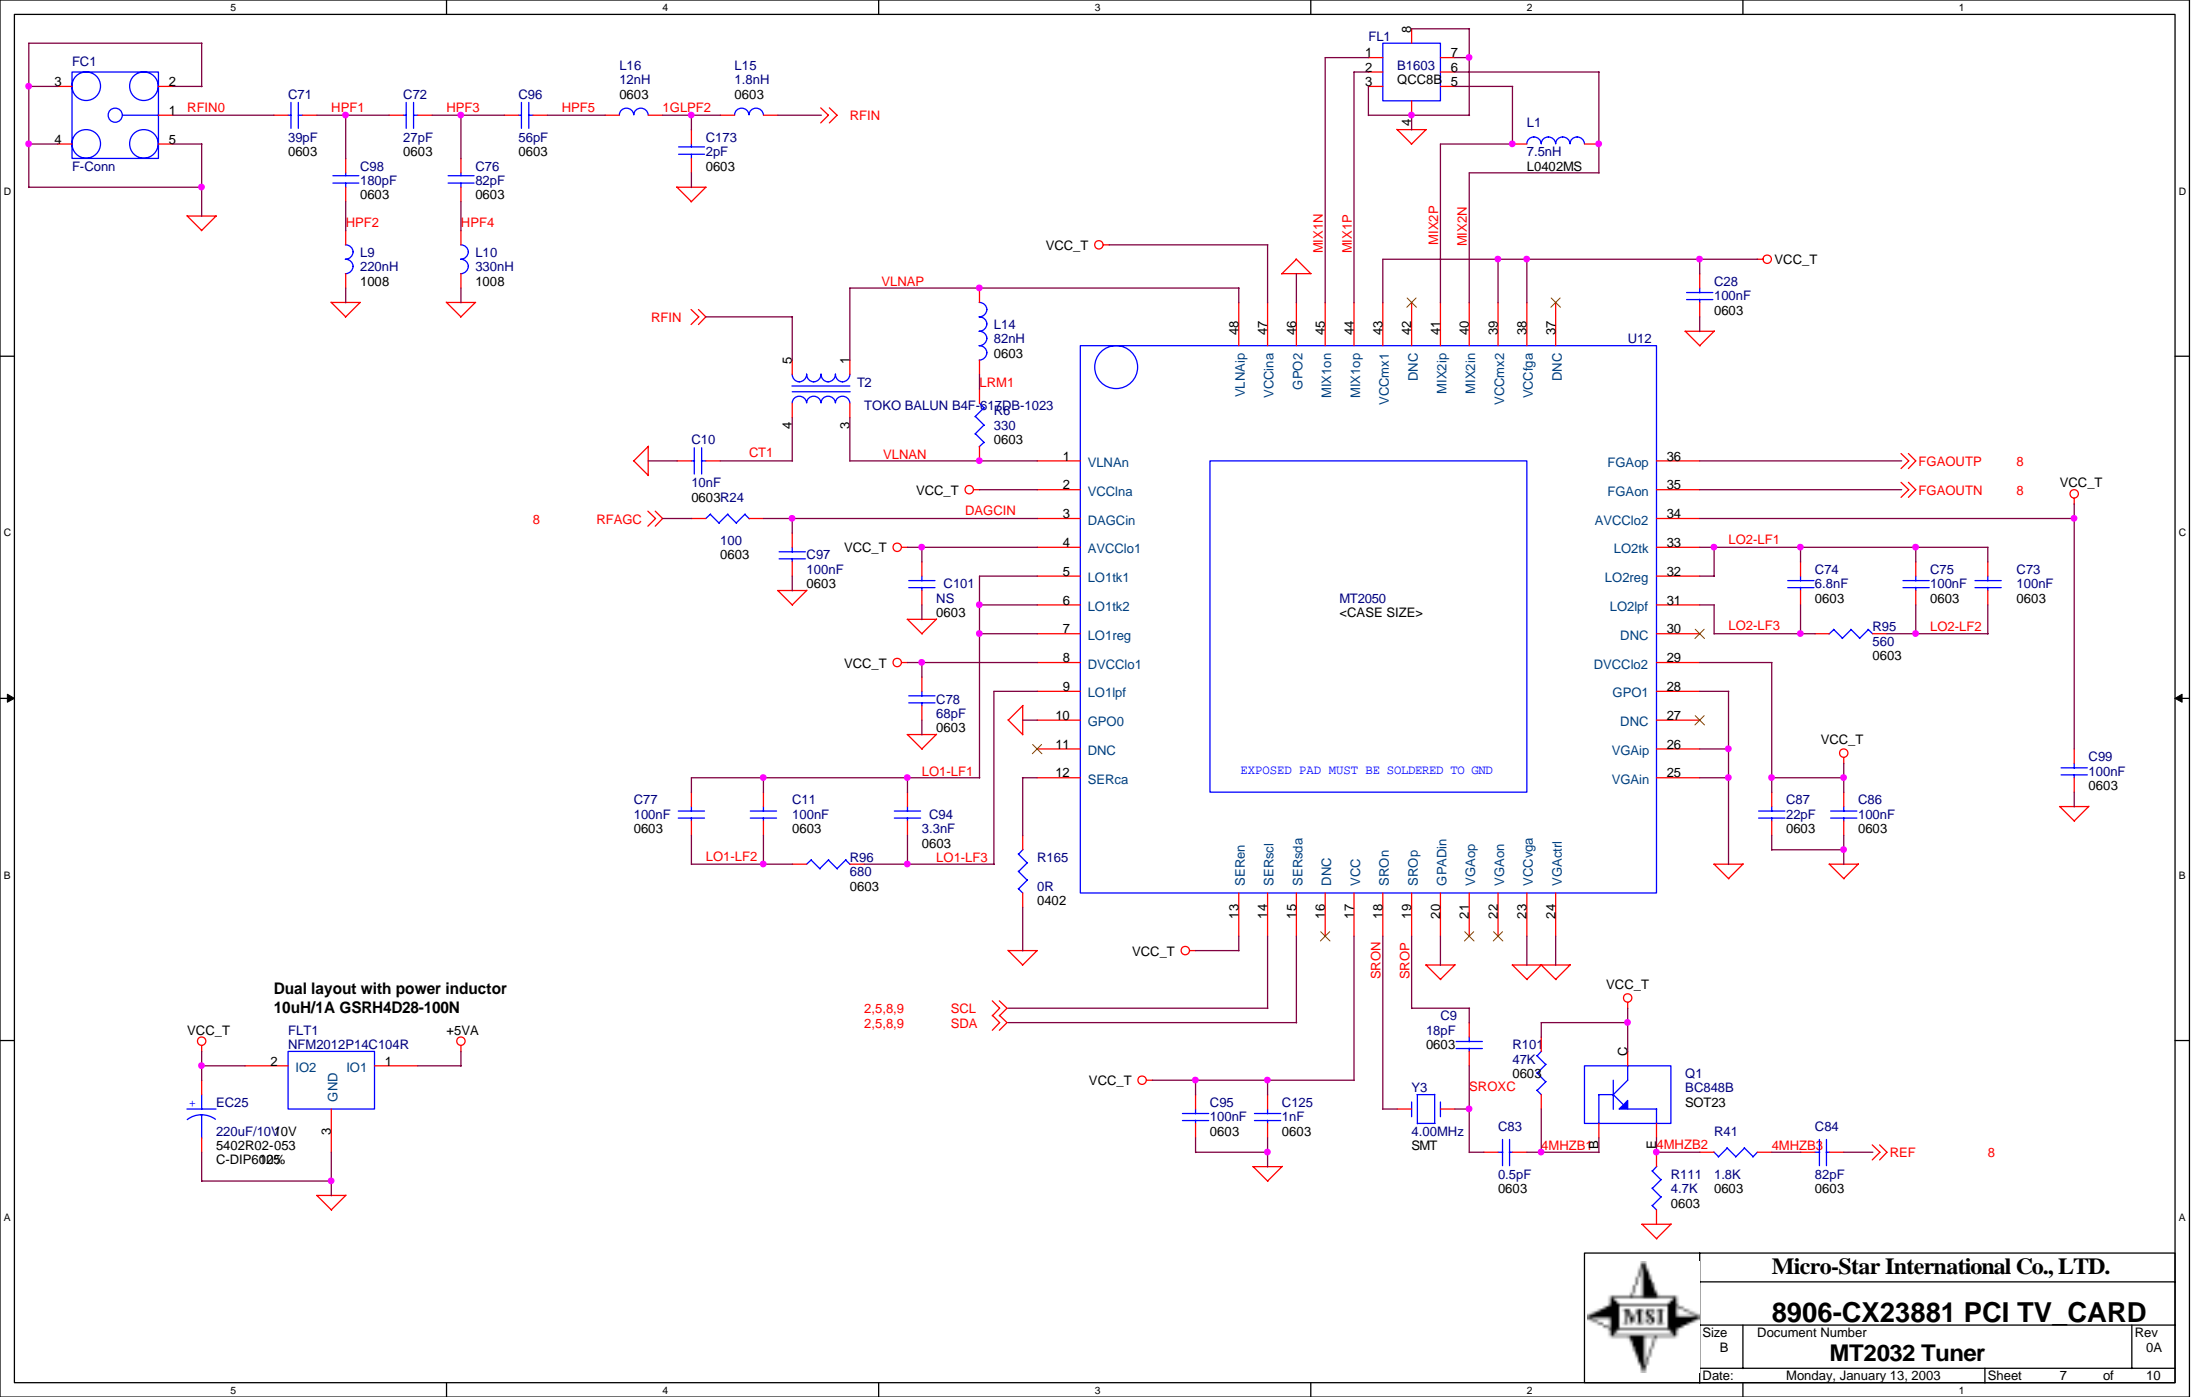

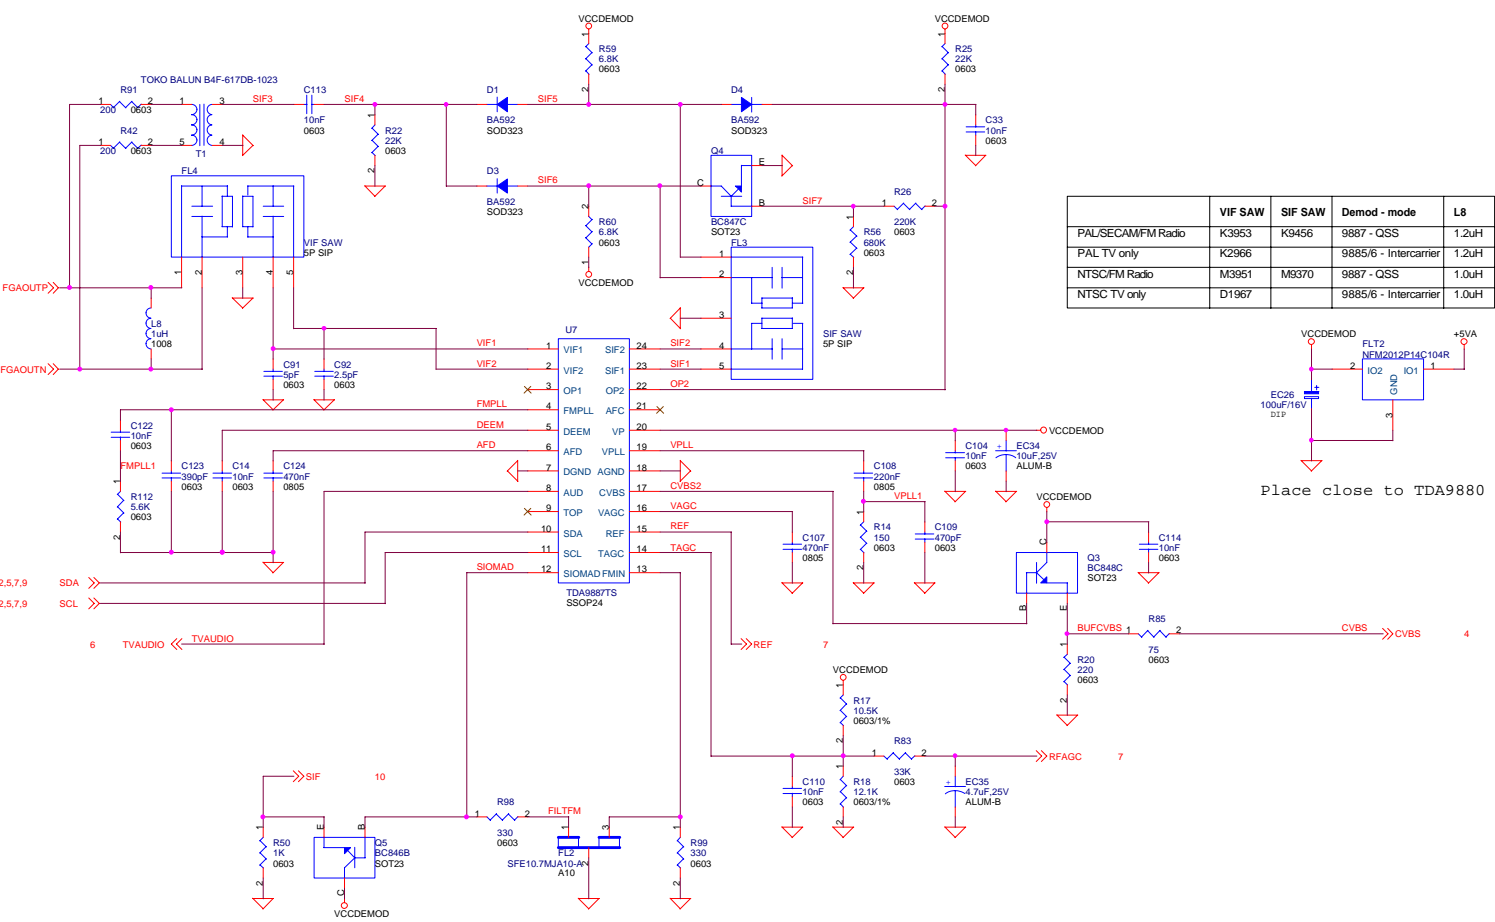


	VIF SAW	SIF SAW	Demod - mode	L8
PAL/SECAM/FM Radio	K3953	K9456	9887 - QSS	1.2uH
PAL TV only	K2966		9885/6 - Inter-carrier	1.2uH
NTSC/FM Radio	M3951	M9370	9887 - QSS	1.0uH
NTSC TV only	D1967		9885/6 - Inter-carrier	1.0uH




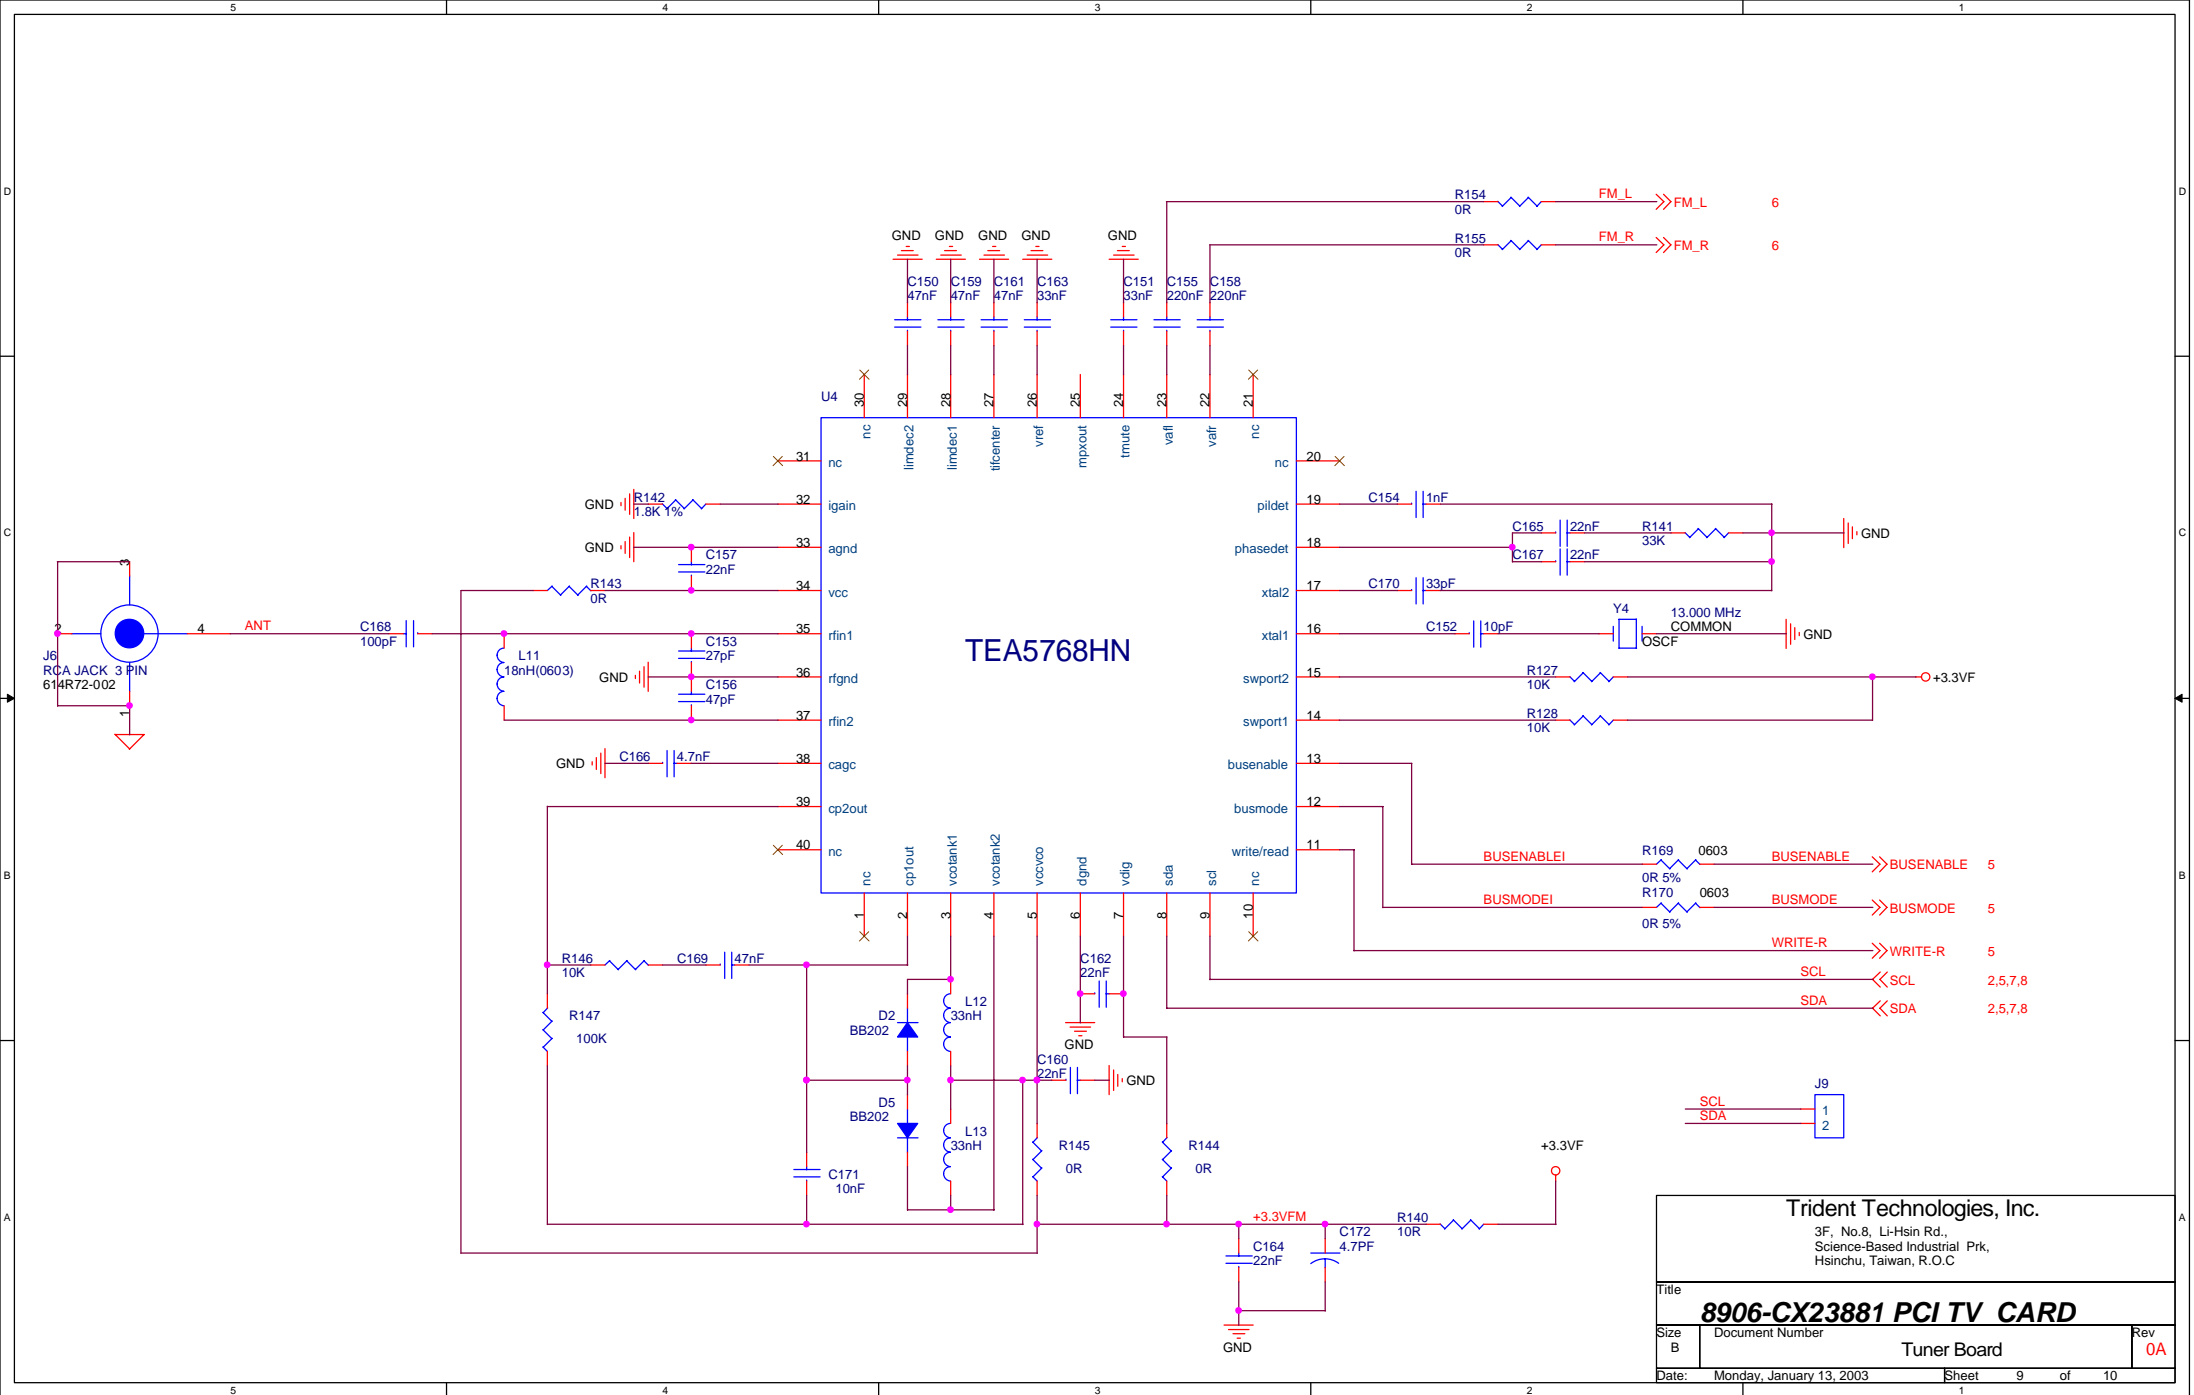

NTSC Version
For PAL: C174 is 20pf and R156 is 301 1%

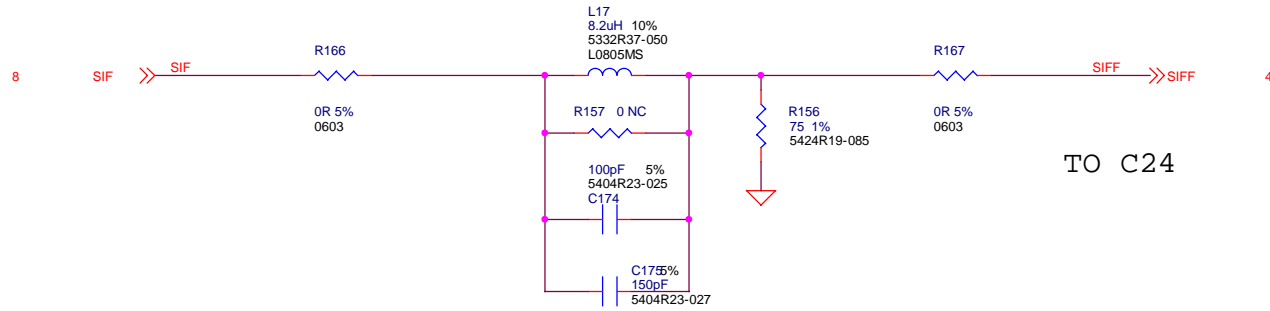

For the European market:
C177 = 910pF
C178 = 860pF
C180 = 3.9nF

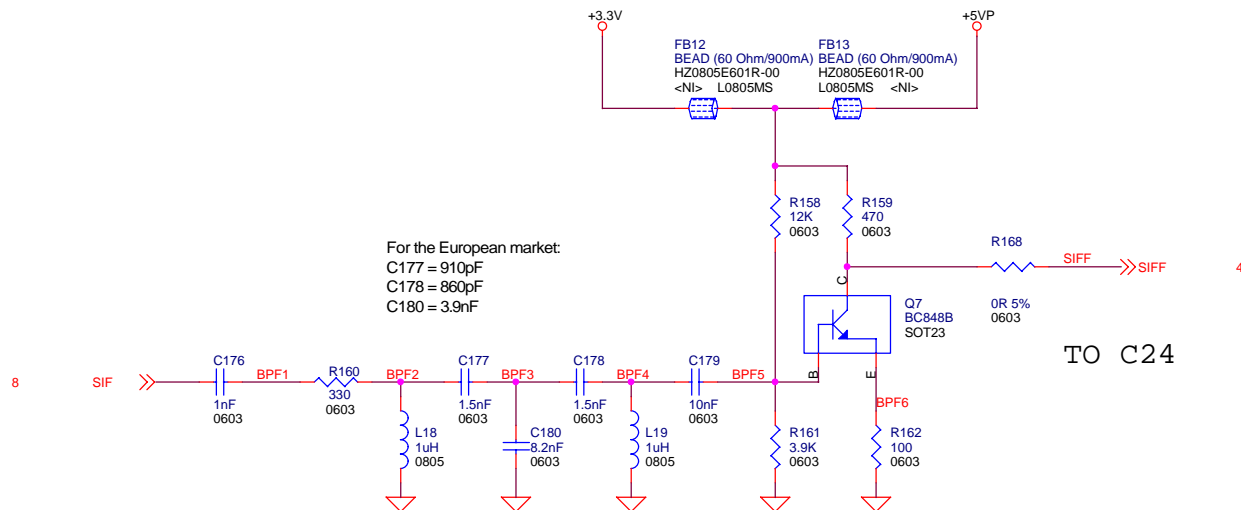

Micro-Star International Co., LTD.

Size B	Document Number SIF FILTER	Rev 0A
Date: Monday, January 13, 2003	Sheet 10	of 10