


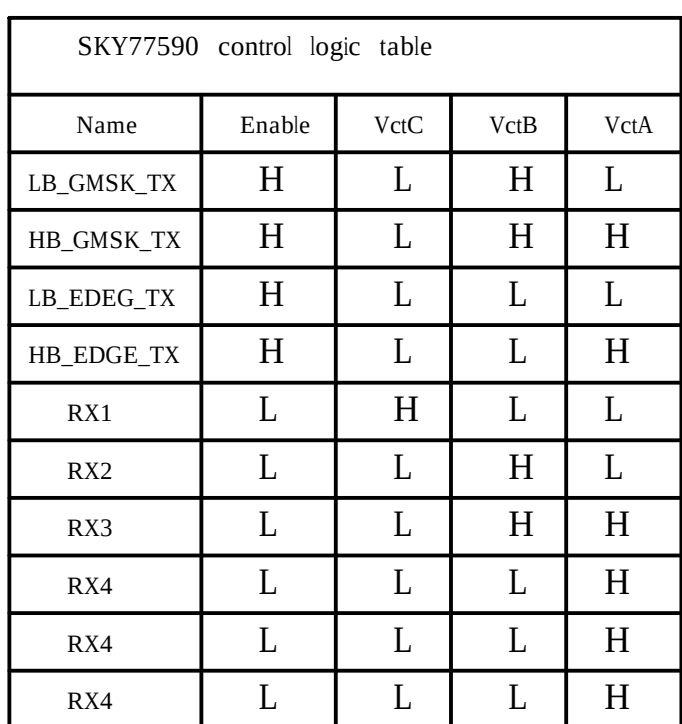


Figure 10 shows four circuit diagrams (a, b, c, d) for a 100V AC input. Each circuit includes a transformer, a rectifier bridge, and a matching network with a 50 ohm load.

- (a) **W000_RL_F**: A full-wave bridge rectifier circuit. The transformer has a primary of 100V and a secondary with a center tap. The secondary is connected to a bridge rectifier (U001) with four diodes. The output of the bridge is connected to a 50 ohm load (R001) through a matching network consisting of a series inductor (L001) and a shunt capacitor (C001). The output is labeled **W000_RL_F**.
- (b) **W000_RL_F**: A full-wave bridge rectifier circuit. The transformer has a primary of 100V and a secondary with a center tap. The secondary is connected to a bridge rectifier (U001) with four diodes. The output of the bridge is connected to a 50 ohm load (R001) through a matching network consisting of a series inductor (L001) and a shunt capacitor (C001). The output is labeled **W000_RL_F**.
- (c) **W2100_RL_F**: A full-wave bridge rectifier circuit. The transformer has a primary of 100V and a secondary with a center tap. The secondary is connected to a bridge rectifier (U001) with four diodes. The output of the bridge is connected to a 50 ohm load (R001) through a matching network consisting of a series inductor (L001) and a shunt capacitor (C001). The output is labeled **W2100_RL_F**.
- (d) **W2100_RL_F**: A full-wave bridge rectifier circuit. The transformer has a primary of 100V and a secondary with a center tap. The secondary is connected to a bridge rectifier (U001) with four diodes. The output of the bridge is connected to a 50 ohm load (R001) through a matching network consisting of a series inductor (L001) and a shunt capacitor (C001). The output is labeled **W2100_RL_F**.





32K-Less

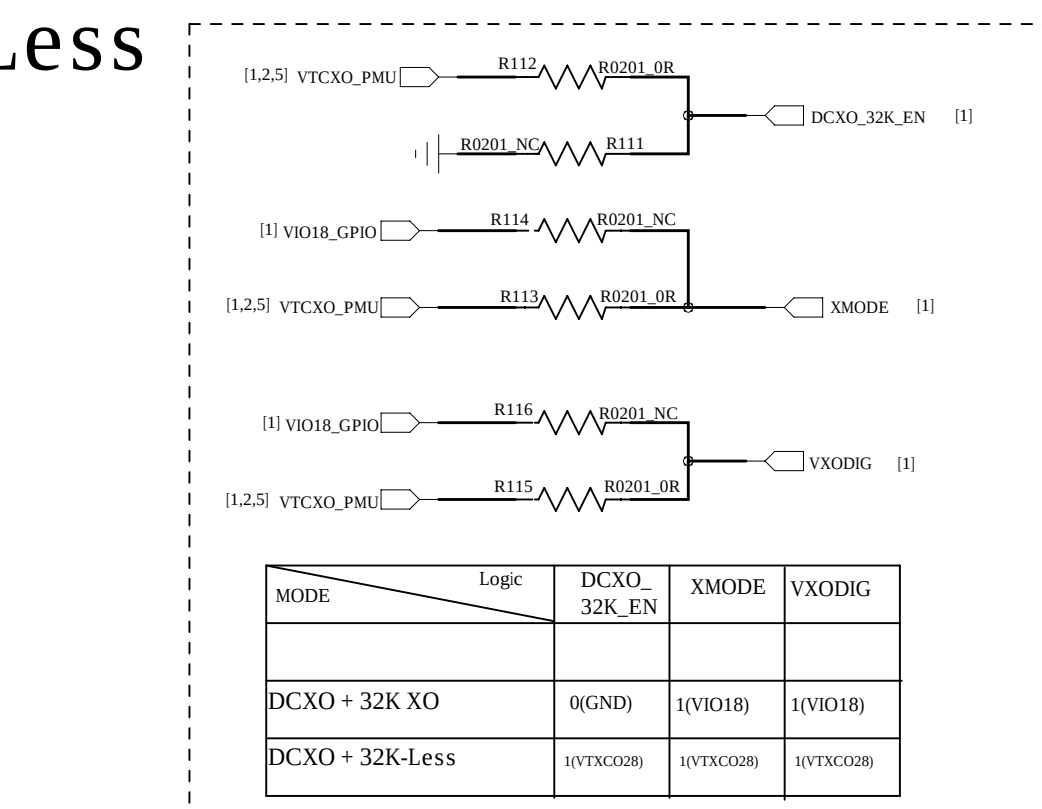

Two Application Circuit Conditions,

- 1.TSX Circuit : X600=TSX, R653=R656=NC, R654=100K $\pm$ 1%, R655=R657=0ohm
- 2.XTAL Circuit :X600=Mobile XTAL, R653=R656=0ohm, R654=R655=R657=NC.

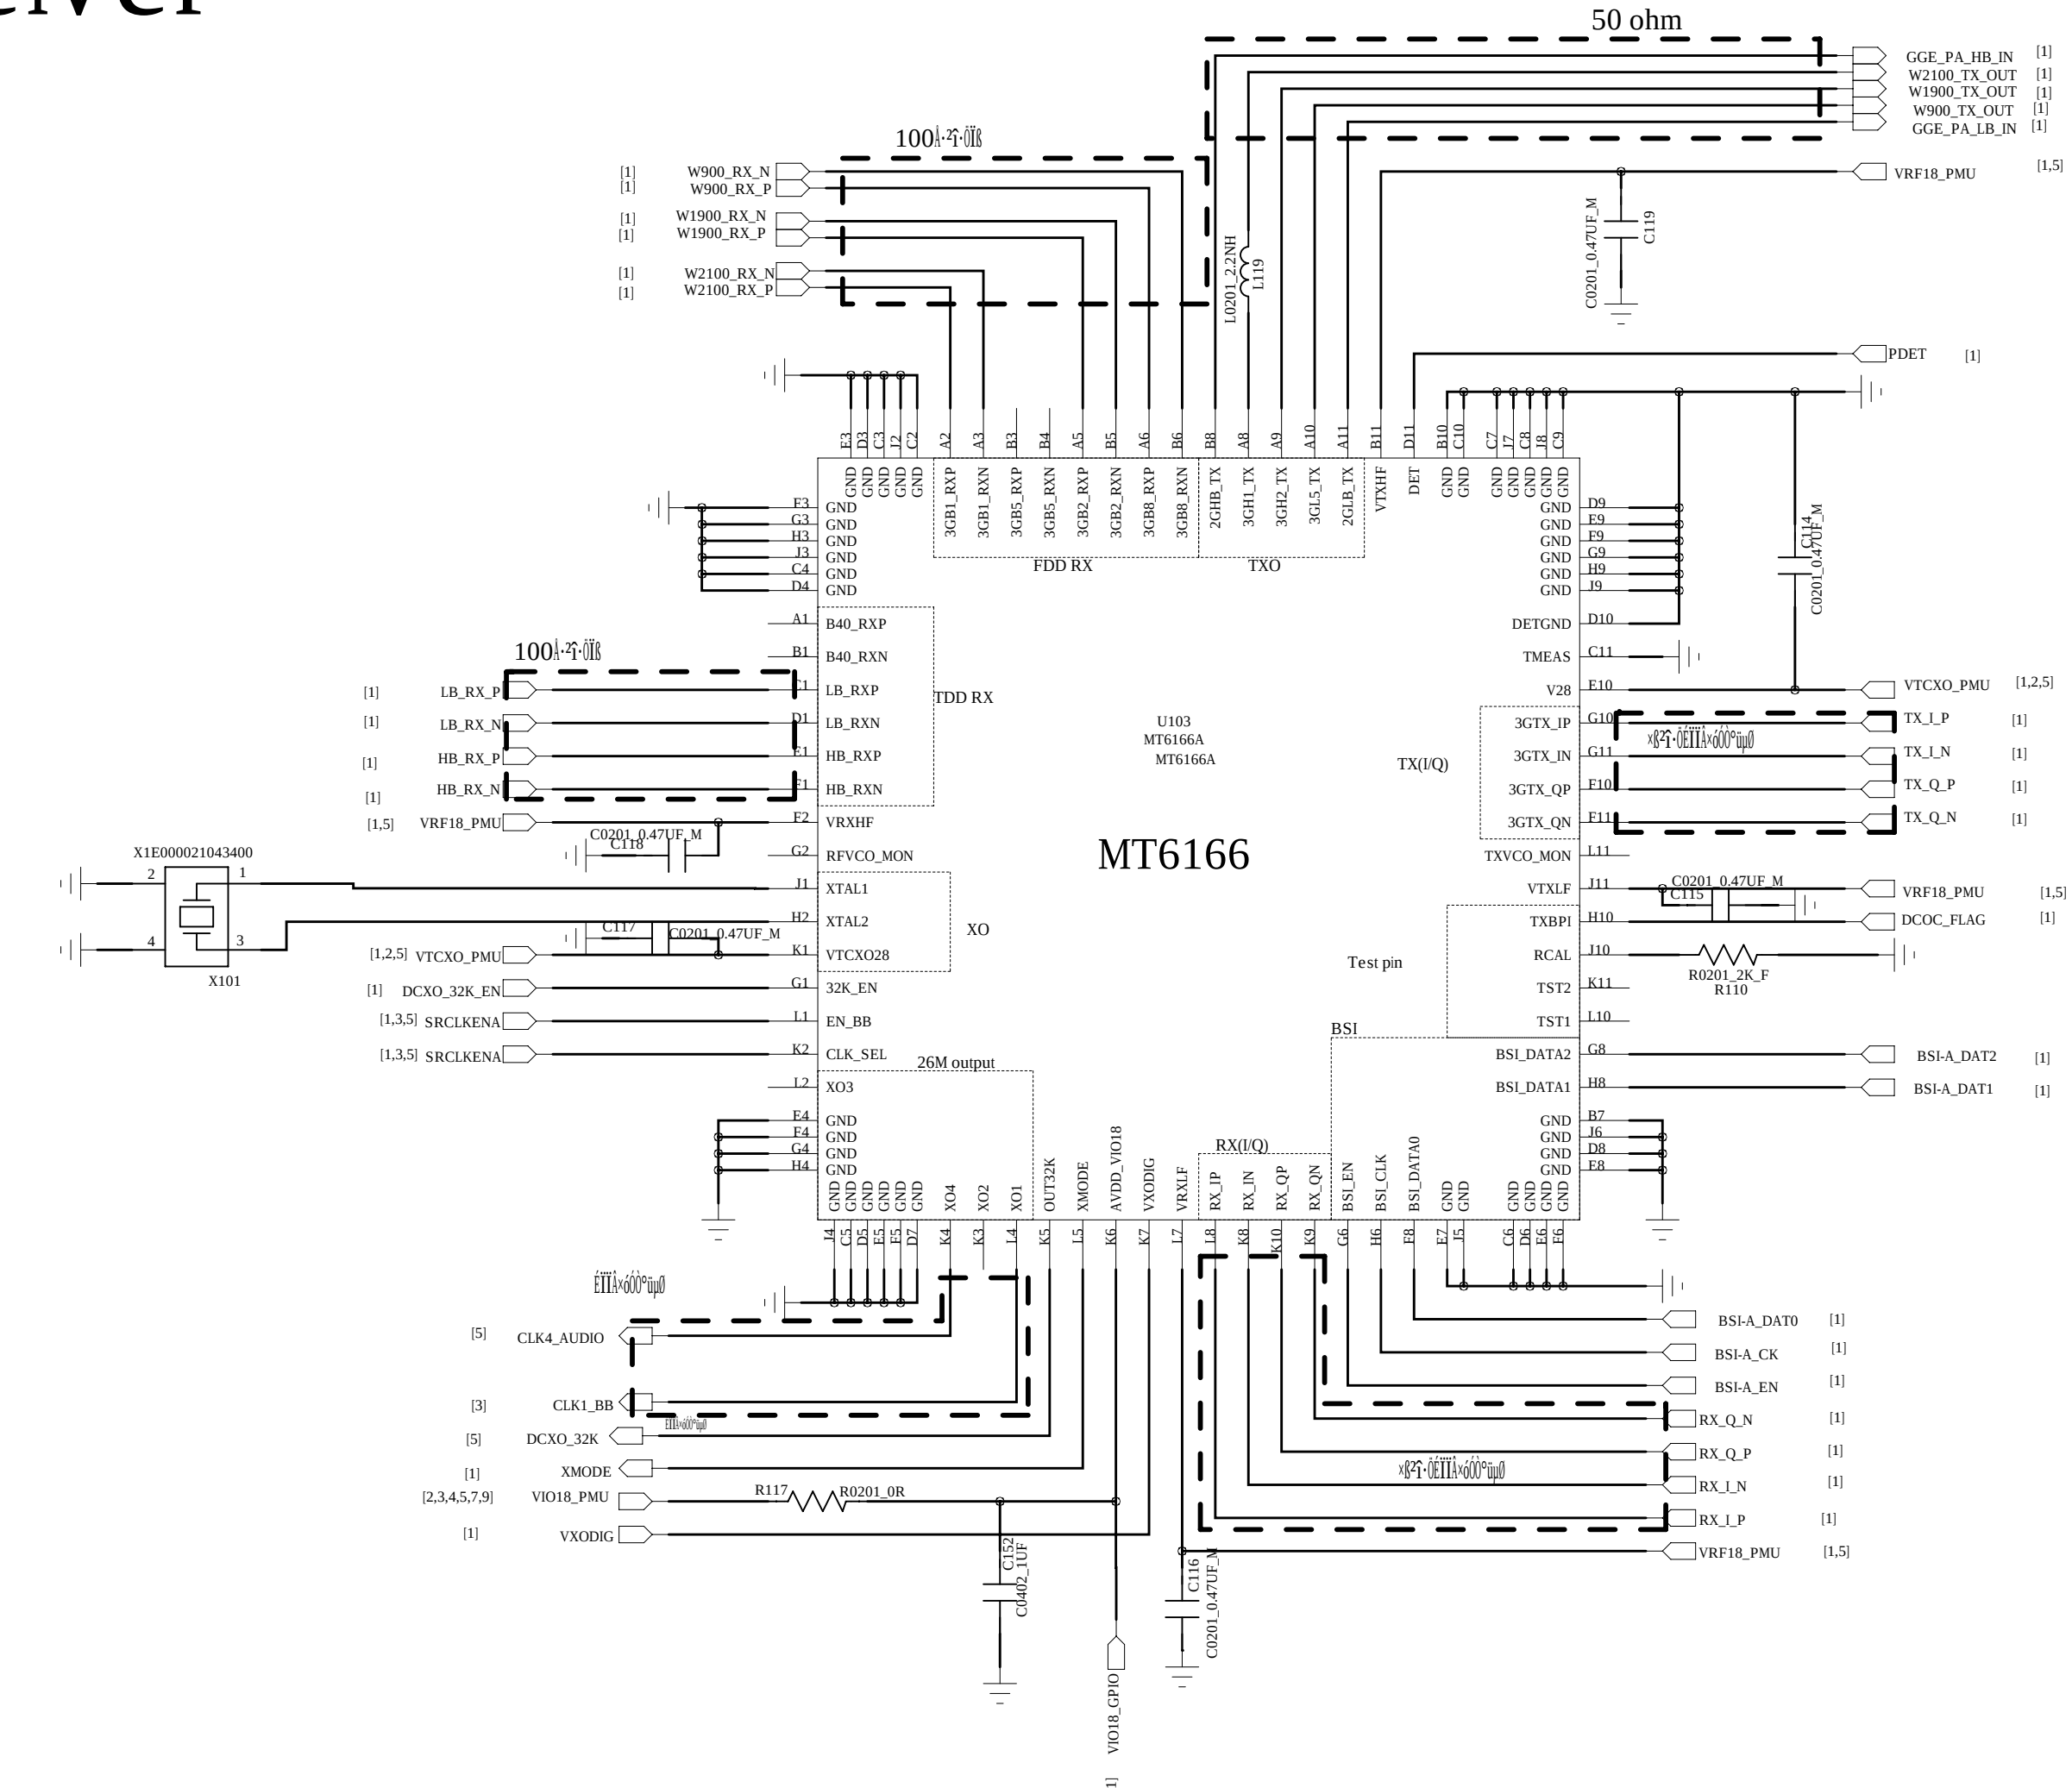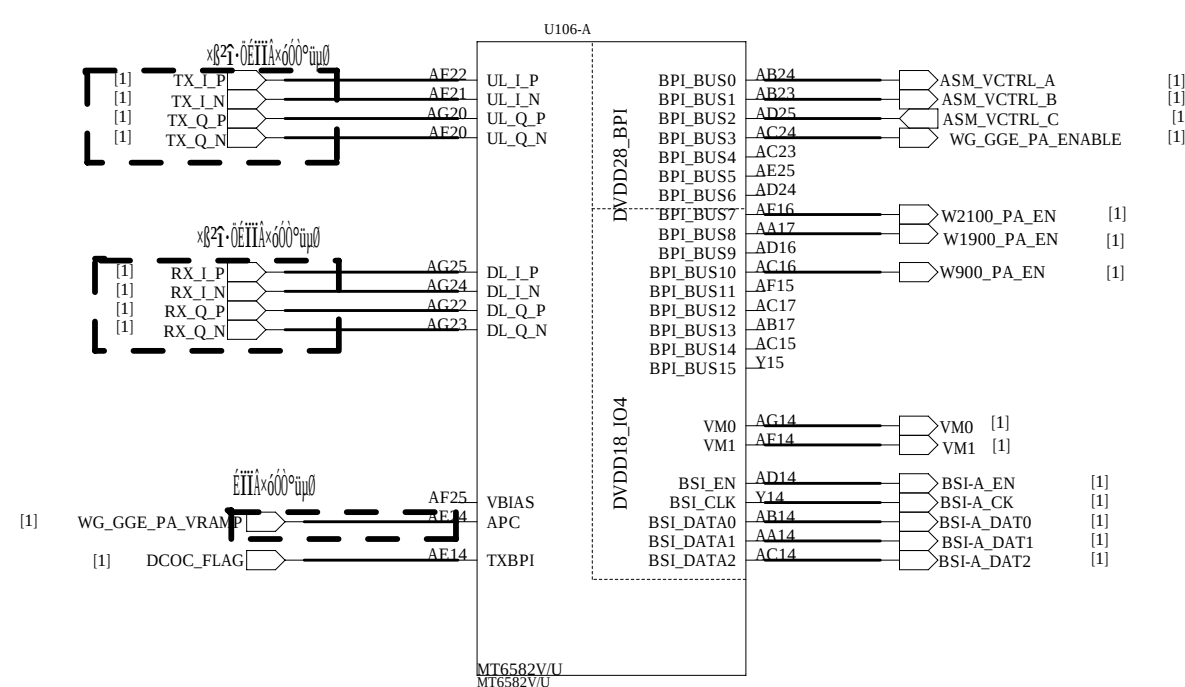


该文档是极速PDF编辑器生成

如果想去掉该提示,请访问并下载:
<http://www.jisupdfeditor.com/>

TRANSSION

REVISION RECORD			
VER	REASON	APPROVED	DATE

该文档是极速PDF编辑器生成，
如果想去掉该提示,请访问并下载：
<http://www.jsupdfeditor.com/>

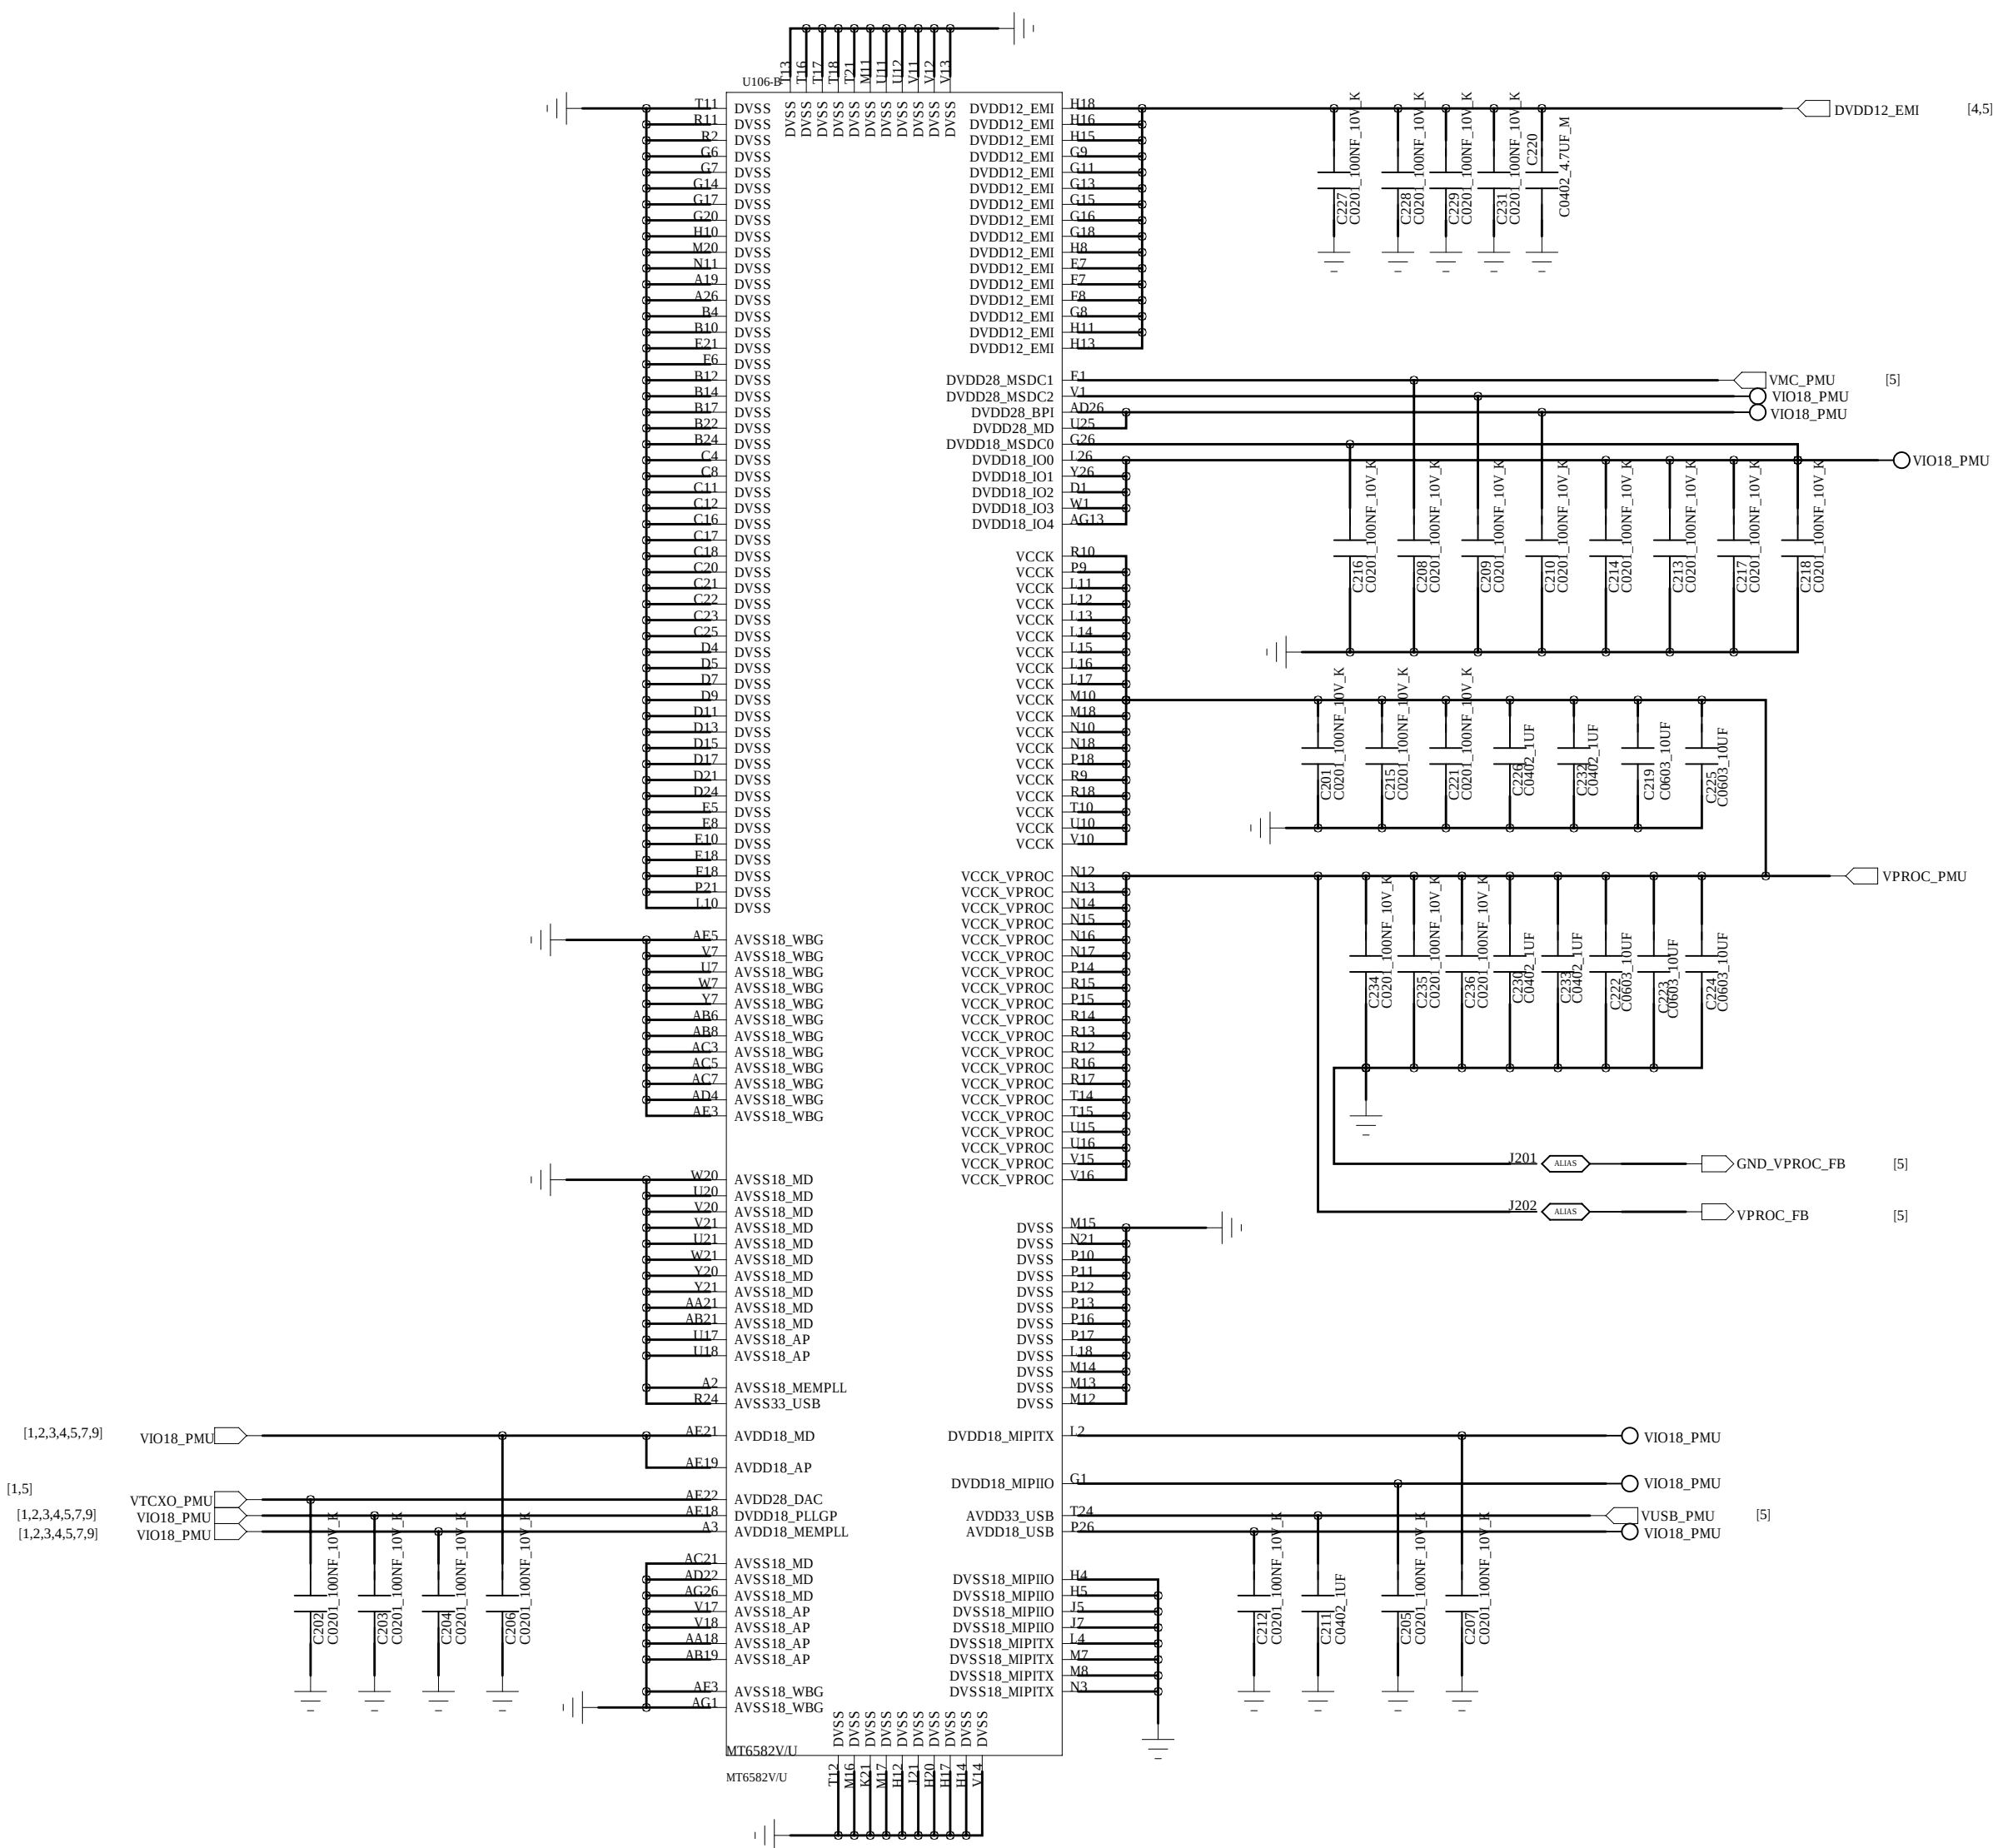

REVISION RECORD			
VER	REASON	APPROVED	DATE


DRAWN	DATED
CHECKED	DATED
QUALITY CONTROL	DATED
RELEASED	DATED

CODE	SIZE	2018-12-22	REV




SCALE: 10

REVISION RECORD			
VER	REASON	APPROVED	DATE

该文档是极速PDF编辑器生成，
如果想去掉该提示,请访问并下载：
<http://www.jsupdfeditor.com/>

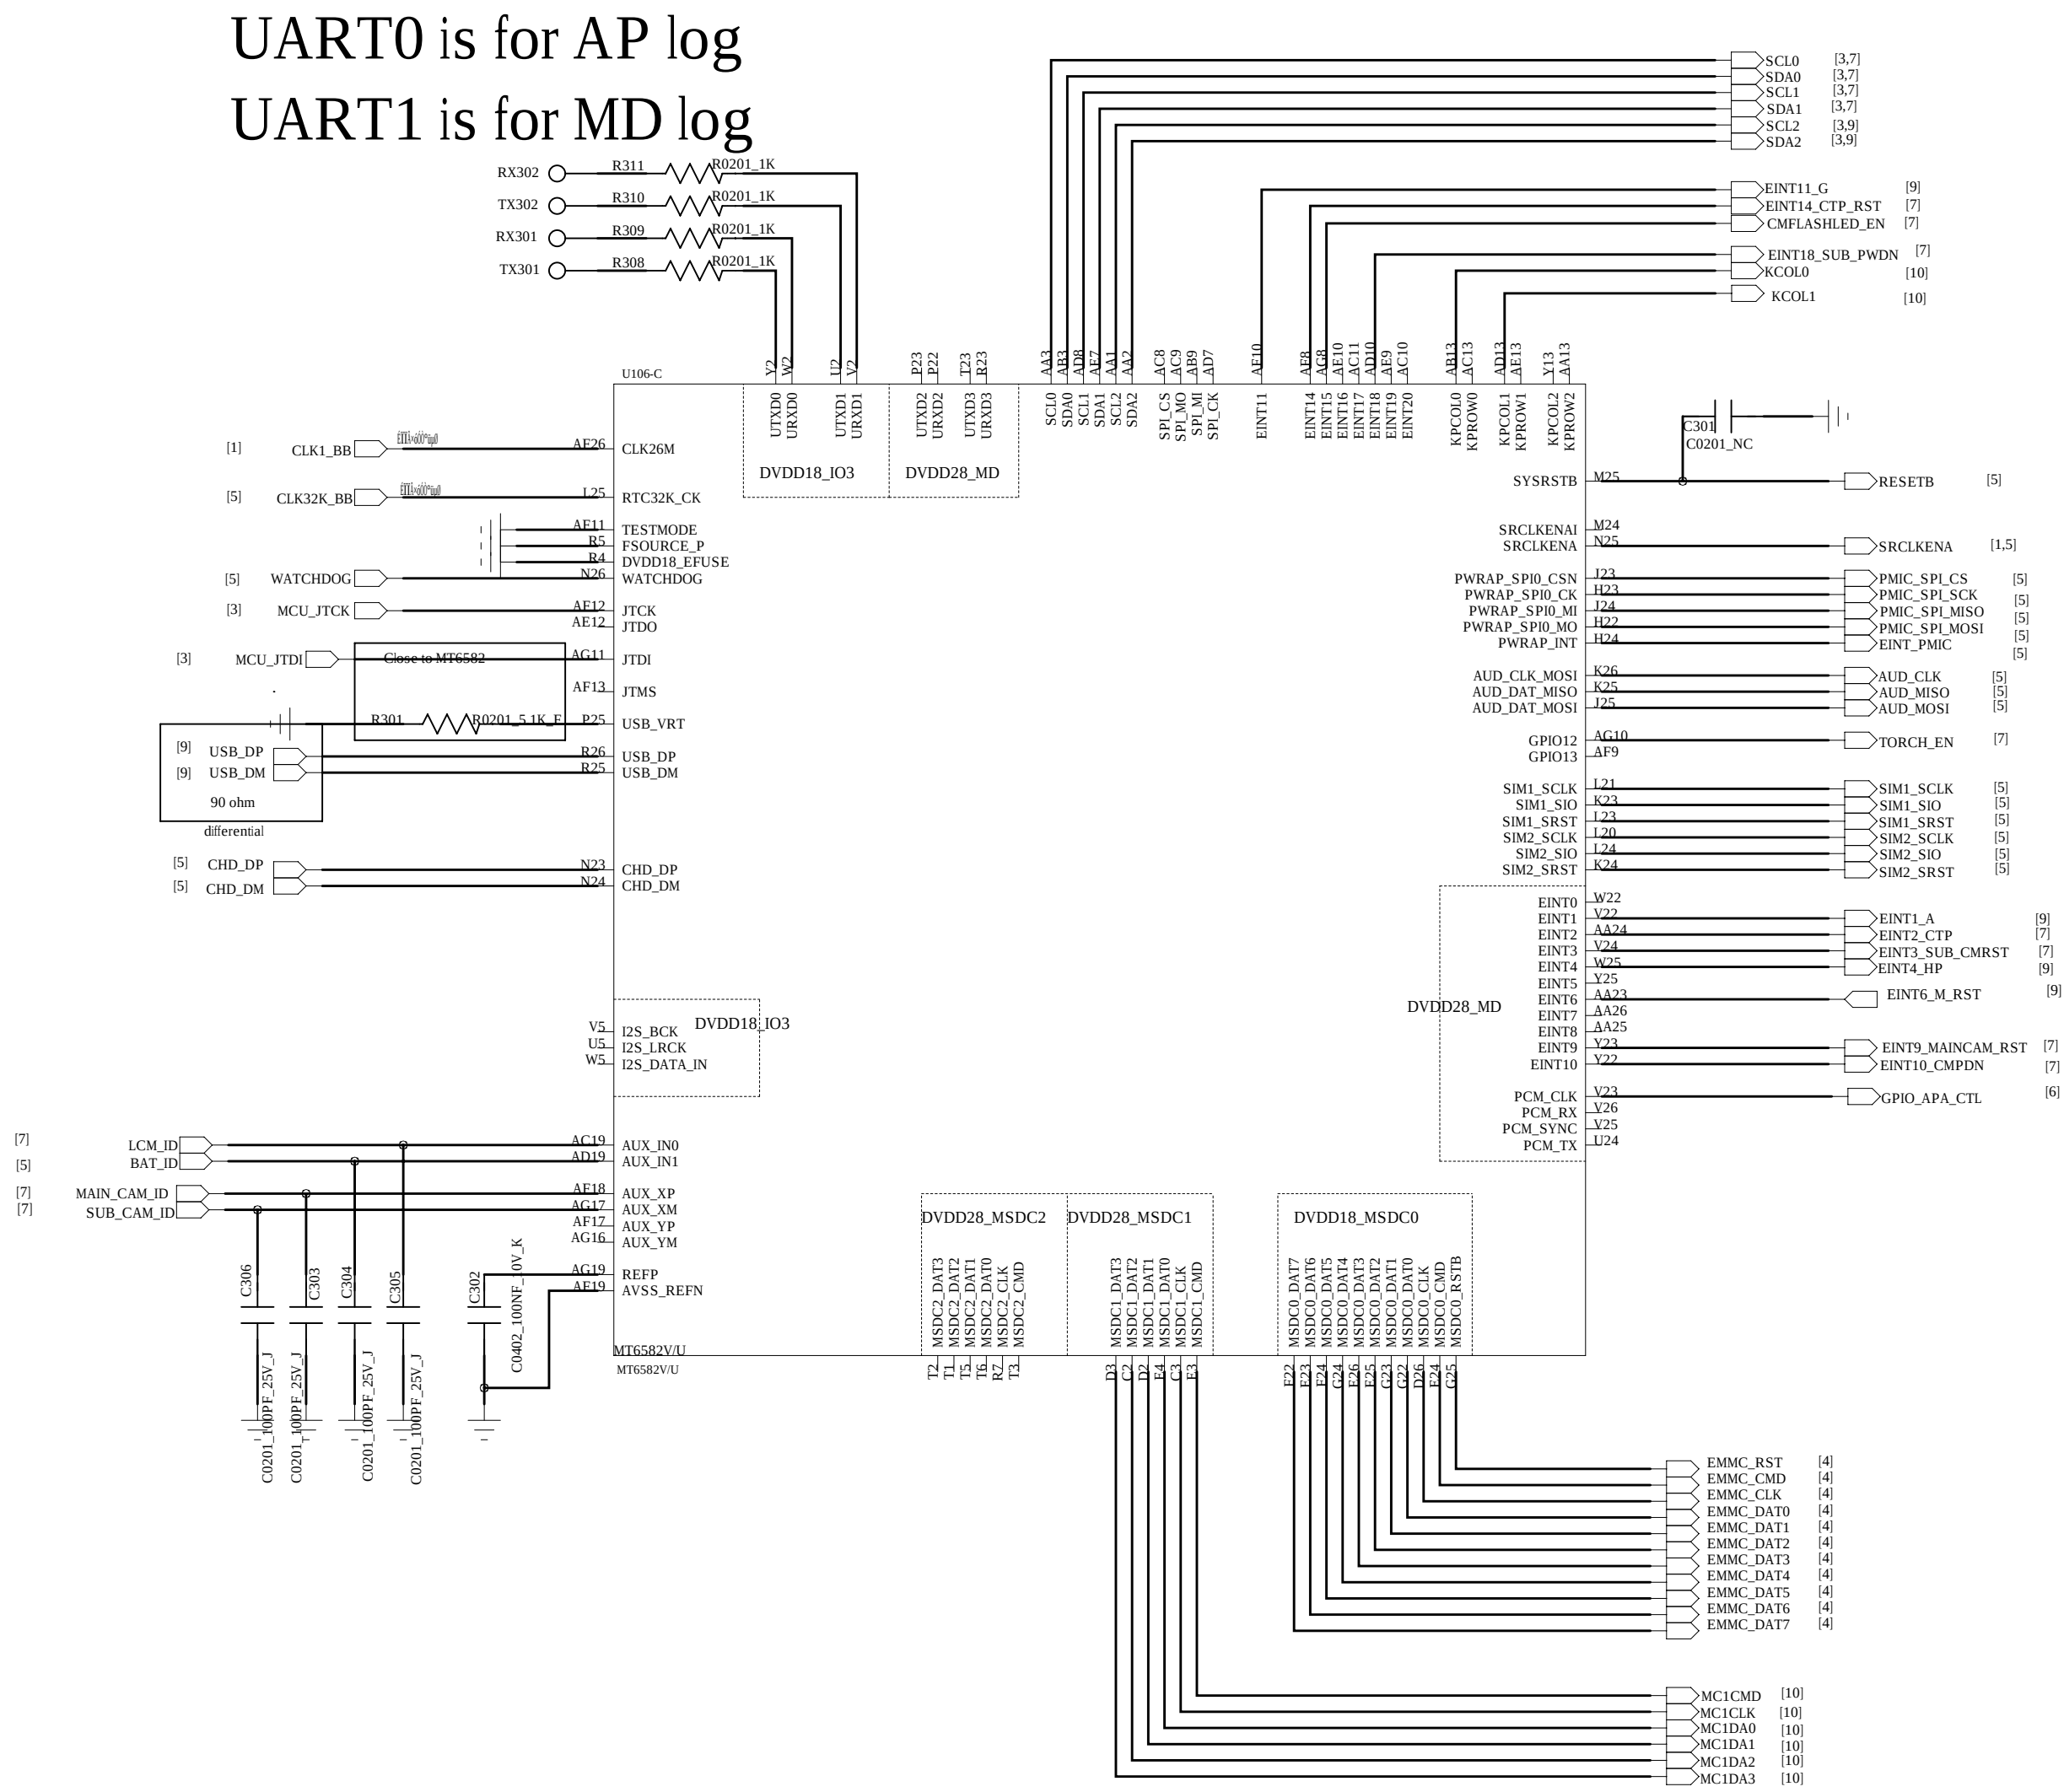

R411 4.7k
R410 NC
R411 NC
R410 4.7k

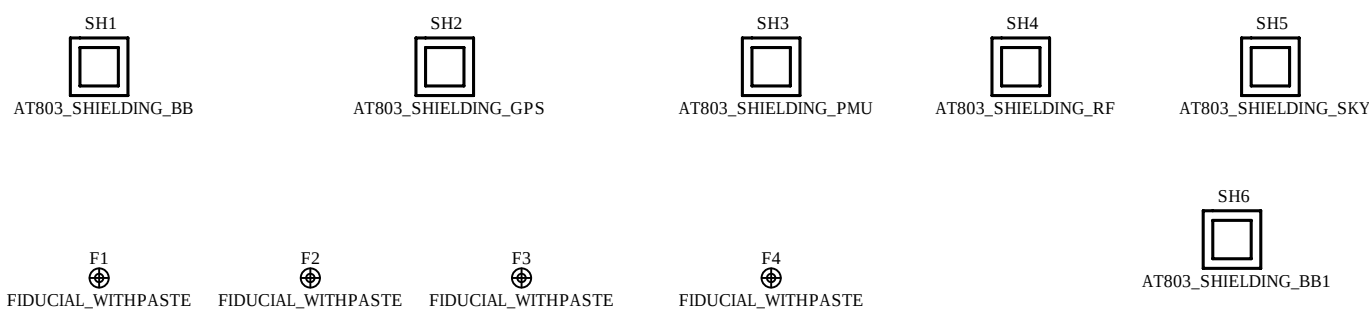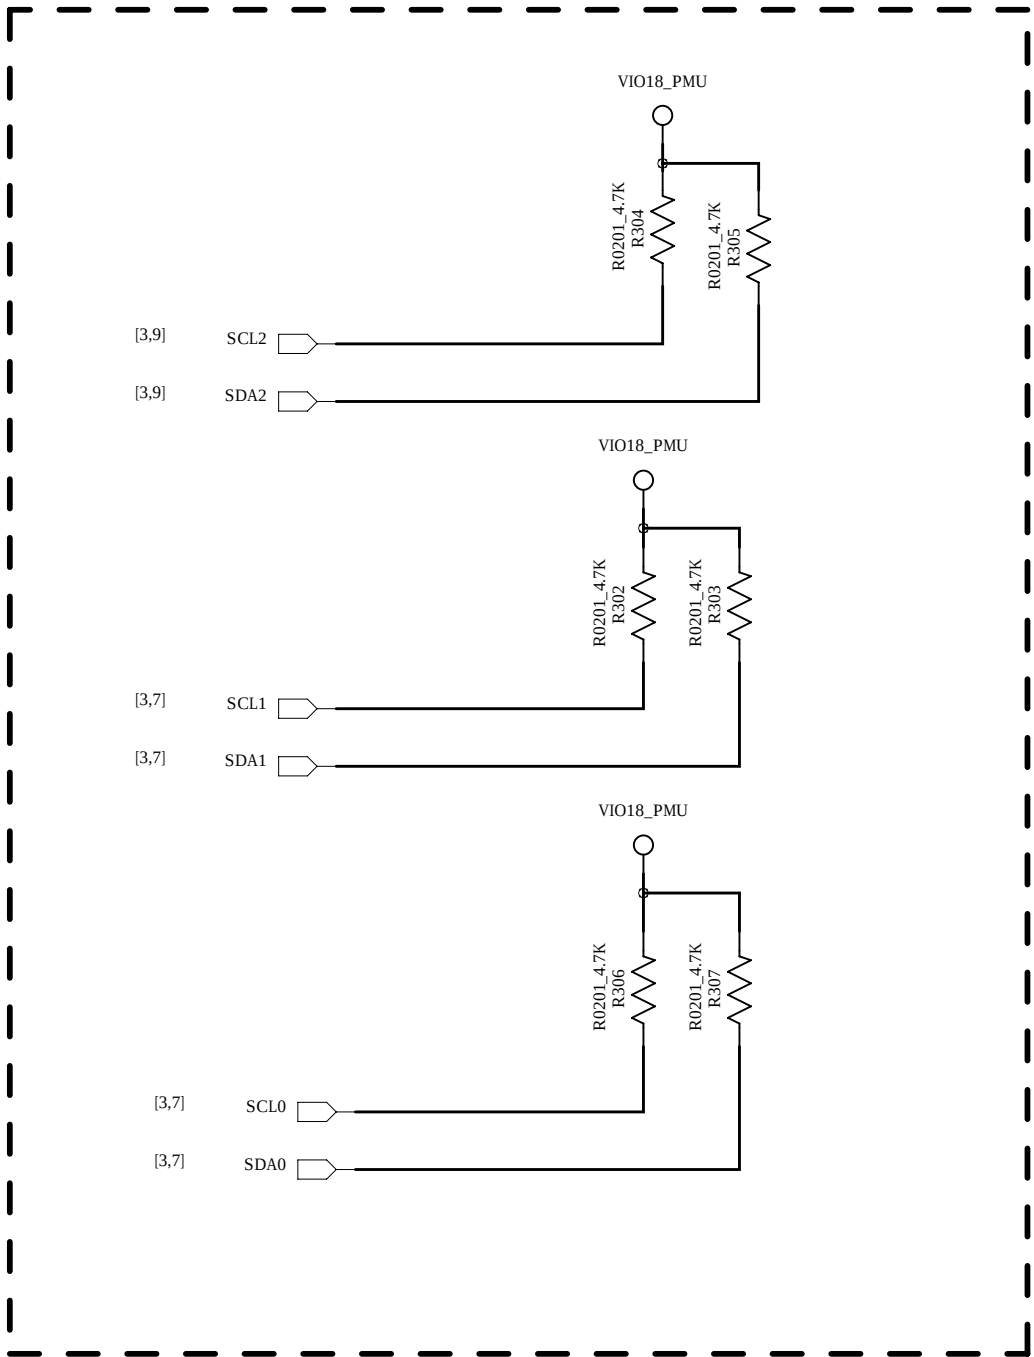


DRAWN			

REVISION RECORD			
VER	REASON	APPROVED	DATE

REVISION RECORD			
VER	REASON	APPROVED	DATE

该文档是极速PDF编辑器生成，
如果想去掉该提示,请访问并下载：
<http://www.jsupdfeditor.com/>

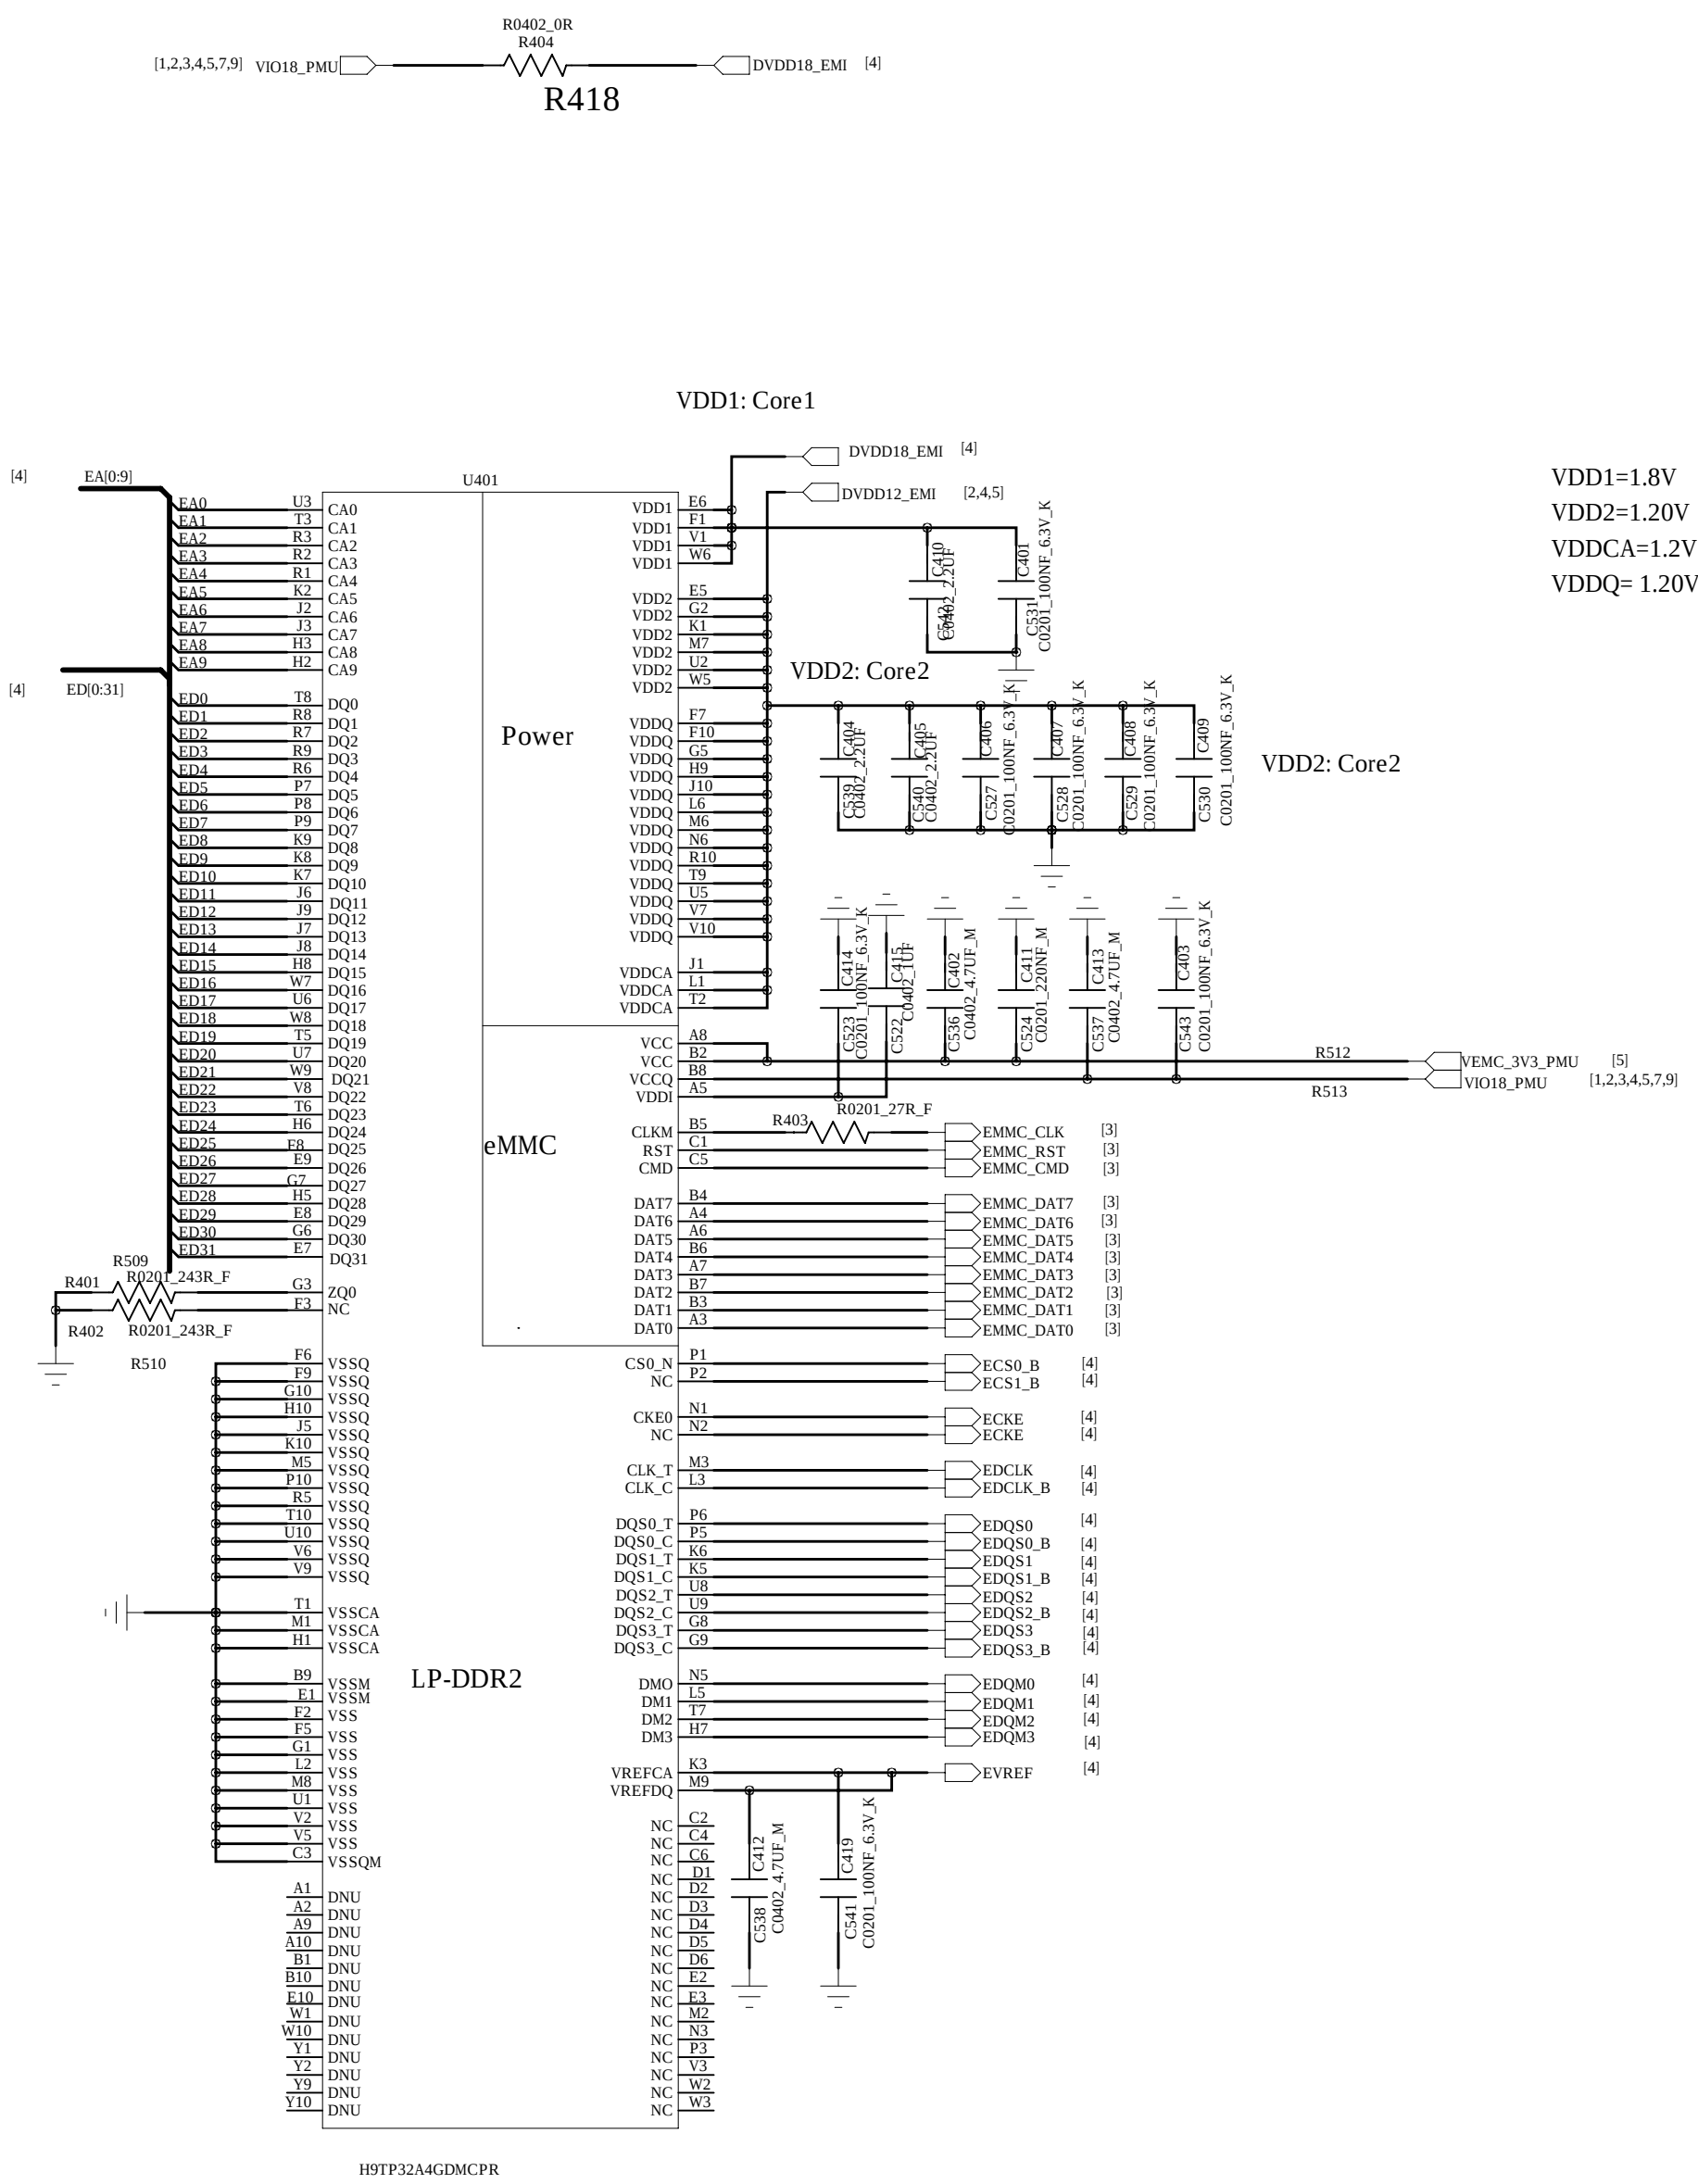

REVISION RECORD			
NO.	REASON	APPROVED	DATE
1			
2			
3			


该文档是极速PDF编辑器生成，
请访问并下载：
www.pdfeditor.com/





LDO List

LDO	Output Voltage(V)	Cap range	Notes
VM	1.24/1.39/1.54/1.84	-20%~+20%	Far-end bypass cap
VRF18	1.825	-20%~+20%	Far-end bypass cap
VIO18	1.8	-20%~+20%	Far-end bypass cap
VCN_1V8	1.8	-20%~+20%	Far-end bypass cap
VCAMD	1.2/1.3/1.5/1.8	-20%~+20%	Far-end bypass cap
VCAM_IO	1.8	-20%~+20%	Far-end bypass cap
VGP3	1.2/1.3/1.5/1.8	-20%~+20%	Far-end bypass cap
VA	2.8	-20%~+20%	Far-end bypass cap
VTCXO	2.8	-20%~+20%	Far-end bypass cap
VCN28	2.8	-20%~+20%	Far-end bypass cap
VCAMA	2.8	-20%~+20%	Far-end bypass cap
VCN33	3.3/3.4/3.5/3.6	-20%~+20%	Far-end bypass cap
VIO28	2.8	-20%~+20%	Far-end bypass cap
VUSB	3.3	-20%~+20%	Far-end bypass cap
VMC	1.8/3.3	-20%~+20%	Far-end bypass cap
VMCH	3.0/3.3	-20%~+20%	Far-end bypass cap
VEMC_3V3	3.0/3.3	-20%~+20%	Far-end bypass cap
VCAM_AF	1.2/1.3/1.5/1.8/2.0	-20%~+20%	Far-end bypass cap
VSIM1	1.8/3.0	-20%~+20%	Far-end bypass cap
VSIM2	1.8/3.0	-20%~+20%	Far-end bypass cap
VGP1	1.2/1.3/1.5/1.8/2.0	-20%~+20%	Far-end bypass cap
VGP2	1.2/1.3/1.5/1.8/2.0	-20%~+20%	Far-end bypass cap
VIBR	1.2/1.3/1.5/1.8/2.0	-20%~+20%	Far-end bypass cap
VDIG18	1.8	-20%~+20%	Far-end bypass cap
VRTC	2.8	-20%~+20%	Far-end bypass cap

Ball name	Net name	Trace width
VA	VA_PMU	As wide as possible (≥6mil)
VCN28	VCN_2V8_PMU	As wide as possible (≥8mil)
VTCXO	VTCXO_PMU	As wide as possible (>6mil) / (4mil under chip area)
VCAMA	VCAMA_PMU	As wide as possible (≥12mil), (Main CAM : trace length/wide<310)
VCN33	VCN_3V3_PMU	As wide as possible (≥12mil)
AVDD33_RTC	VRTC	As wide as possible (≥4mil)
VM	VM_PMU	As wide as possible (≥35mil), (trace length/wide<35)
VRF18	VRF18_PMU	As wide as possible (≥15mil), (trace length/wide<150)
VIO18	VIO18_PMU	As wide as possible (≥12mil) / (8mil under chip area)
VIO28	VIO28_PMU	As wide as possible (>8mil) / (5mil under chip area)
VCN18	VCN_1V8_PMU	As wide as possible (≥12mil) / (8mil under chip area)
VCAMD	VCAMD_PMU	As wide as possible (≥15mil), (Main CAM : trace length/wide<340)
VCAM_IO	VCAMD_IO_PMU	As wide as possible (≥6mil)
VMC	VMC_PMU	As wide as possible (≥8mil) / (4mil under chip area)
VMCH	VMCH_PMU	As wide as possible (≥12mil)
VUSB	VUSB_PMU	As wide as possible (≥8mil) / (6mil under chip area)
VSIM1	VSIM1_PMU	As wide as possible (≥6mil)
VSIM2	VSIM2_PMU	As wide as possible (≥6mil)
VGP1	VGP1_PMU	As wide as possible (≥6mil)
VIBR	VIBR_PMU	As wide as possible (≥6mil) / (4mil under chip area)
VGP2	VGP2_PMU	As wide as possible (≥6mil)
VGP3	VGP3_PMU	As wide as possible (≥15mil), (trace length/wide<315)
VCAM_AF	VCAM_AF_PMU	As wide as possible (≥6mil)

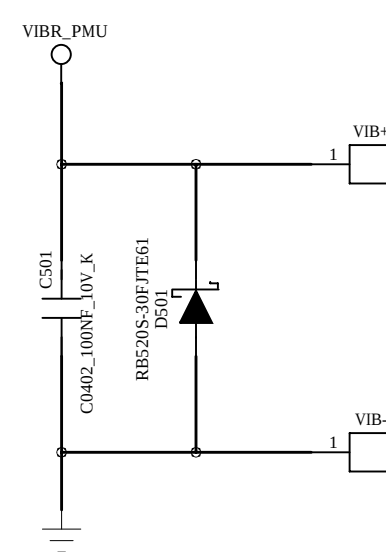

=> for longer RTC time sustain after battery remove, please refer to RTC design notice

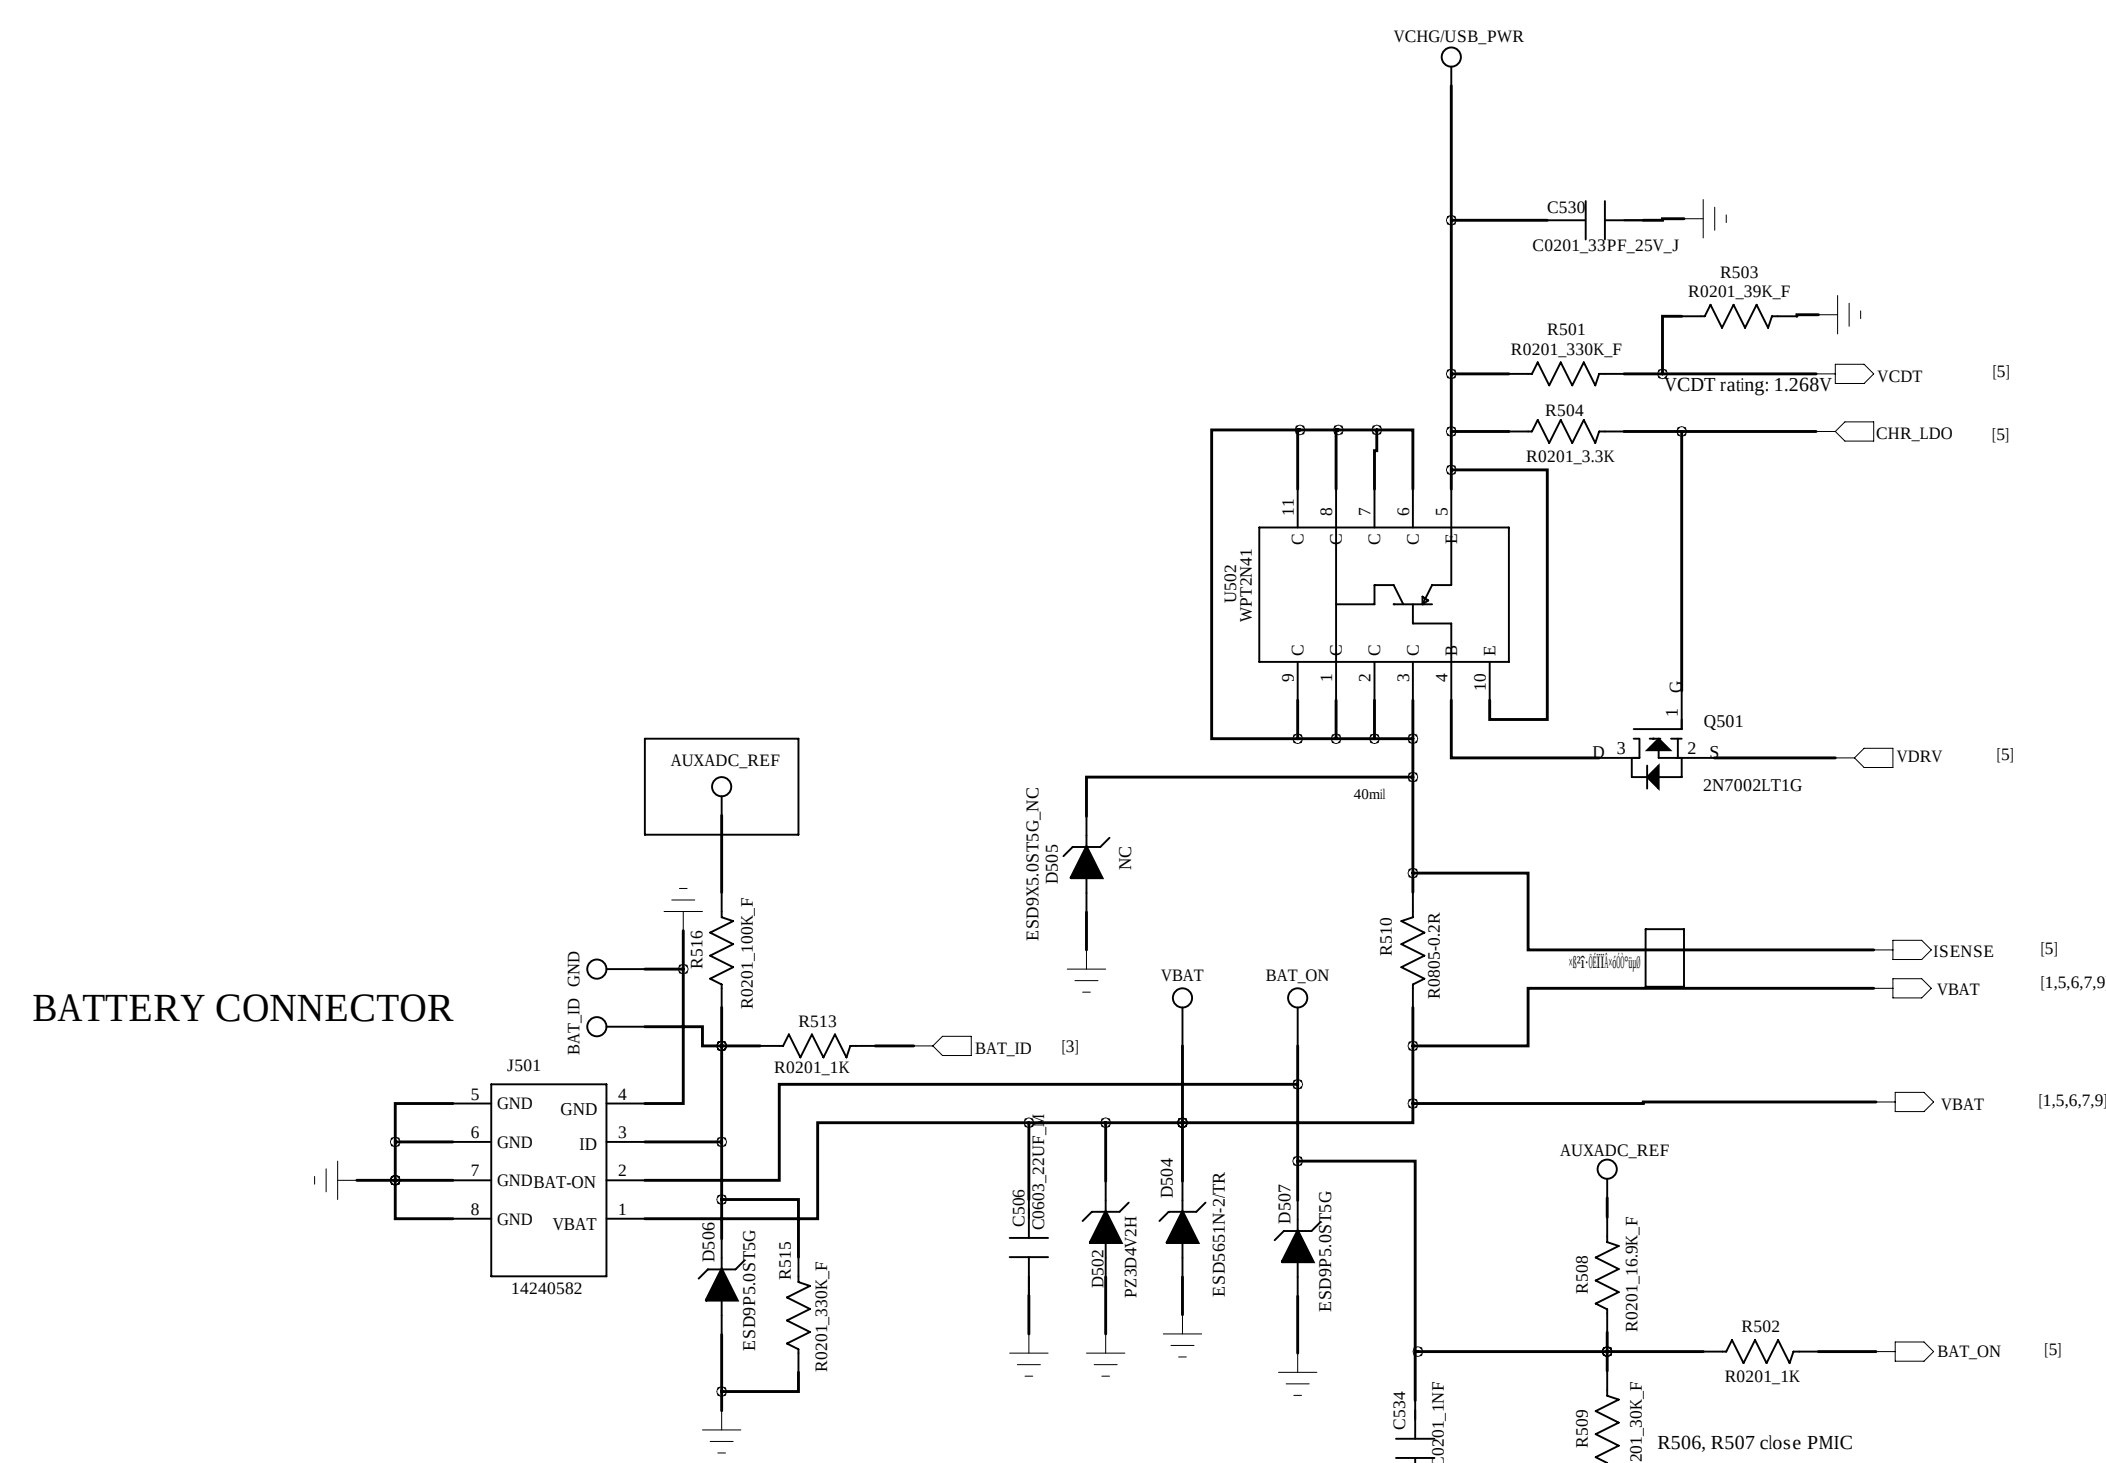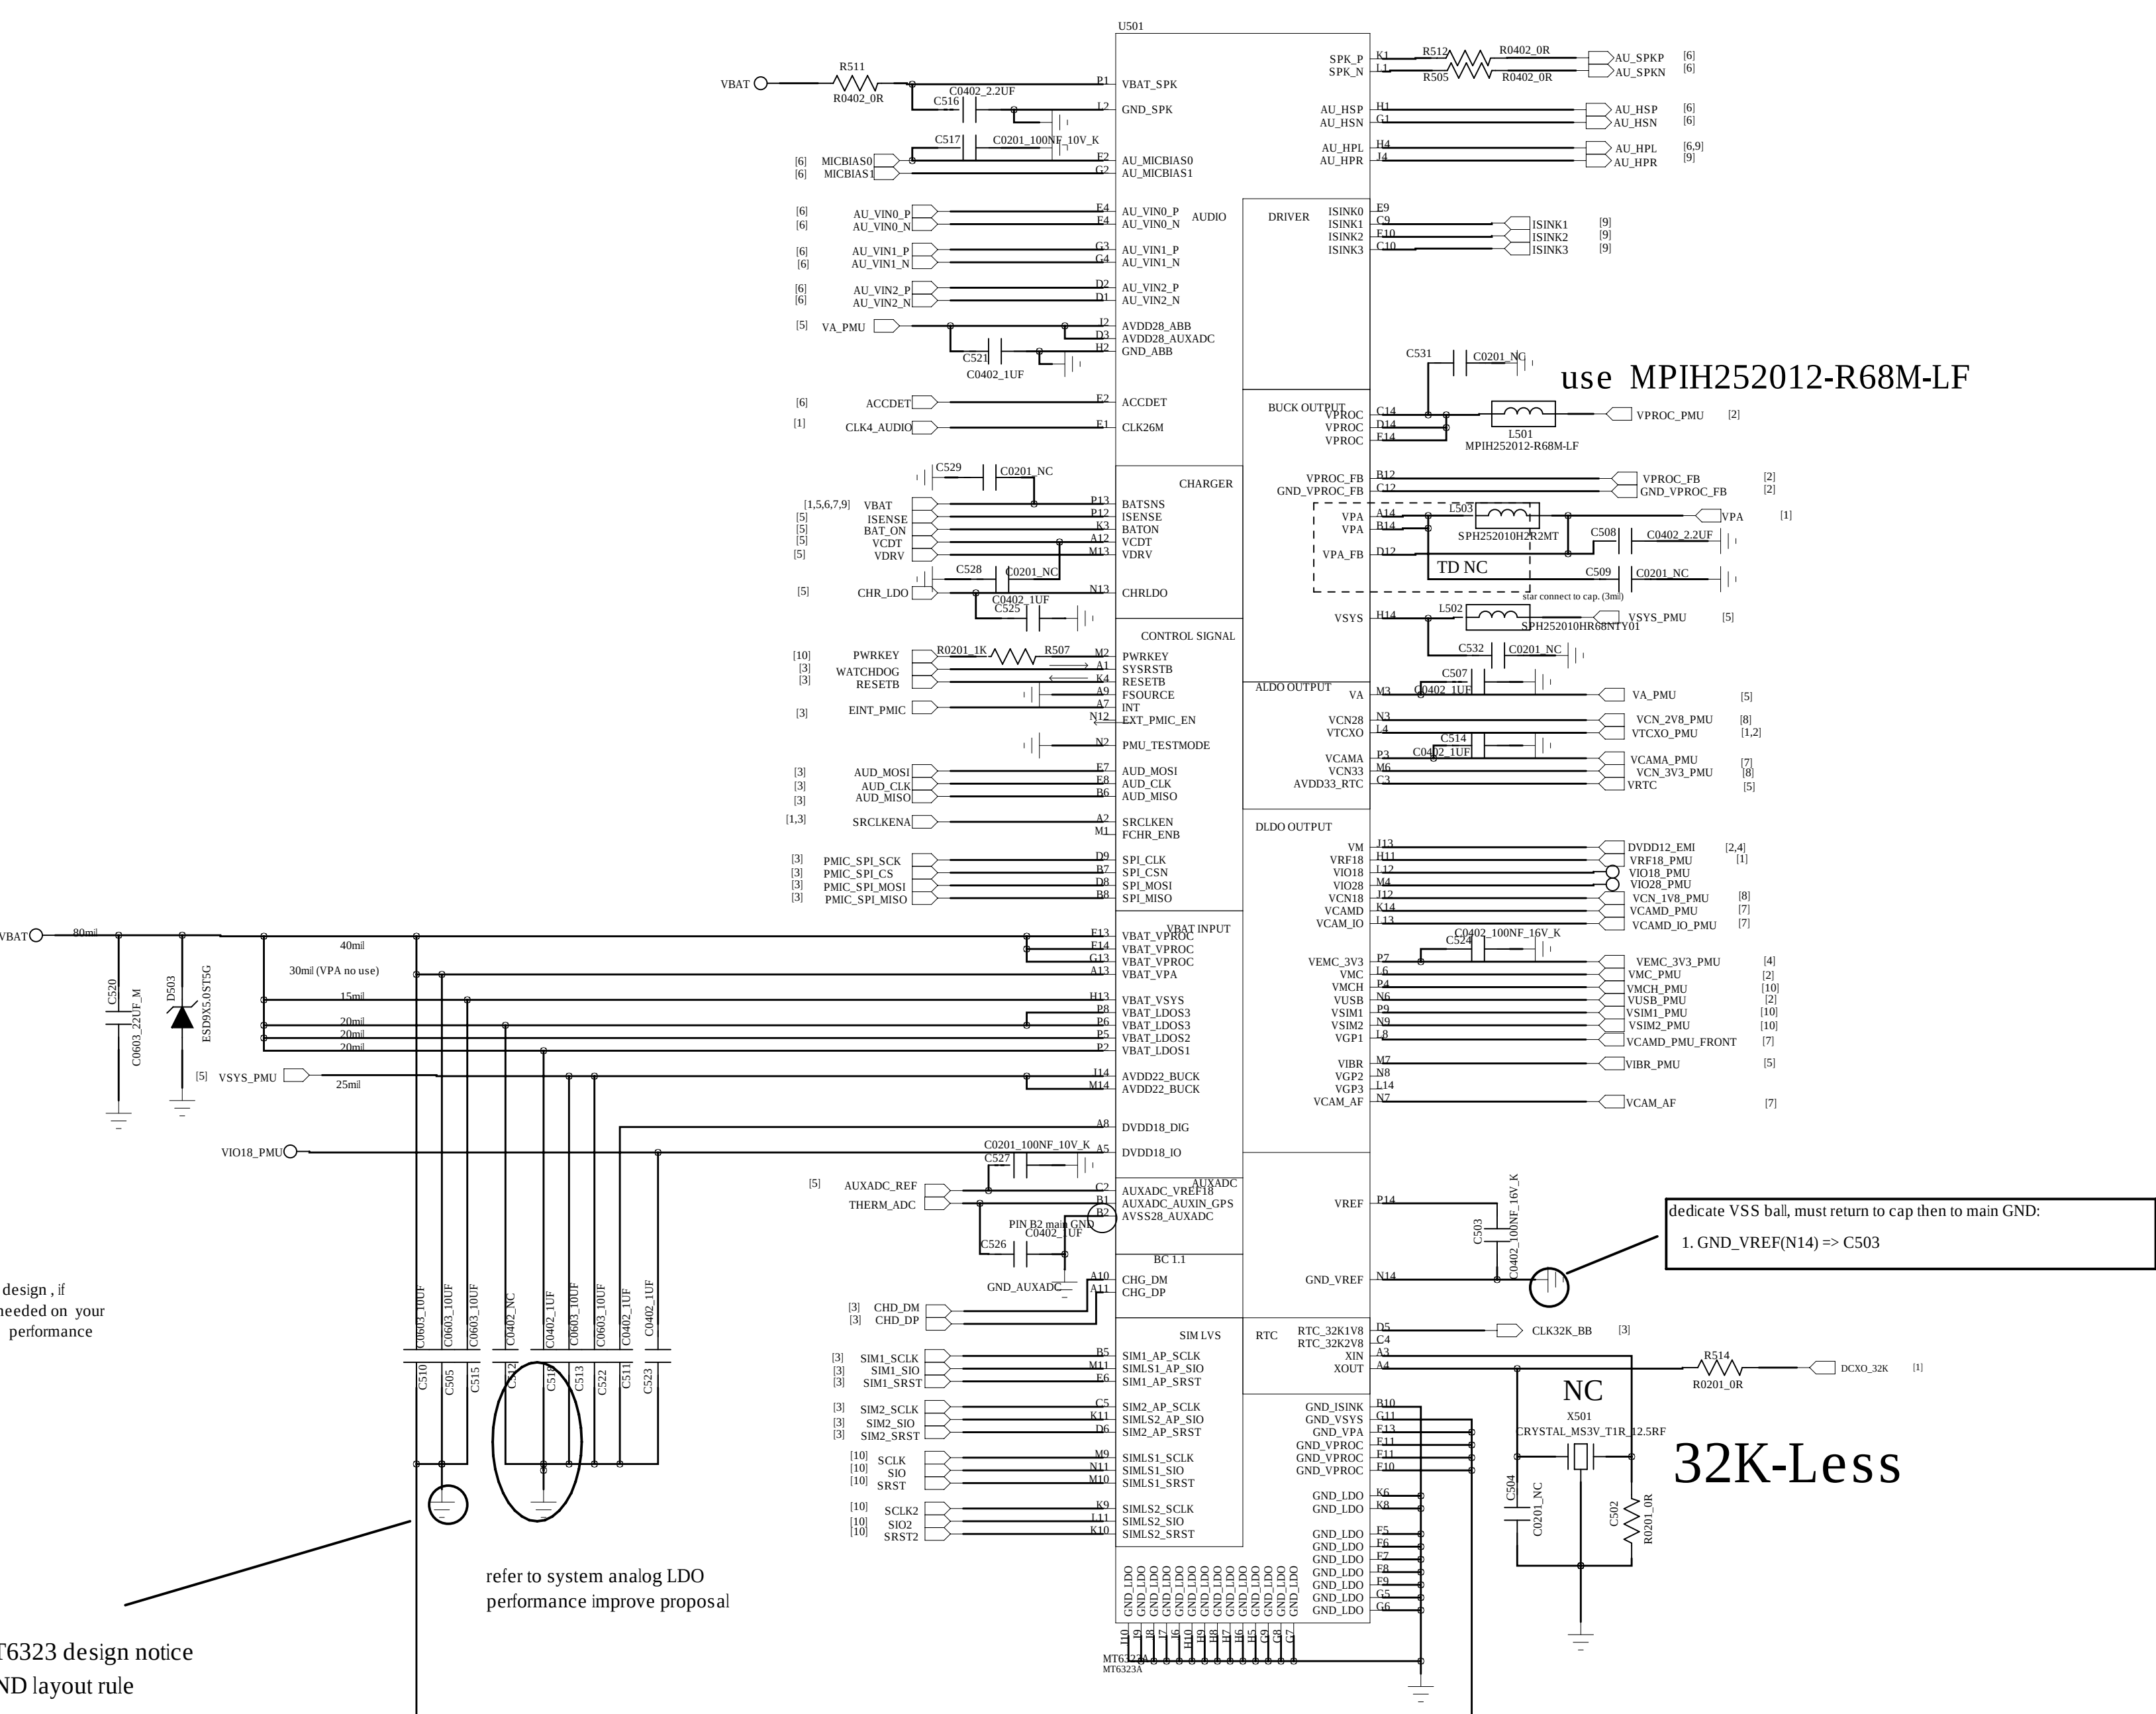

NTC=10K, R506=16.9K, R507=27K
NTC=47K, R506=61.9K, R507=100K

DRAWN			
CHECKED	DATED	CODE	SIZE
QUALITY CONTROL	DATED		
RELEASED	DATED		

TRANSFORM

REF: 1077

2018-12-12

SCALE


SHEET 56

10




TRANSMISSION			
PAPER HOTZ			
CODE:	SIZE:	2010-12-22	REV:
SCALE:		SHEET: 6 of 10	


Audio PA

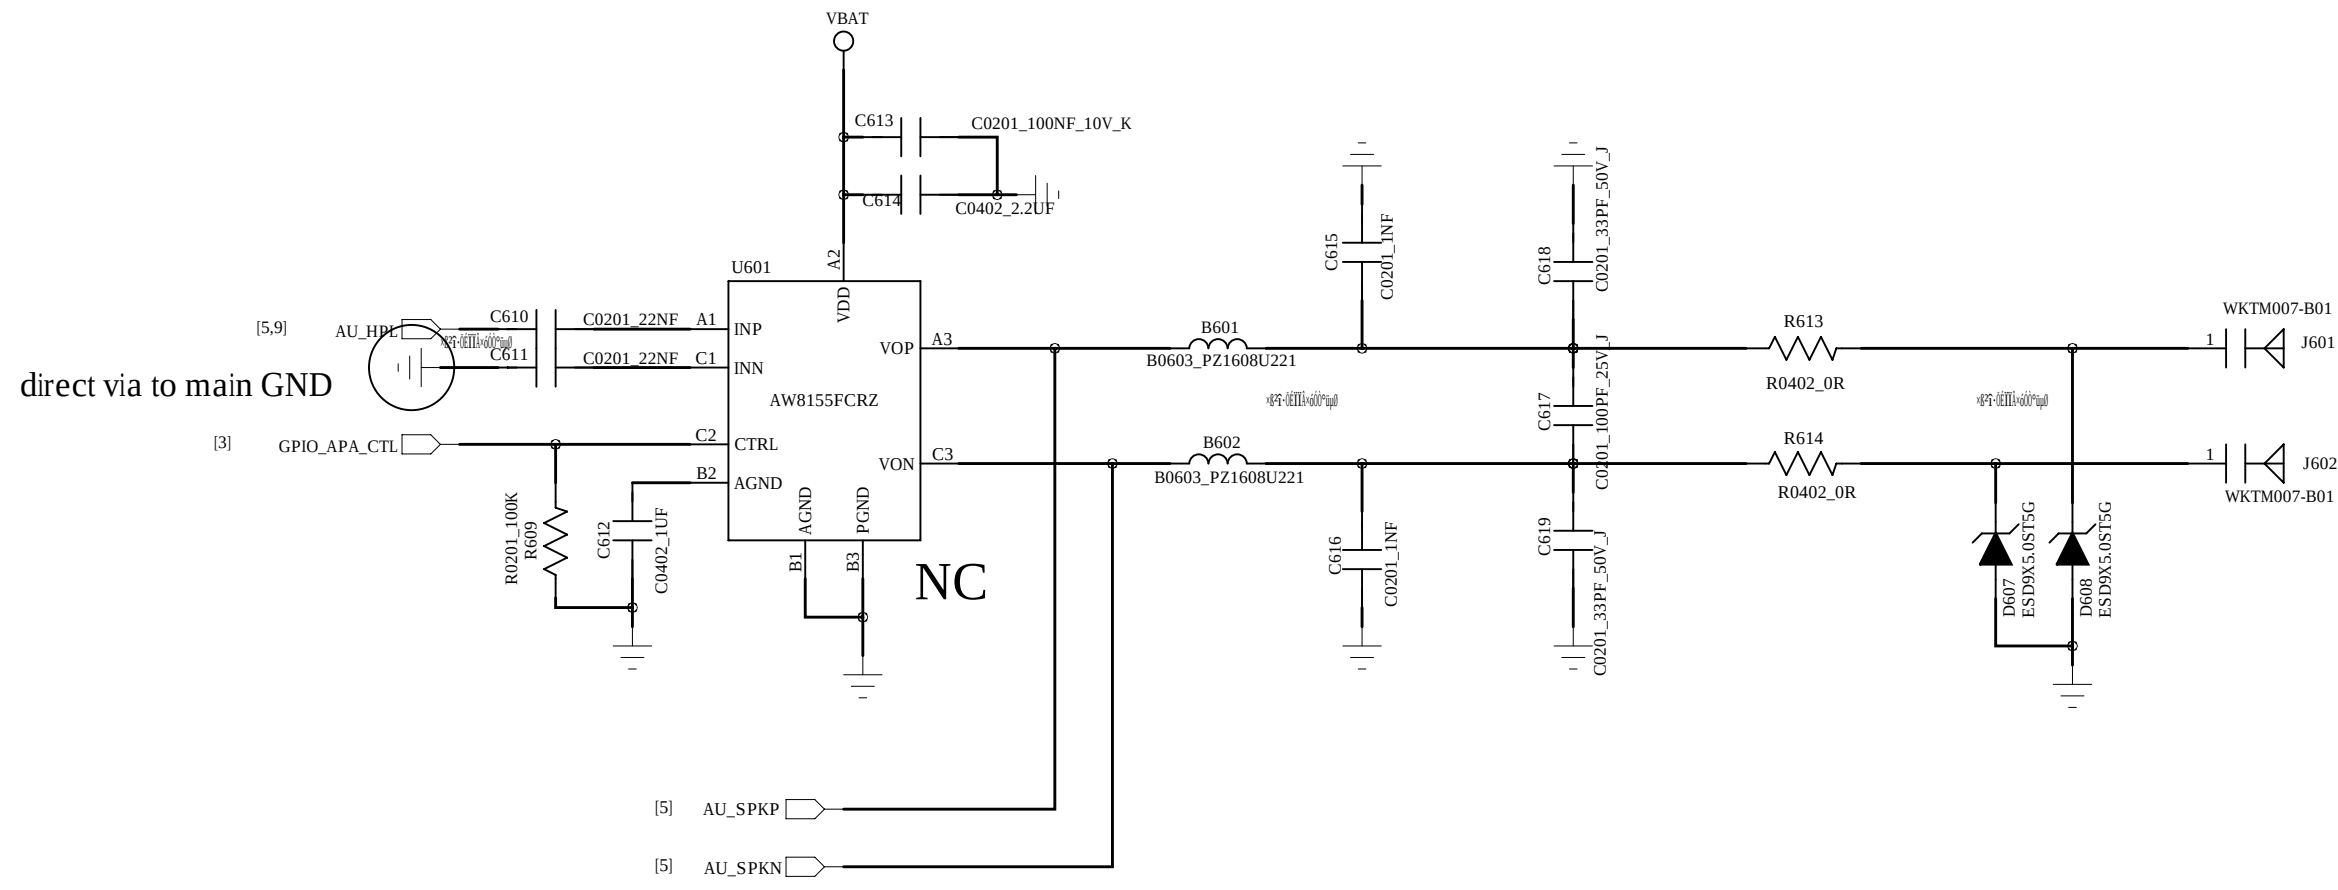





Earphone MICPHONE

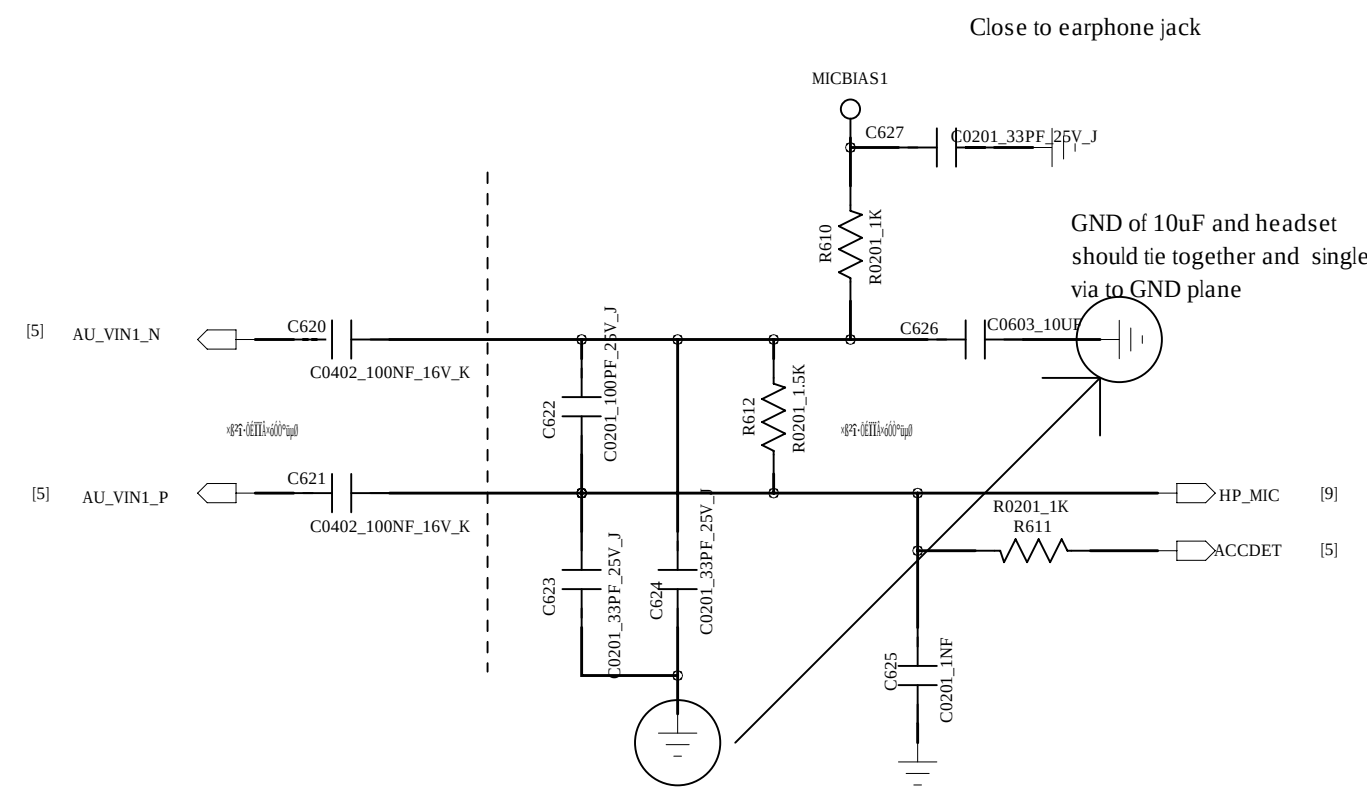


DRAWN:	DATED:
CHECKED:	DATED:
QUALITY CONTROL:	DATED:
RELEASED:	DATED:


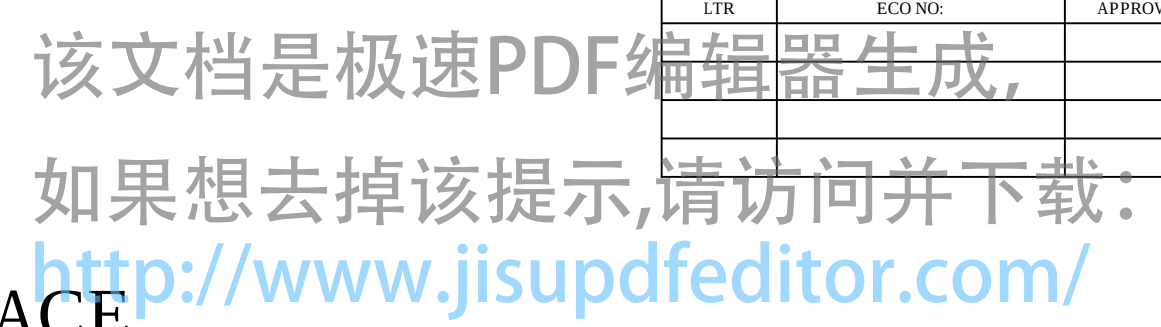


TRANSMISSION			
REFR HOTT			
CODE:	SIZE:	2018-12-22	REV:
SCALE:		SHEET: 2 OF 10	

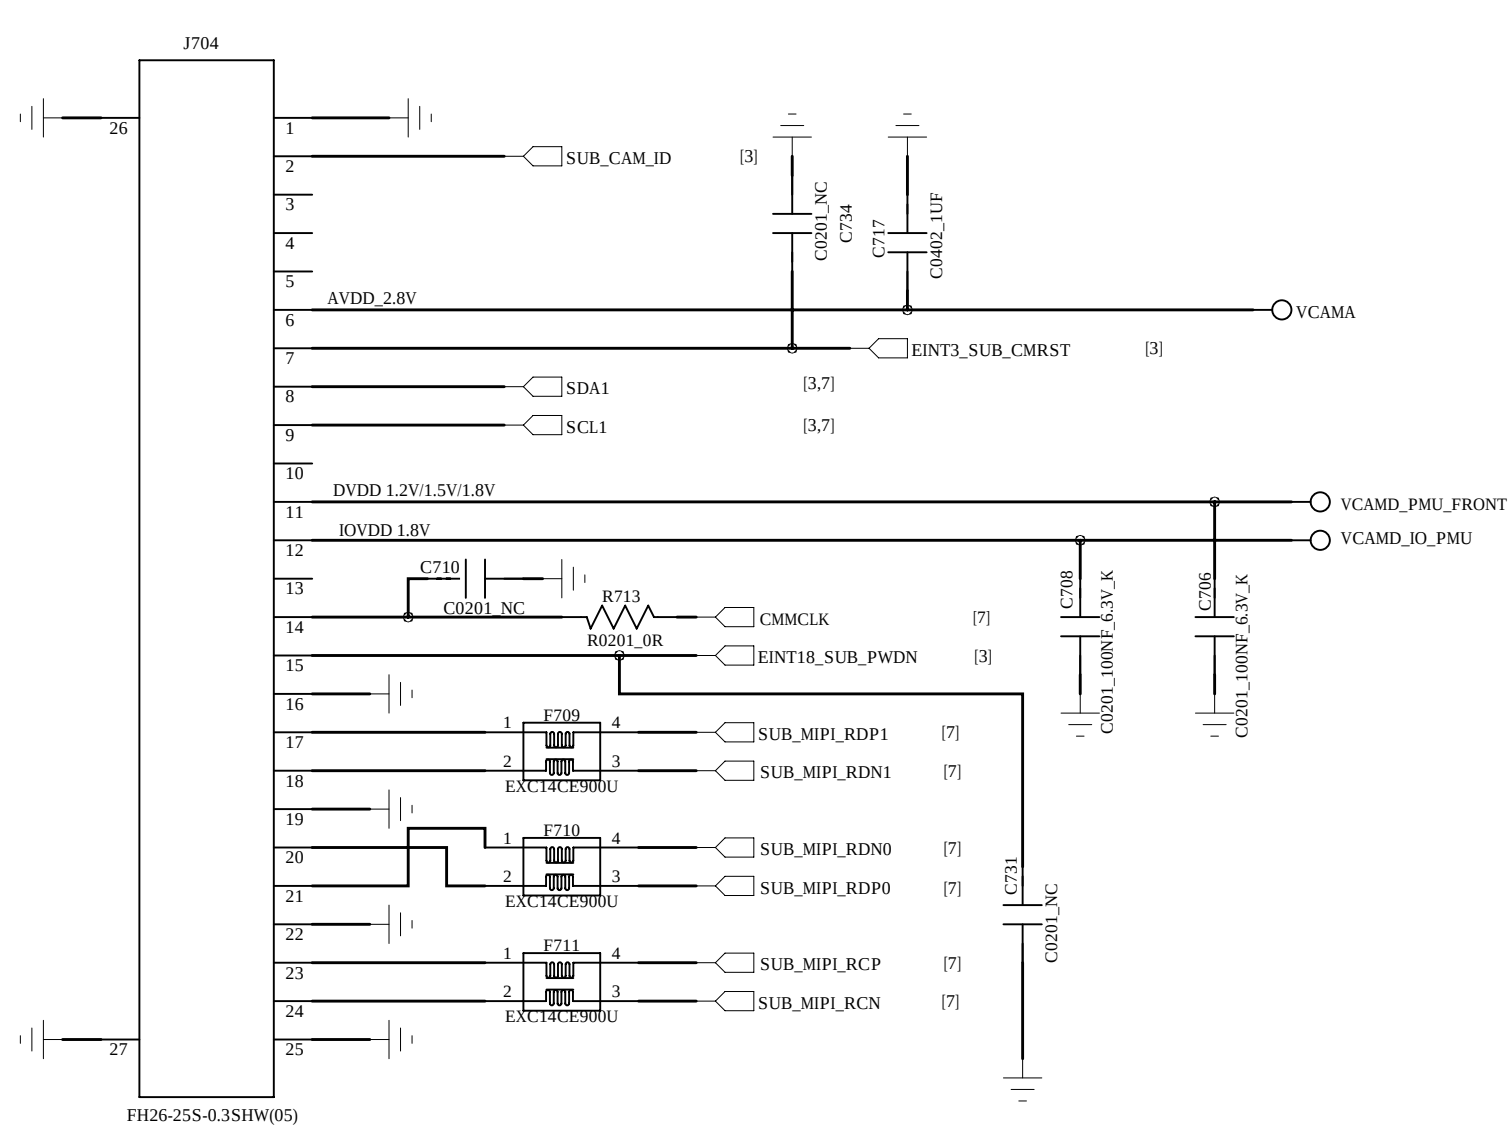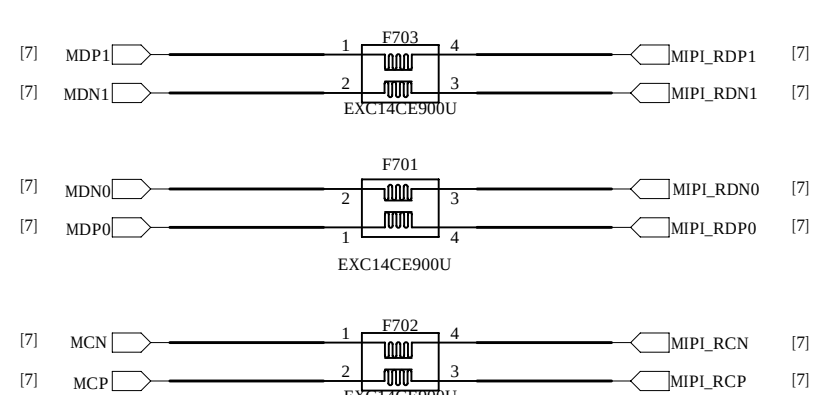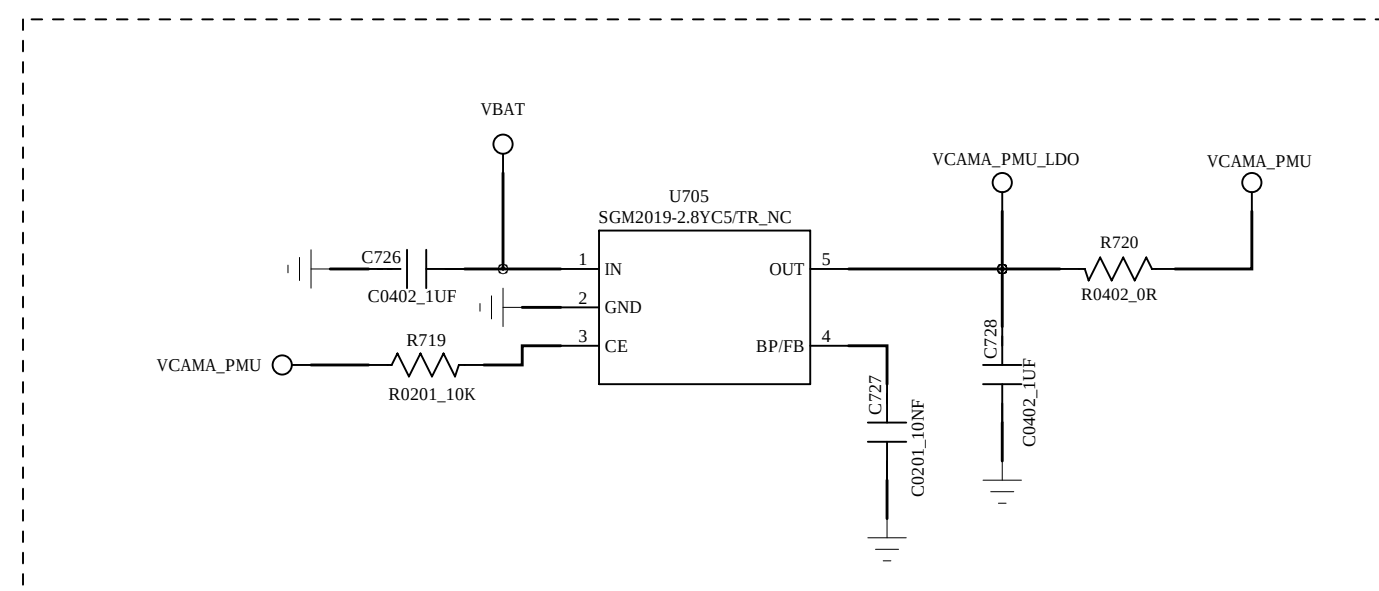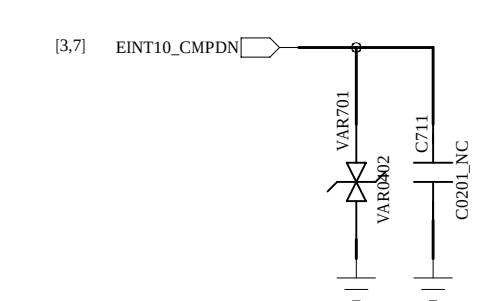


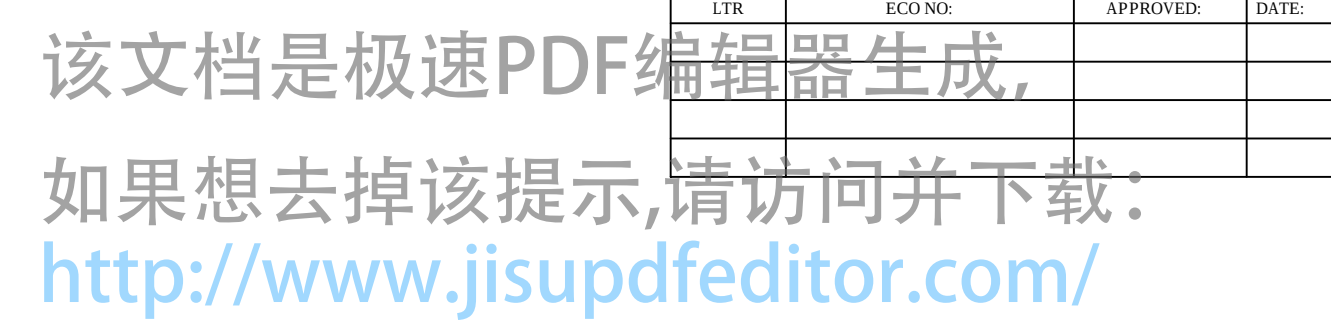

DRAWN:	DATED:				
CHECKED:	DATED:	CODE:	SIZE:	2010-12-22	REV:
QUALITY CONTROL:	DATED:				
RELEASED:	DATED:	SCALE:			SHEET: 9 10

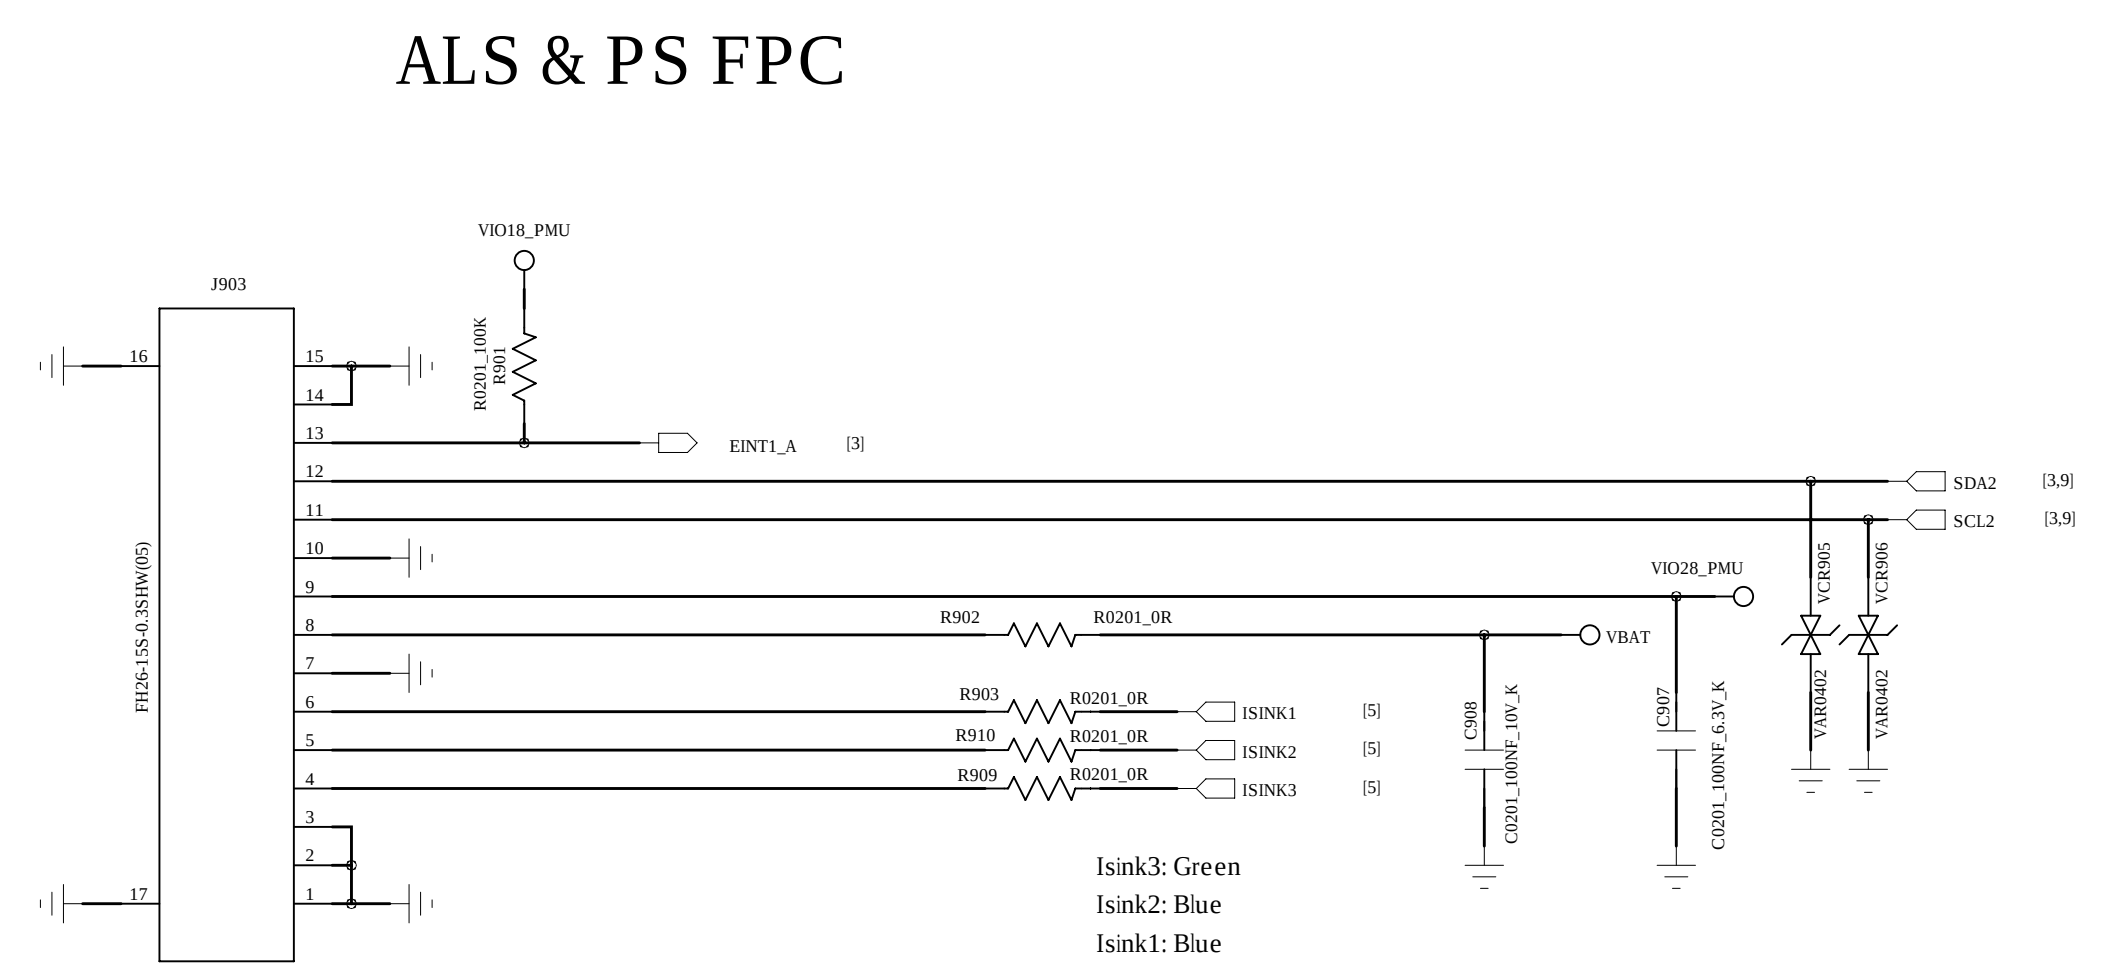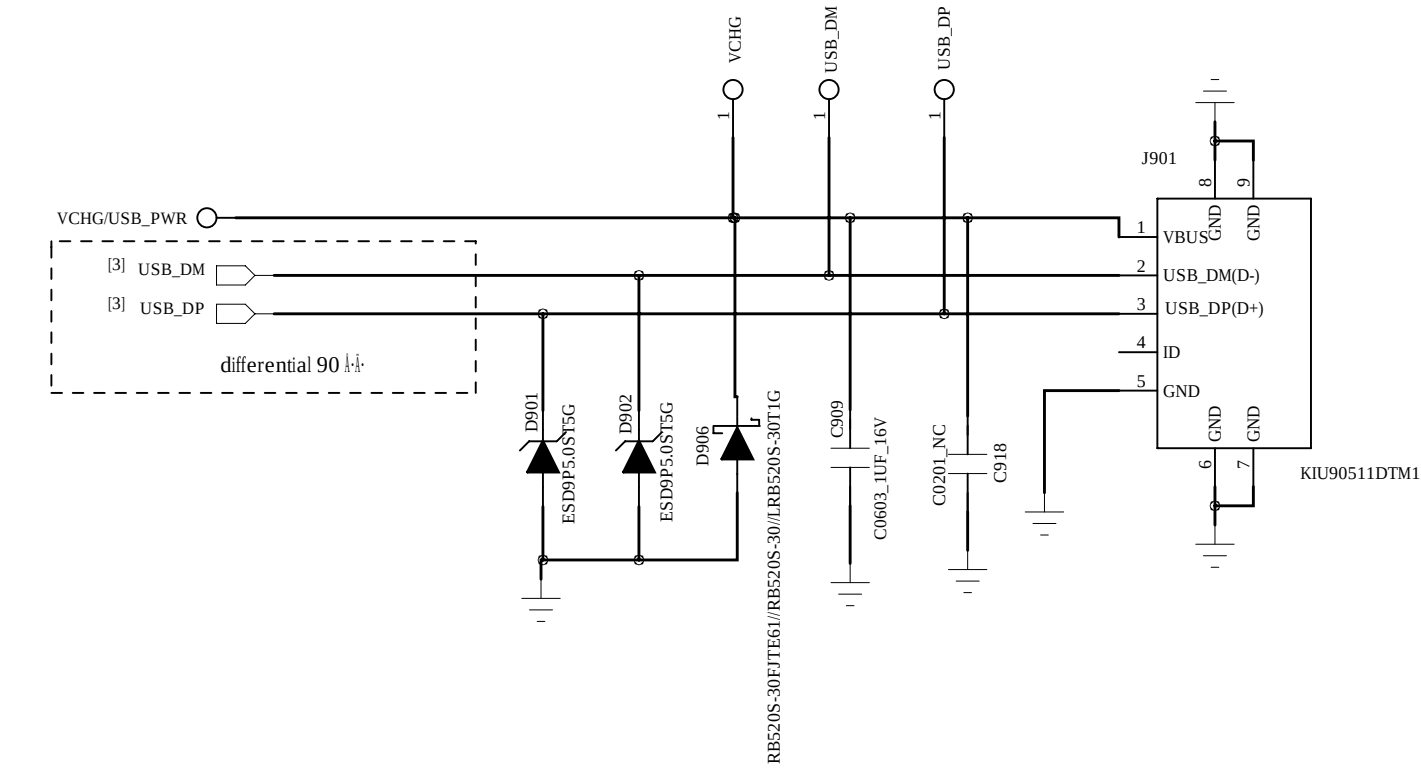

ALS & PS FPC

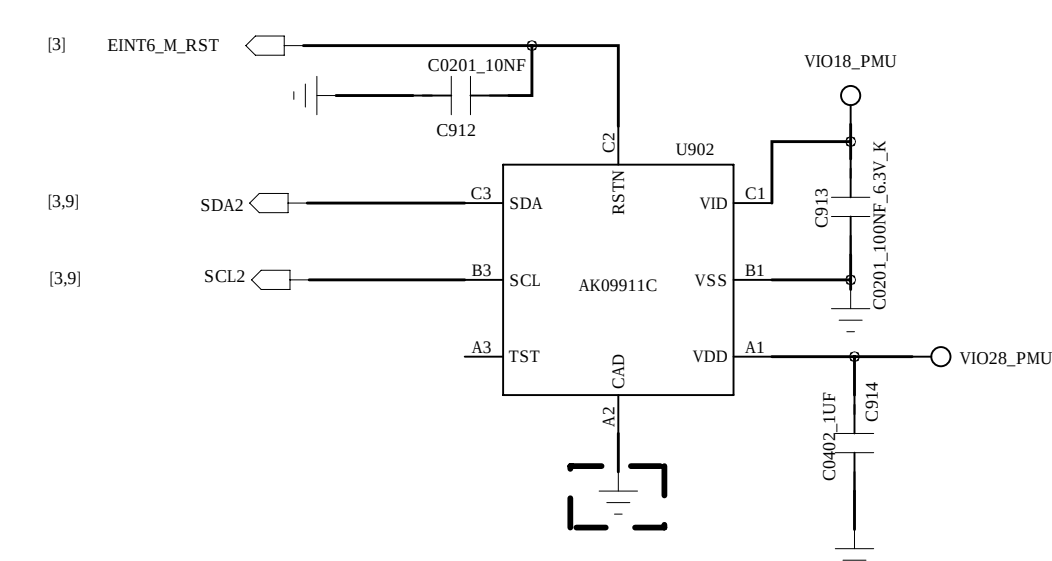


REVISION RECORD			
LYR	ECO/NO	APPROVED	DATE


该文档是极速PDF编辑器生成，
如果想去掉该提示,请访问并下载：
<http://www.jisupdfeditor.com/>



Power key

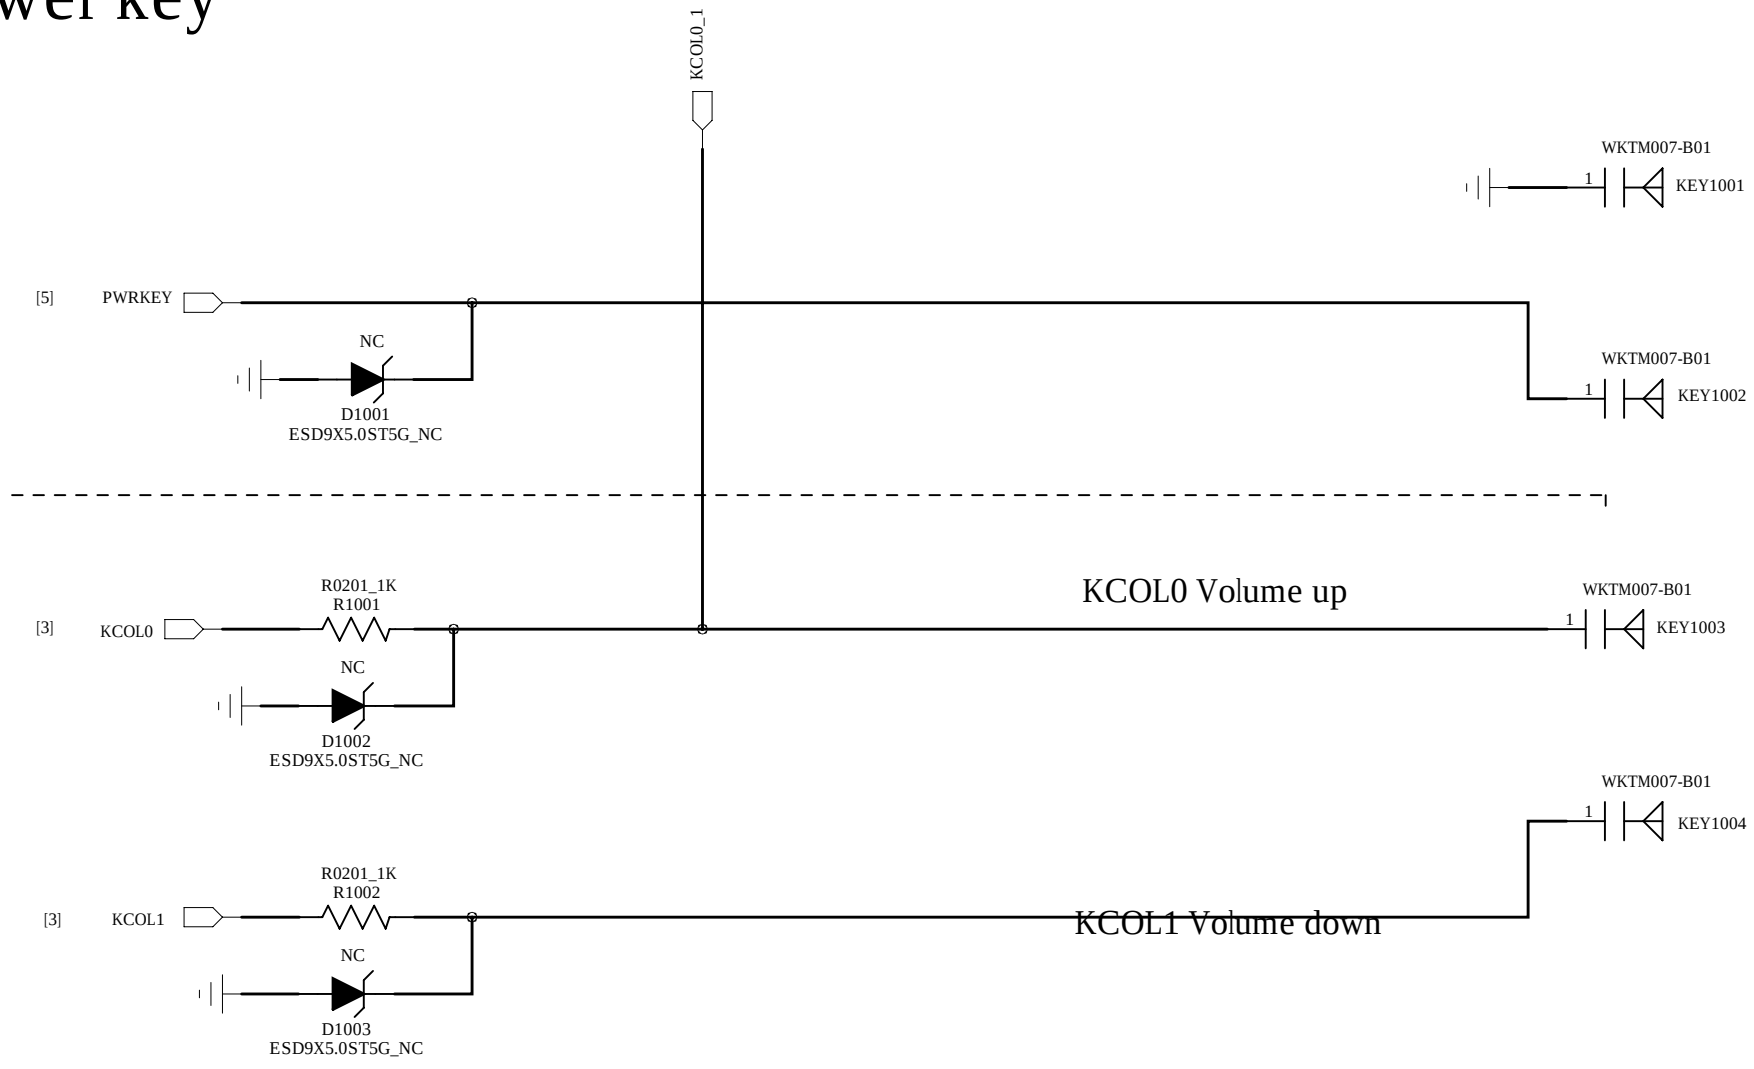


*** T-FLASH ***

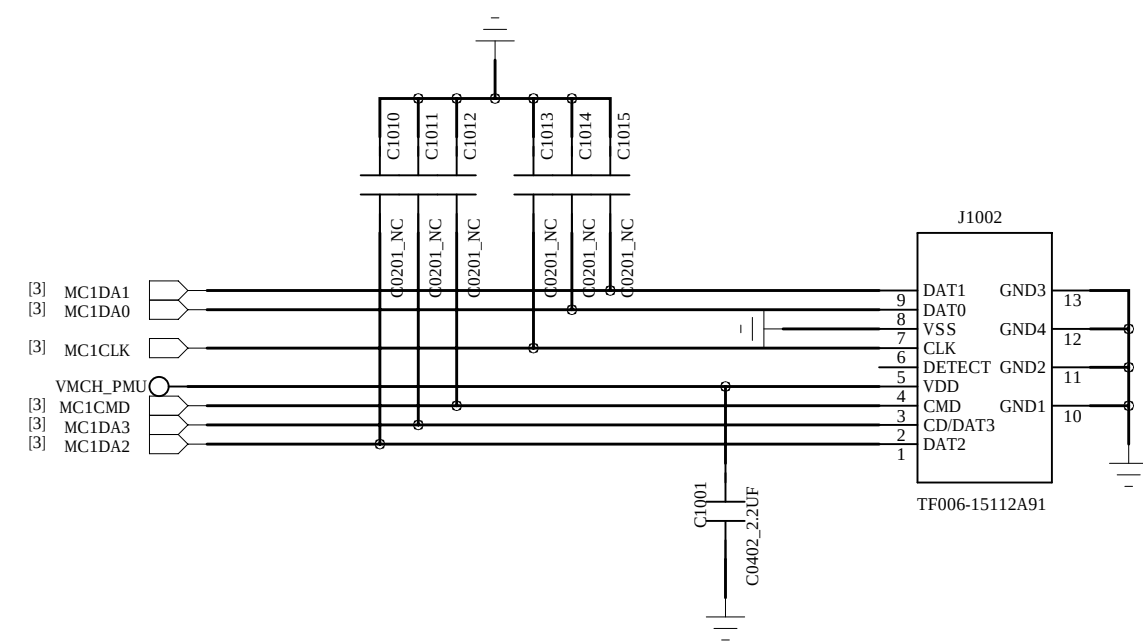


*** SIM1 ***

SIM1

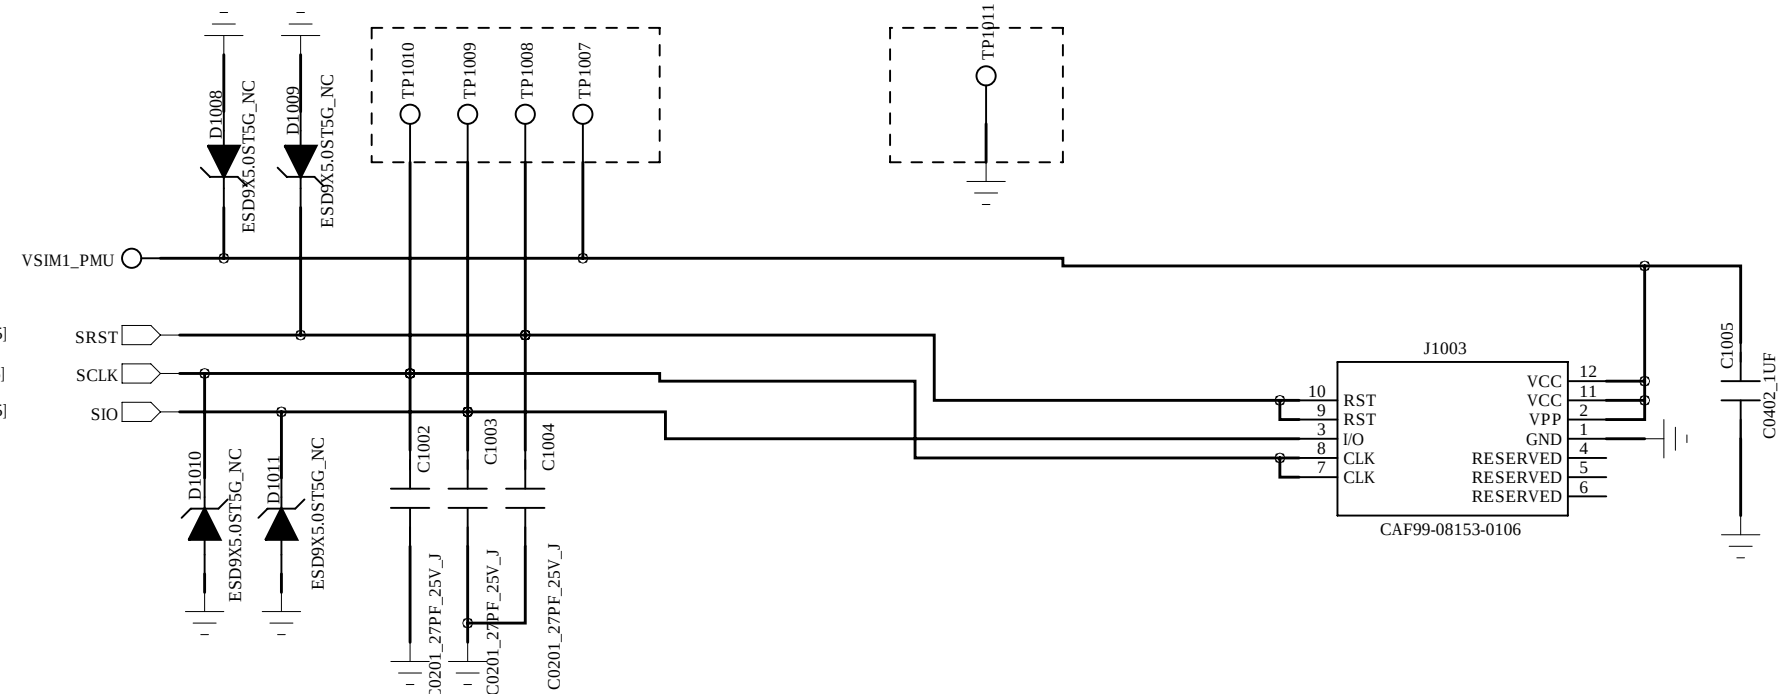

*** SIM2 ***

SIM2

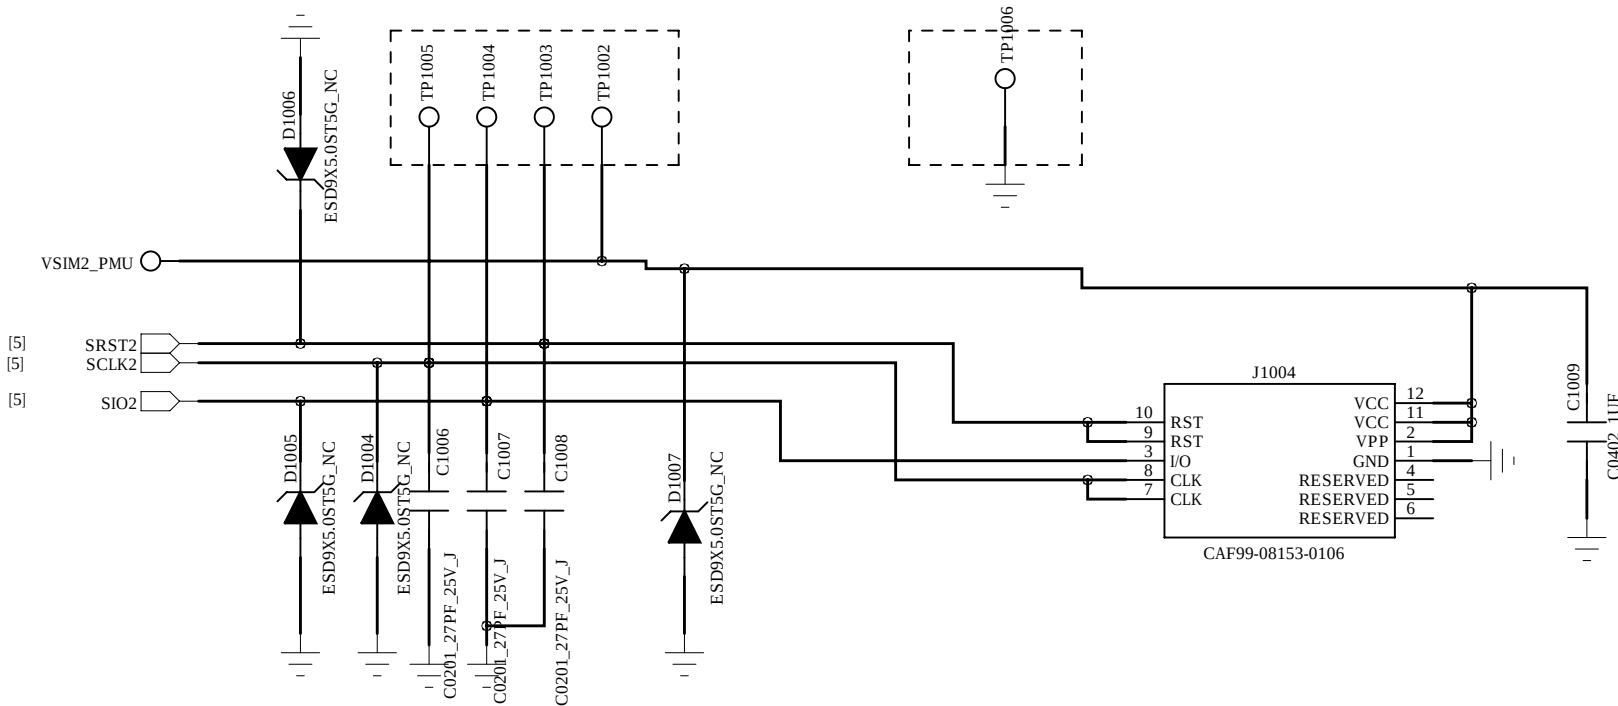

REVISION RECORD			
LYR	ECO/NO	APPROVED	DATE

DRAWN:	DATED:
CHECKED:	DATED:
QUALITY CONTROL:	DATED:
RELEASED:	DATED:

CODE	SIZE	2018-12-22	REV.