

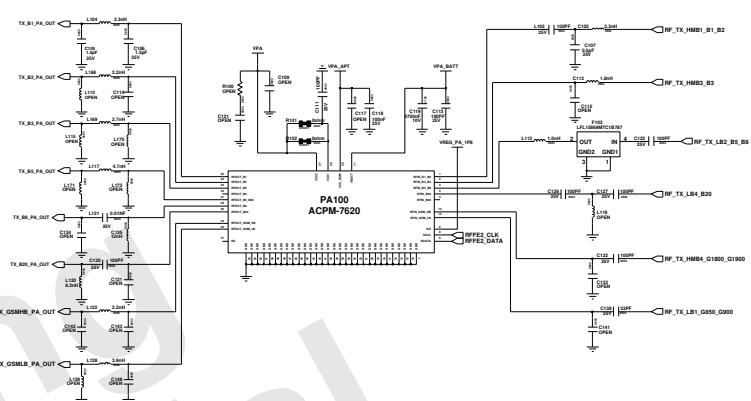


#1 RF



**MLB MAIN CA FEMID(B1TX/2/3/5/8/20, GSM QUAD)
HB MAIN SWITCH (B1RX/B7)**



```
user111|swcad111|10.253.40.87|20140707-160834
```


F

Changed by: user86	Date Changed: Thursday, January 30, 2014	Time Changed: 8:38:46 am	QA CHK:	REV:	Drawing Number:	Page: 2
-----------------------	---	-----------------------------	---------	------	-----------------	------------

CP PART

CP PMIC

U300
PMD9635

U304
MDM9235M-1

CP JTAG



CP VERSION	REV.0	REV.1
REV.0	0 0 0	0 0 1

FAST_BOOT [0-1]	FAST_BOOT_1	FAST_BOOT_2
0001	PCIE_DEFAULT	Boot USB
0010	Boot USB	Boot HSEC
0011	Boot HSEC	




REV.0	REV.1
0001	0002

REV.0	REV.1
0001	0002


SENSORS

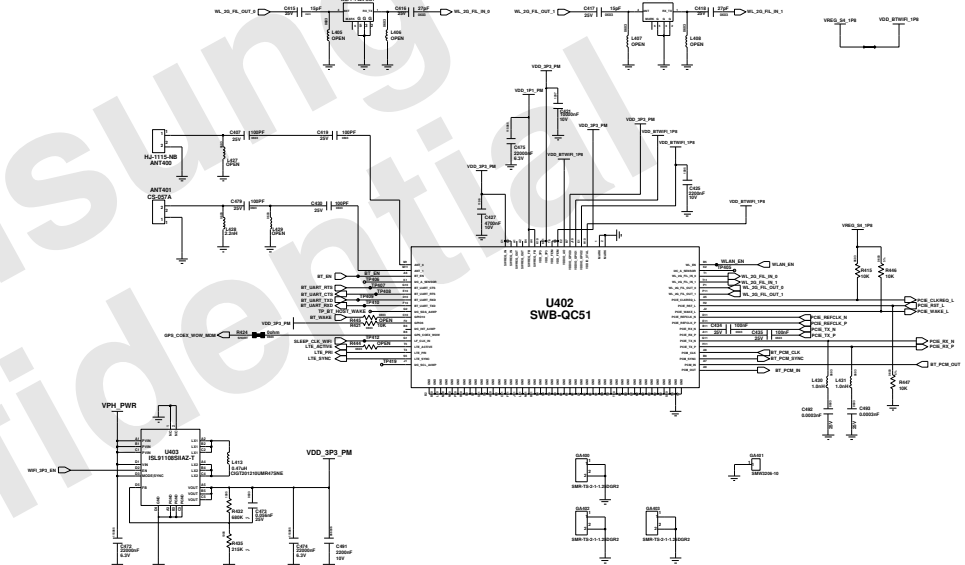

PCB JTAG

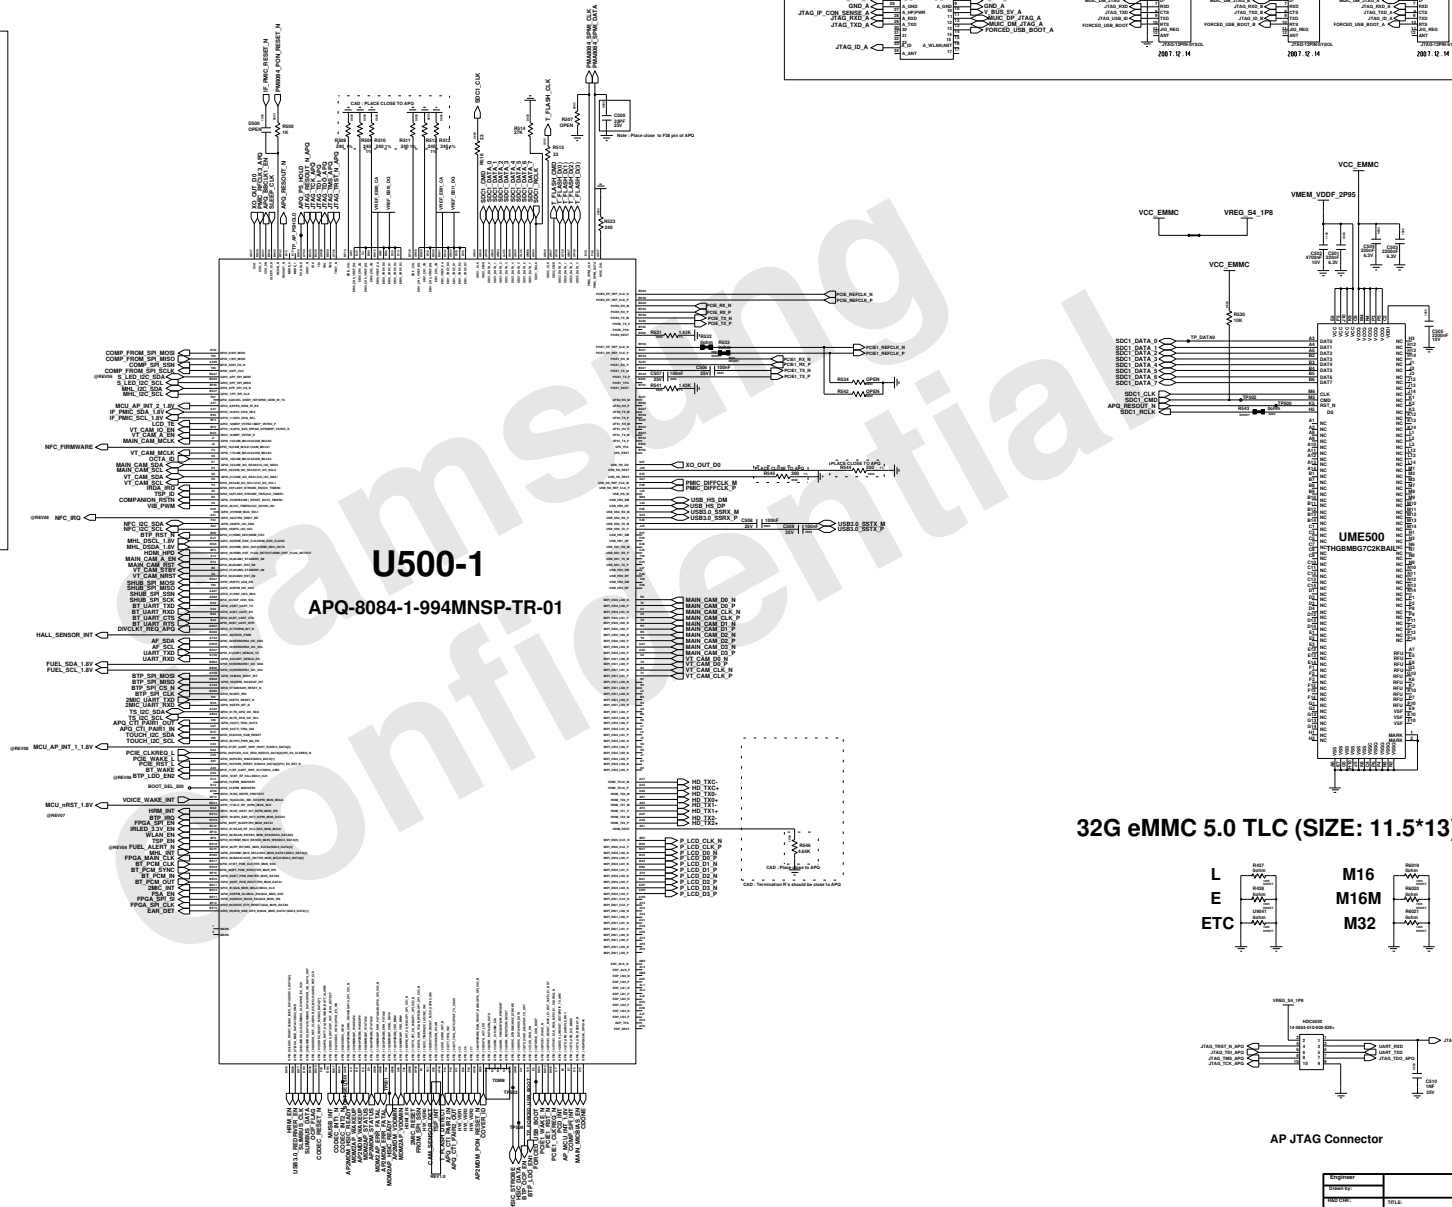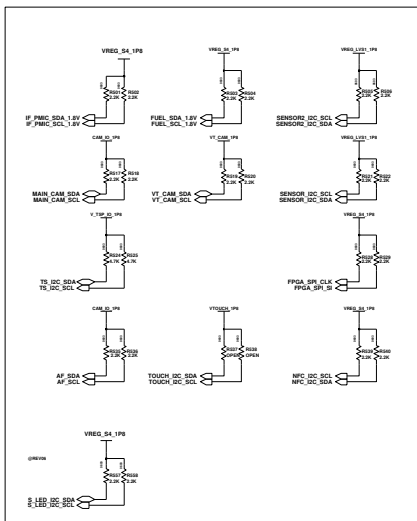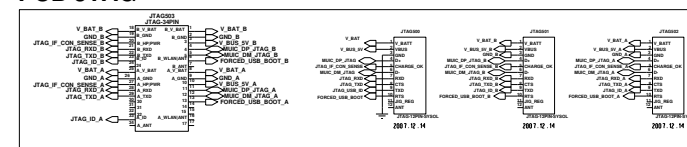




32G eMMC 5.0 TLC (SIZE: 11.5*13)







AP JTAG Connector

Engineer	
Drawn by:	
Rev'd CTR:	TITLE:
DOC CTR, CTR:	SM-G906S/K/L REV1.
INFO EXTER CASE:	


AP PMIC (PMA8084)



IF PMIC (CL34)

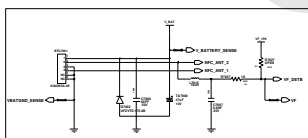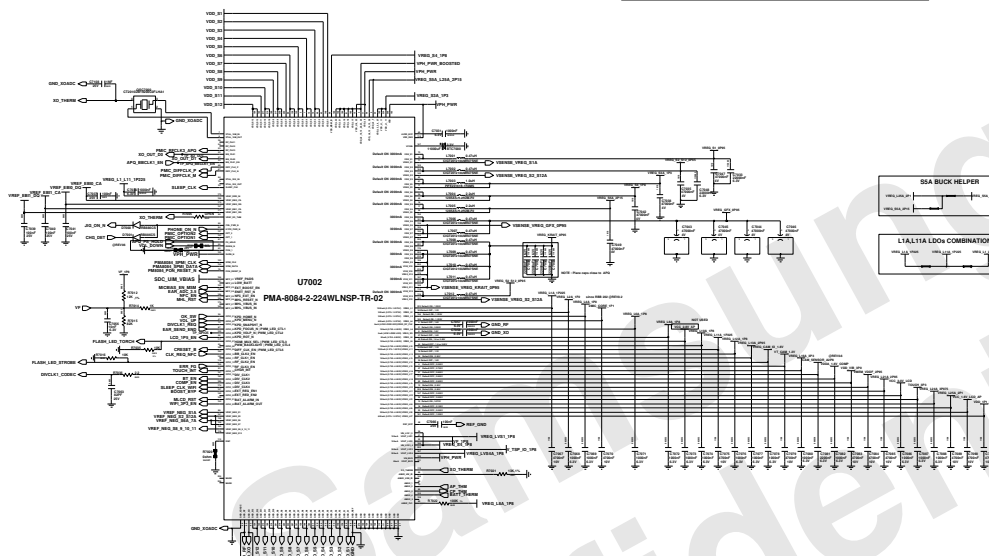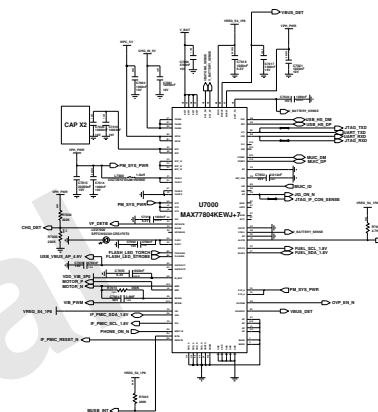


Battery Connector



Wireless Charger




Option Cover Detect

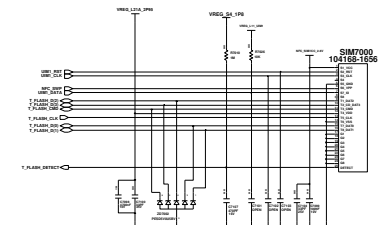


SD/SIM SOCKET


AUDIO

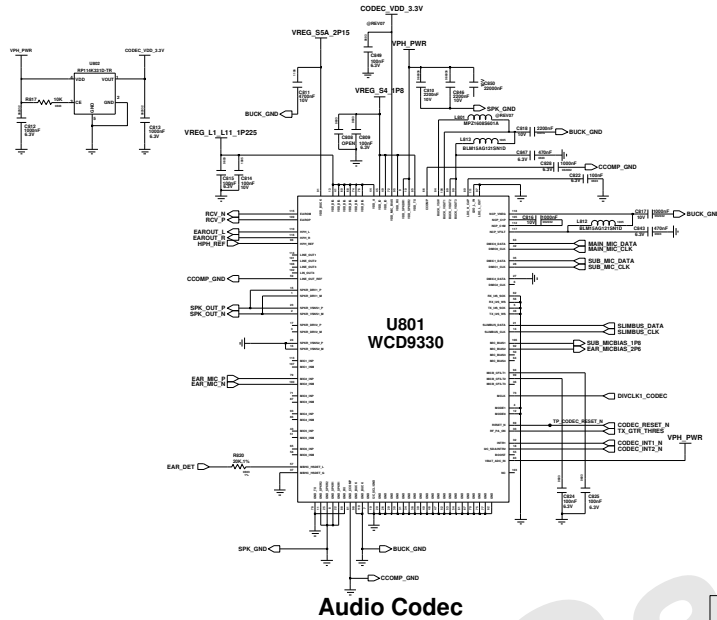


Earjack + RCV

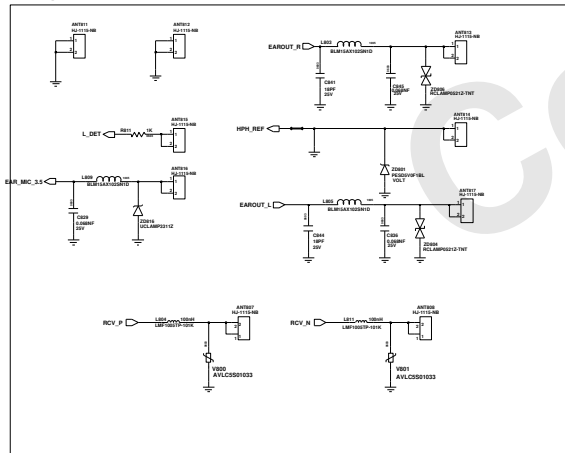

2-MIC CHIP

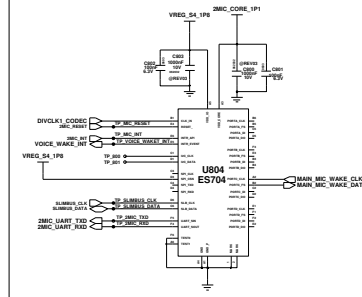


MIC Bias LDOs

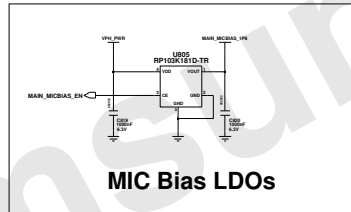


OR Gate


CLK Switch

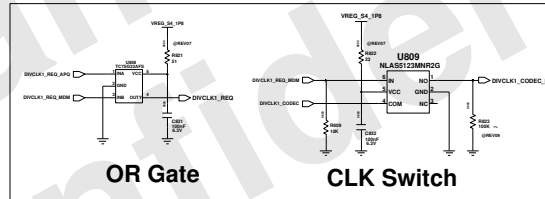

Noise Detection




SUB MIC

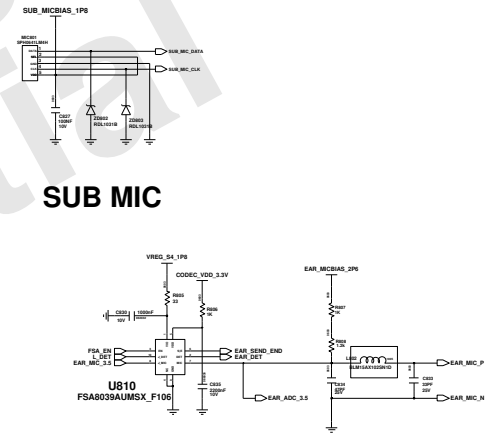

Ear MIC

PWR On & Motor Conn

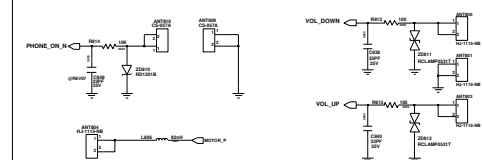

Volume Key



Part Name	Part Number
AUDIO	SM-G906S/K/L REV1.0
Rev. 1.0	1/1

CAMERA



16M_Camera Connector (MIPI)




COMPANION IC

CAM POWER




SUB FPCB IF CONN.

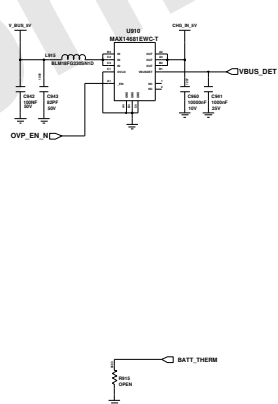

DISPLAY (For WQHD)



USB3.0, USB2.0(MHL), Wireless Charging Path
Hall IC, Touch

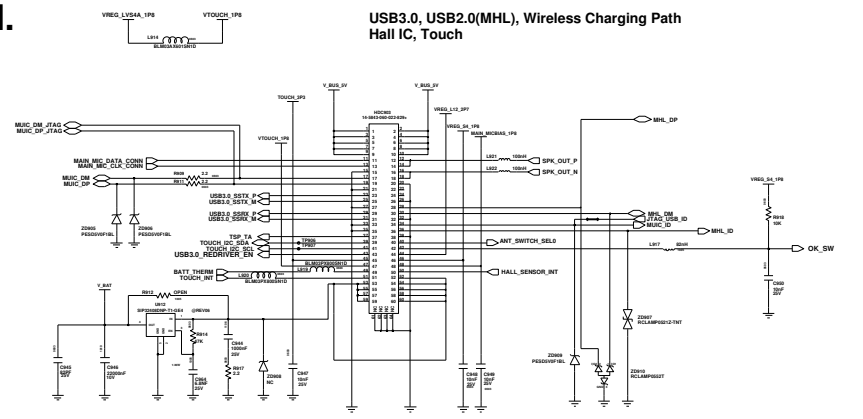

Engineer:	CAM / DISPLAY
Jack	
Drawn by:	
Jack	
Rev CDR:	
DOE CTR: CDR:	TITLE:
INFO ENGR CDR:	SM-G906S/K/L REV1.0