




ANT1 LB

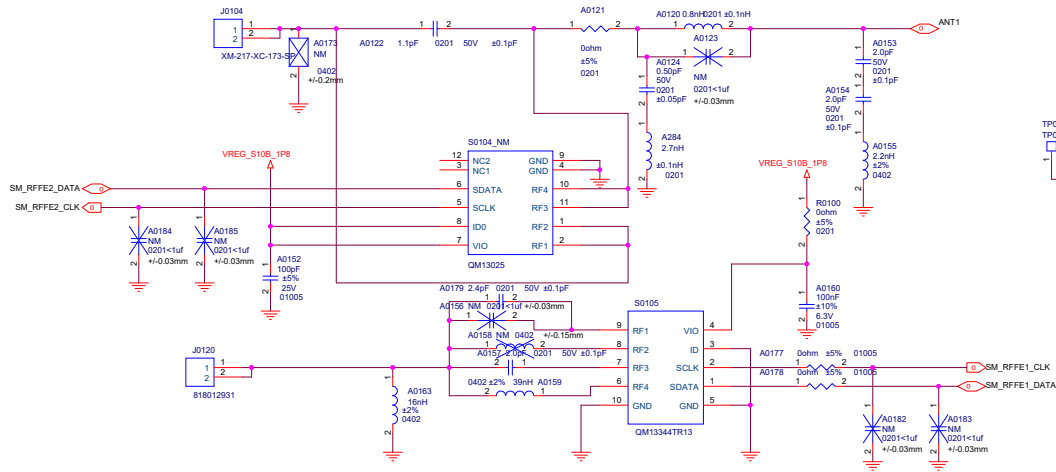


ANT4 MHB

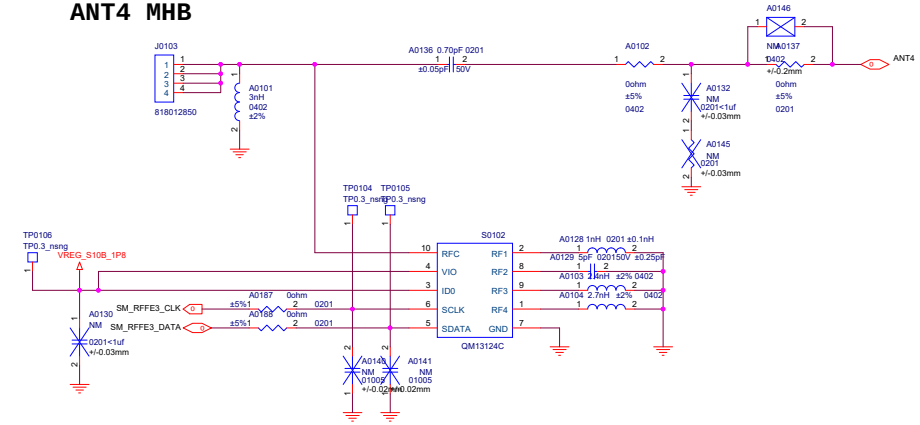


ANT10 N78+N79

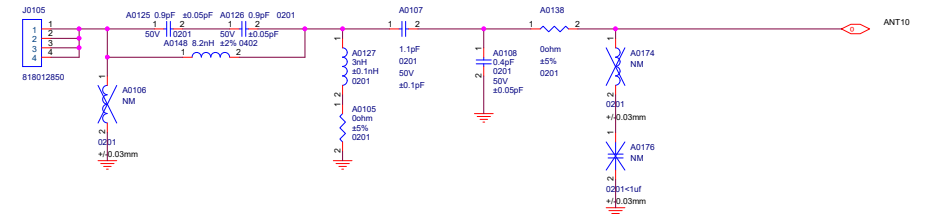


ANT5 MHB+B32

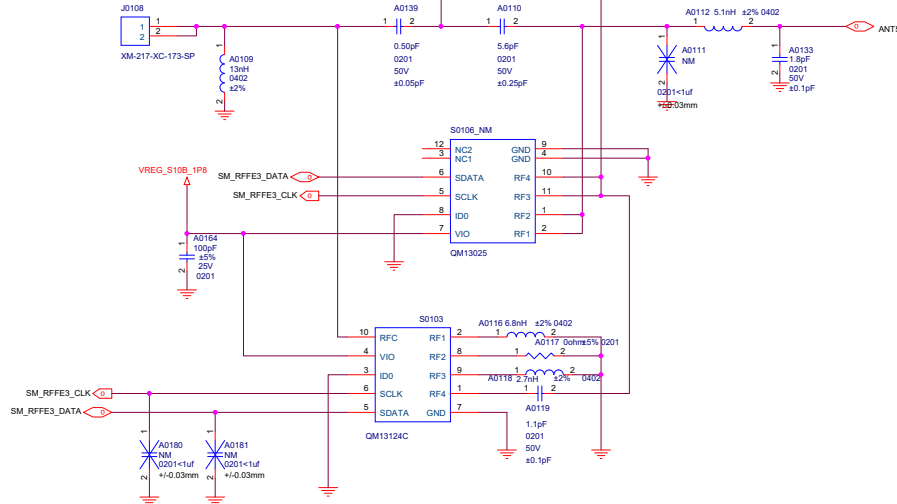


ANT11 N78/N79




MAIN PCB GND




SAR SENSOR

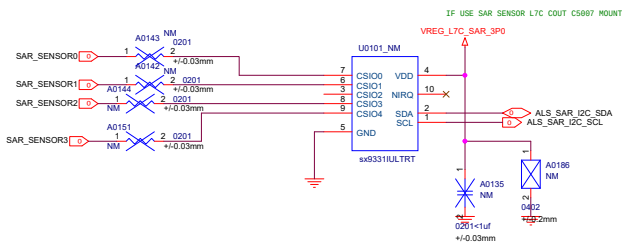


ANT16 GPS L1+WIFI2.4 CHAIN0

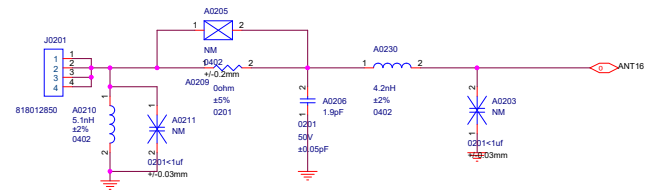


ANT18 WIFI2.4G+WIFI6E CHAIN1

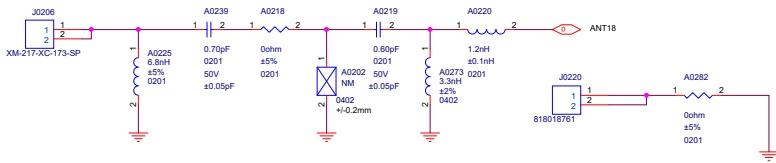


ANT19 GPS L5

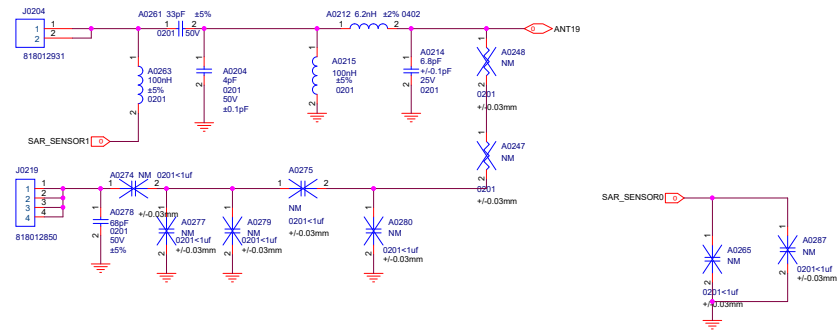


ANT2 LB(3)+B32

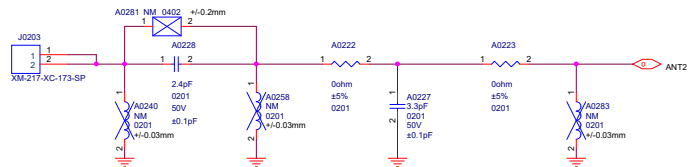

ANT13 N78/N79

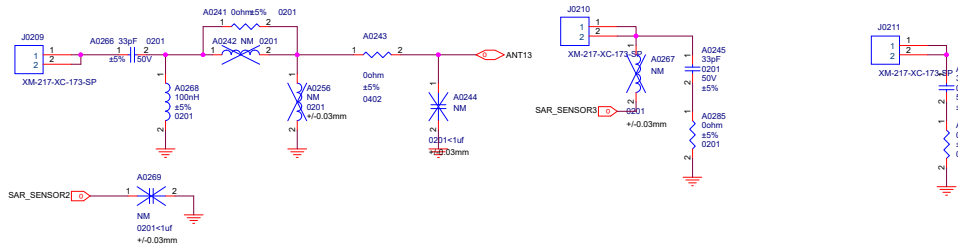

ANT17 WIFI 6E CHAIN0

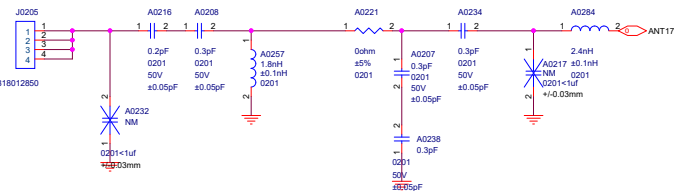

ANT0
CN
MHB_DM
LB_TRX
N1/N3/N41 SA DM
N28 SA PRX
N41 NSA DRX

ANT1

CN
LB DRX
N28 SA DRX

ANT2

CN
N5 PRX2
N8 PRX2

ANT3

CN
MHB TRX
N1/N3/N41 SA TRX

ANT4

CN
MHB PM
n41 NSA TRX
n1/n3/n41 SA PM
N41 SA TX1

ANT5

CN
MHB DRX
n41 DM
n1/n3/n41 SA DRX
N41 NSA DM

ANT7(LDS)
CN
N41 NSA PM+

ANT10
n77/n78/n79 TRX


ANT11
N77/N78/N79 DRX

ANT12
N77/N78/N79 DM


ANT13 n77/n78/n79 PM

WIFI+GPS


ANT16 GPS L1+WIFI2.4 CHAIN0



ANT17 WIFI 6E CHAIN0




ANT18 WIFI2.4G+WIFI6E CHAIN1







ANT19 GPS L5


			
Title			
L2_MAIN			
Size	Document Number	Rev	
A2	RF CONN	P0	
Date: Friday, April 08, 2022			Sheet 3 of 79


QET7100_2

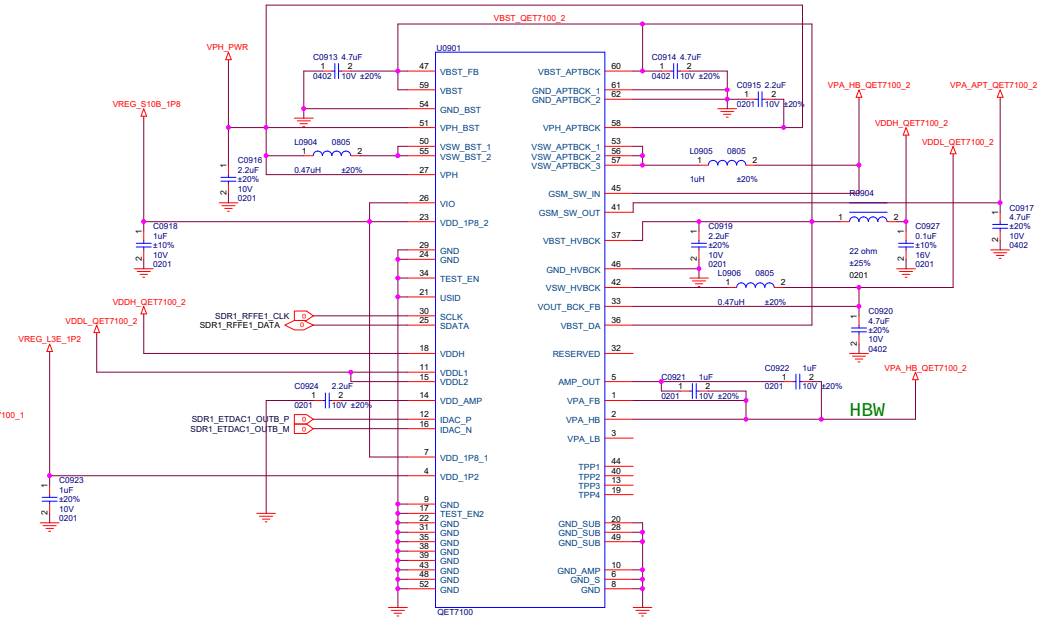


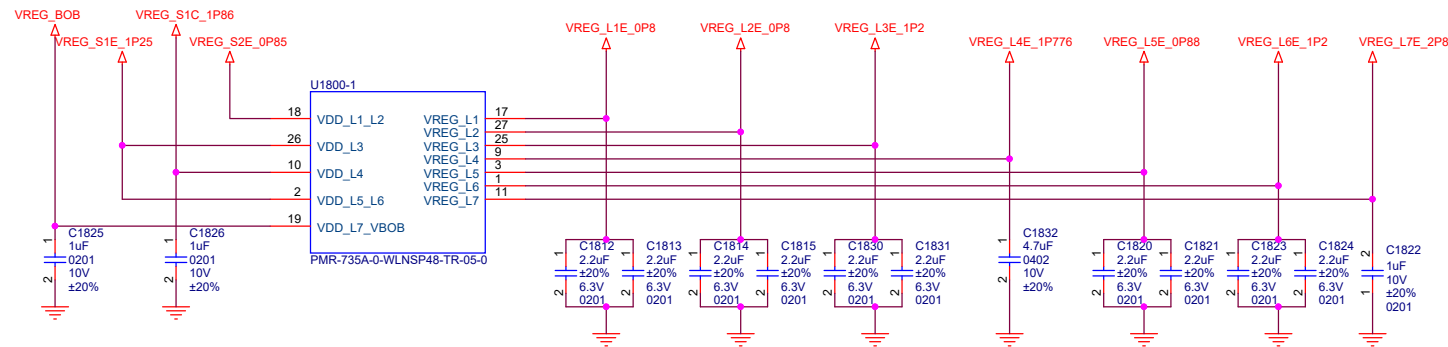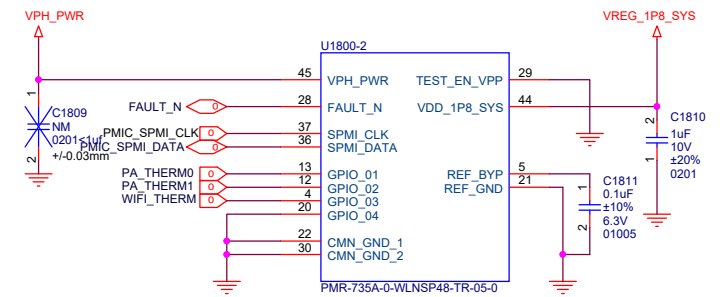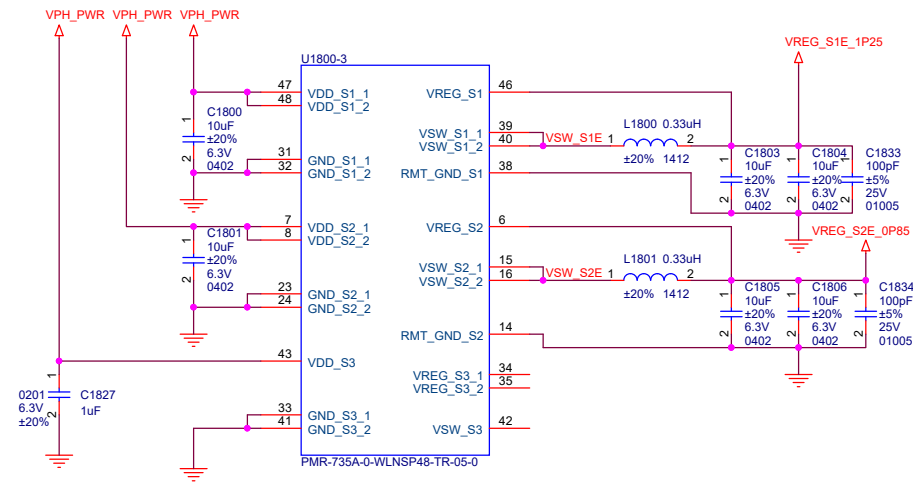

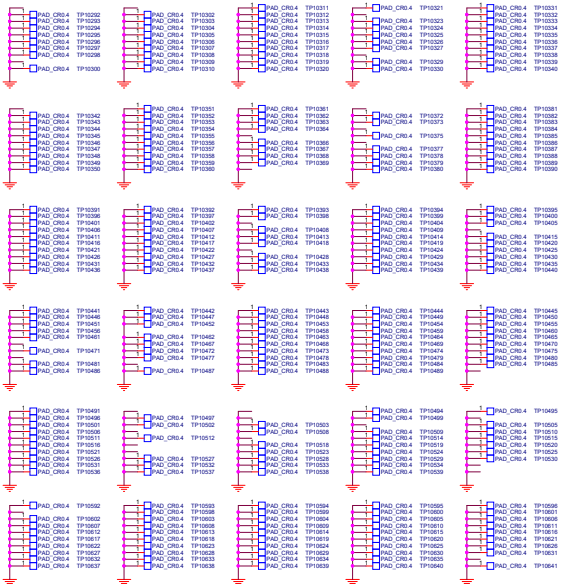


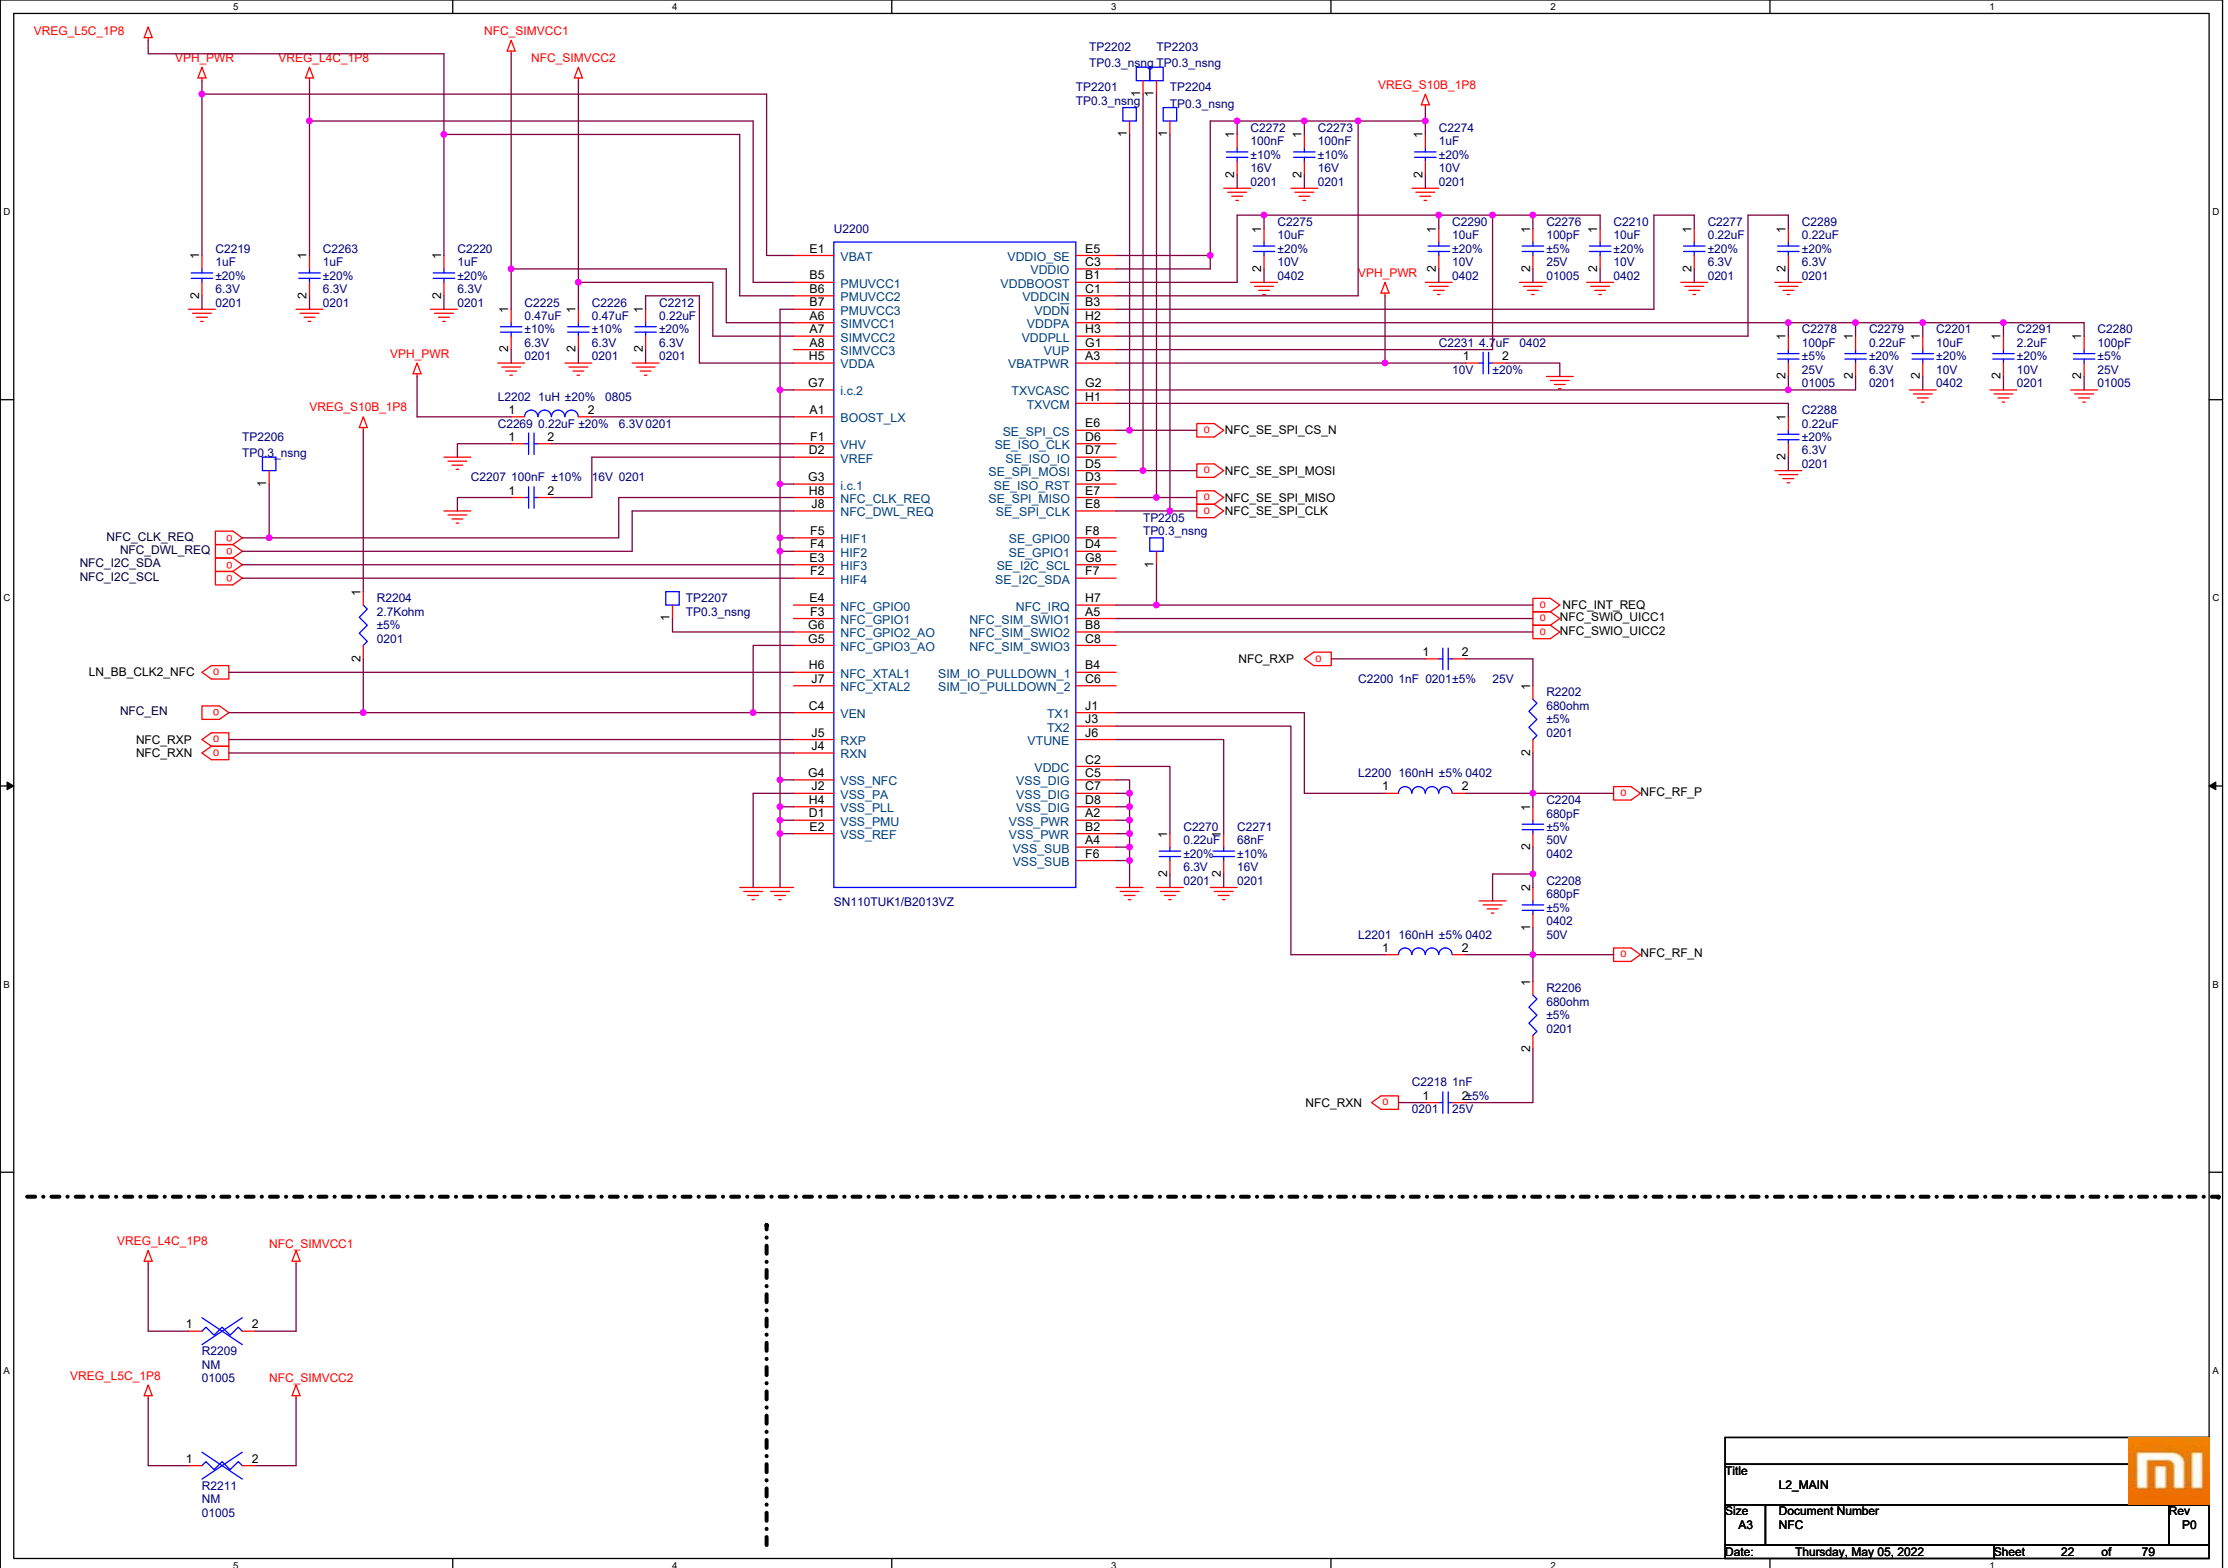


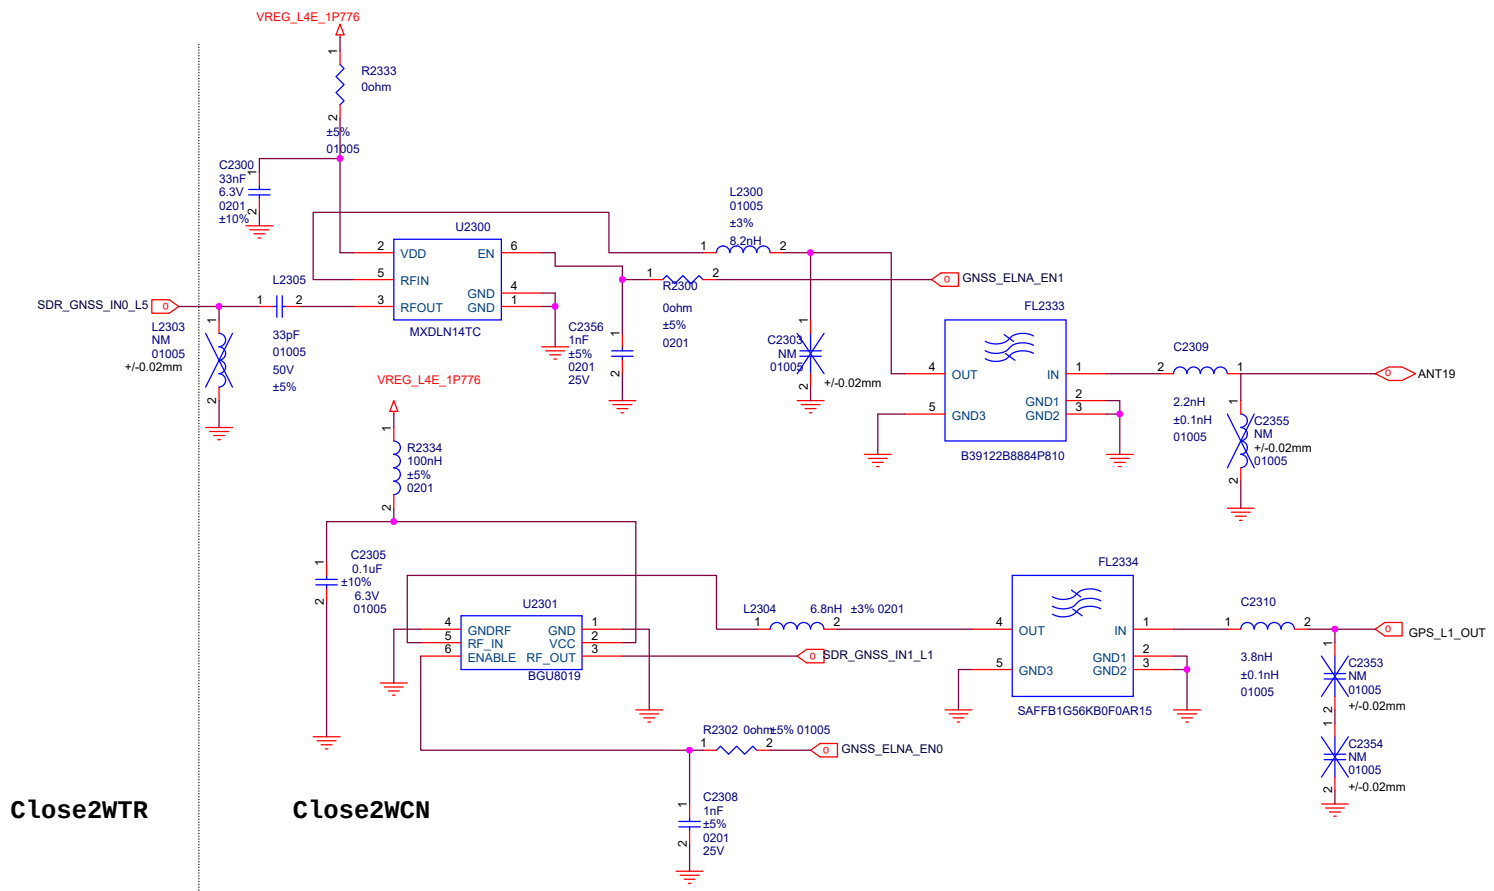


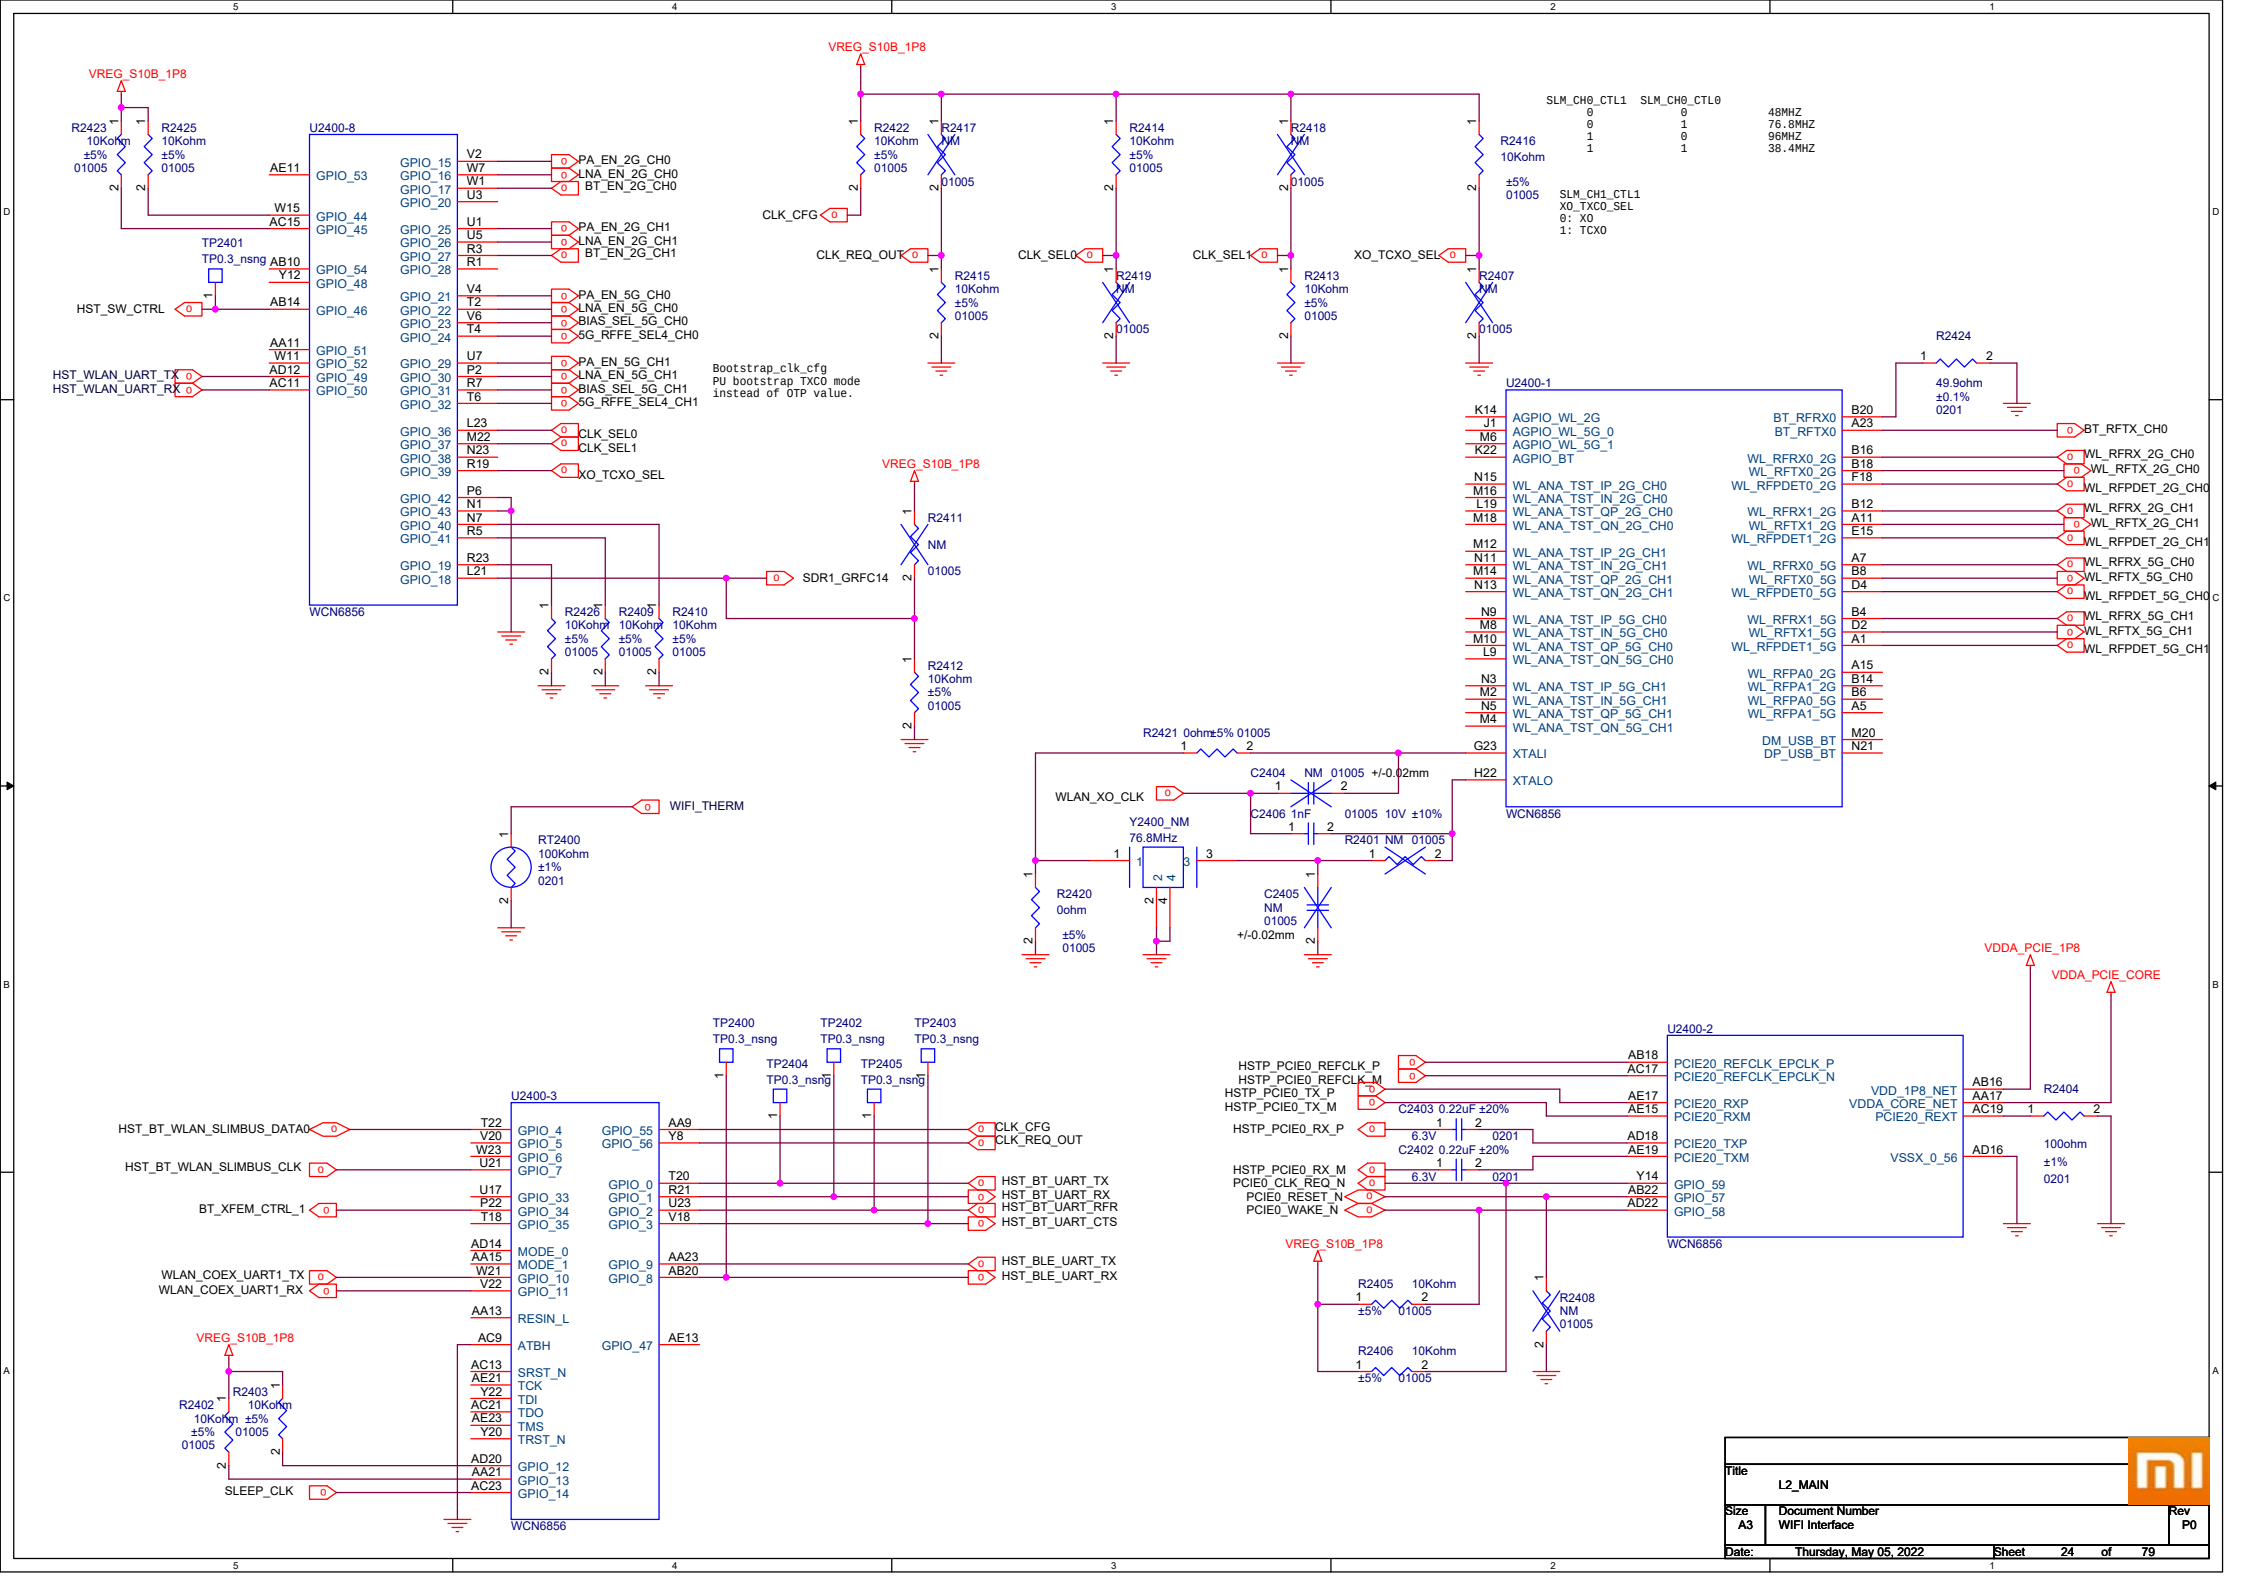


WIFI 2.4G CHAIN0

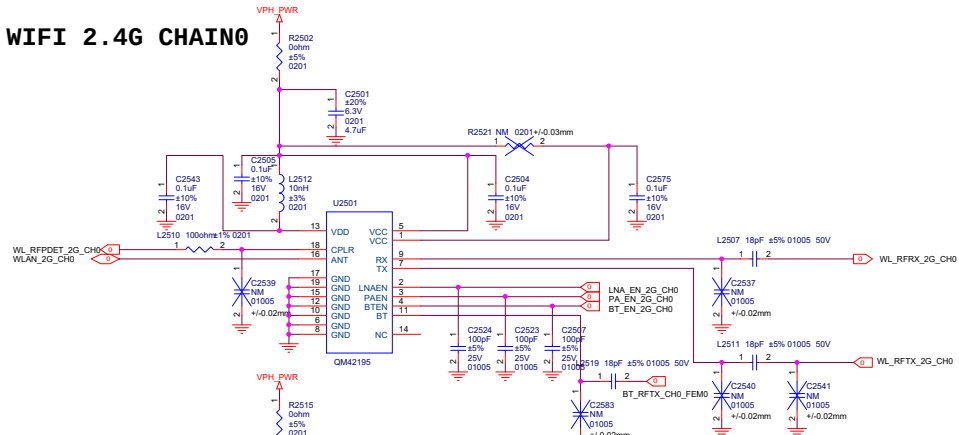


WIFI 2.4G CHAIN1

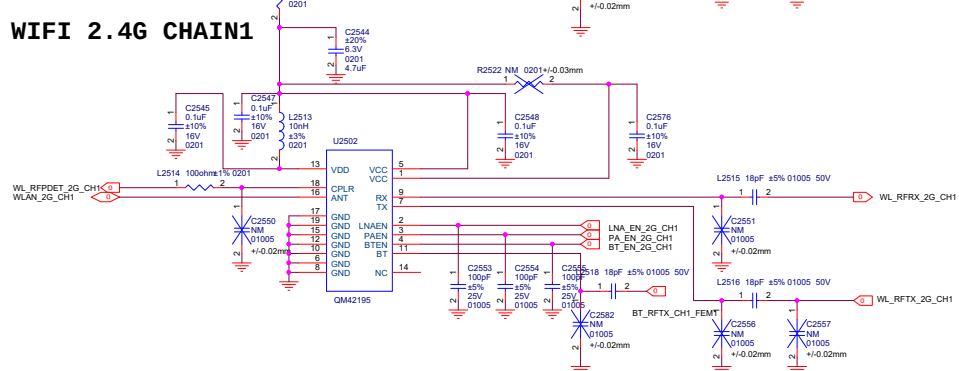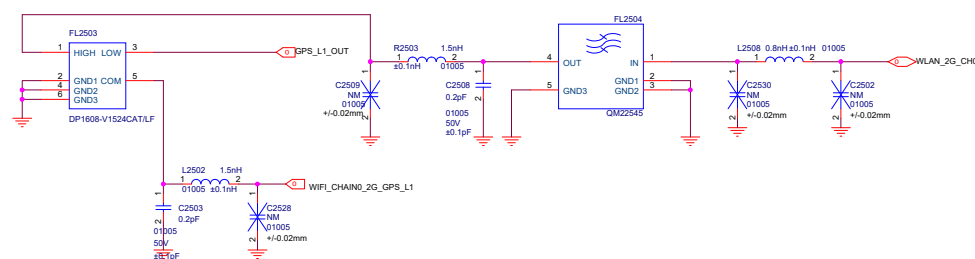**GPS L1+WIFI2.4 CHAIN0**


WIFI 6E CHAIN0

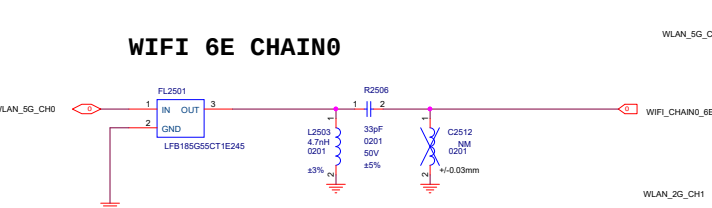



WIFI2.4G+WIFI6E CHAIN1

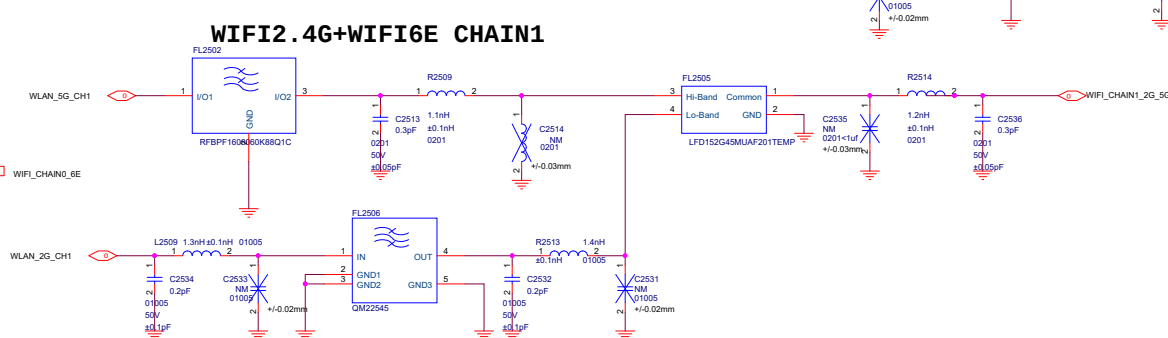


WIFI 5G CHAIN0


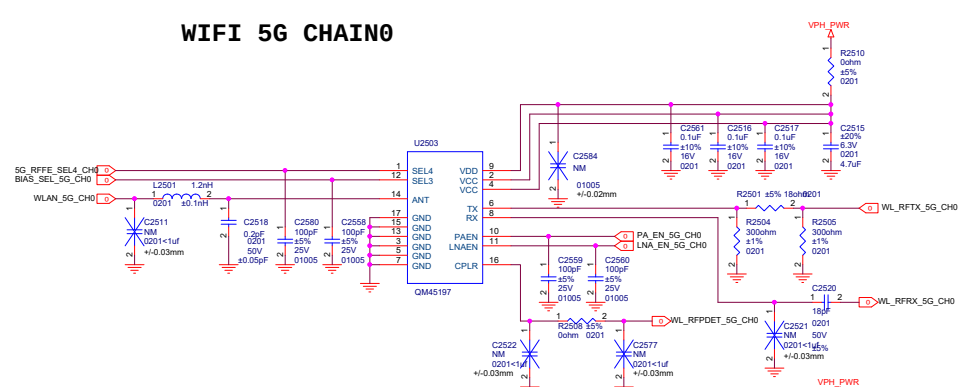


WIFI 5G CHAIN1

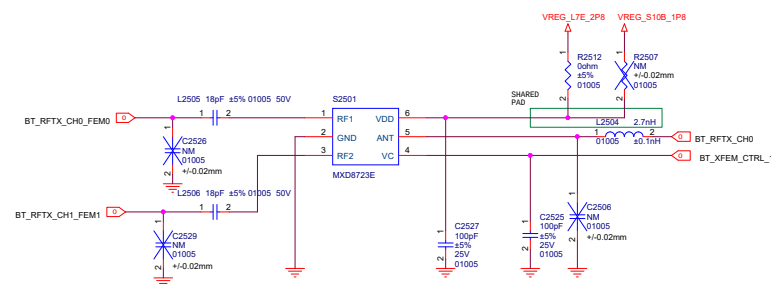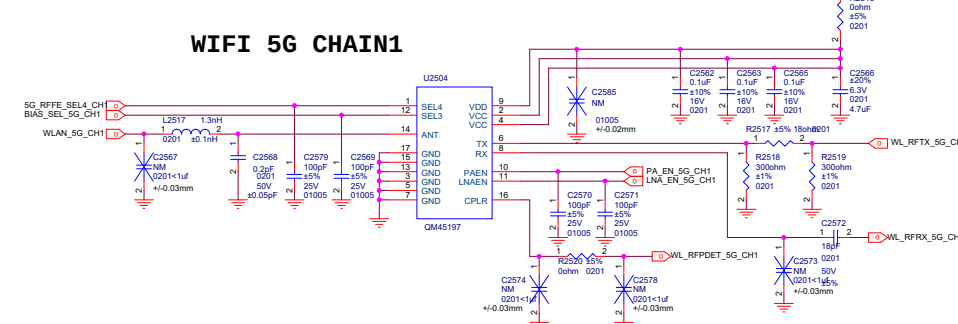


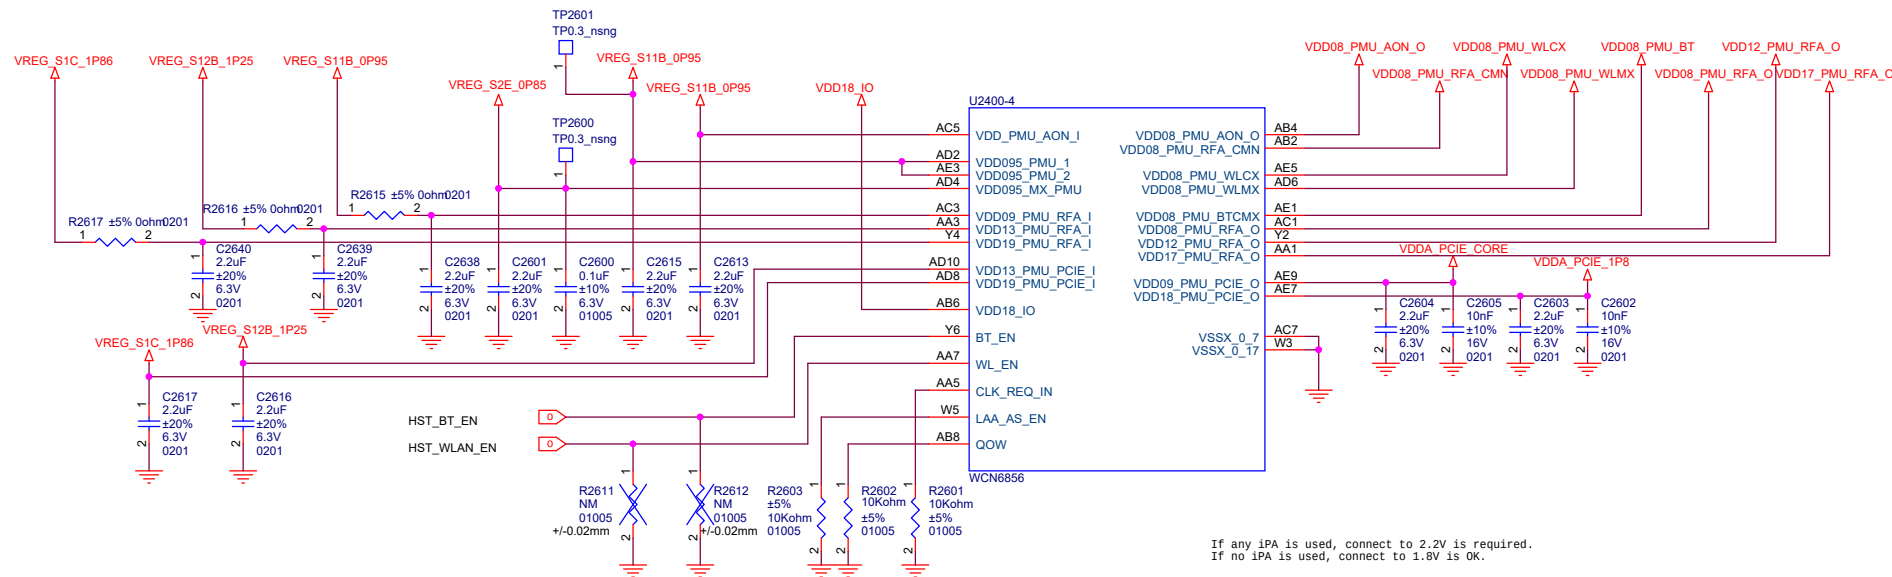


If any iPA is used, connect to 2.2V is required.
If no iPA is used, connect to 1.8V is OK.

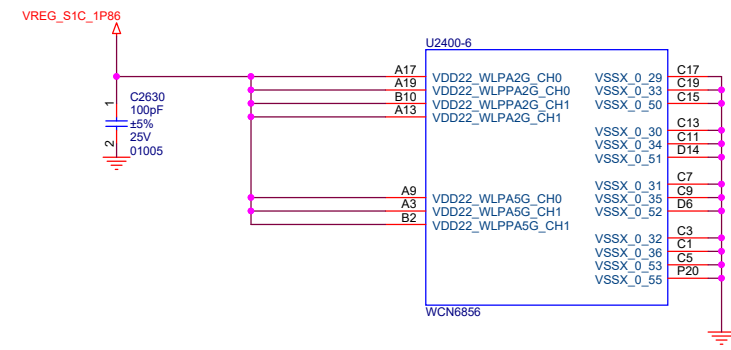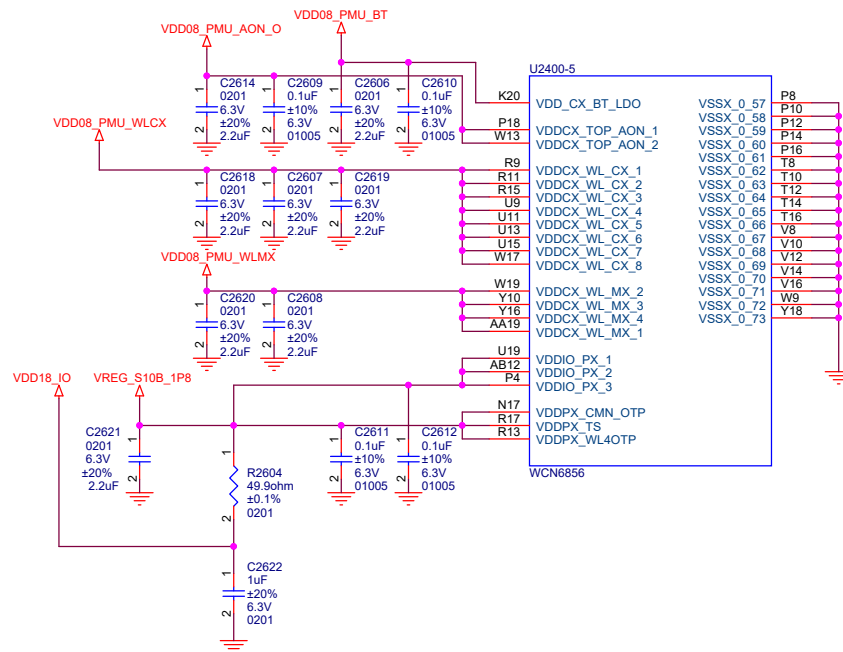



Place all ZQ resistors close to SM8350

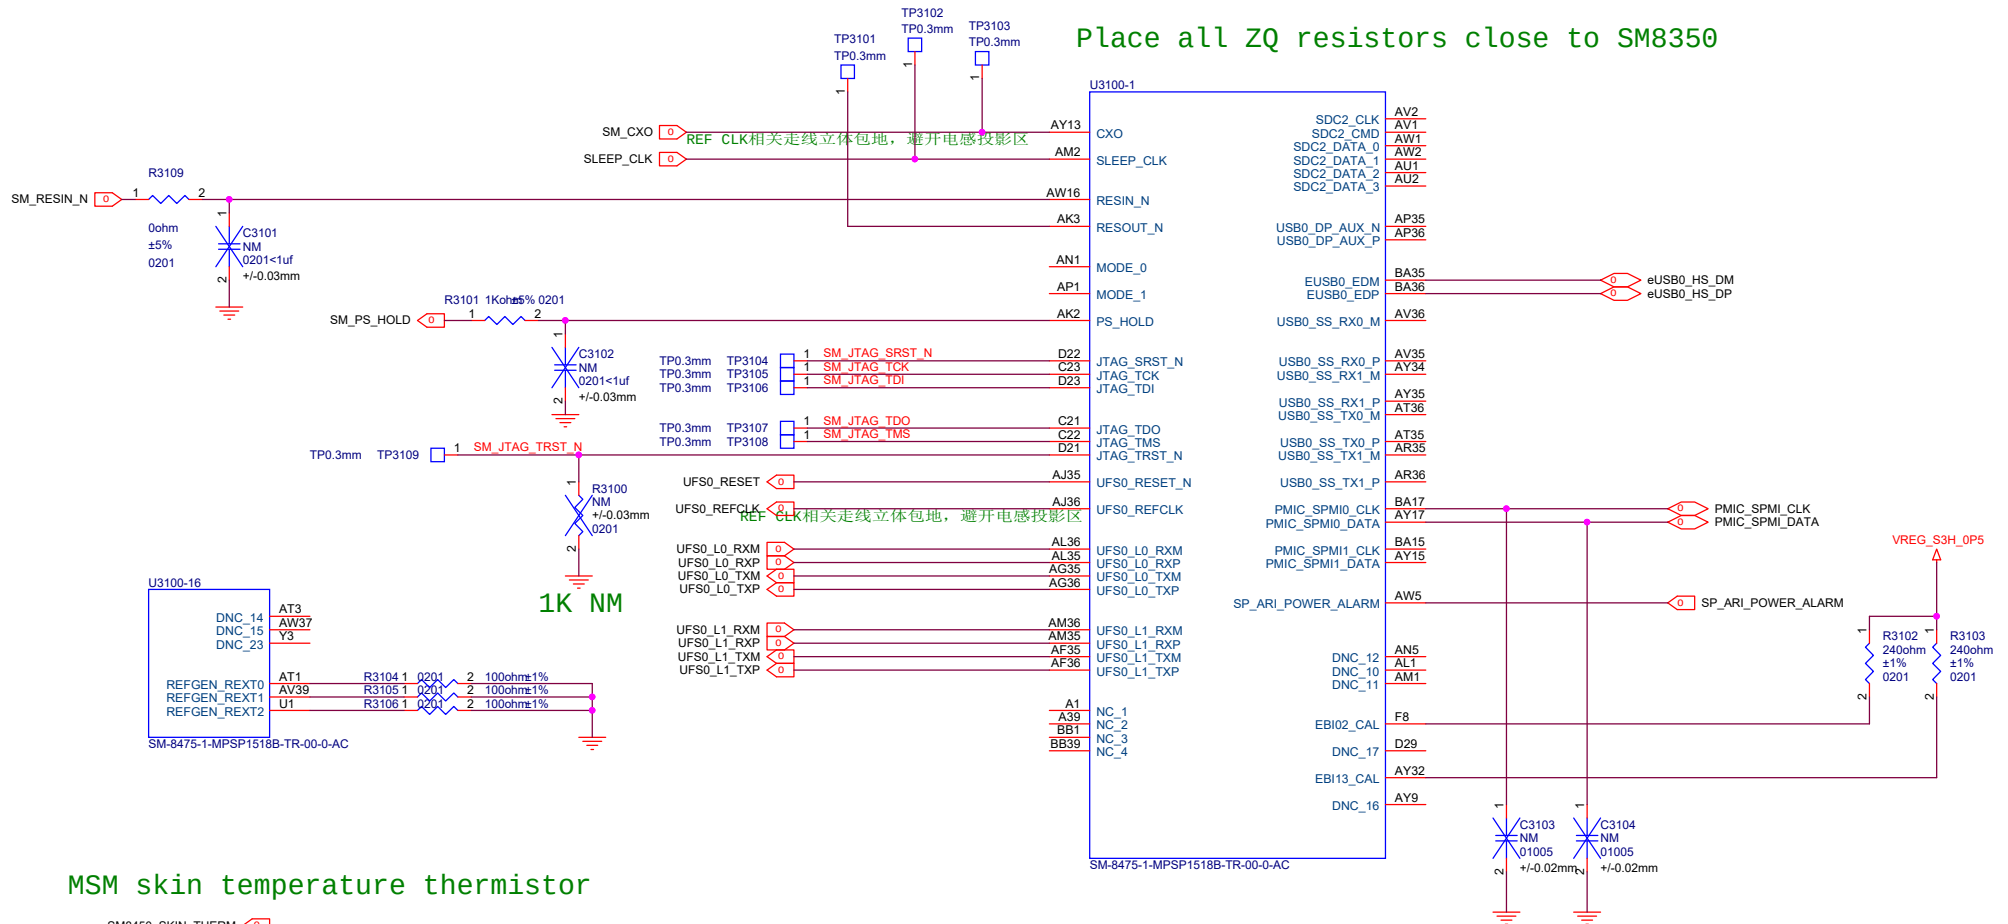














MSM skin temperature thermistor





Quiet thermistor Place on a cool place

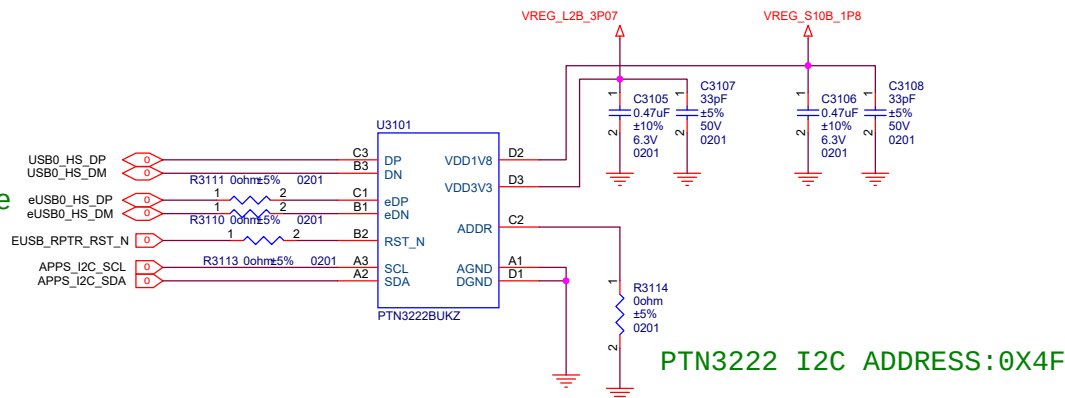




PTN3222 I2C ADDRESS:0X4F

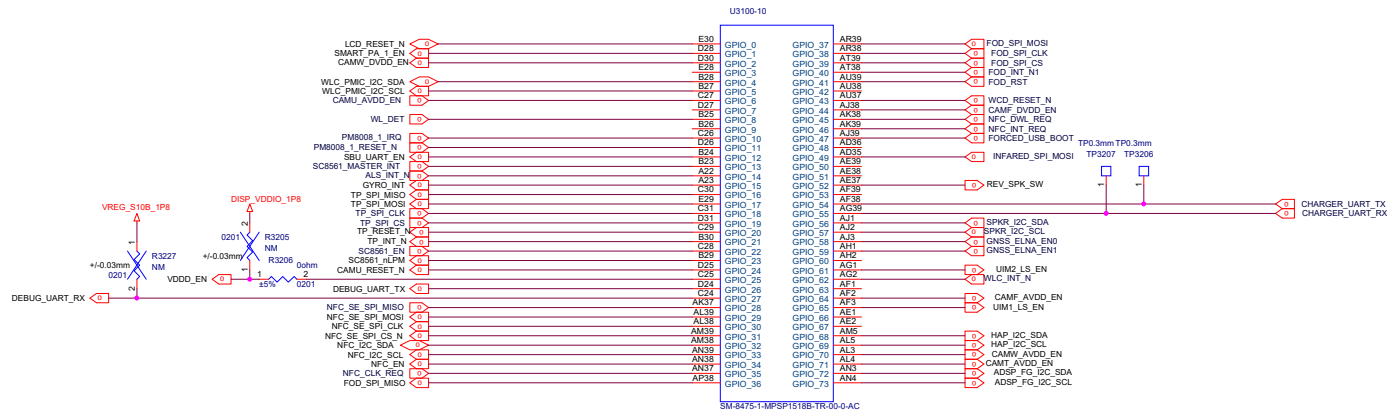


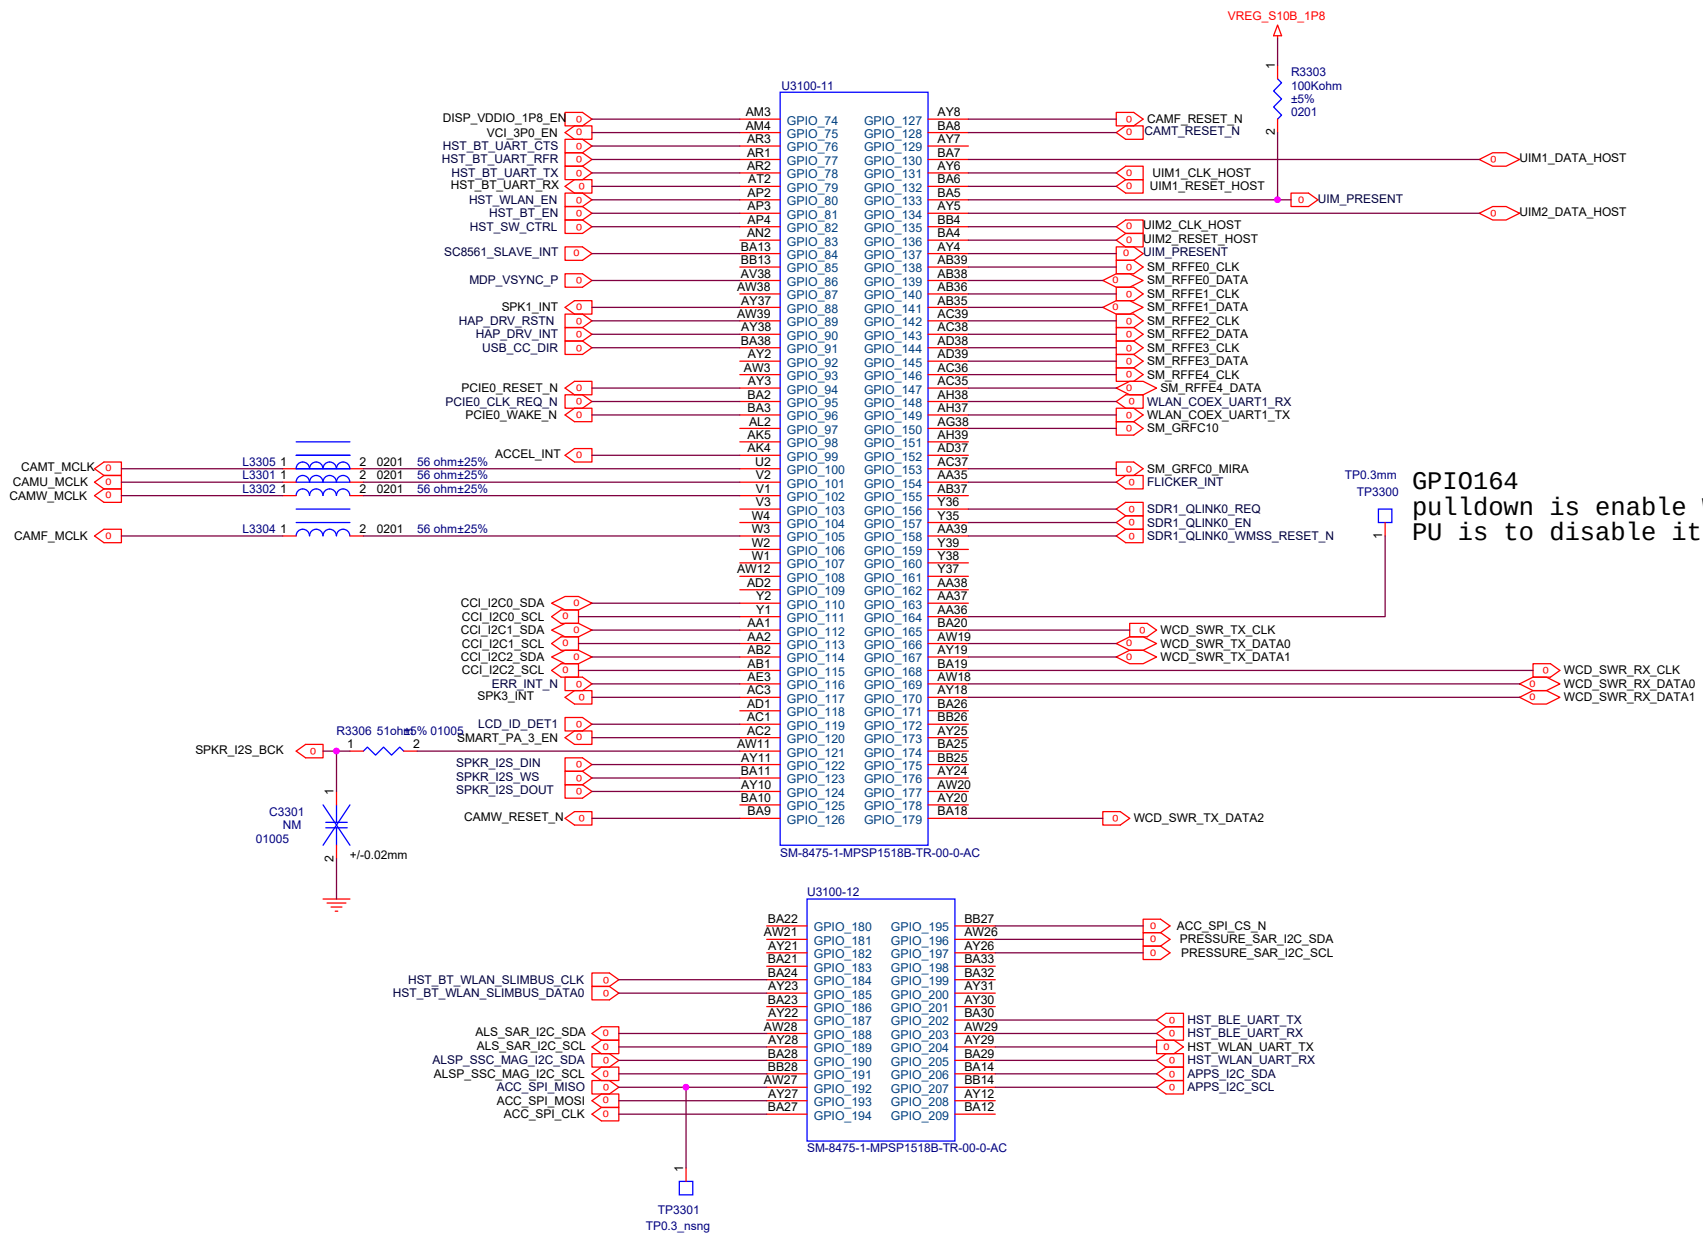


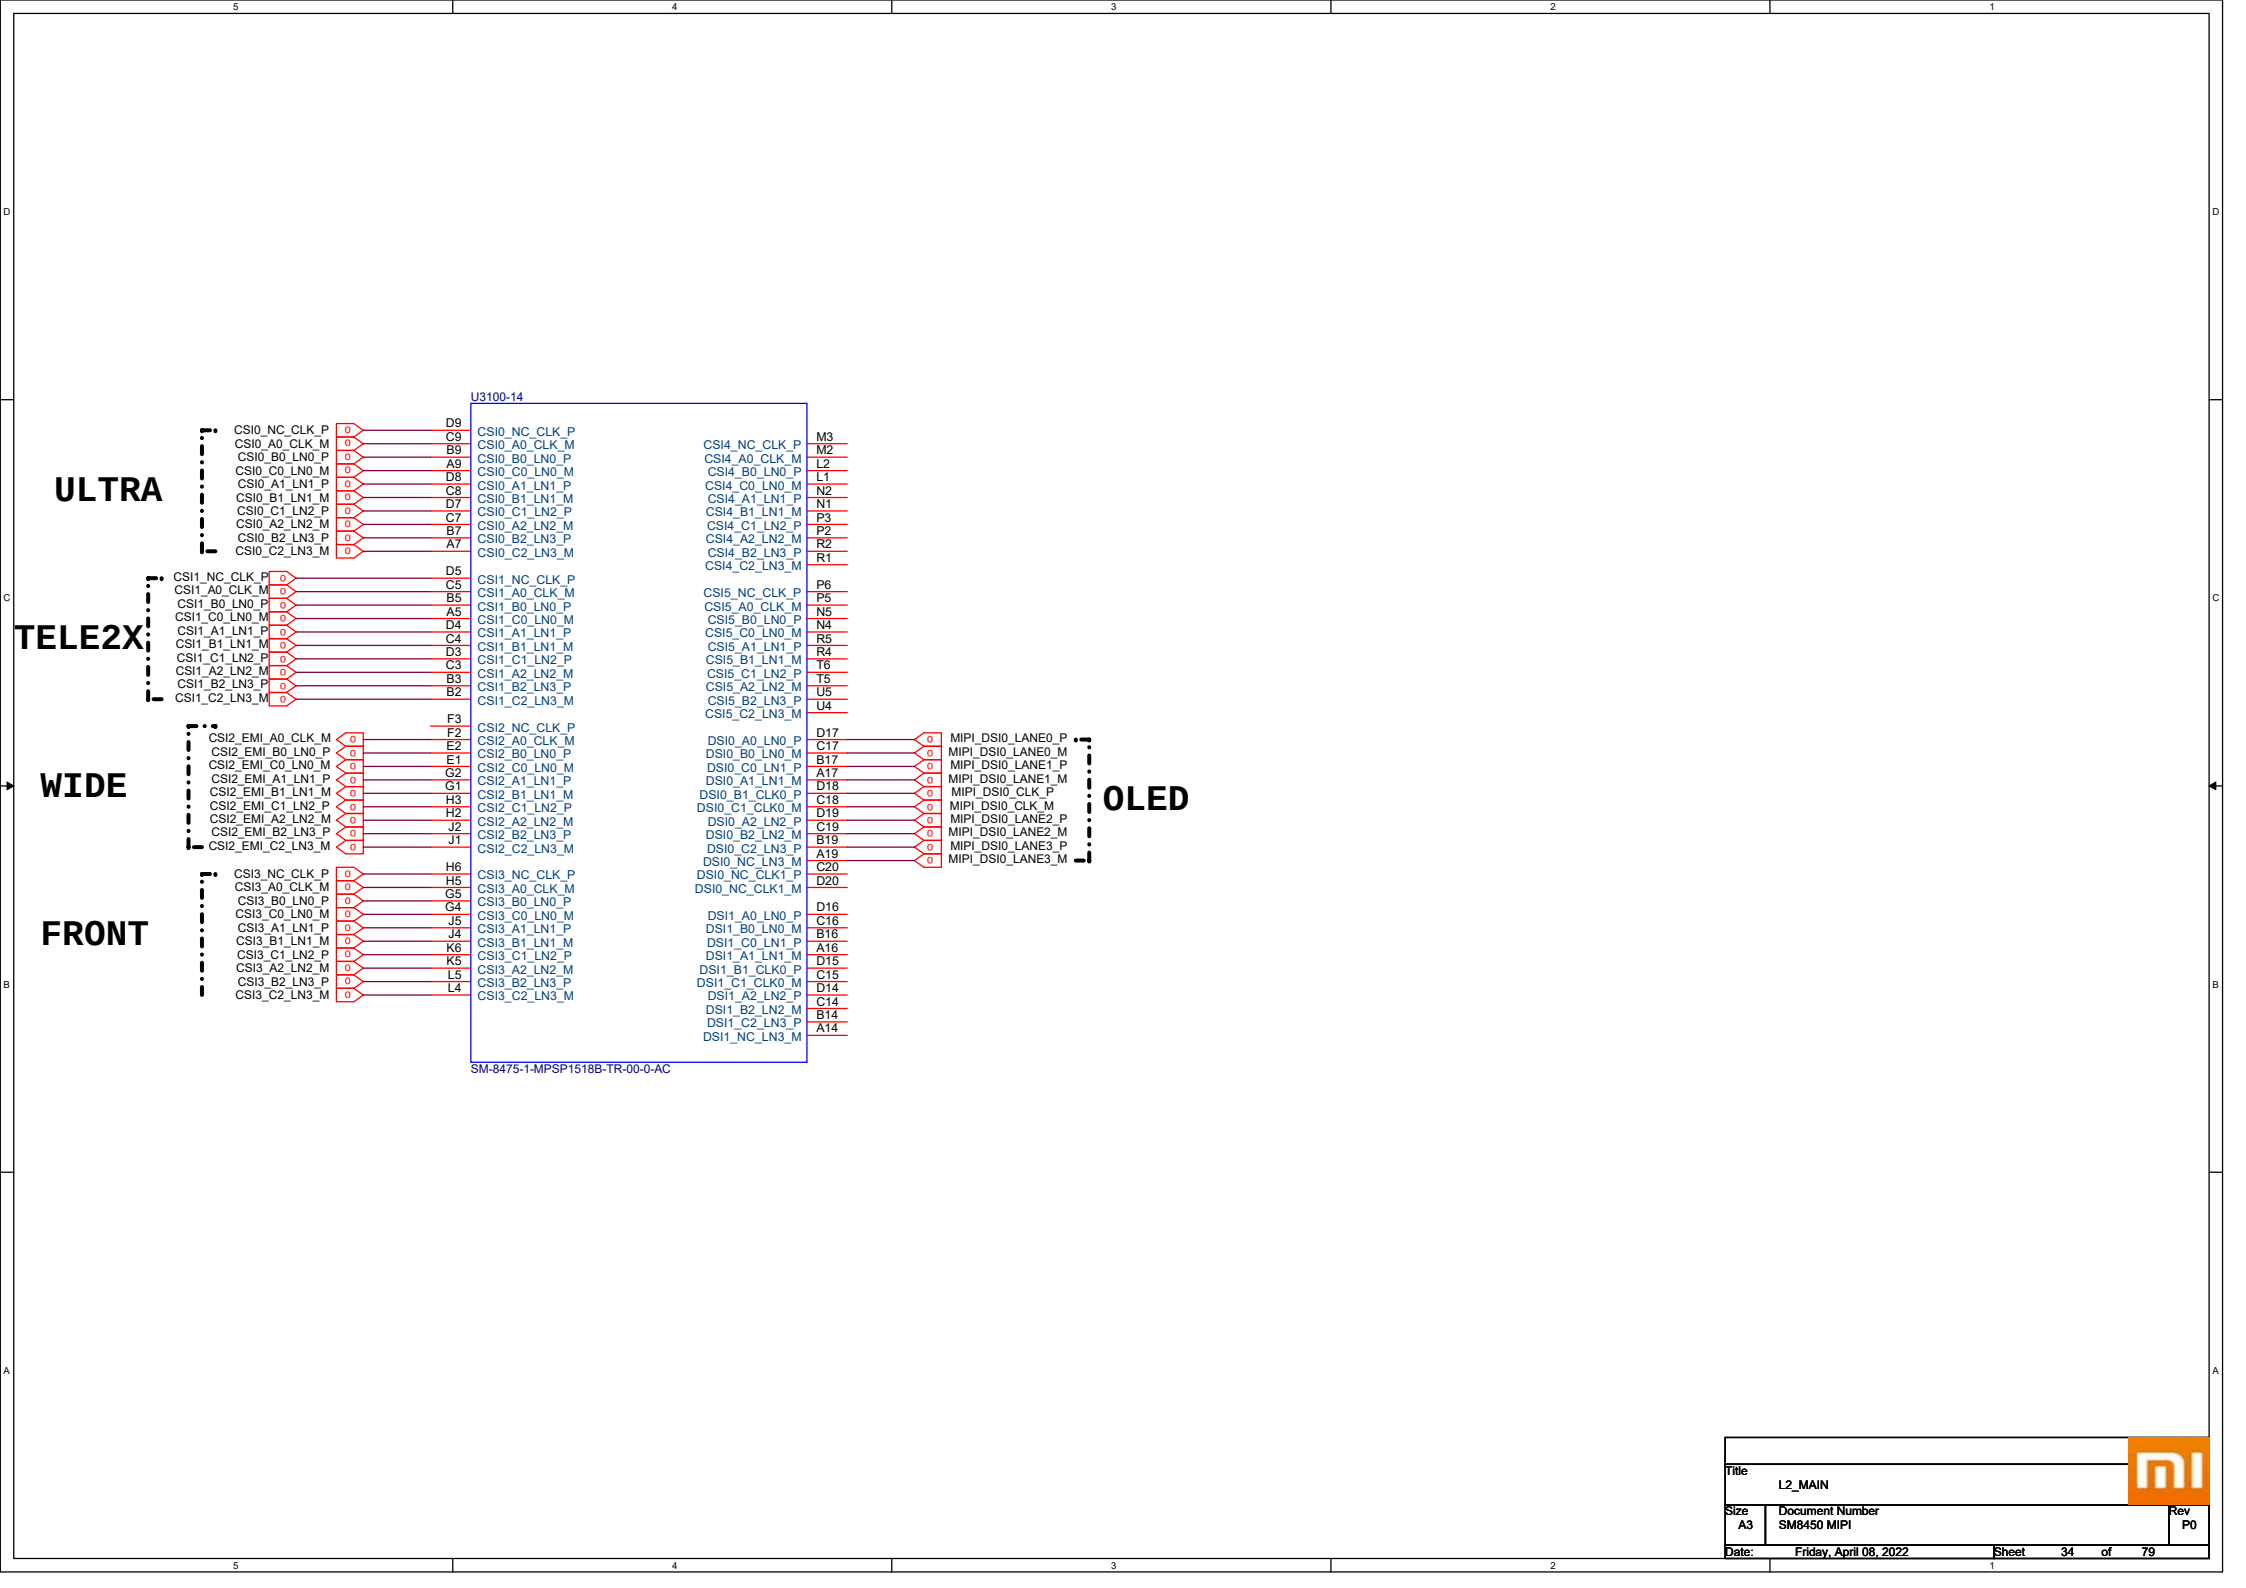




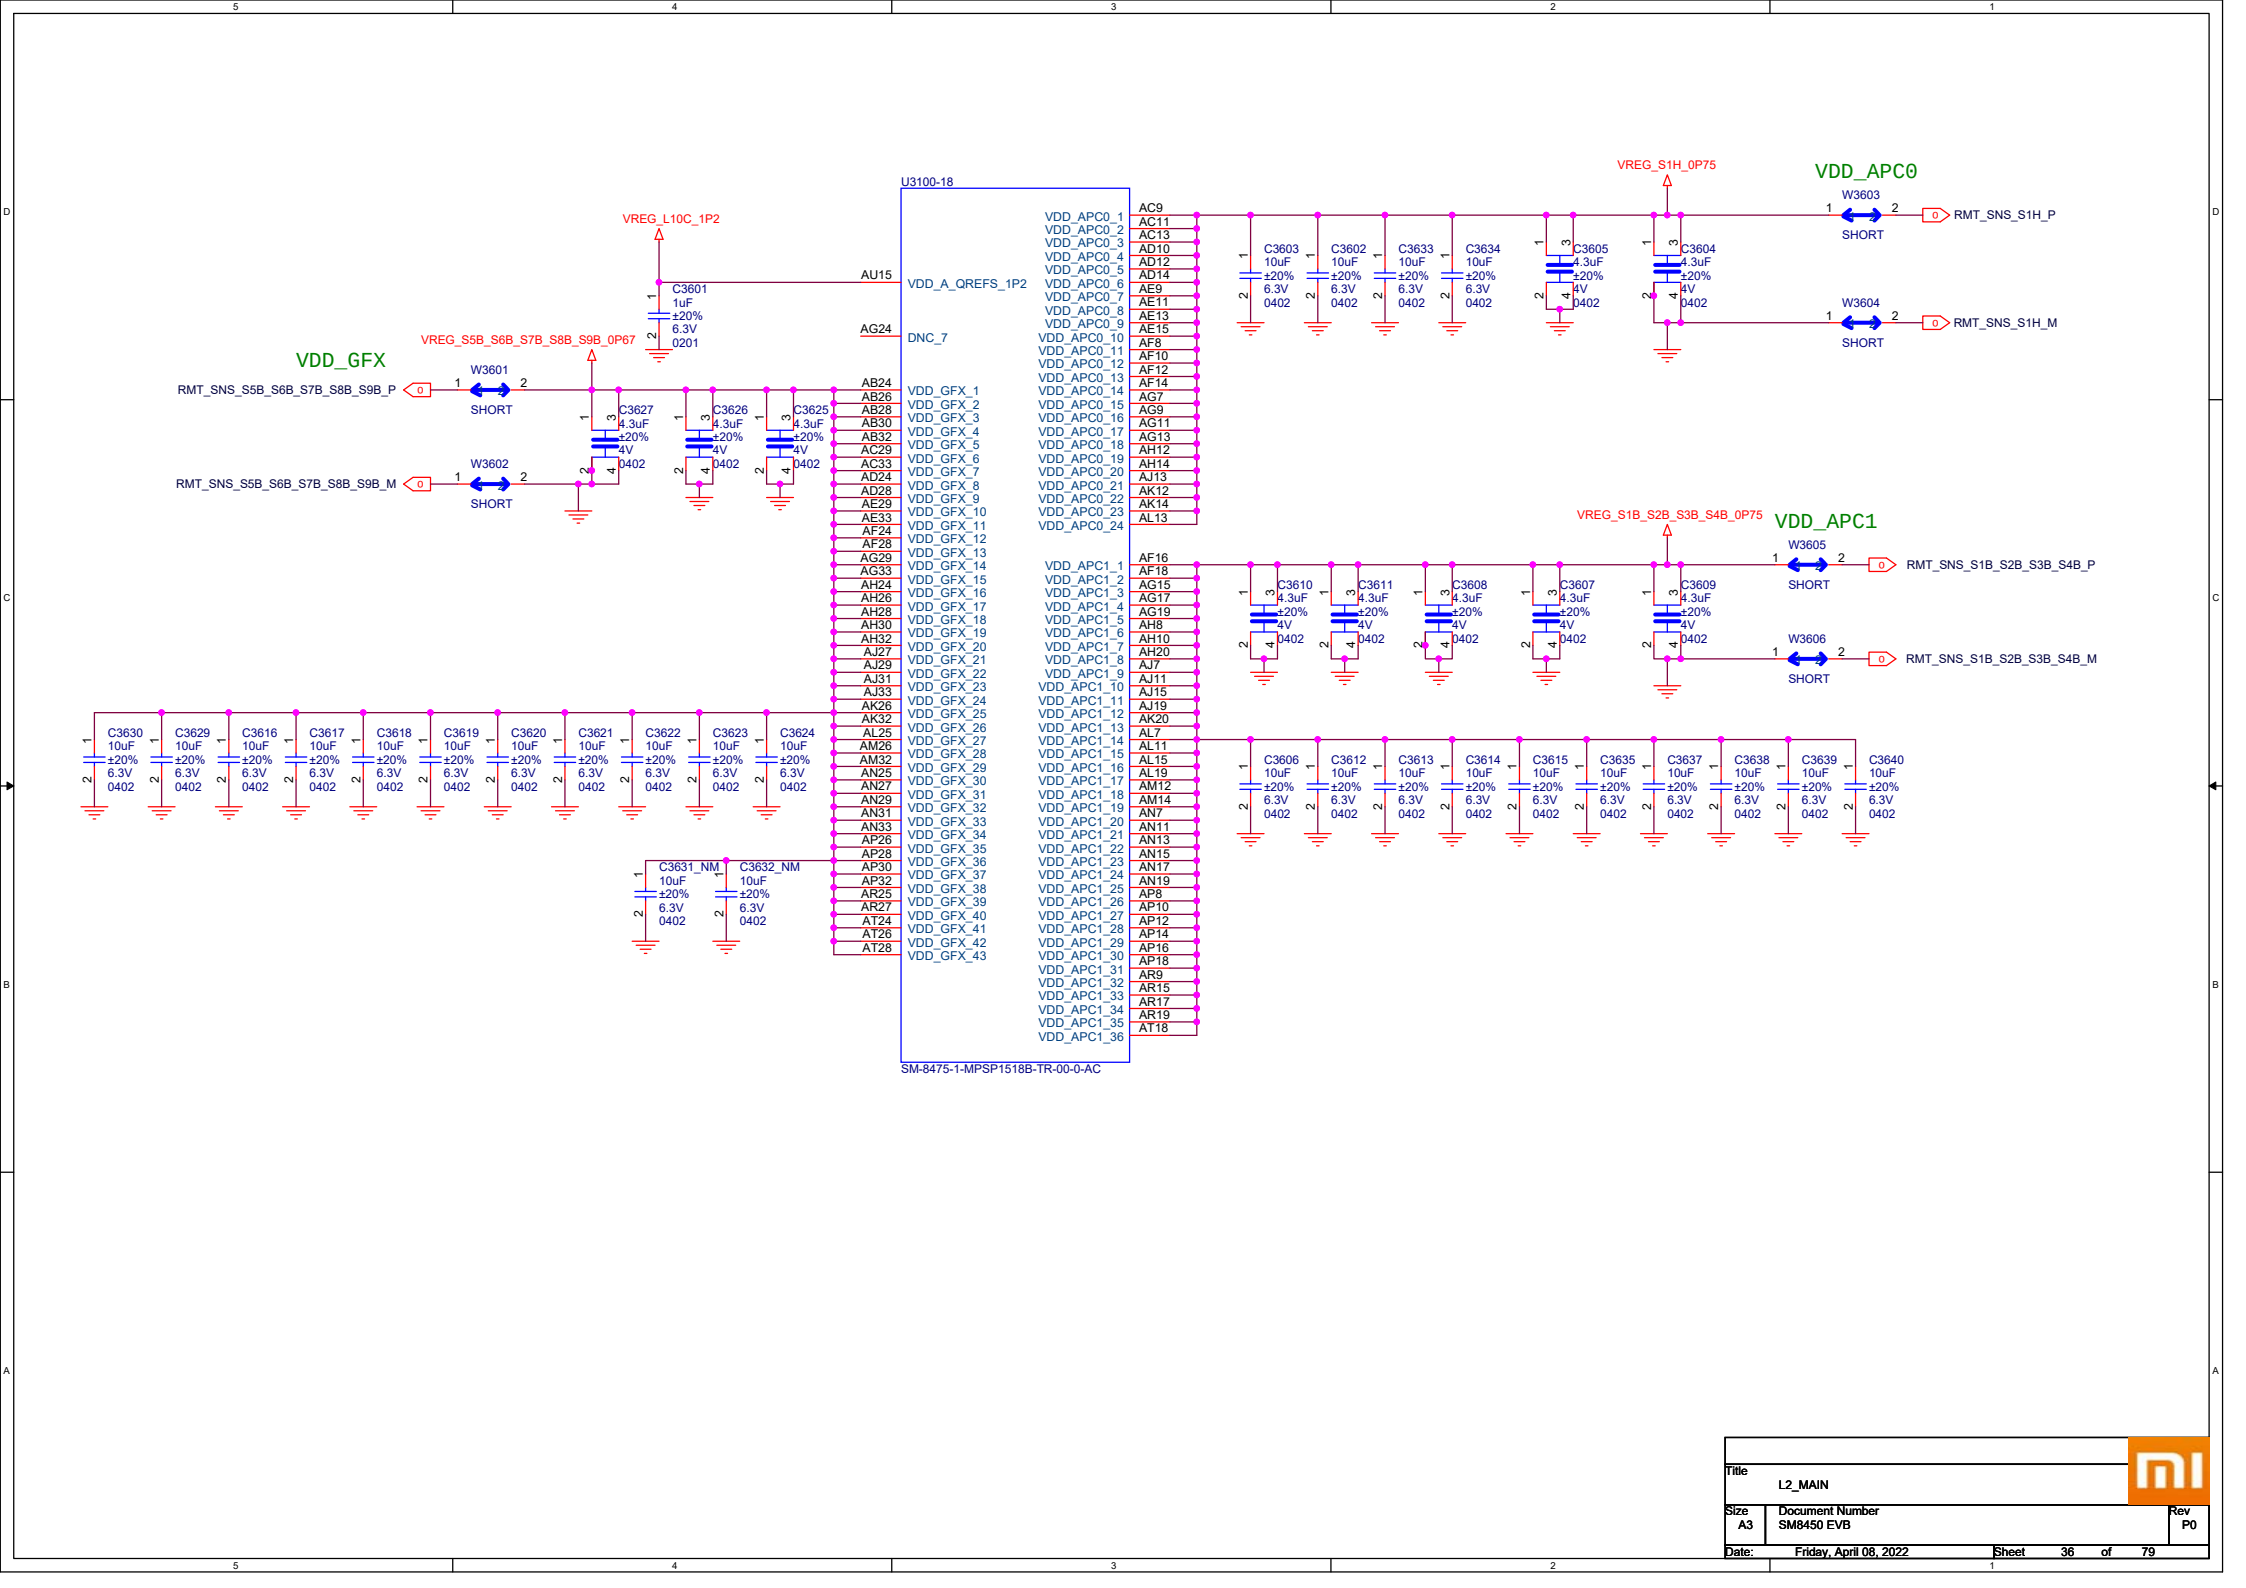

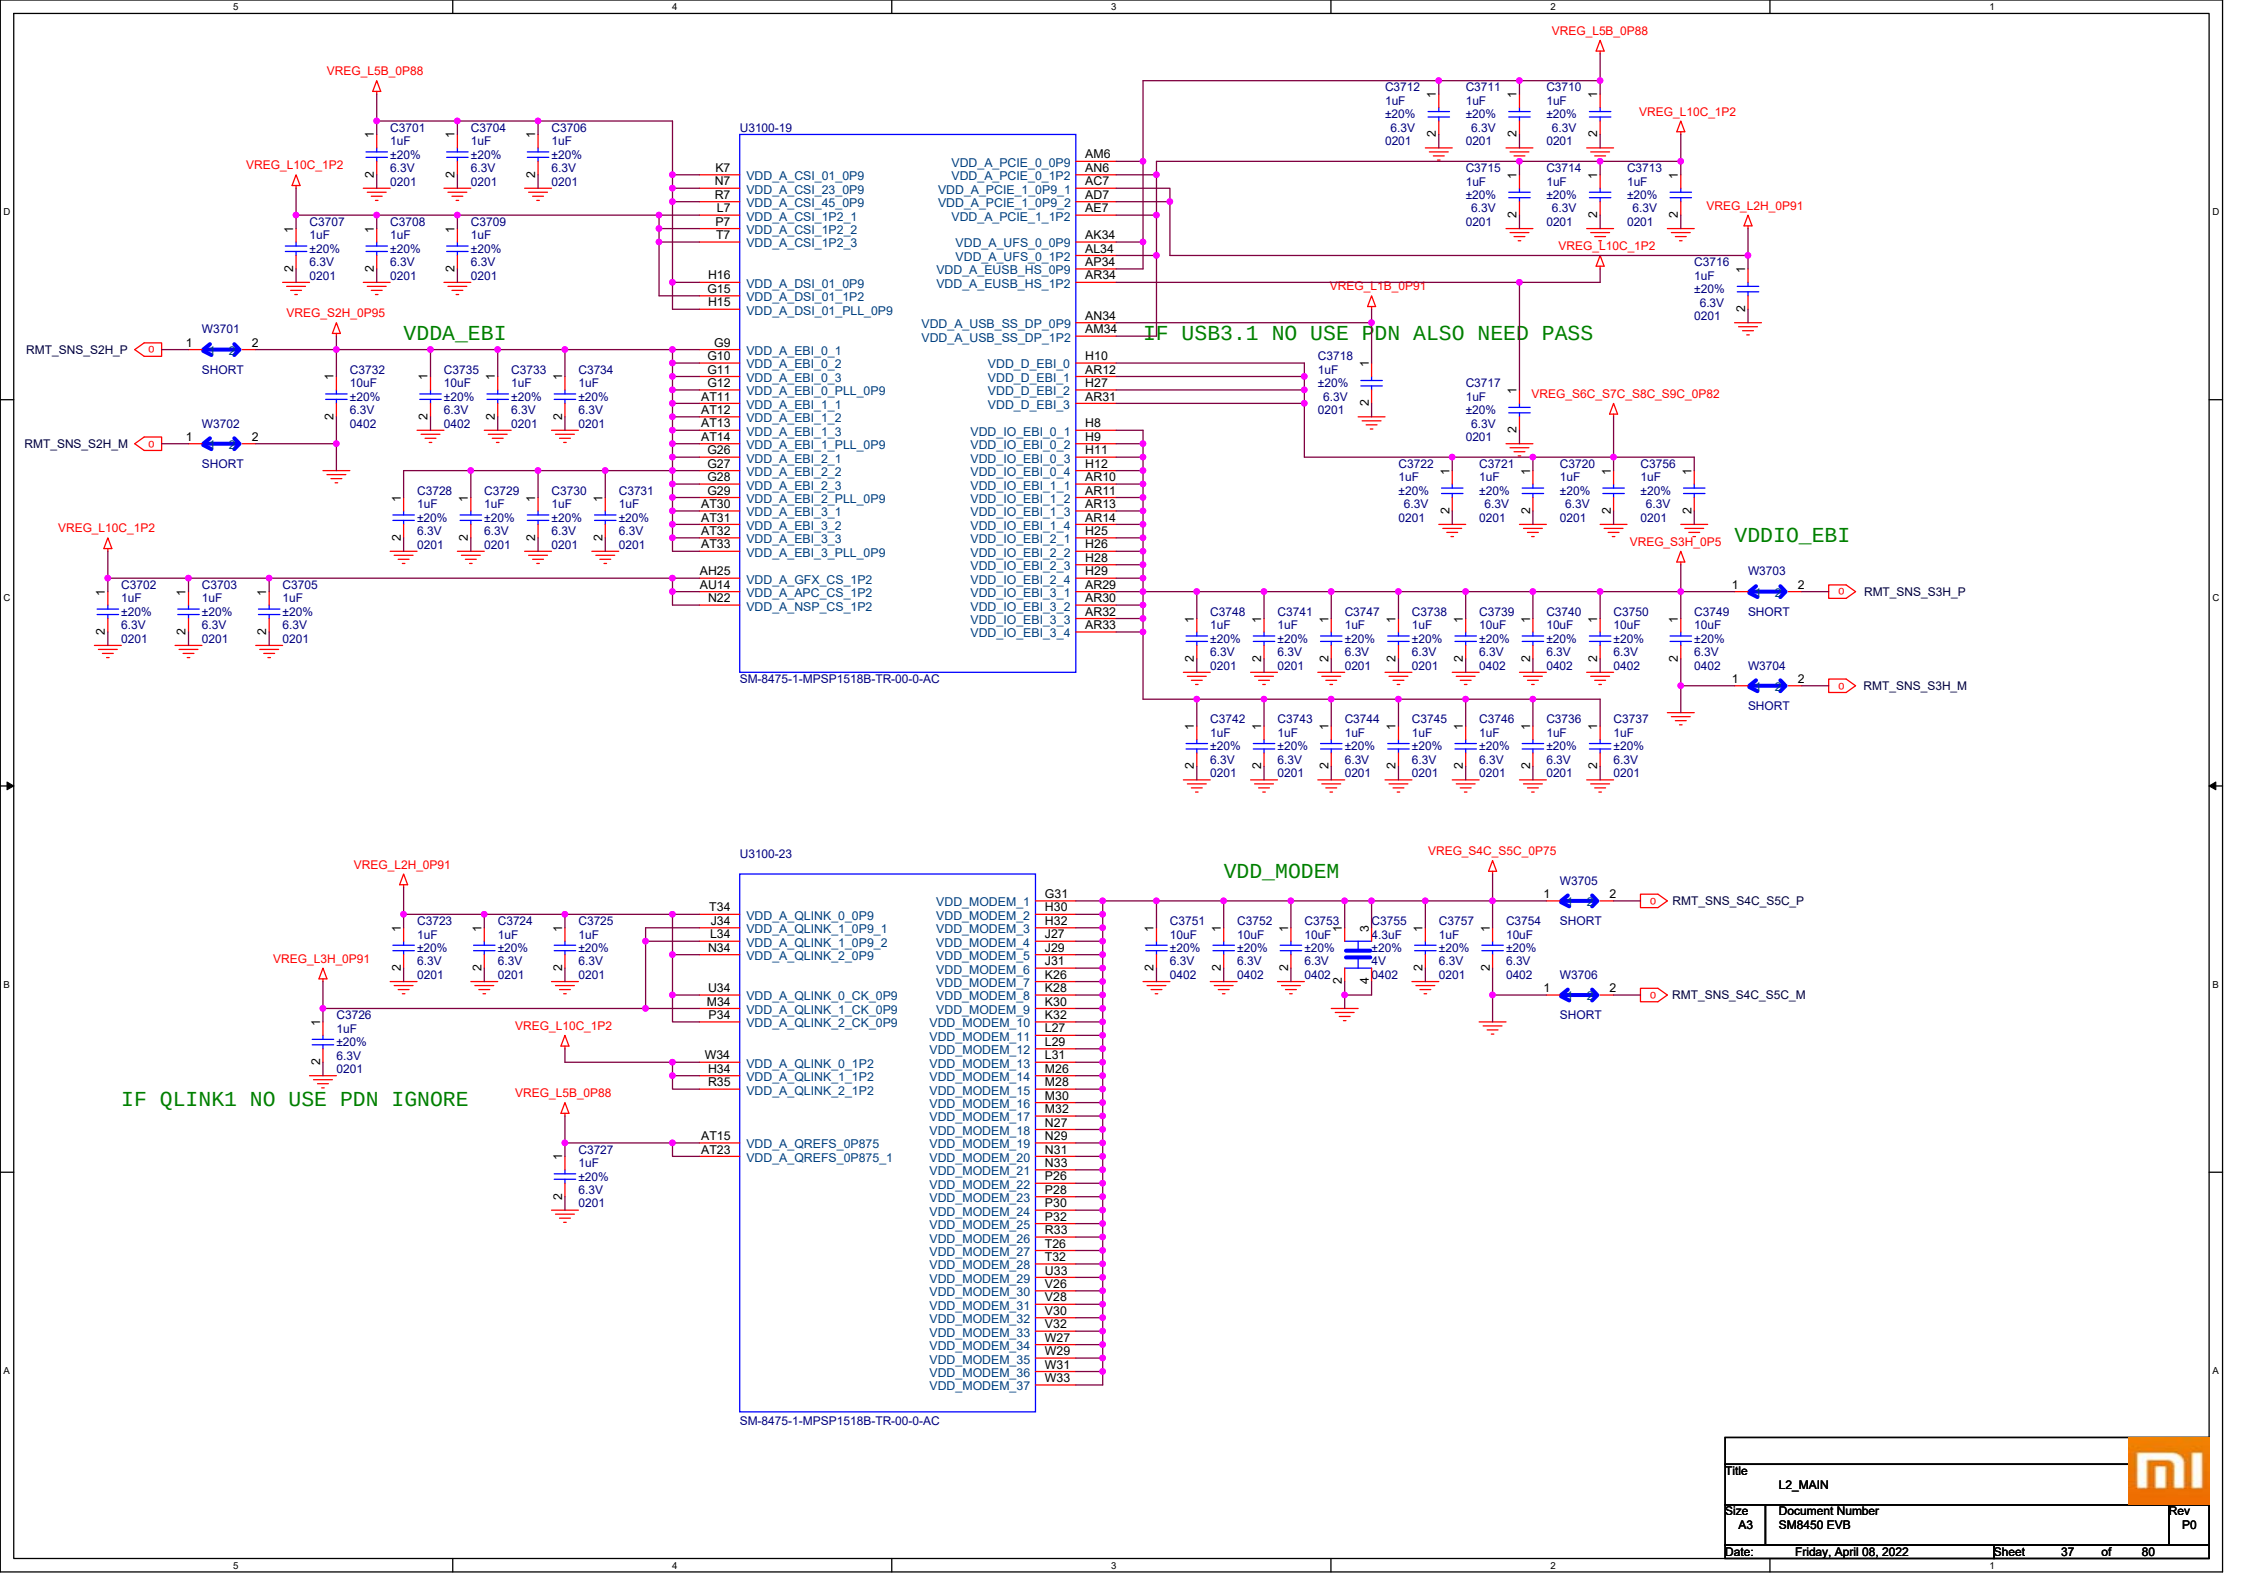

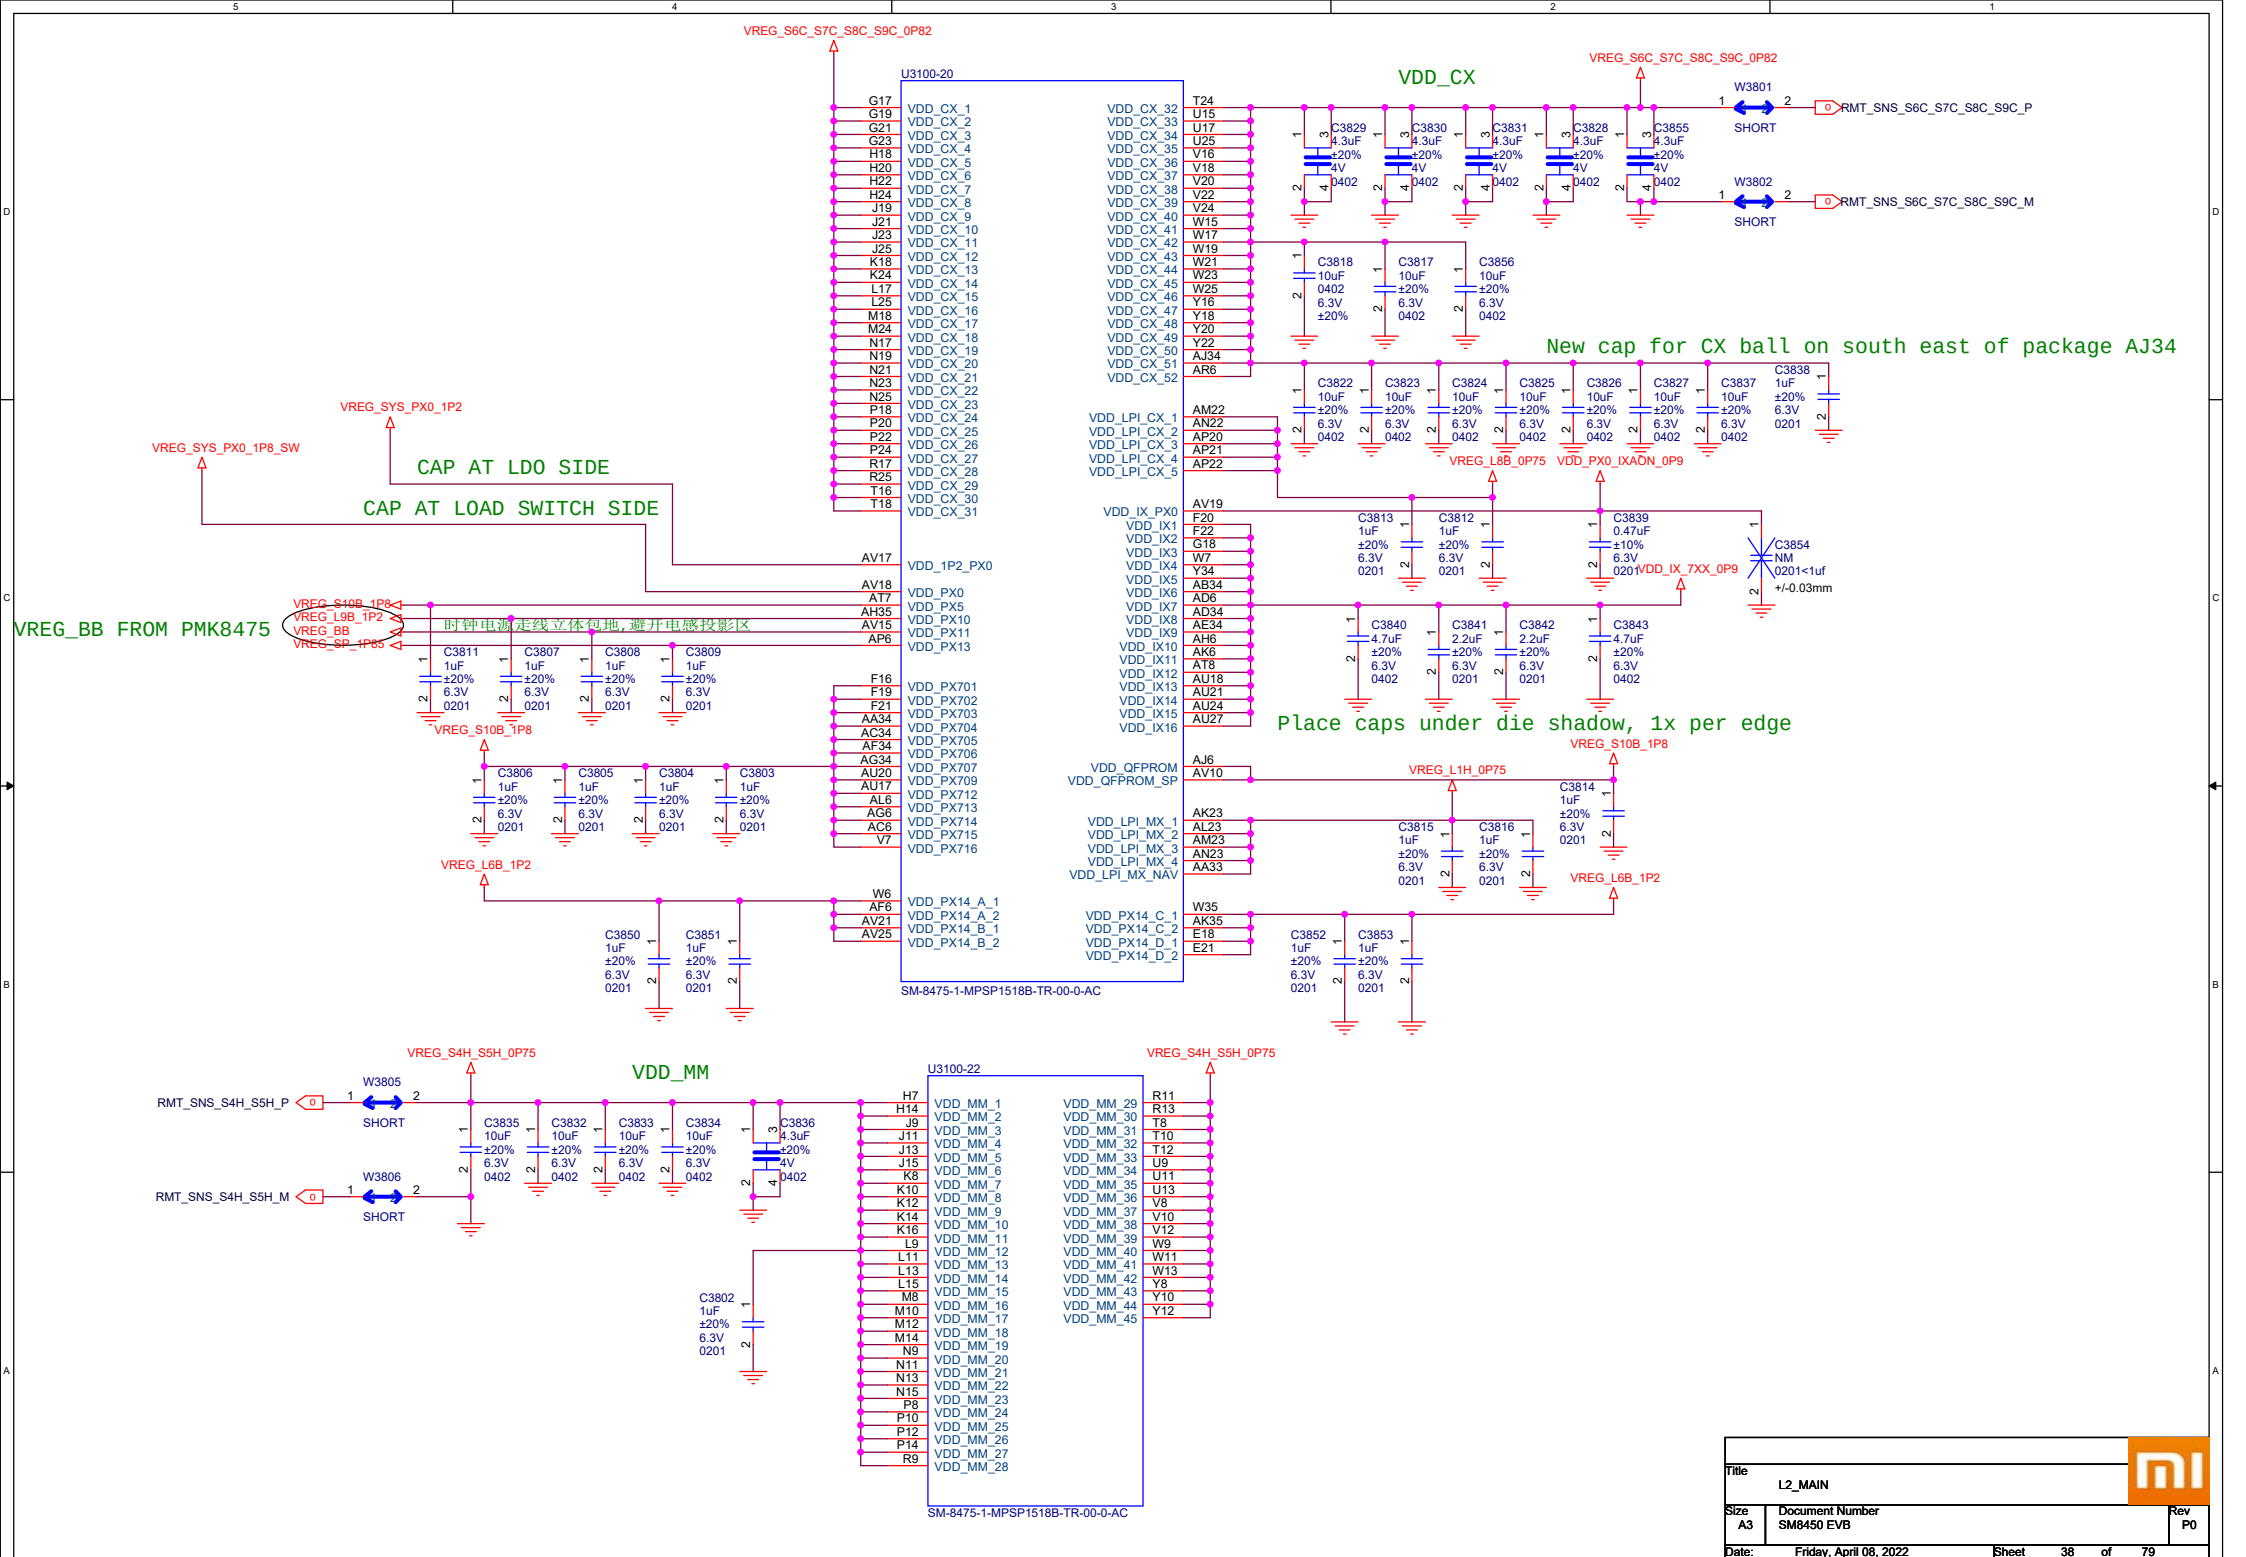

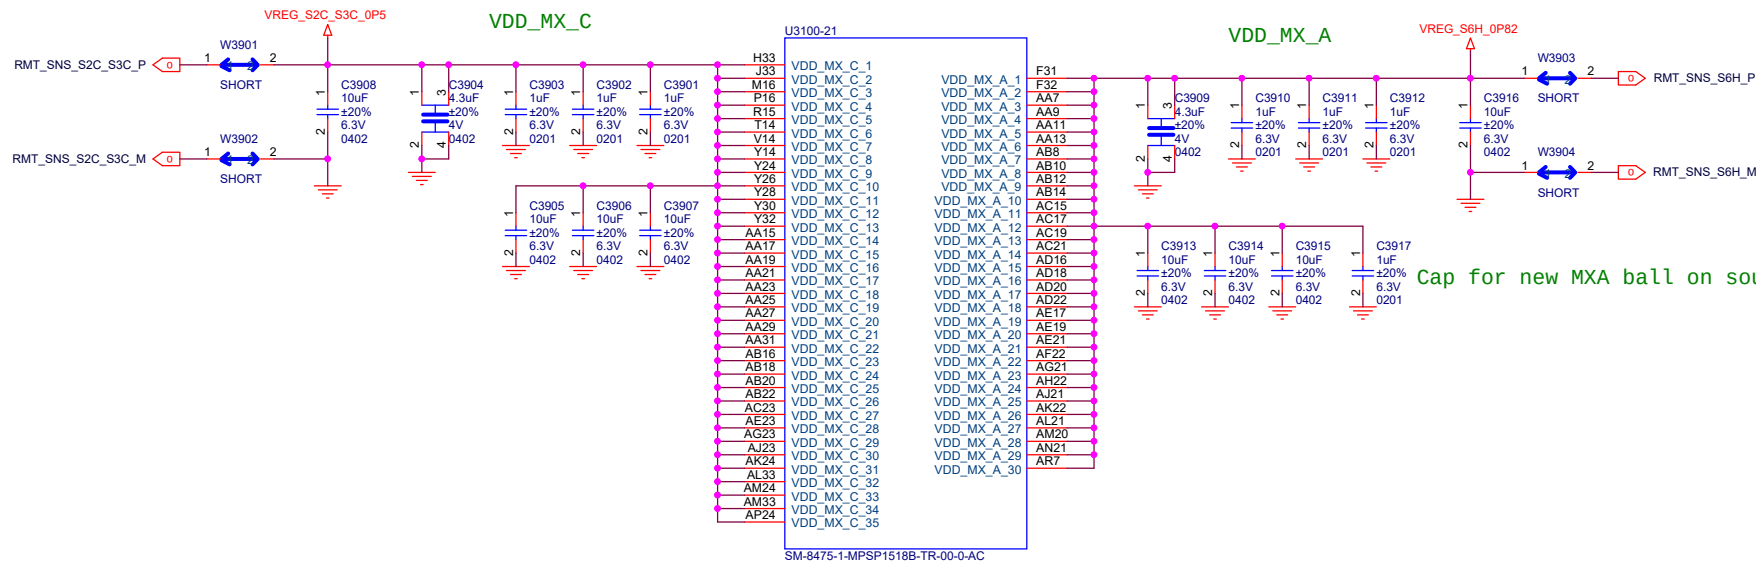

Cap for new MXA ball on south west of package AR7

(Note: Caps shared with VDDIO pins)

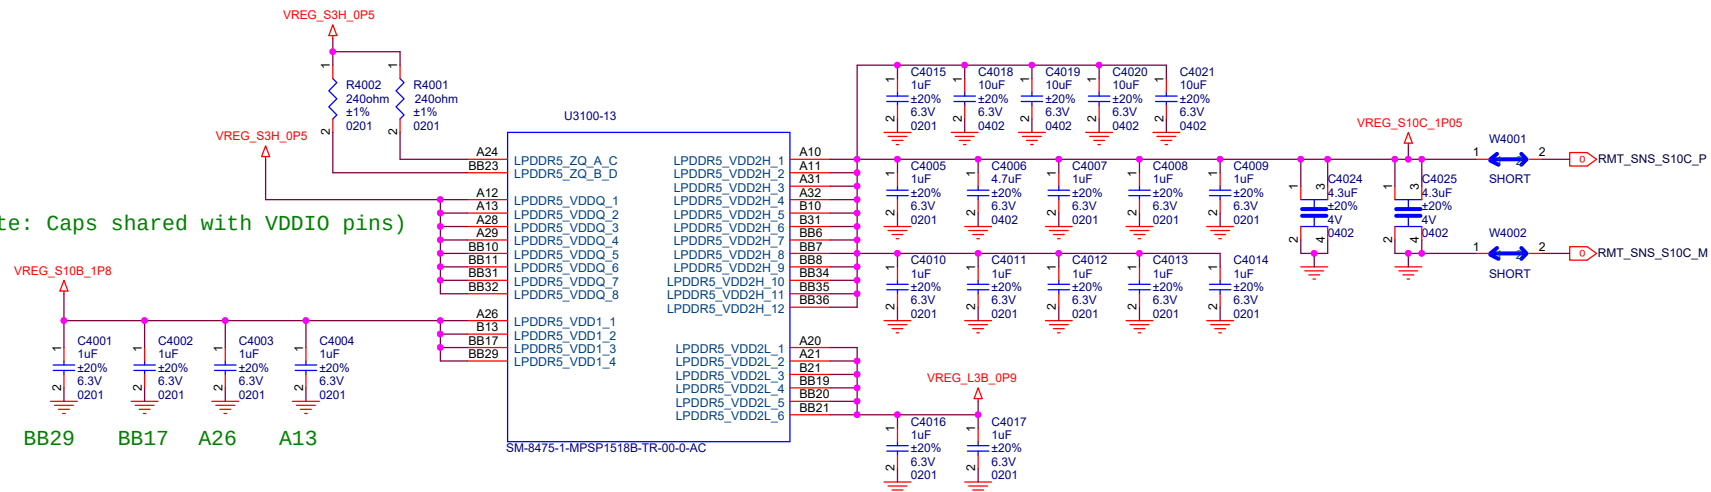


Table with 2 columns: Component, Pin. Components include AD8, AF20, AF19, J8, J17, K17, AJ25, AJ24, AE16, AA24, L33, M33, AP23. Pins include DNC_2, DNC_4, DNC_6, DNC_5, DNC_19, DNC_18, DNC_20, DNC_9, DNC_8, DNC_3, DNC_1, DNC_21, DNC_22, DNC_13.

U3100-2

SM-8475-1-MPSP1518B-TR-00-0-AC

Table with 3 columns: Pin, GND, Pin. Pins include A2, A3, A4, A6, A8, A15, A18, A25, A27, A30, A33, A35, A37, A38, B1, B4, B6, B8, B11, B12, B15, B18, B20, B22, B32, B33, B35, B37, B39, C1, C2, C6, C10, C11, C12, C13, C32, C34, C36, C37, C39, D1, D2, D6, D10, D11, D12, D13, D32, D34. GND pins range from GND_1 to GND_100.

U3100-3

SM-8475-1-MPSP1518B-TR-00-0-AC

Table with 3 columns: Pin, GND, Pin. Pins include F26, F27, F28, F29, F30, F33, F34, F36, F38, F39, G3, G6, G7, G8, G13, G14, G16, G20, G22, G24, G25, G30, G32, G33, G34, G35, G36, G38, G39, H1, H4, H13, H17, H19, H21, H23, H31, H37, J3, J6, J7, J10, J12, J14, J18, J20, J22, J24, J26. GND pins range from GND_101 to GND_200.

U3100-4

SM-8475-1-MPSP1518B-TR-00-0-AC

Table with 3 columns: Pin, GND, Pin. Pins include M31, M35, M36, M37, M38, M39, N3, N6, N8, N10, N12, N14, N16, N18, N20, N24, N26, N28, N30, N32, N37, P1, P4, P9, P11, P13, P15, P17, P19, P21, P23, P25, P27, P29, P31, P33, P37, R3, R6, R8, R10, R12, R14, R16, R18, R24, R26, R32, R34, R36. GND pins range from GND_201 to GND_300.

U3100-5

SM-8475-1-MPSP1518B-TR-00-0-AC

Table with 3 columns: Pin, GND, Pin. Pins include W5, W8, W10, W12, W14, W16, W18, W20, W22, W24, W26, W28, W30, W32, W36, W37, W38, W39, Y4, Y6, Y7, Y9, Y11, Y13, Y15, Y17, Y19, Y21, Y23, Y25, Y27, Y29, Y31, Y33, AA3, AA6, AA8, AA10, AA12, AA26, AA28, AA30, AA32, AB3. GND pins range from GND_301 to GND_400.

U3100-6

SM-8475-1-MPSP1518B-TR-00-0-AC

Table with 3 columns: Pin, GND, Pin. Pins include AE36, AF4, AF5, AF7, AF9, AF11, AF13, AF15, AF17, AF21, AF23, AF25, AF29, AF33, AF37, AG3, AG8, AG10, AG12, AG14, AG16, AG18, AG20, AG22, AG28, AG37, AH3, AH7, AH9, AH11, AH13, AH15, AH19, AH21, AH23, AH27, AH29, AH31, AH34, AH38, AH39, AJ4, AJ5, AJ12, AJ14, AJ20, AJ22, AJ26, AJ28, AJ30, AJ32. GND pins range from GND_401 to GND_500.

U3100-7

SM-8475-1-MPSP1518B-TR-00-0-AC

Table with 3 columns: Pin, GND, Pin. Pins include AP31, AP33, AP37, AP39, AR4, AR5, AR6, AR16, AR18, AR20, AR21, AR22, AR23, AR24, AR26, AR28, AR37, AT10, AT17, AT19, AT20, AT21, AT22, AT25, AT27, AT29, AT34, AT37, AU3, AU6, AU7, AU8, AU9, AU10, AU11, AU12, AU13, AU16, AU19, AU22, AU23, AU26, AU28, AU29, AU30, AU31. GND pins range from GND_501 to GND_600.


U3100-8

SM-8475-1-MPSP1518B-TR-00-0-AC

Table with 3 columns: Pin, GND, Pin. Pins include AY1, AY14, AY16, AY33, AY36, AY38, BA1, BA16, BA31, BA34, BA37, BA39, BB2, BB3, BB5, BB9, BB12, BB16, BB18, BB19, BB22, BB24, BB30, BB33, BB37, BB38. GND pins range from GND_601 to GND_626.


U3100-9

SM-8475-1-MPSP1518B-TR-00-0-AC

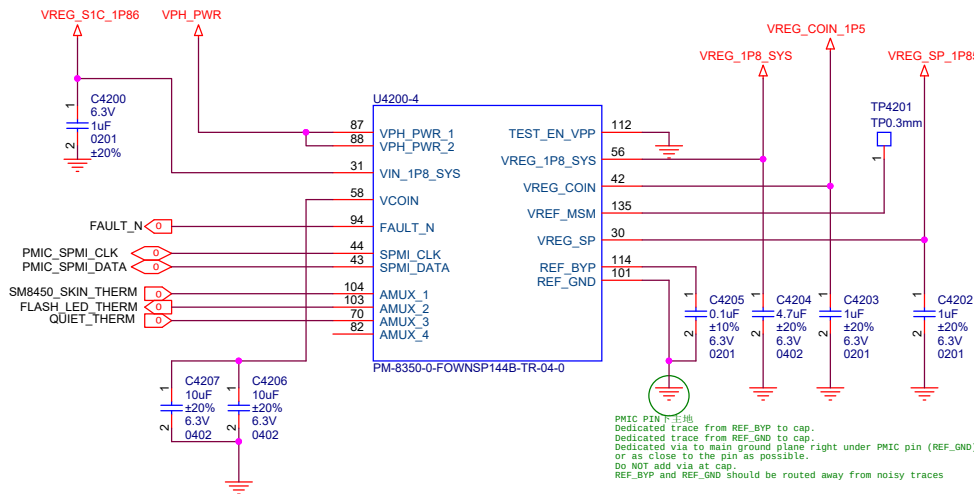


SPMI_CLK & SPMI_DATA should be routed away from noisy traces
Route signals in parallel as much as possible

PMIC PIN 7 主地
Dedicated trace from REF_BYP to cap.
Dedicated trace from REF_GND to cap.
Dedicated via to main ground plane right under PMIC pin (REF_GND)
or as close to the pin as possible.
Do NOT add via at cap.
REF_BYP and REF_GND should be routed away from noisy traces

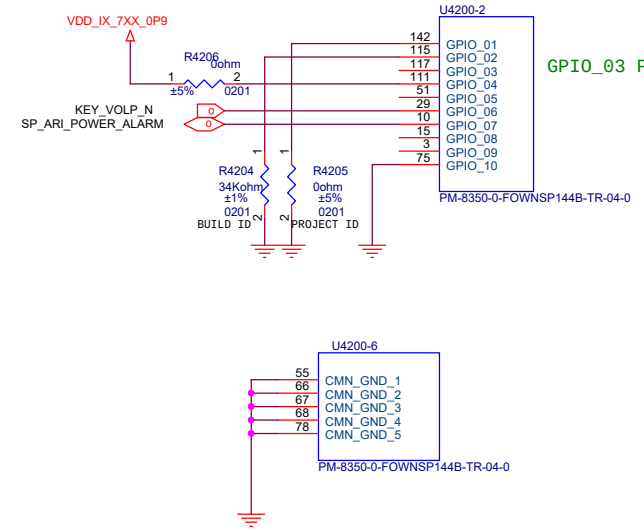


GPIO_03 PROJECT ID RESERVED

EXT_SWITCH_LDO_AMP

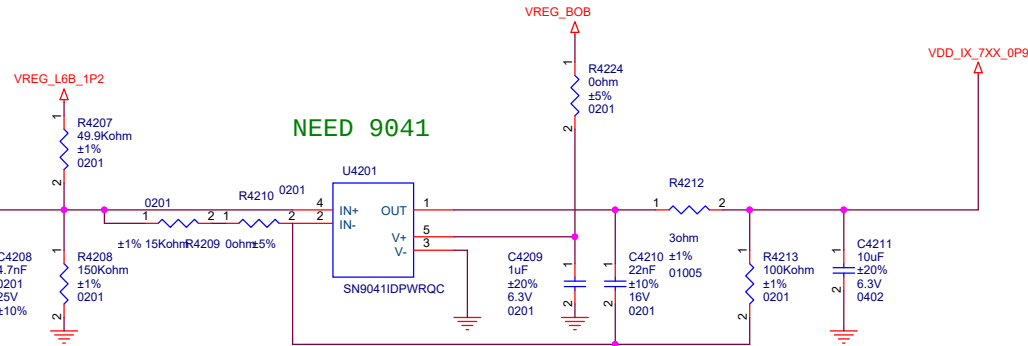


NEED 9041


10uF required to meet Cmin of 15uF for the TLV9041

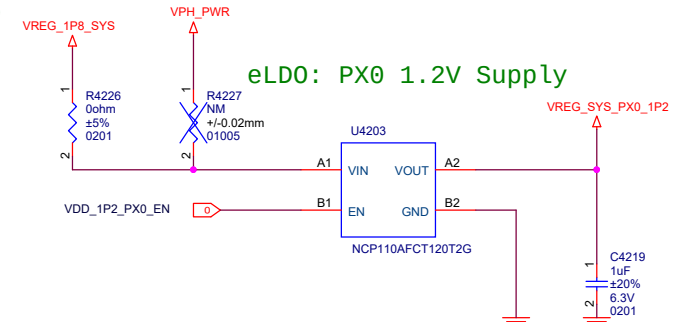

Load Switch: PX0 1.8V Supply

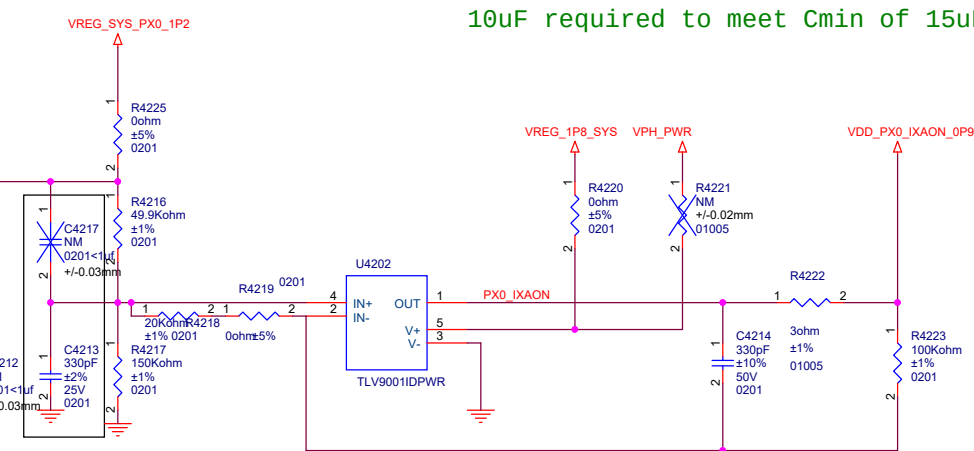

此处使用2% 精度

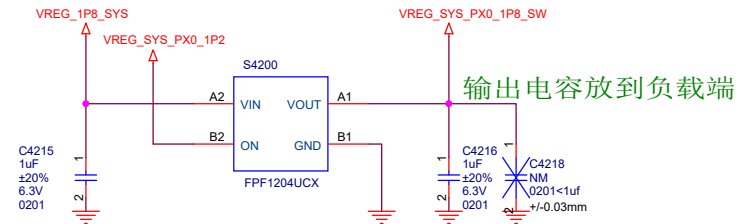


输出电容放到负载端

Input Cap shared between load switch and eLDO
eLDO和load SW布局不在一起时, input 增加1uF电容

Title			
L2_MAIN			
Size A3	Document Number PM6350 XO&CTRL		Rev P0
Date: Thursday, May 05, 2022		Sheet 42 of 79	

VDD_SX统一接VPH_PWR shape

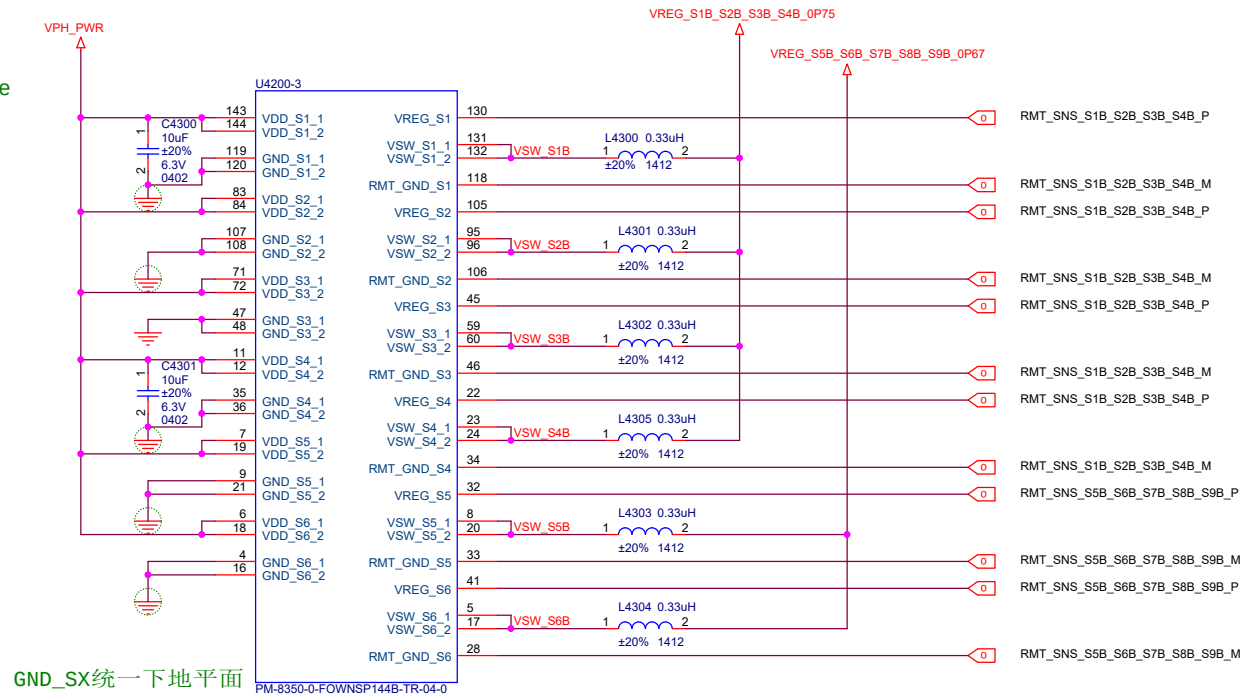


GND_SX统一下地平面


VDD_APC1

VDD_GFX


VDD_SX统一接VPH_PWR shape

GND_SX统一一下地平面

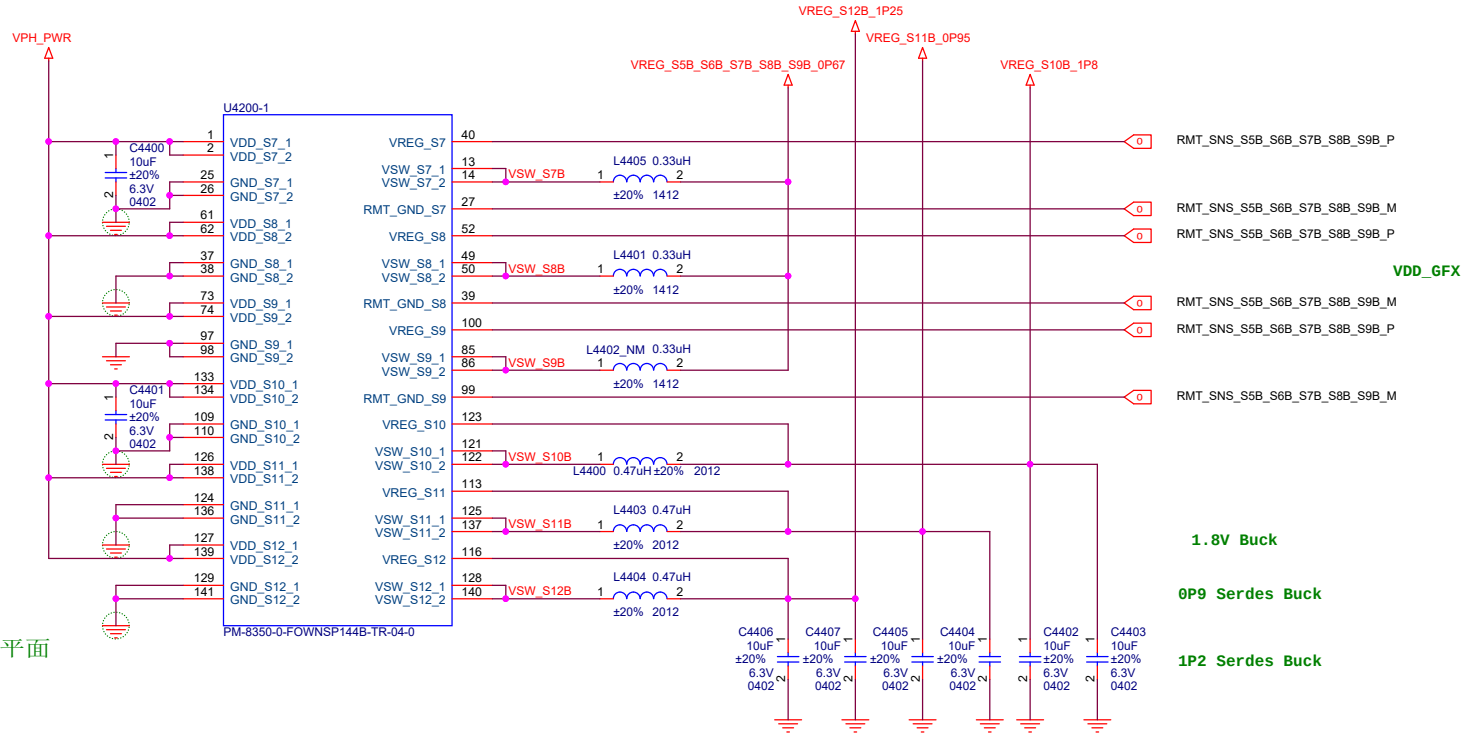

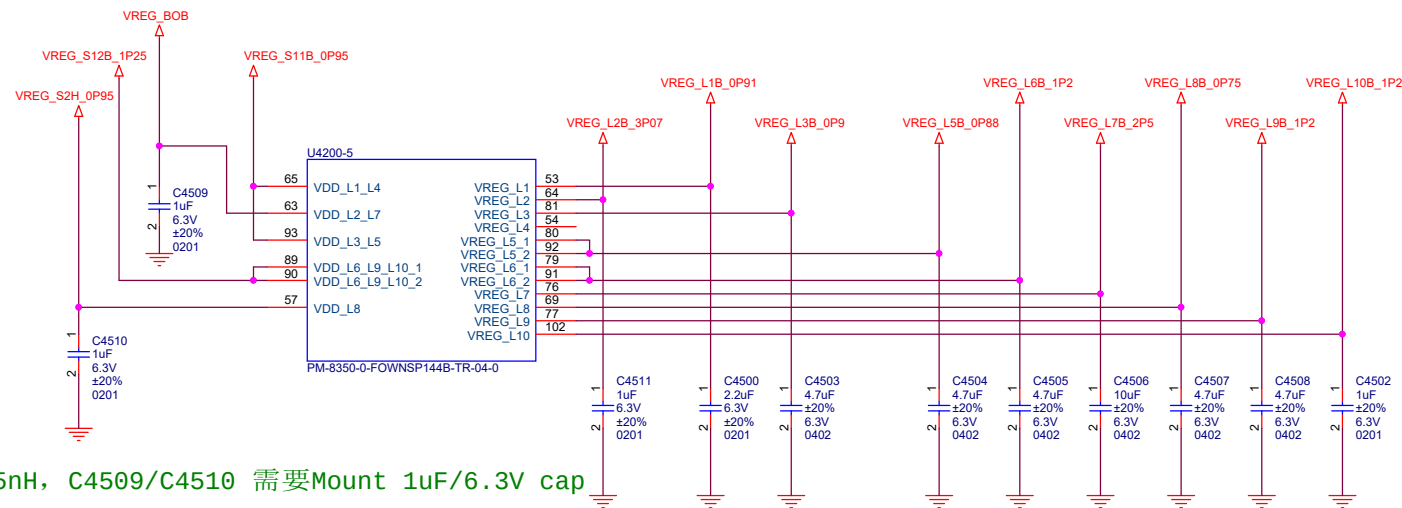


输入ESL大于15nH, C4509/C4510 需要Mount 1uF/6.3V cap

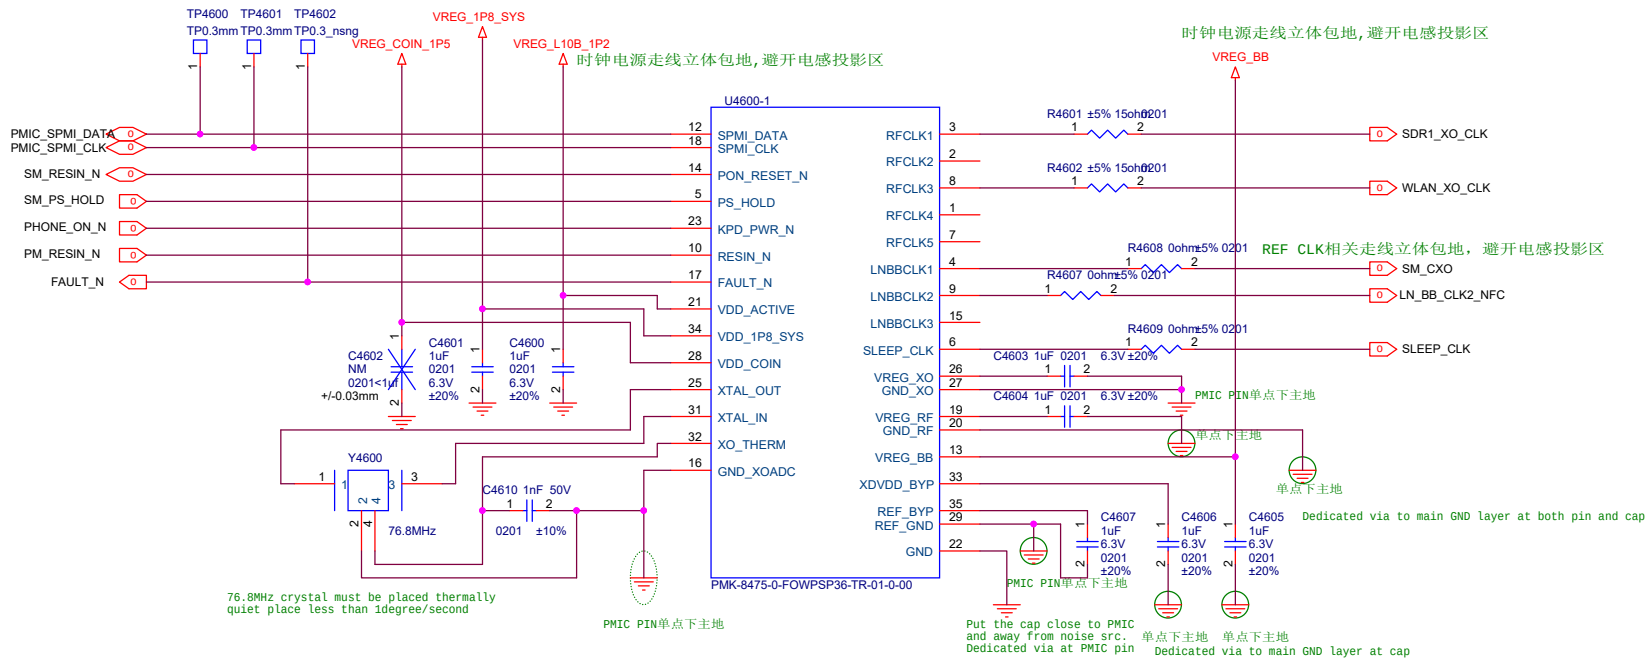




Critical Layout Guidelines for VREF_XO (go/PmicLayoutChecklist)
Preferred: Short, dedicated route to VREF_XO cap, away from noisy signals and connect XO_GND pin to ground side of cap, ground the pin at PMIC pin.
Acceptable: Dedicated via directly to main ground plane at the GND_XO pin and at PMIC pin.
Do NOT connect to any other ground

Critical Layout Guidelines for VREF_RF (go/PmicLayoutChecklist)
Preferred: Short, dedicated route to VREF_RF cap, away from noisy signals and dedicated via to main ground plane at cap or PMIC pin.
Acceptable: Dedicated via directly to main ground plane at the GND_RF pin and at VREF_RF cap (without routing to cap).
Do NOT connect to any other ground

Critical Layout Guidelines for Clocks (go/PmicLayoutChecklist)
Coupling to any RFCLK or LNBCLK output from each aggressor should be < 50 fF.
1. SMPS components (Buck, Boost, Charger)
2. VSW_Sx traces (Buck, Boost, Charger)
3. All other RFCLK, LNBCLK
4. Any high speed digital signal
5. Any other noisy signals

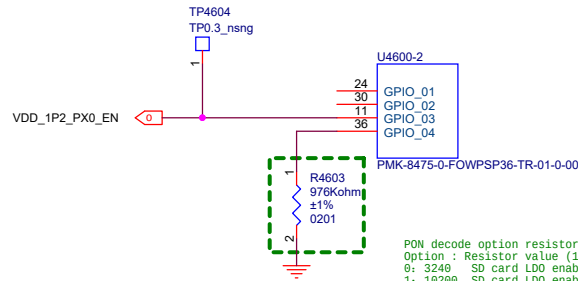


PON decode option resistor R4603
Option : Resistor value (1% series)
0: 3240 SD card LDO enable GPIO_05B high
1: 10200 SD card LDO enable GPIO_05B low
2-3: reserve
4: 39200 skip SD card LDO enable GPIO_05B high
5: 52900 skip SD card LDO enable GPIO_05B low
6-7: reserve

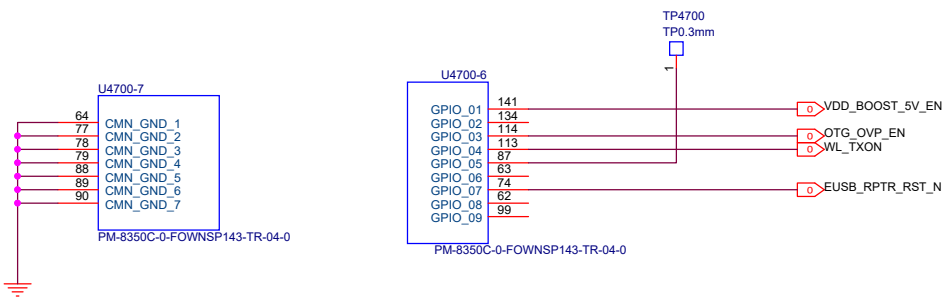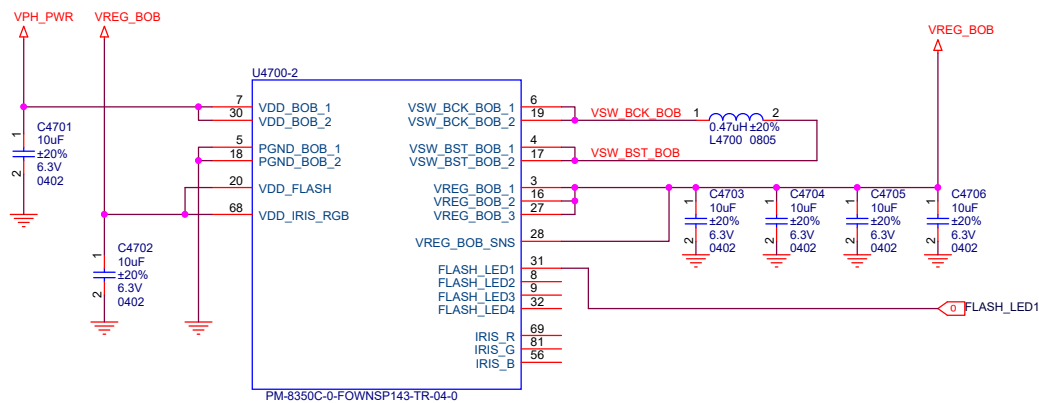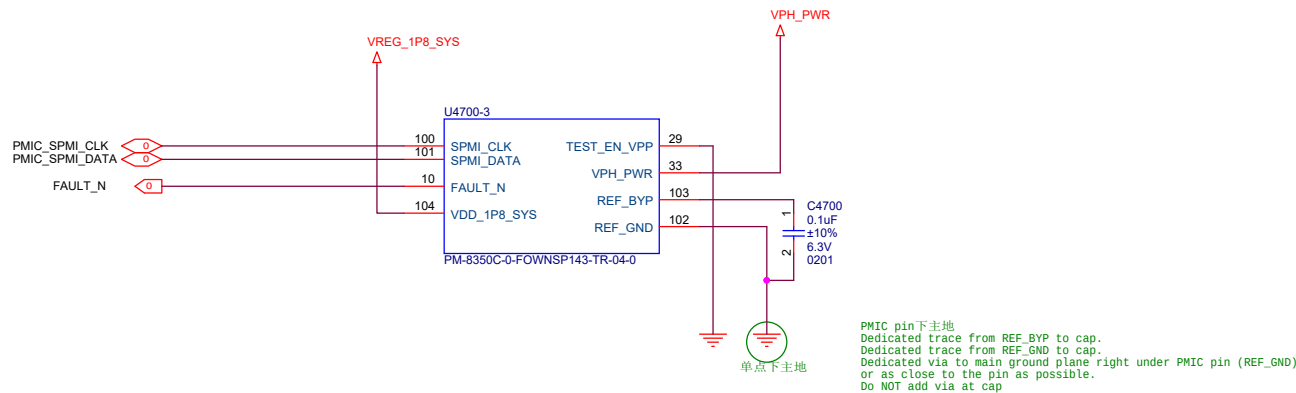


VDD_SX统一接VPH_PWR shape

GND_SX统一下地平面

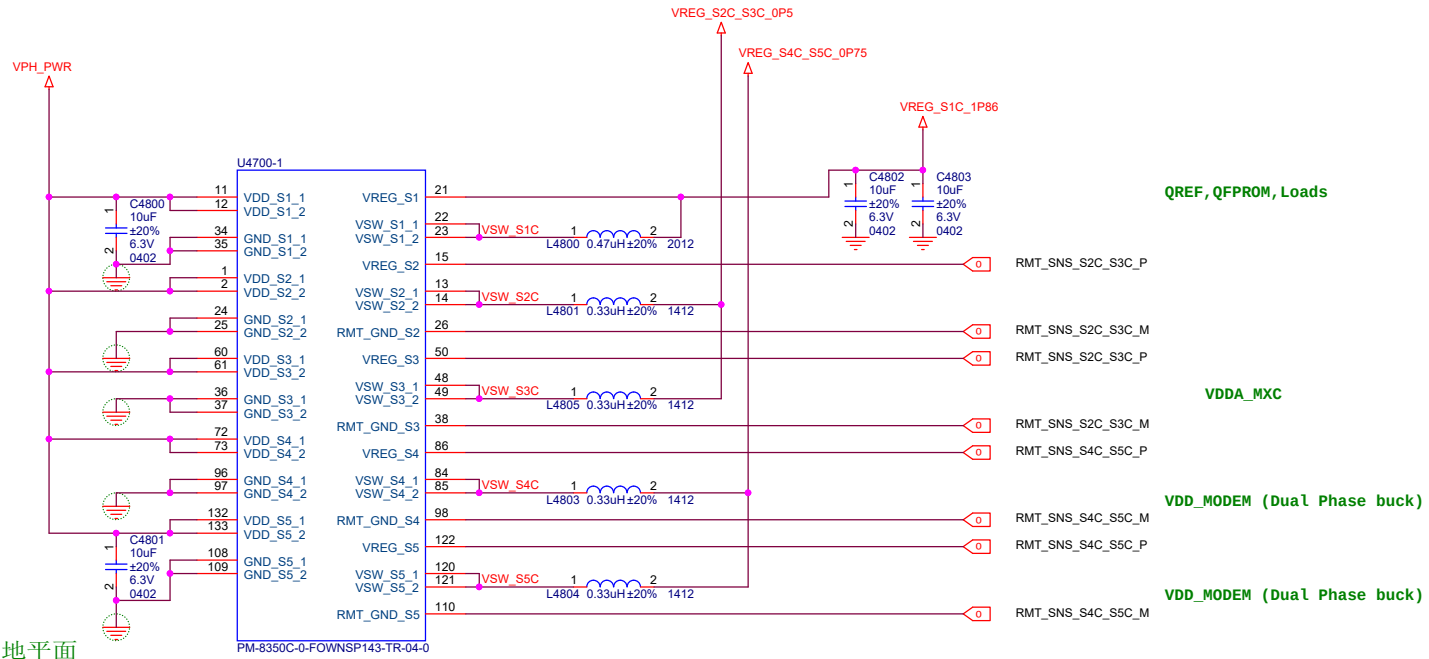


VDD_SX统一接VPH_PWR shape



GND_SX统一下地平面

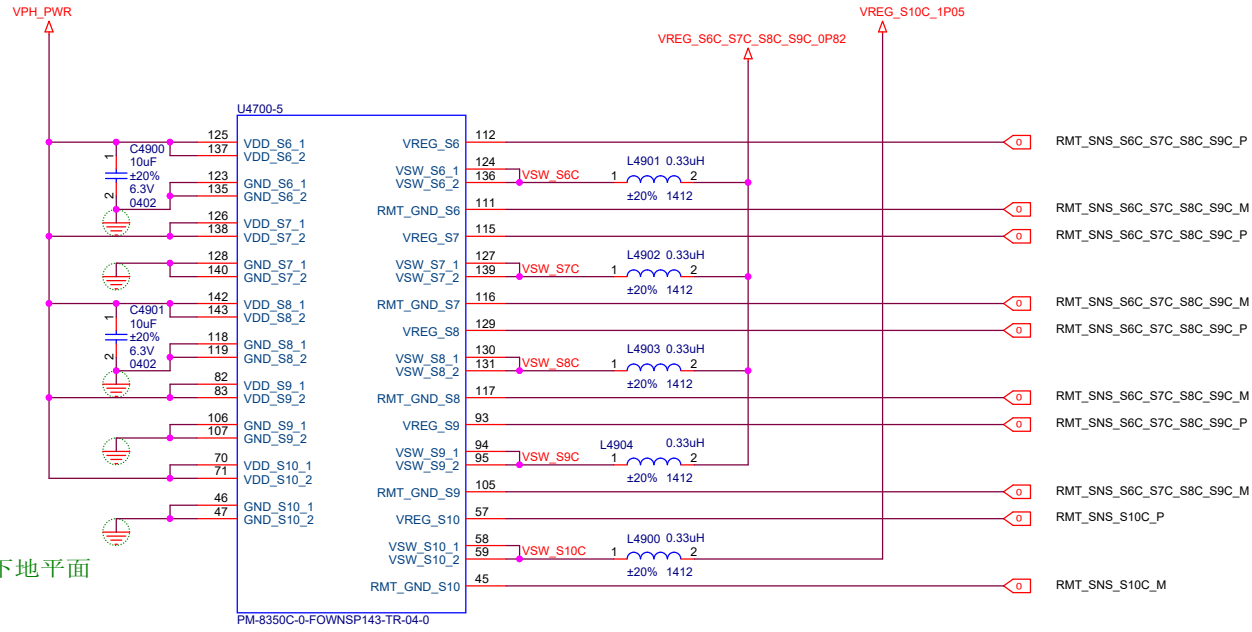


VDD_CX

S10C, LPDDR5 VDD2H/LPDDR4 VDD2

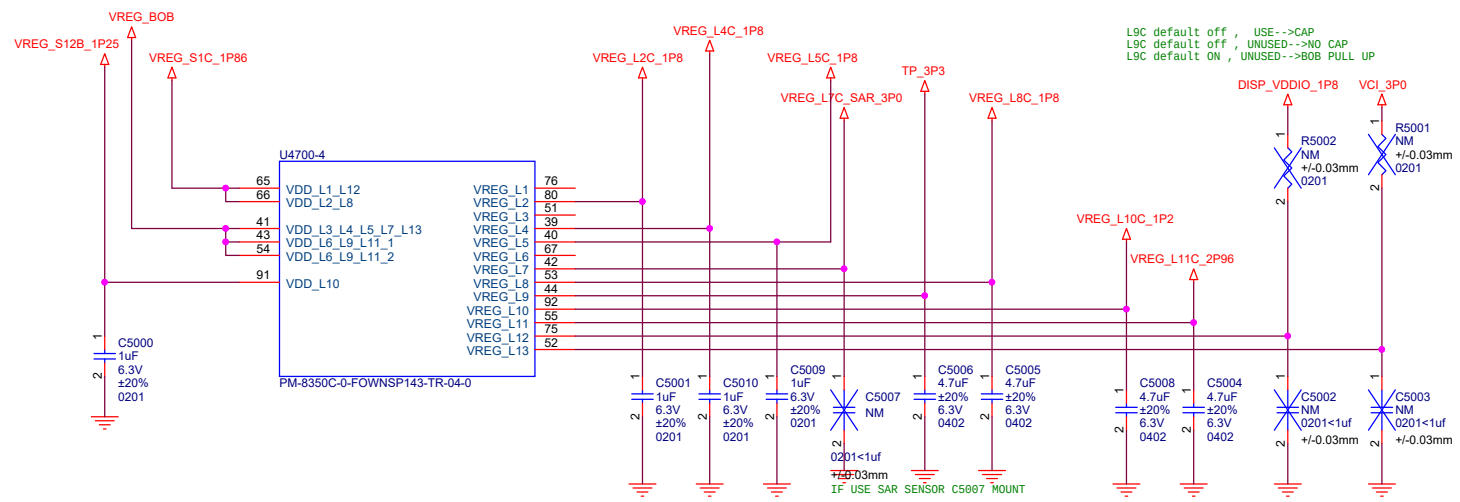

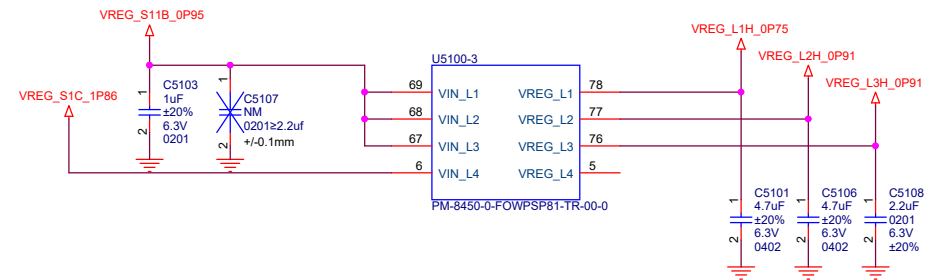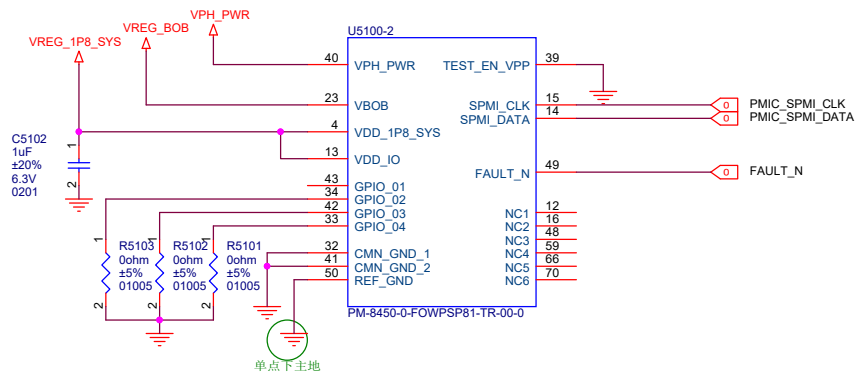

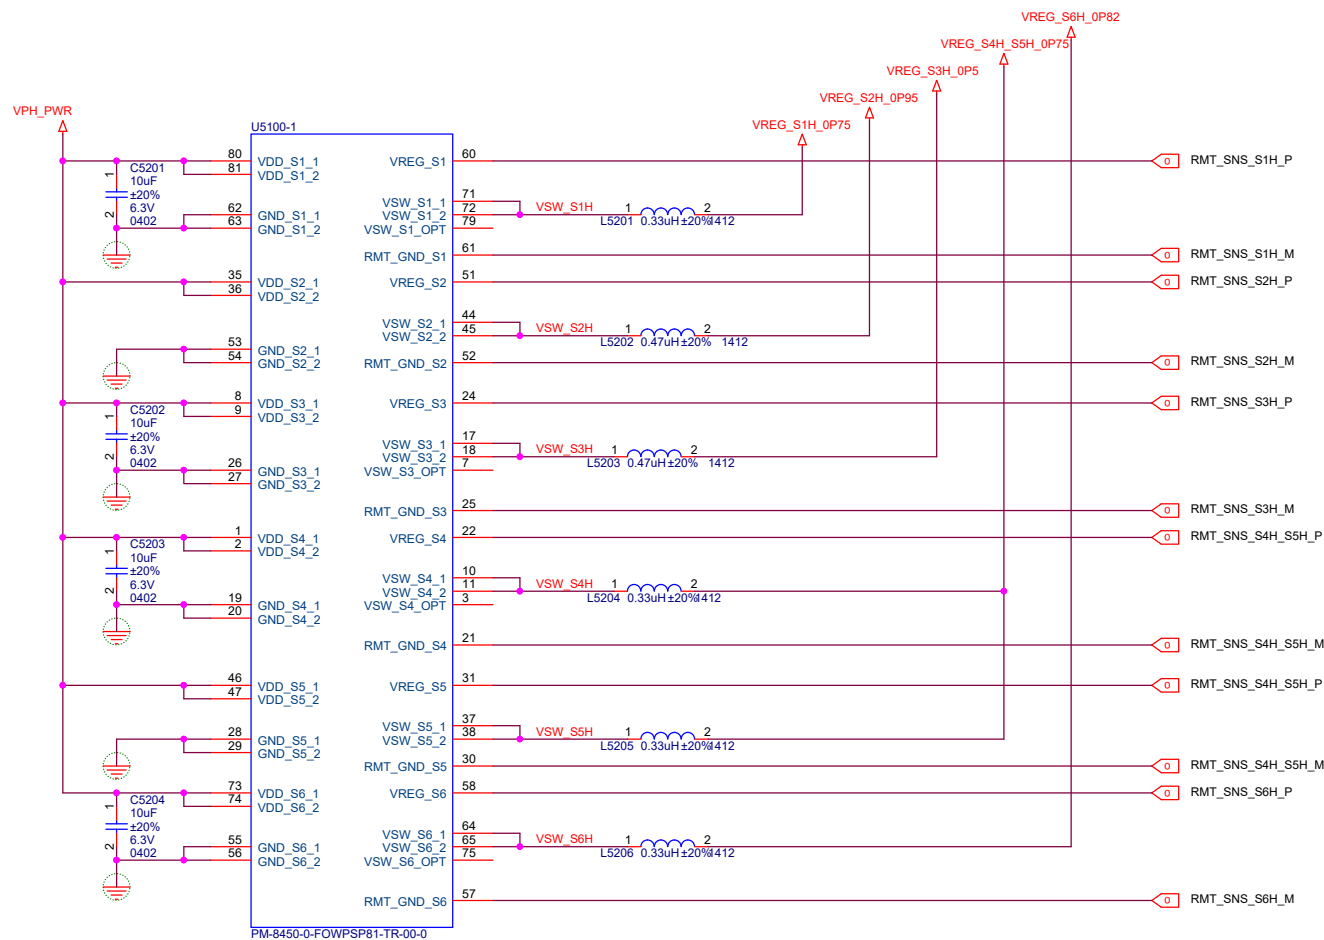


VDD APC0

LPDDR5 PHY


LPDDR5 VDDQ


VDD MM

VDD MX A

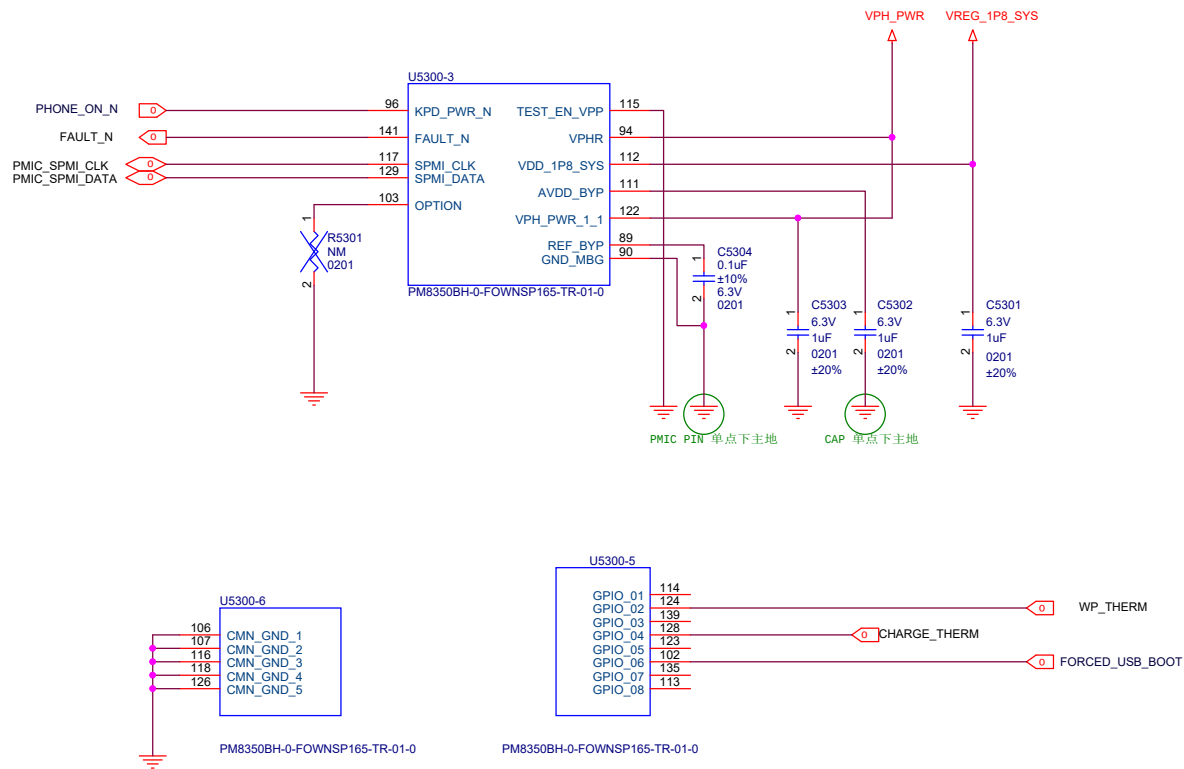

PM8350B---1S BATTERY ,low voltage VIBRATOR DRIVER
 PM8350BH---1S BATTERY ,high voltage VIBRATOR DRIVER
 PM8350BHS---2S BATTERY ,high voltage VIBRATOR DRIVER

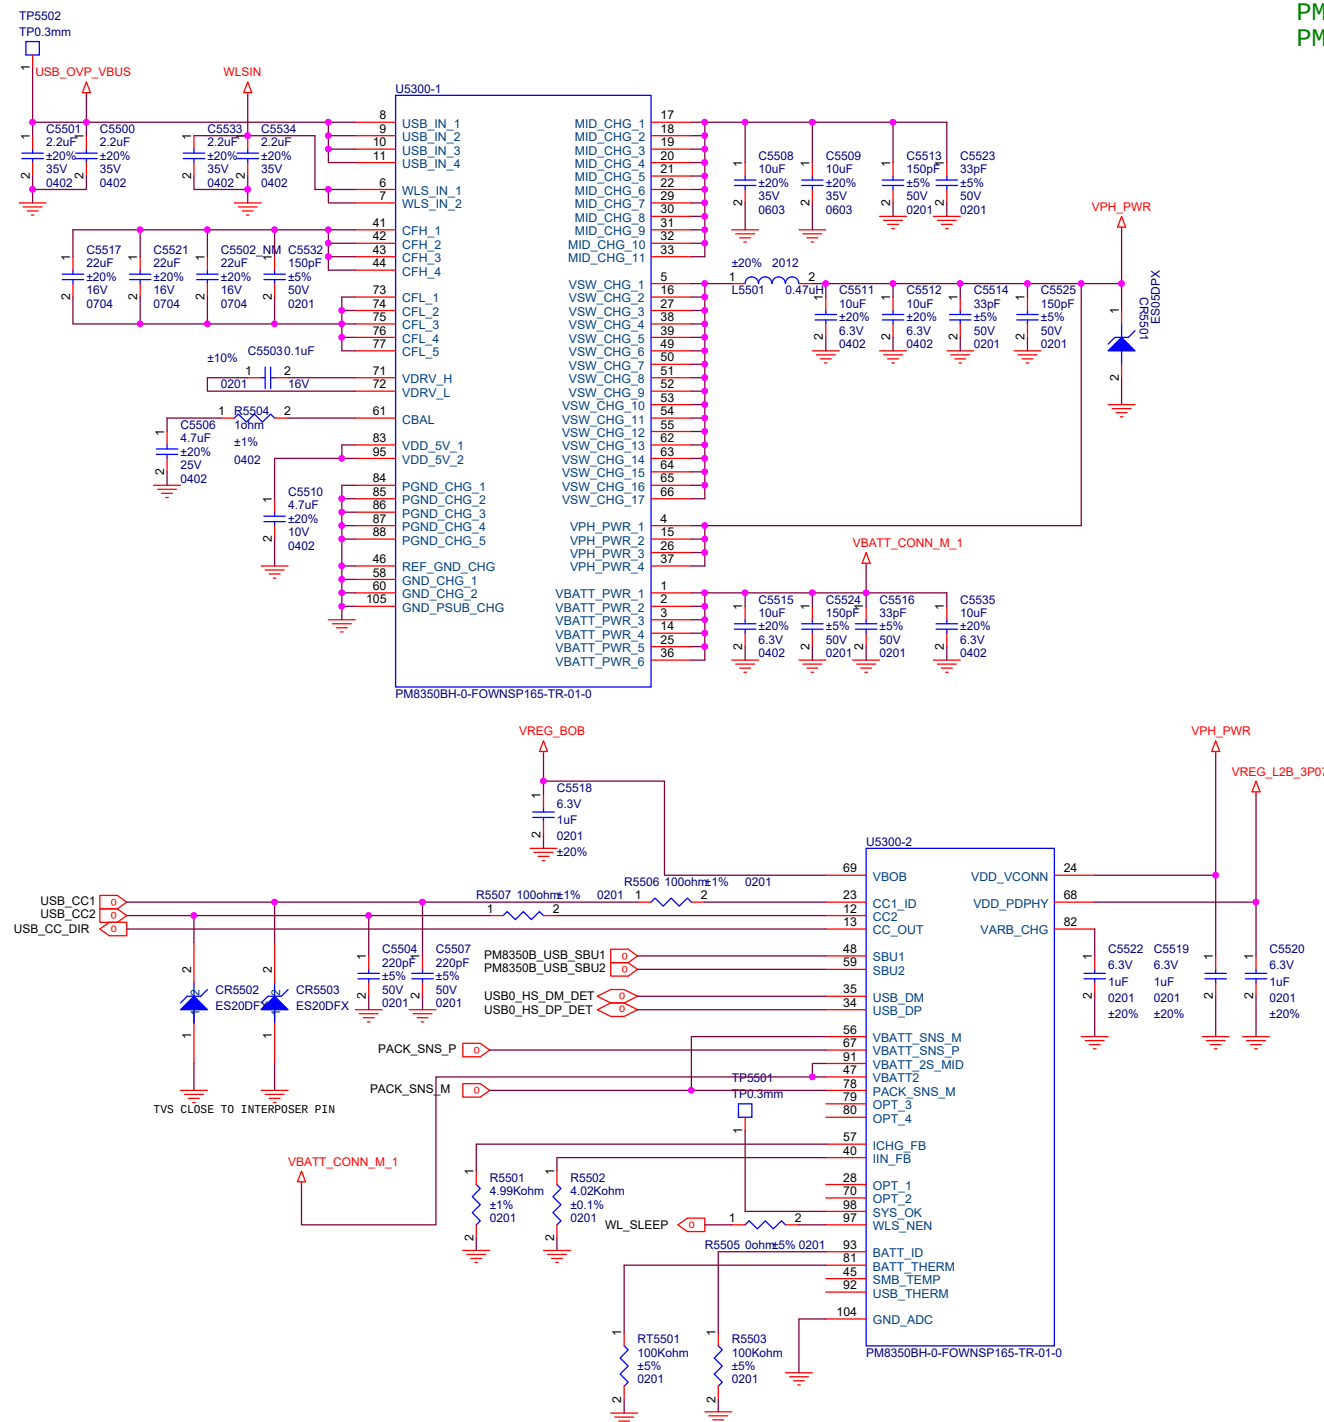

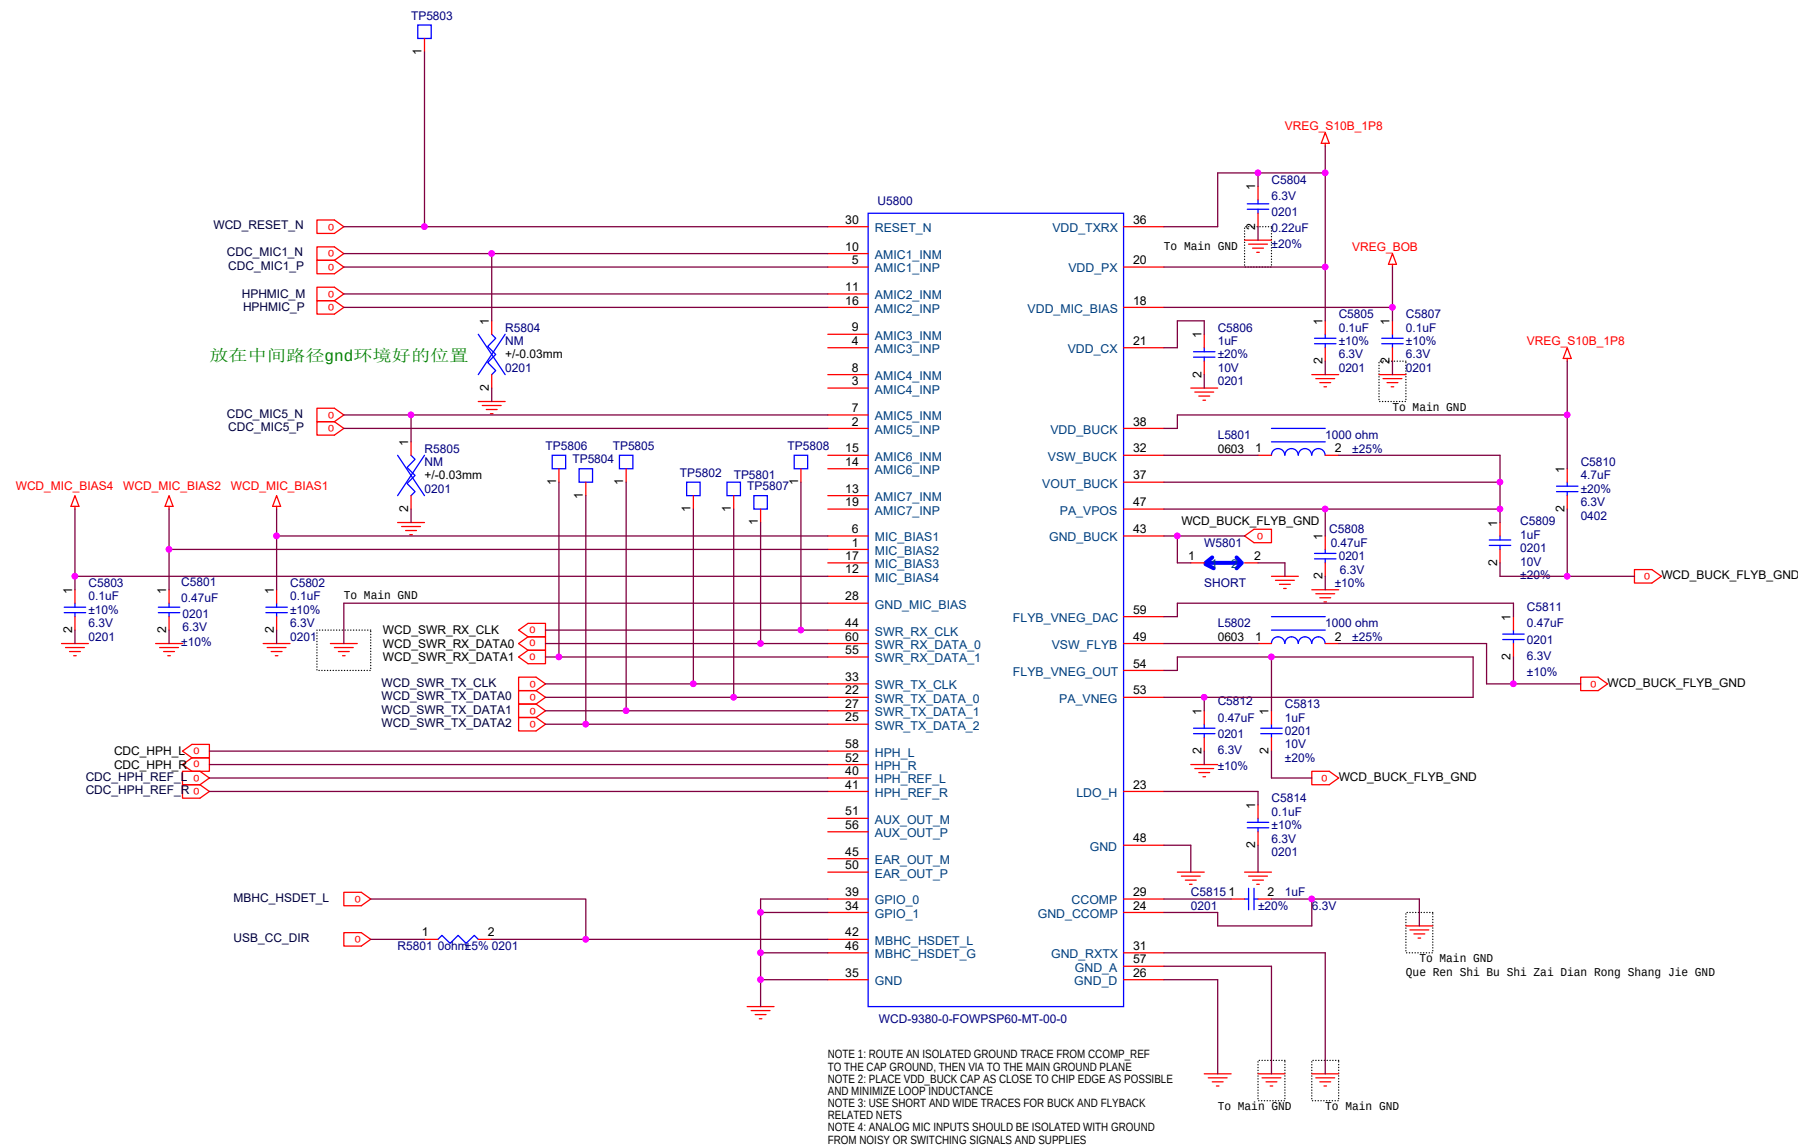

HEADSET

WCD, MIC, BAS2

HEADSET_MIC_P_5

C0004
100pF
0001
10V
05V

R0003
2.2kΩ
0001
0001

R0004
2.2kΩ
0001
0001

D0001

C0005
100nF
0001
10V
05V

R00013
10k
0001
0001

R0005
10k
0001
0001


WCD, MIC, BAS2

HEADSET_MIC_P_5


R6029, R6094, R6005靠近WCD9385 (U5800) 端放置

[illegible][illegible]

A+G

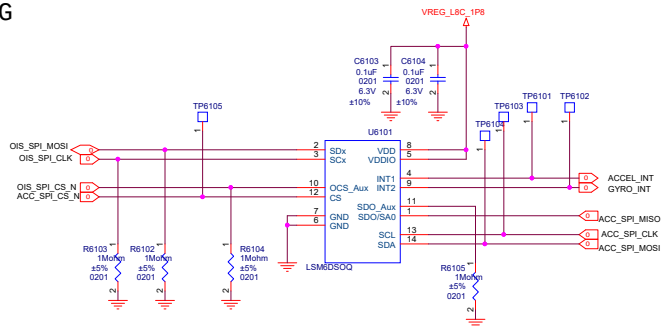


P_L-sensor

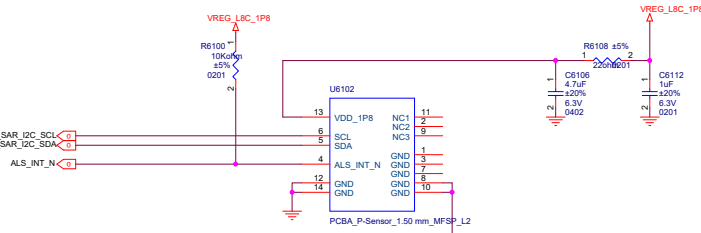

HALL


PRESSURE

Sidekey

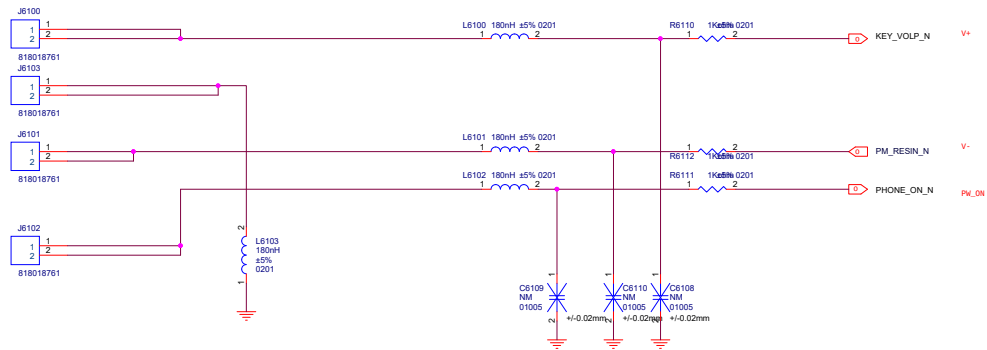




COMPASS

COMPASS

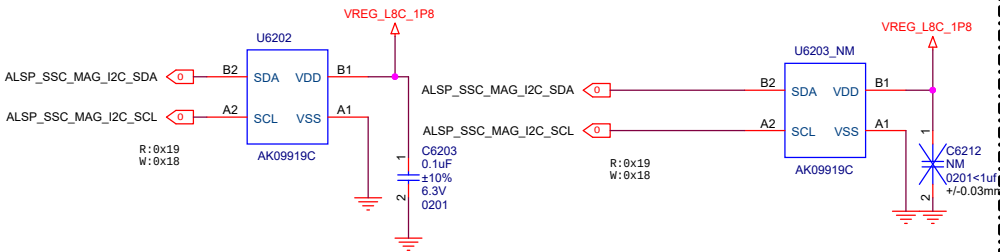



INFRARED

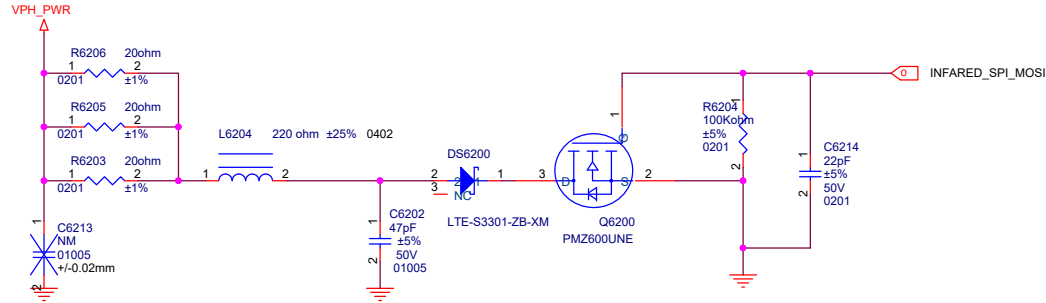

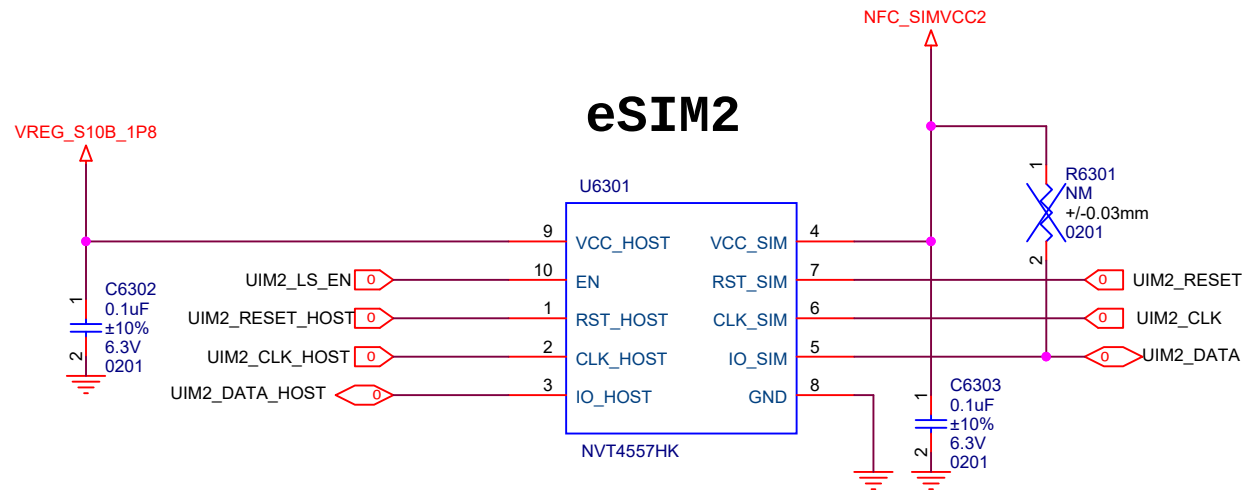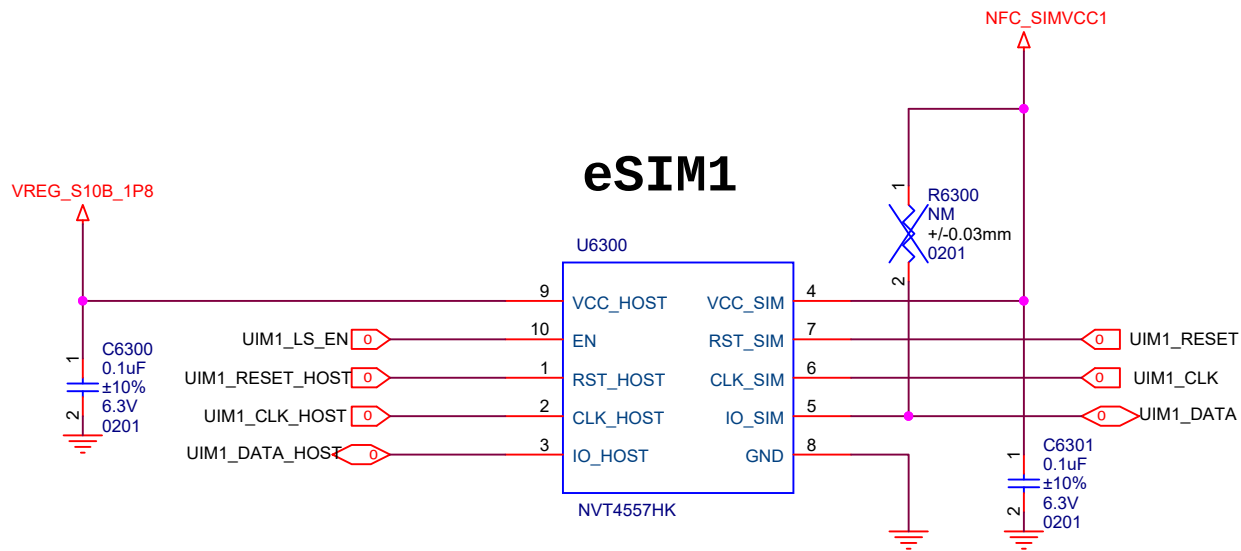


一供NVT4557HK, 二供PI4ULS3V4103


Title		L2_MAIN		
Size	A4	Document Number	SIM	
Date:	Friday, April 08, 2022		Sheet	
2		63		of 79
Rev		P0		

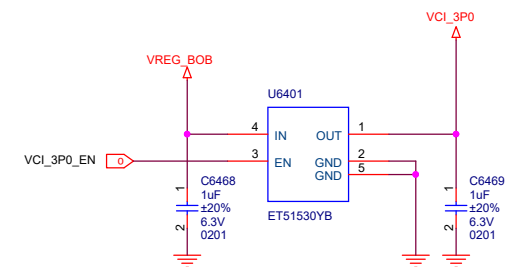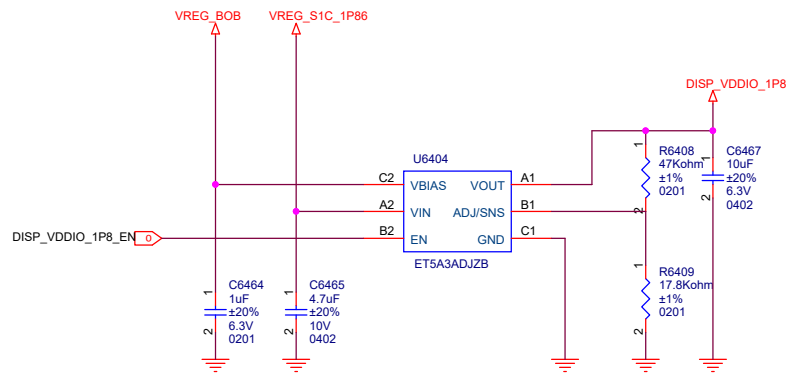


WIDE DVDD

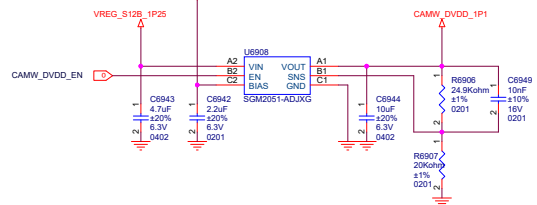





WIDE AVDD2

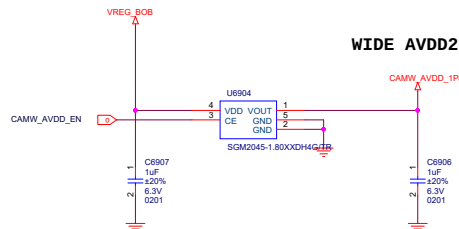


FRONT DVDD


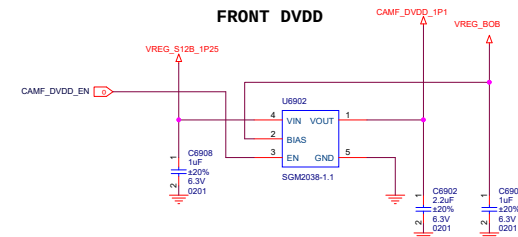


PM8008

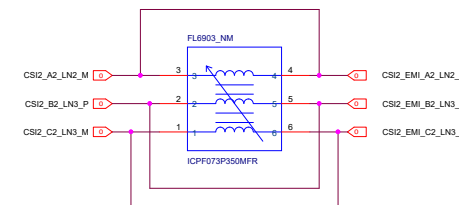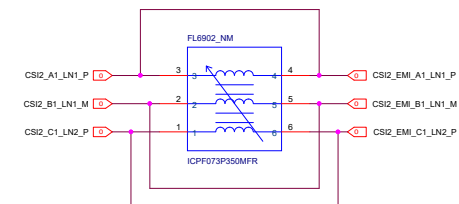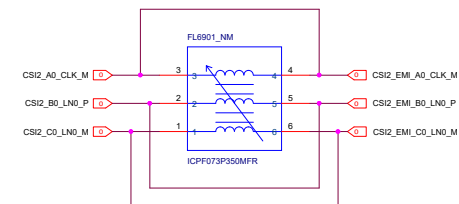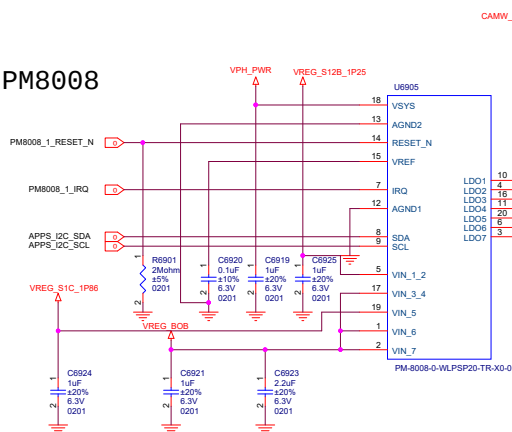


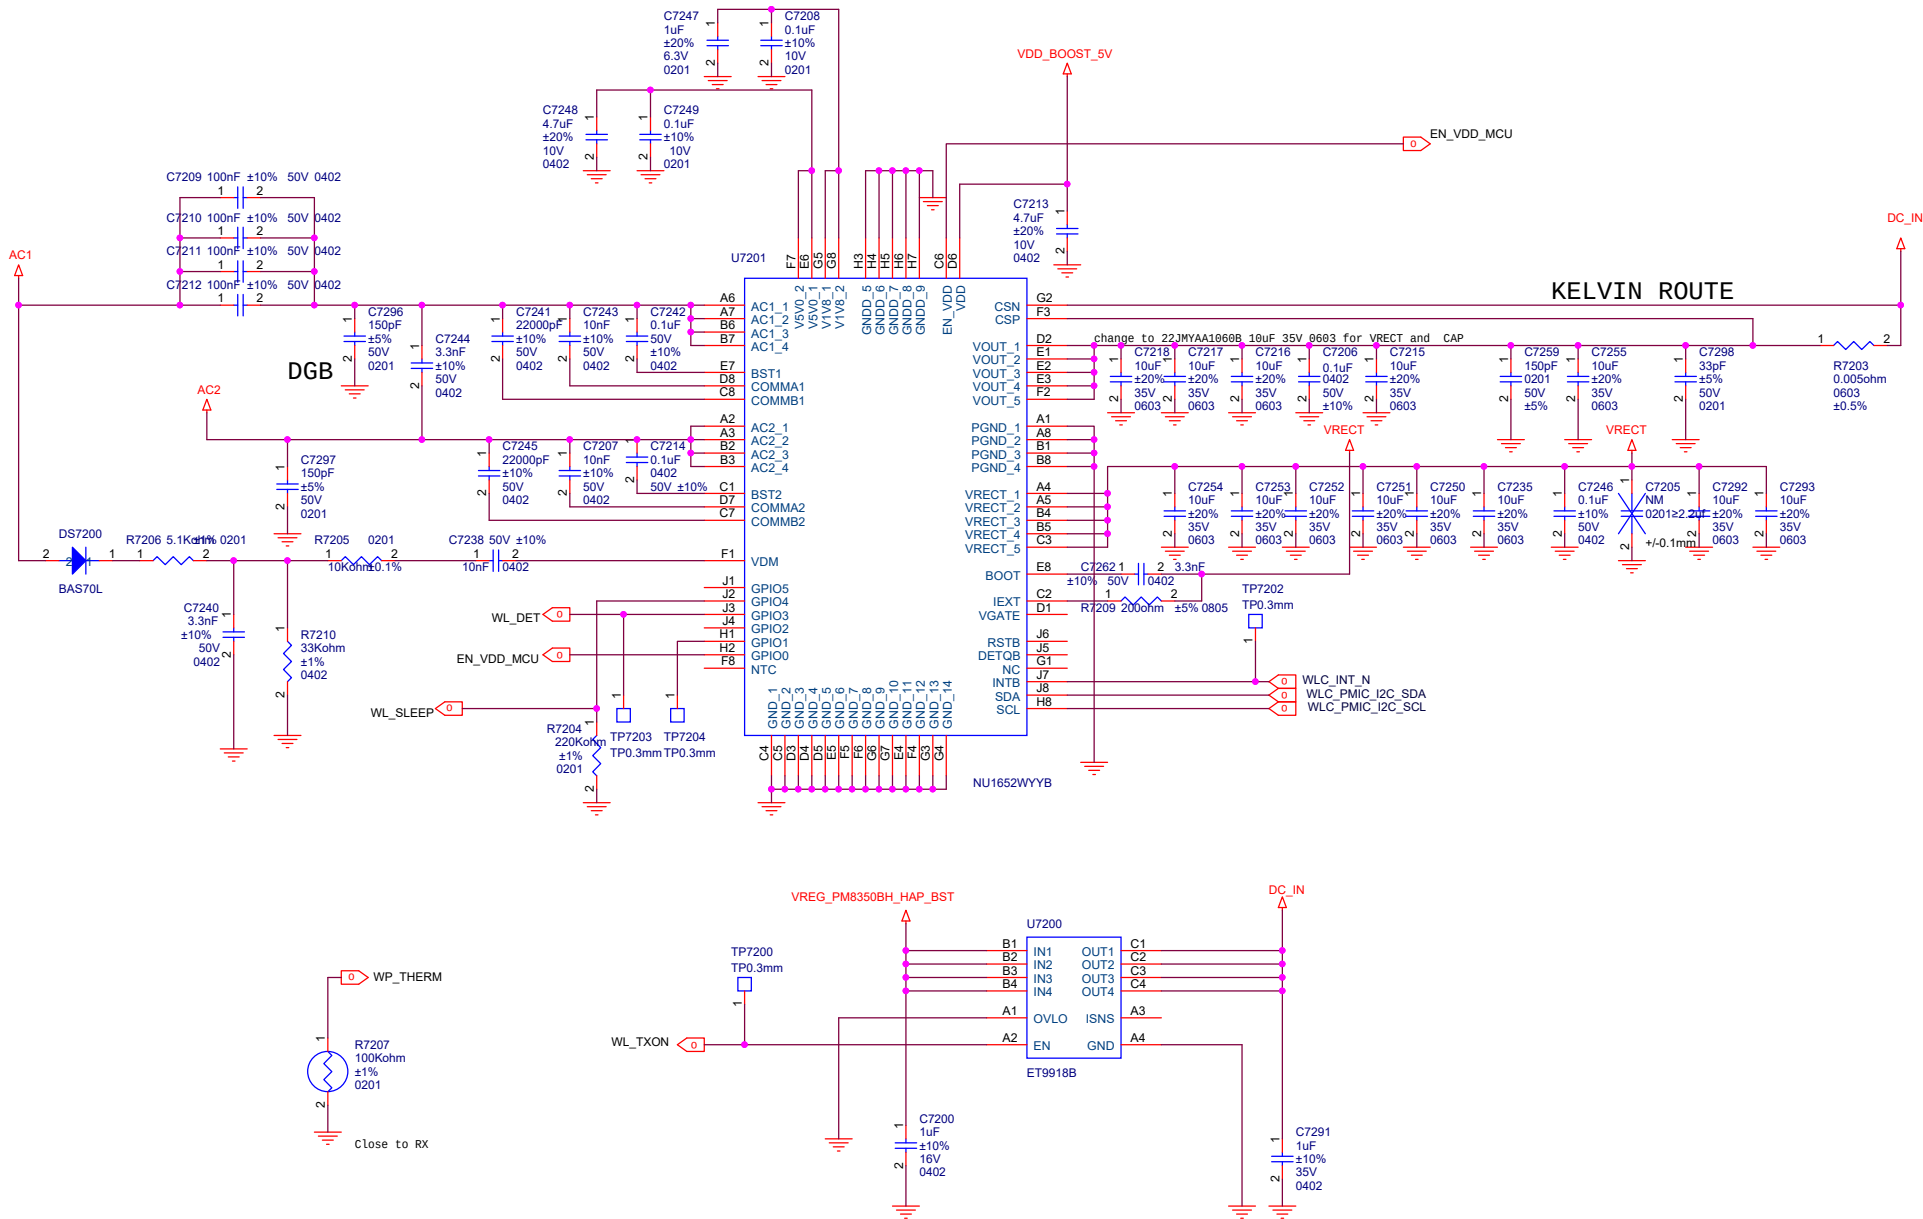



屏蔽罩

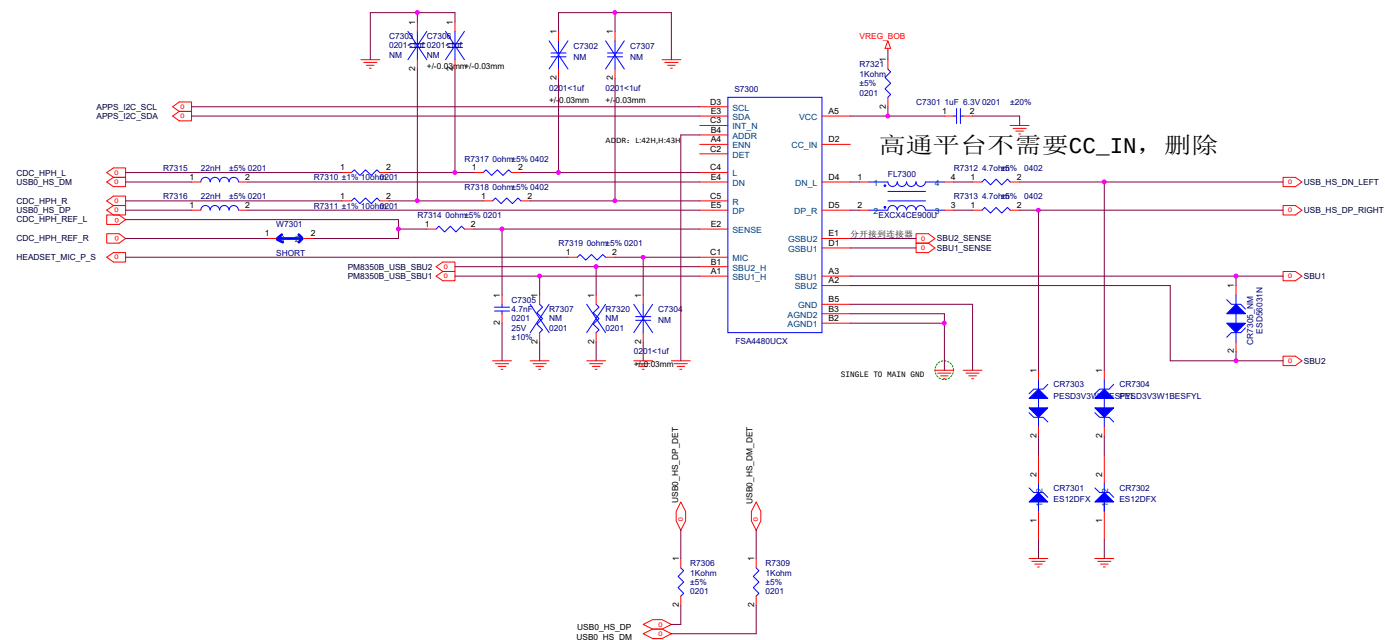




SEC_BAT_BtoB

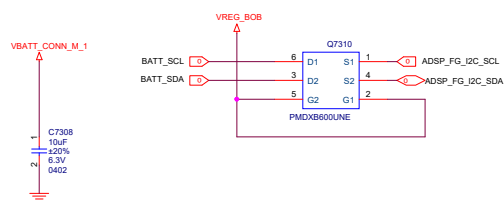









ANT7 N41

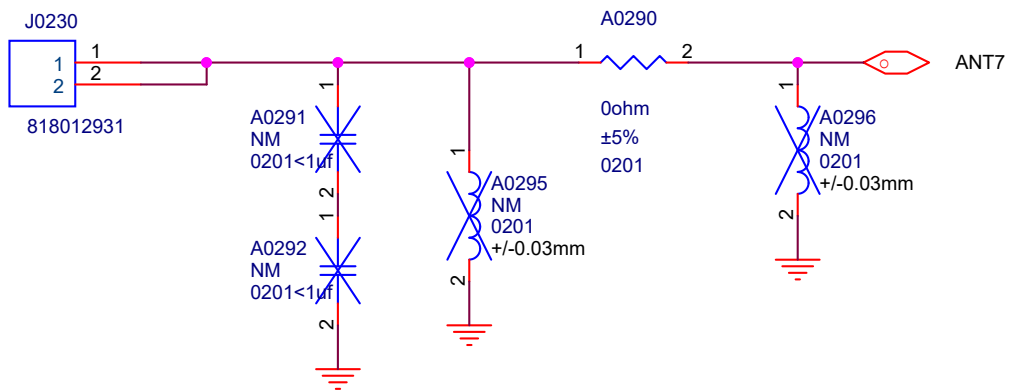


Title			
<Title>			
Size	Document Number		Rev
A	<Doc>		<RevCode>
Date:	Thursday, May 05, 2022		Sheet 1 of 1

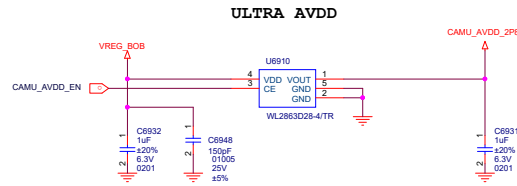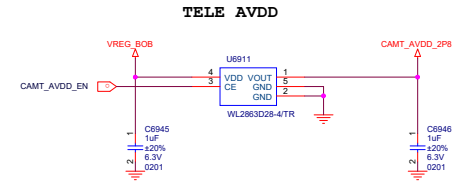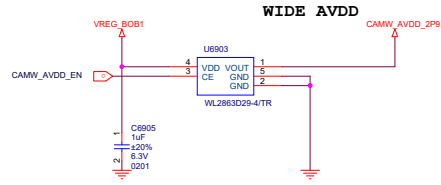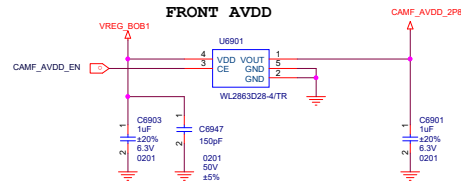


Title			
<Title>			
Size	Document Number	Rev	
A2	<Doc>	<Rev Code>	
Date:	Thursday, May 05, 2022	Sheet	1 of 1

ANT0

CN
MHB_DM
LB_TRX
N1/N3/N41 SA_DM
N28 SA_PRX
N41 NSA_DRX



ANT7(LDS)
CN
N41 NSA_PM+

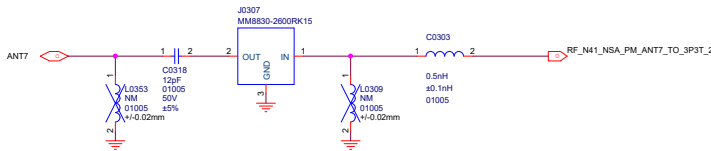


WIFI+GPS

ANT16 GPS L1+WIFI2.4 CHAIN0

ANT1

CN
LB_DRX
N28 SA_DRX

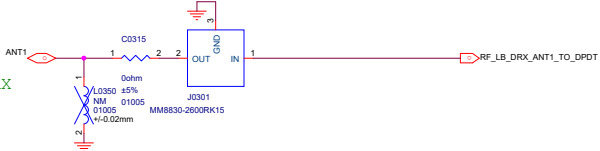


ANT10
n77/n78/n79 TRX

ANT2

CN
N5 PRX2
N8 PRX2

ANT3

CN
MHB_TRX
N1/N3/N41 SA_TRX




可根据PCB布局情况删除

ANT11
N77/N78/N79 DRX

ANT4

CN
MHB_PM
n41 NSA_TRX
n1/n3/n41 SA_PM
N41 SA_TX1

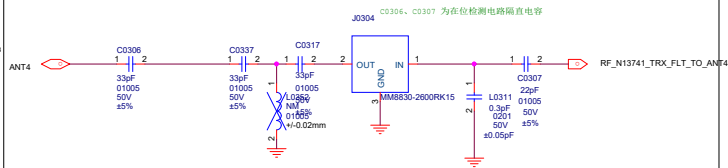

ANT12
N77/N78/N79 DM

ANT13 n77/n78/n79 PM


ANT17 WIFI 6E CHAIN0

ANT18 WIFI2.4G+WIFI6E CHAIN1

ANT19 GPS L5






ANT5



CN
MHB_DRX
n41 DM
n1/n3/n41 SA_DRX
N41 NSA_DM

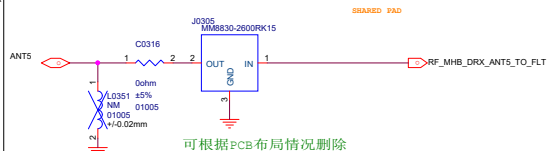









可根据PCB布局情况删除

			
Title			
L2_MAIN			
Size	Document Number	Rev	
A2	RF_CONN	P0	
Date:	Thursday, May 05, 2022	Sheet	3 of 79

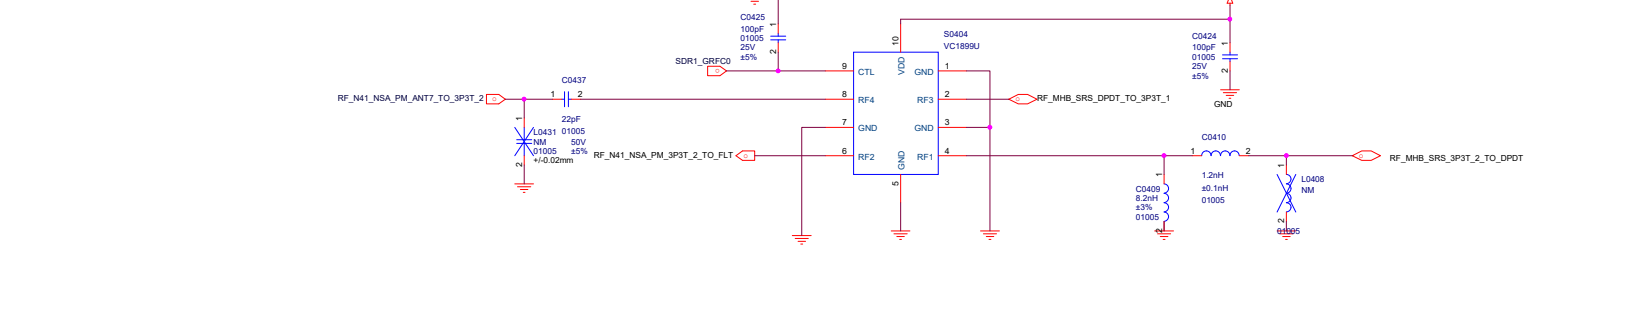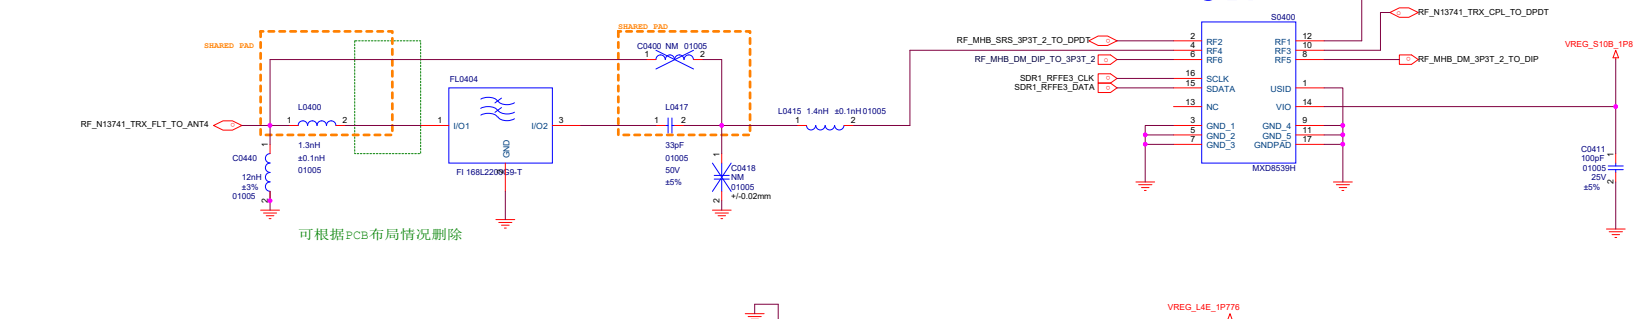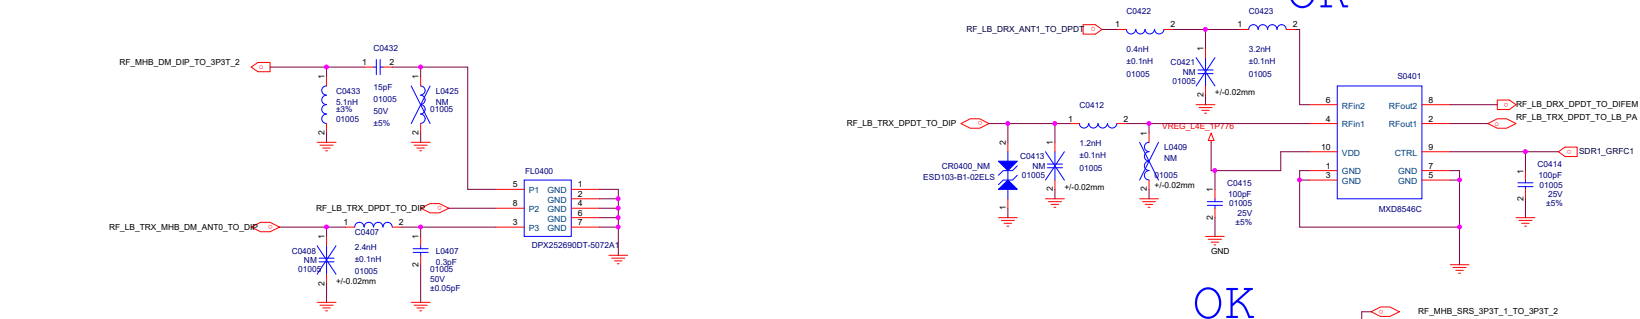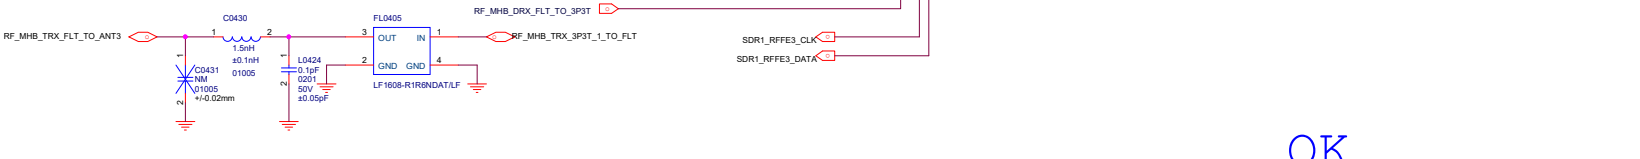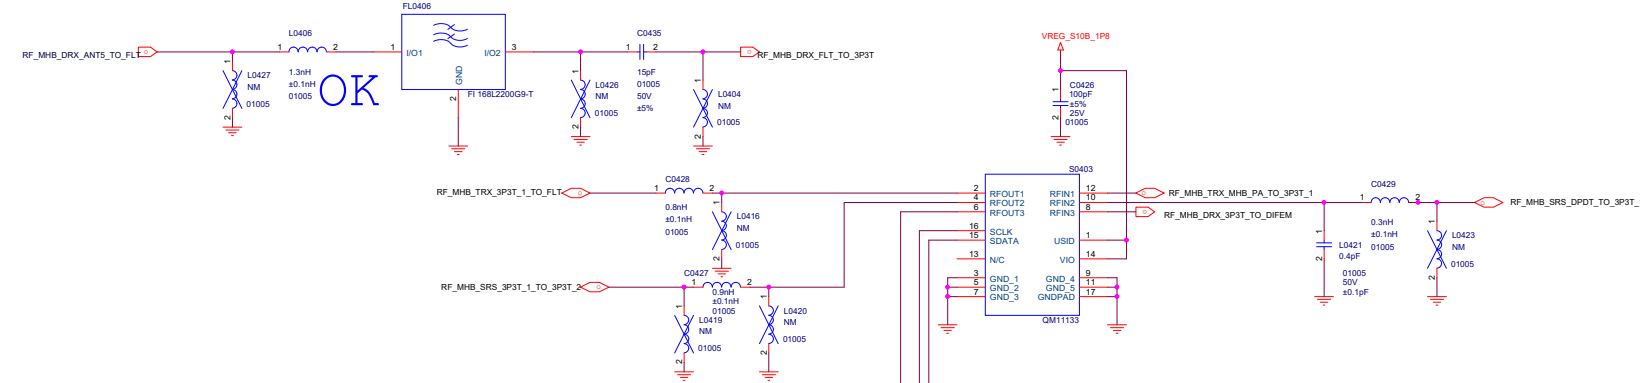

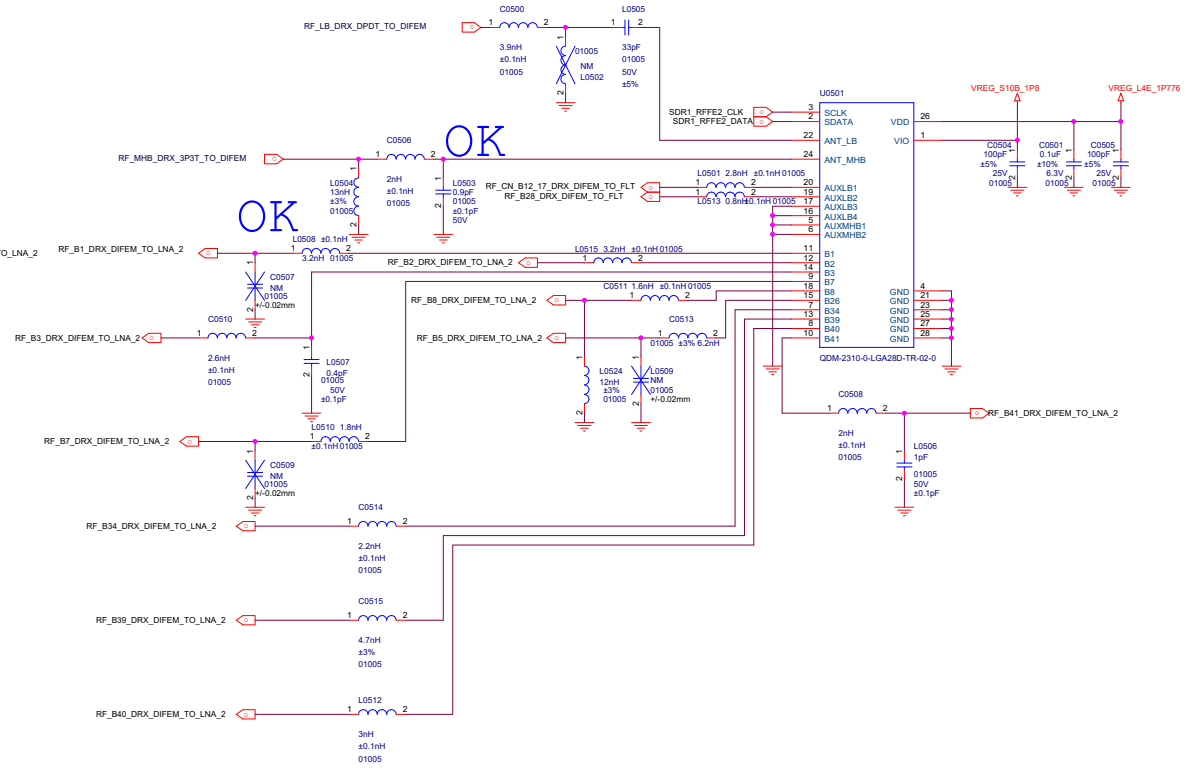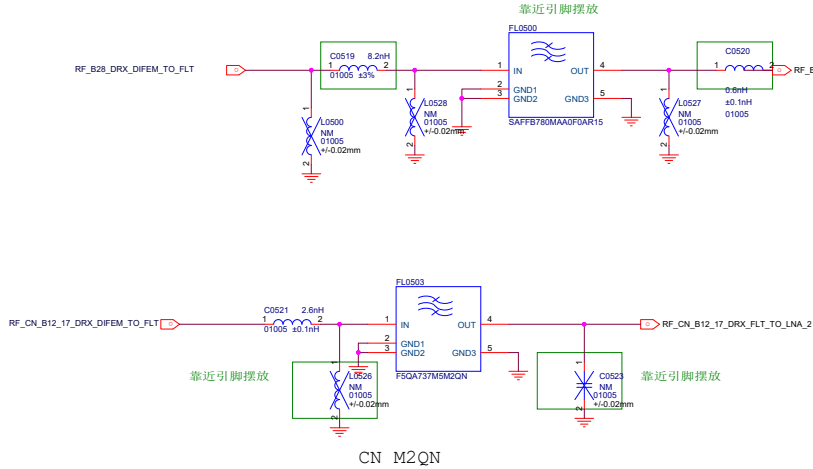


LB TAS DPDT

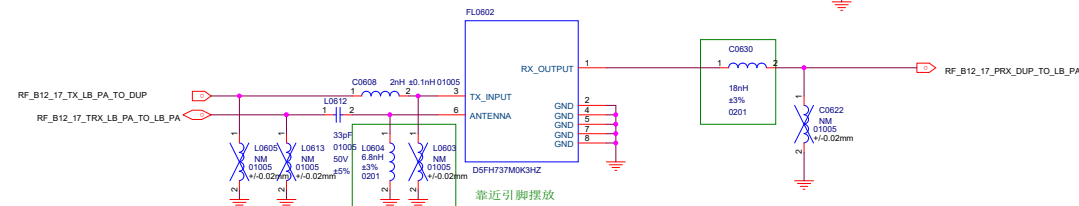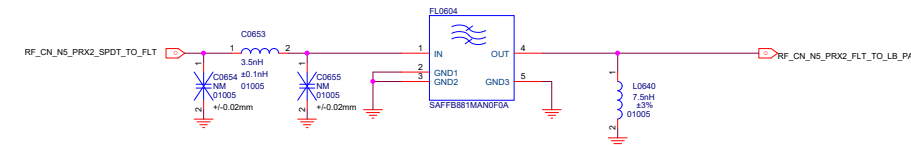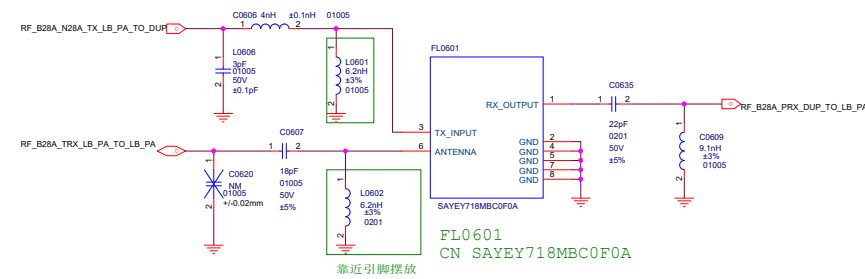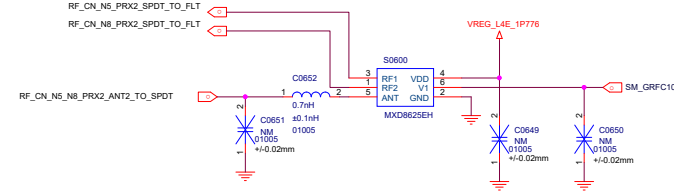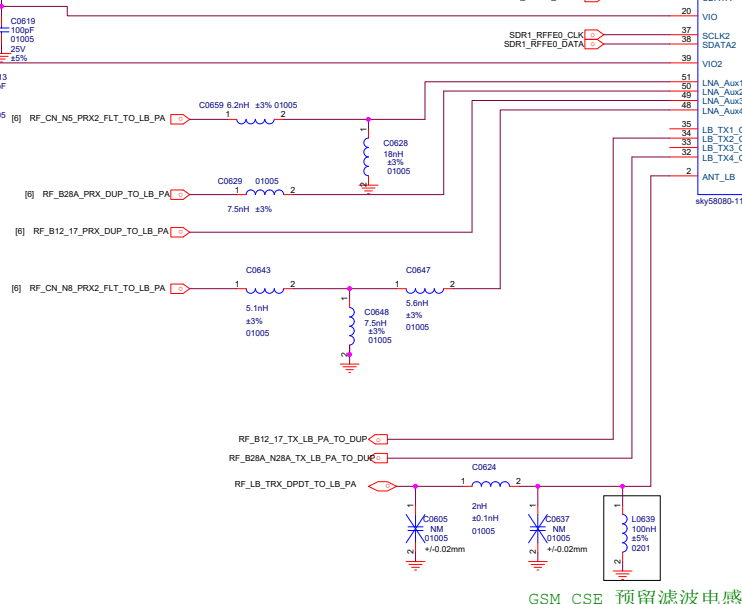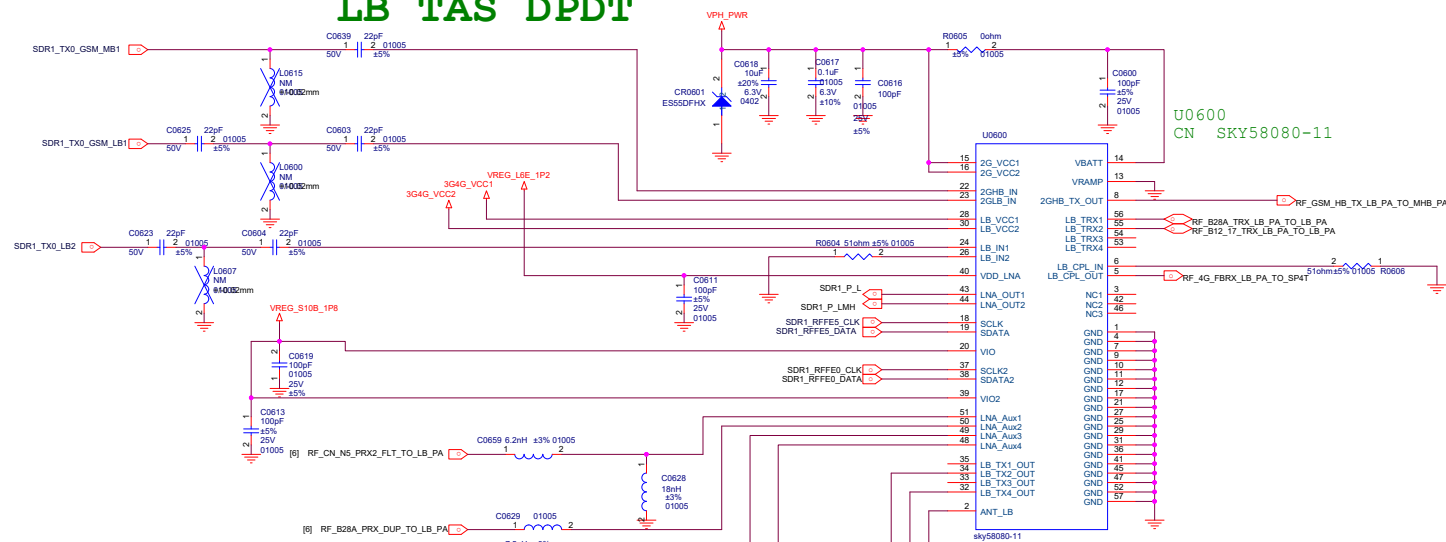

FL0602
CN B12 200200002X96

Title		L2_MAIN		
Size A2	Document Number LB PA		Rev P0	
Date:	Thursday, May 05, 2022	Sheet	6	of 80

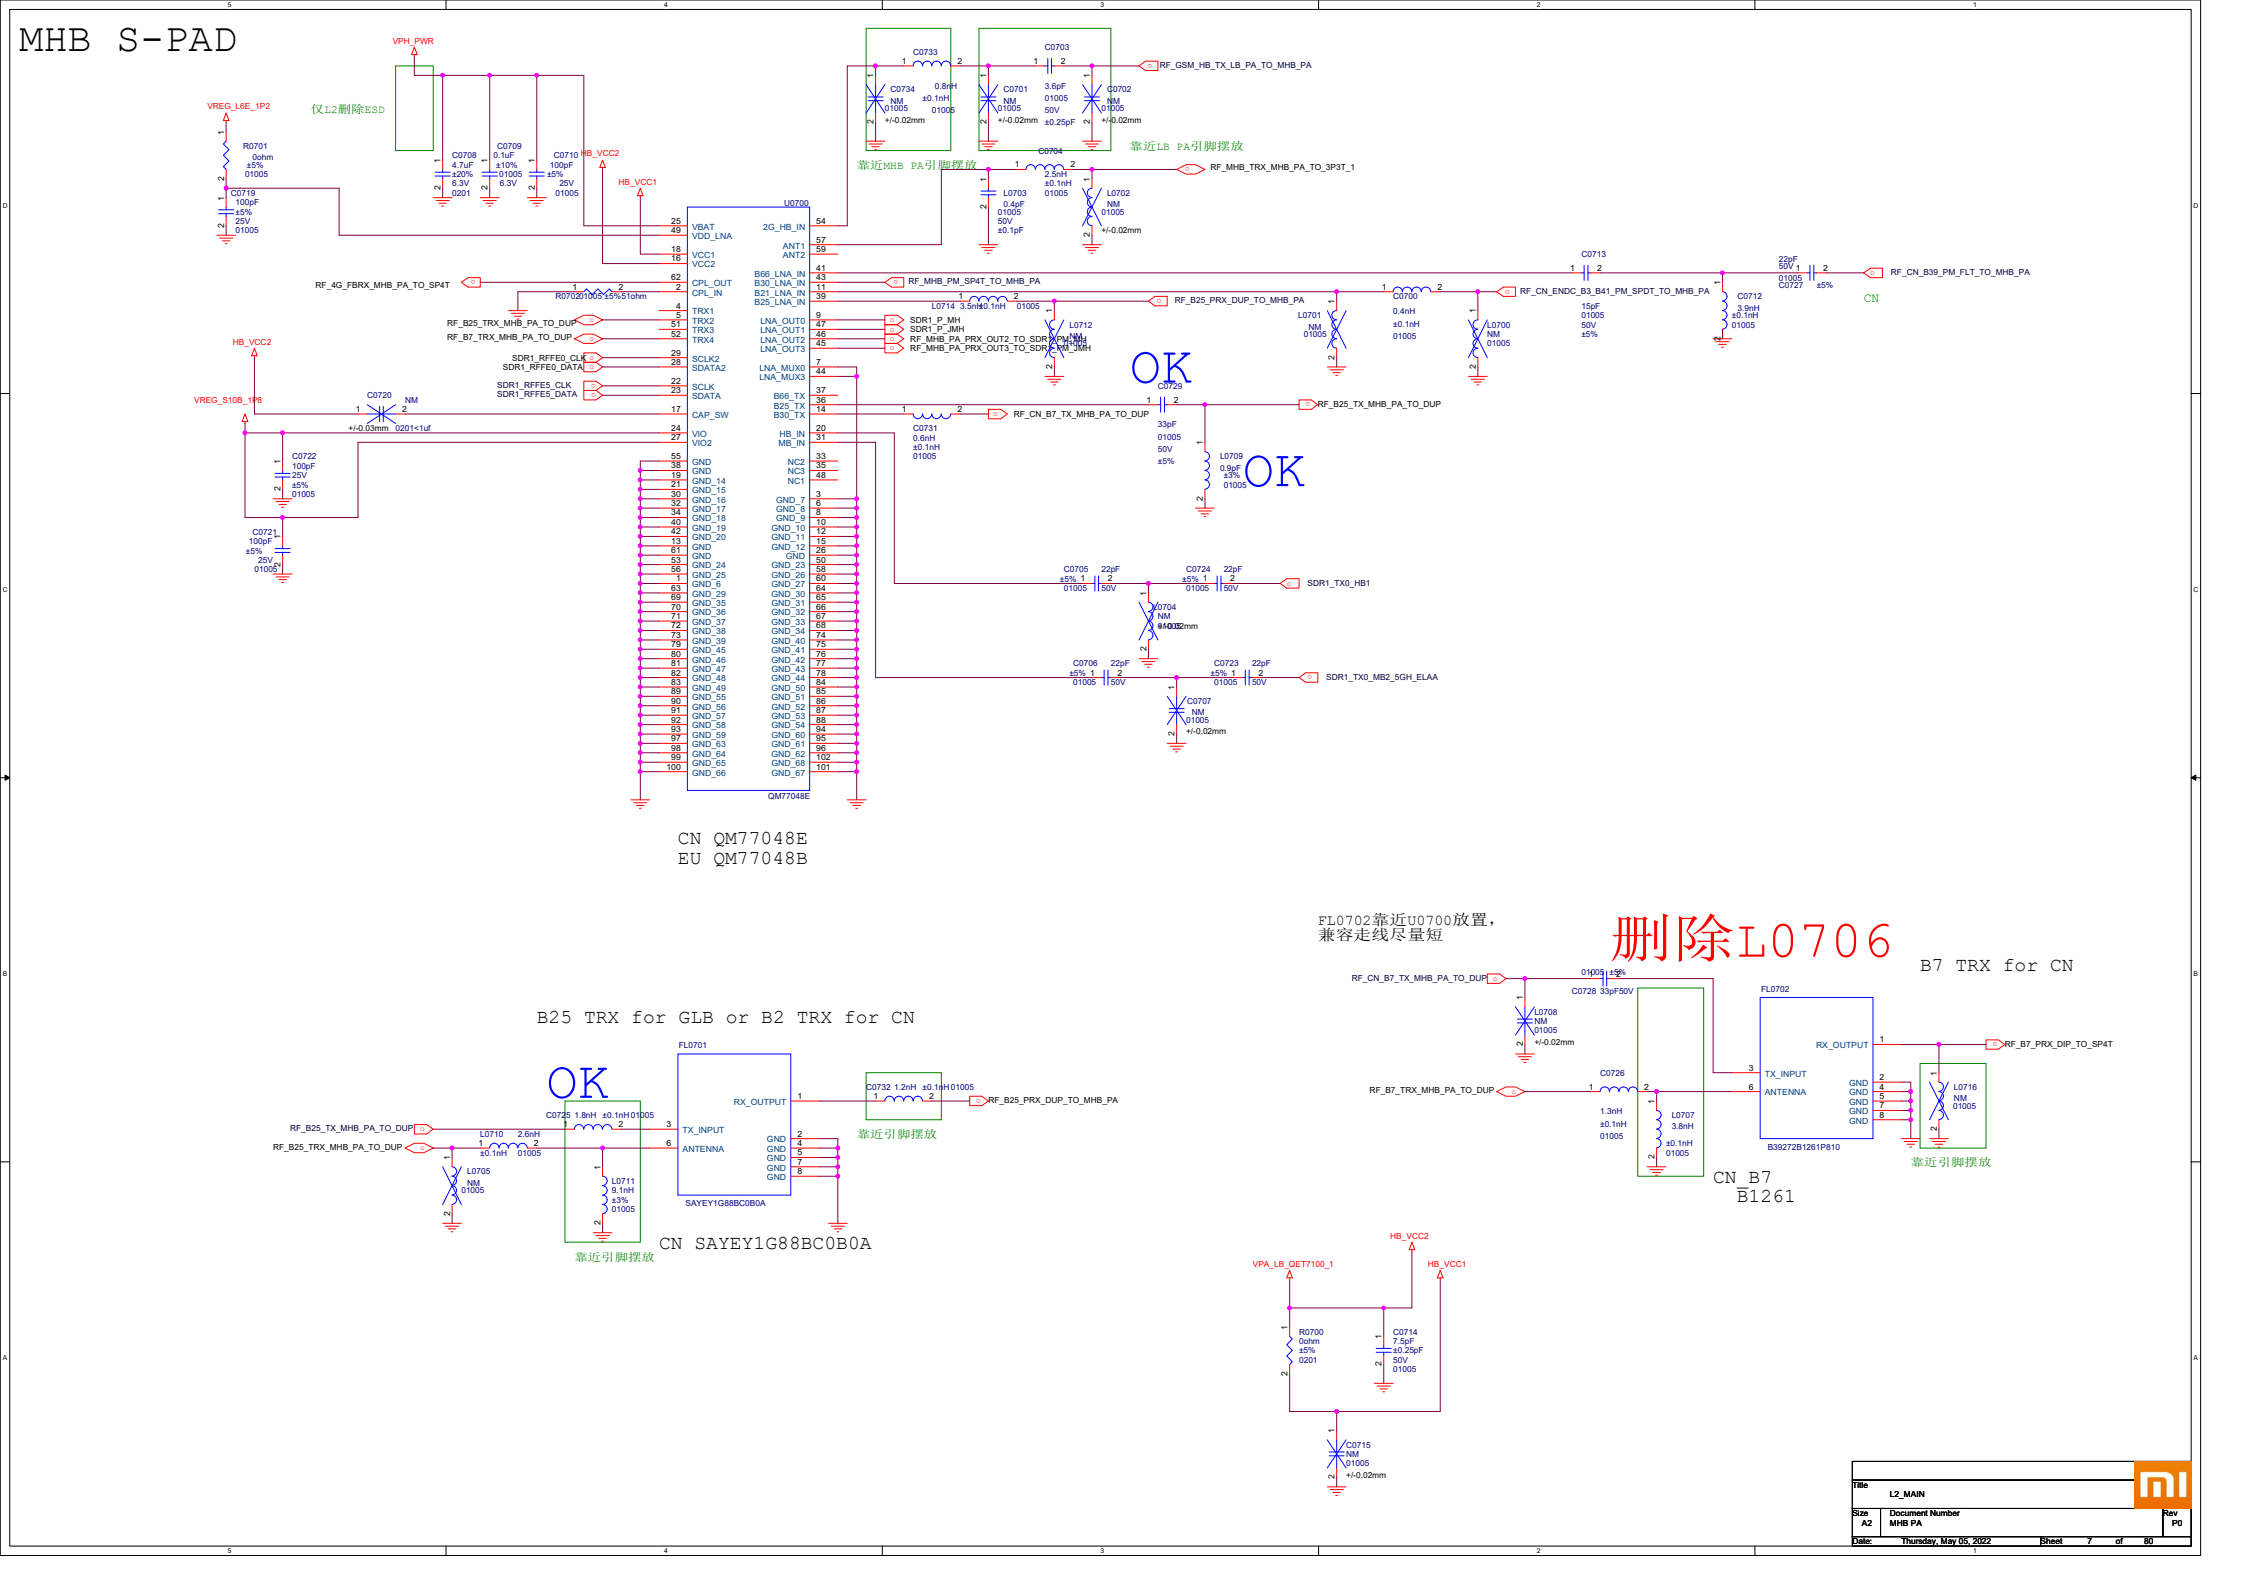[illegible]

MHB S-PAD

仅L2删除ESD

靠近HB PA引脚摆放

靠近LB PA引脚摆放

OK

OK

FL0702靠近U0700放置，兼容走线尽量短

删除L0706

B7 TRX for CN

OK

靠近引脚摆放

靠近引脚摆放

CN SAYEY1G88BC0B0A

CN B7 B1261

Rev P0

File	L2_MAIN
Size	A2
Document Number	MHB PA
Date	Thursday, May 05, 2022
Sheet	7 of 80

MHB S-PAD

仅L2删除ESD

靠近HB PA引脚摆放

靠近LB PA引脚摆放

OK

OK

FL0702靠近U0700放置，兼容走线尽量短

删除L0706

B7 TRX for CN

OK

靠近引脚摆放




靠近引脚摆放


CN SAYEY1G88BC0B0A


CN B7 B1261


Rev P0


File	L2_MAIN
Size	A2
Document Number	MHB PA
Date	Thursday, May 05, 2022
Sheet	7 of 80

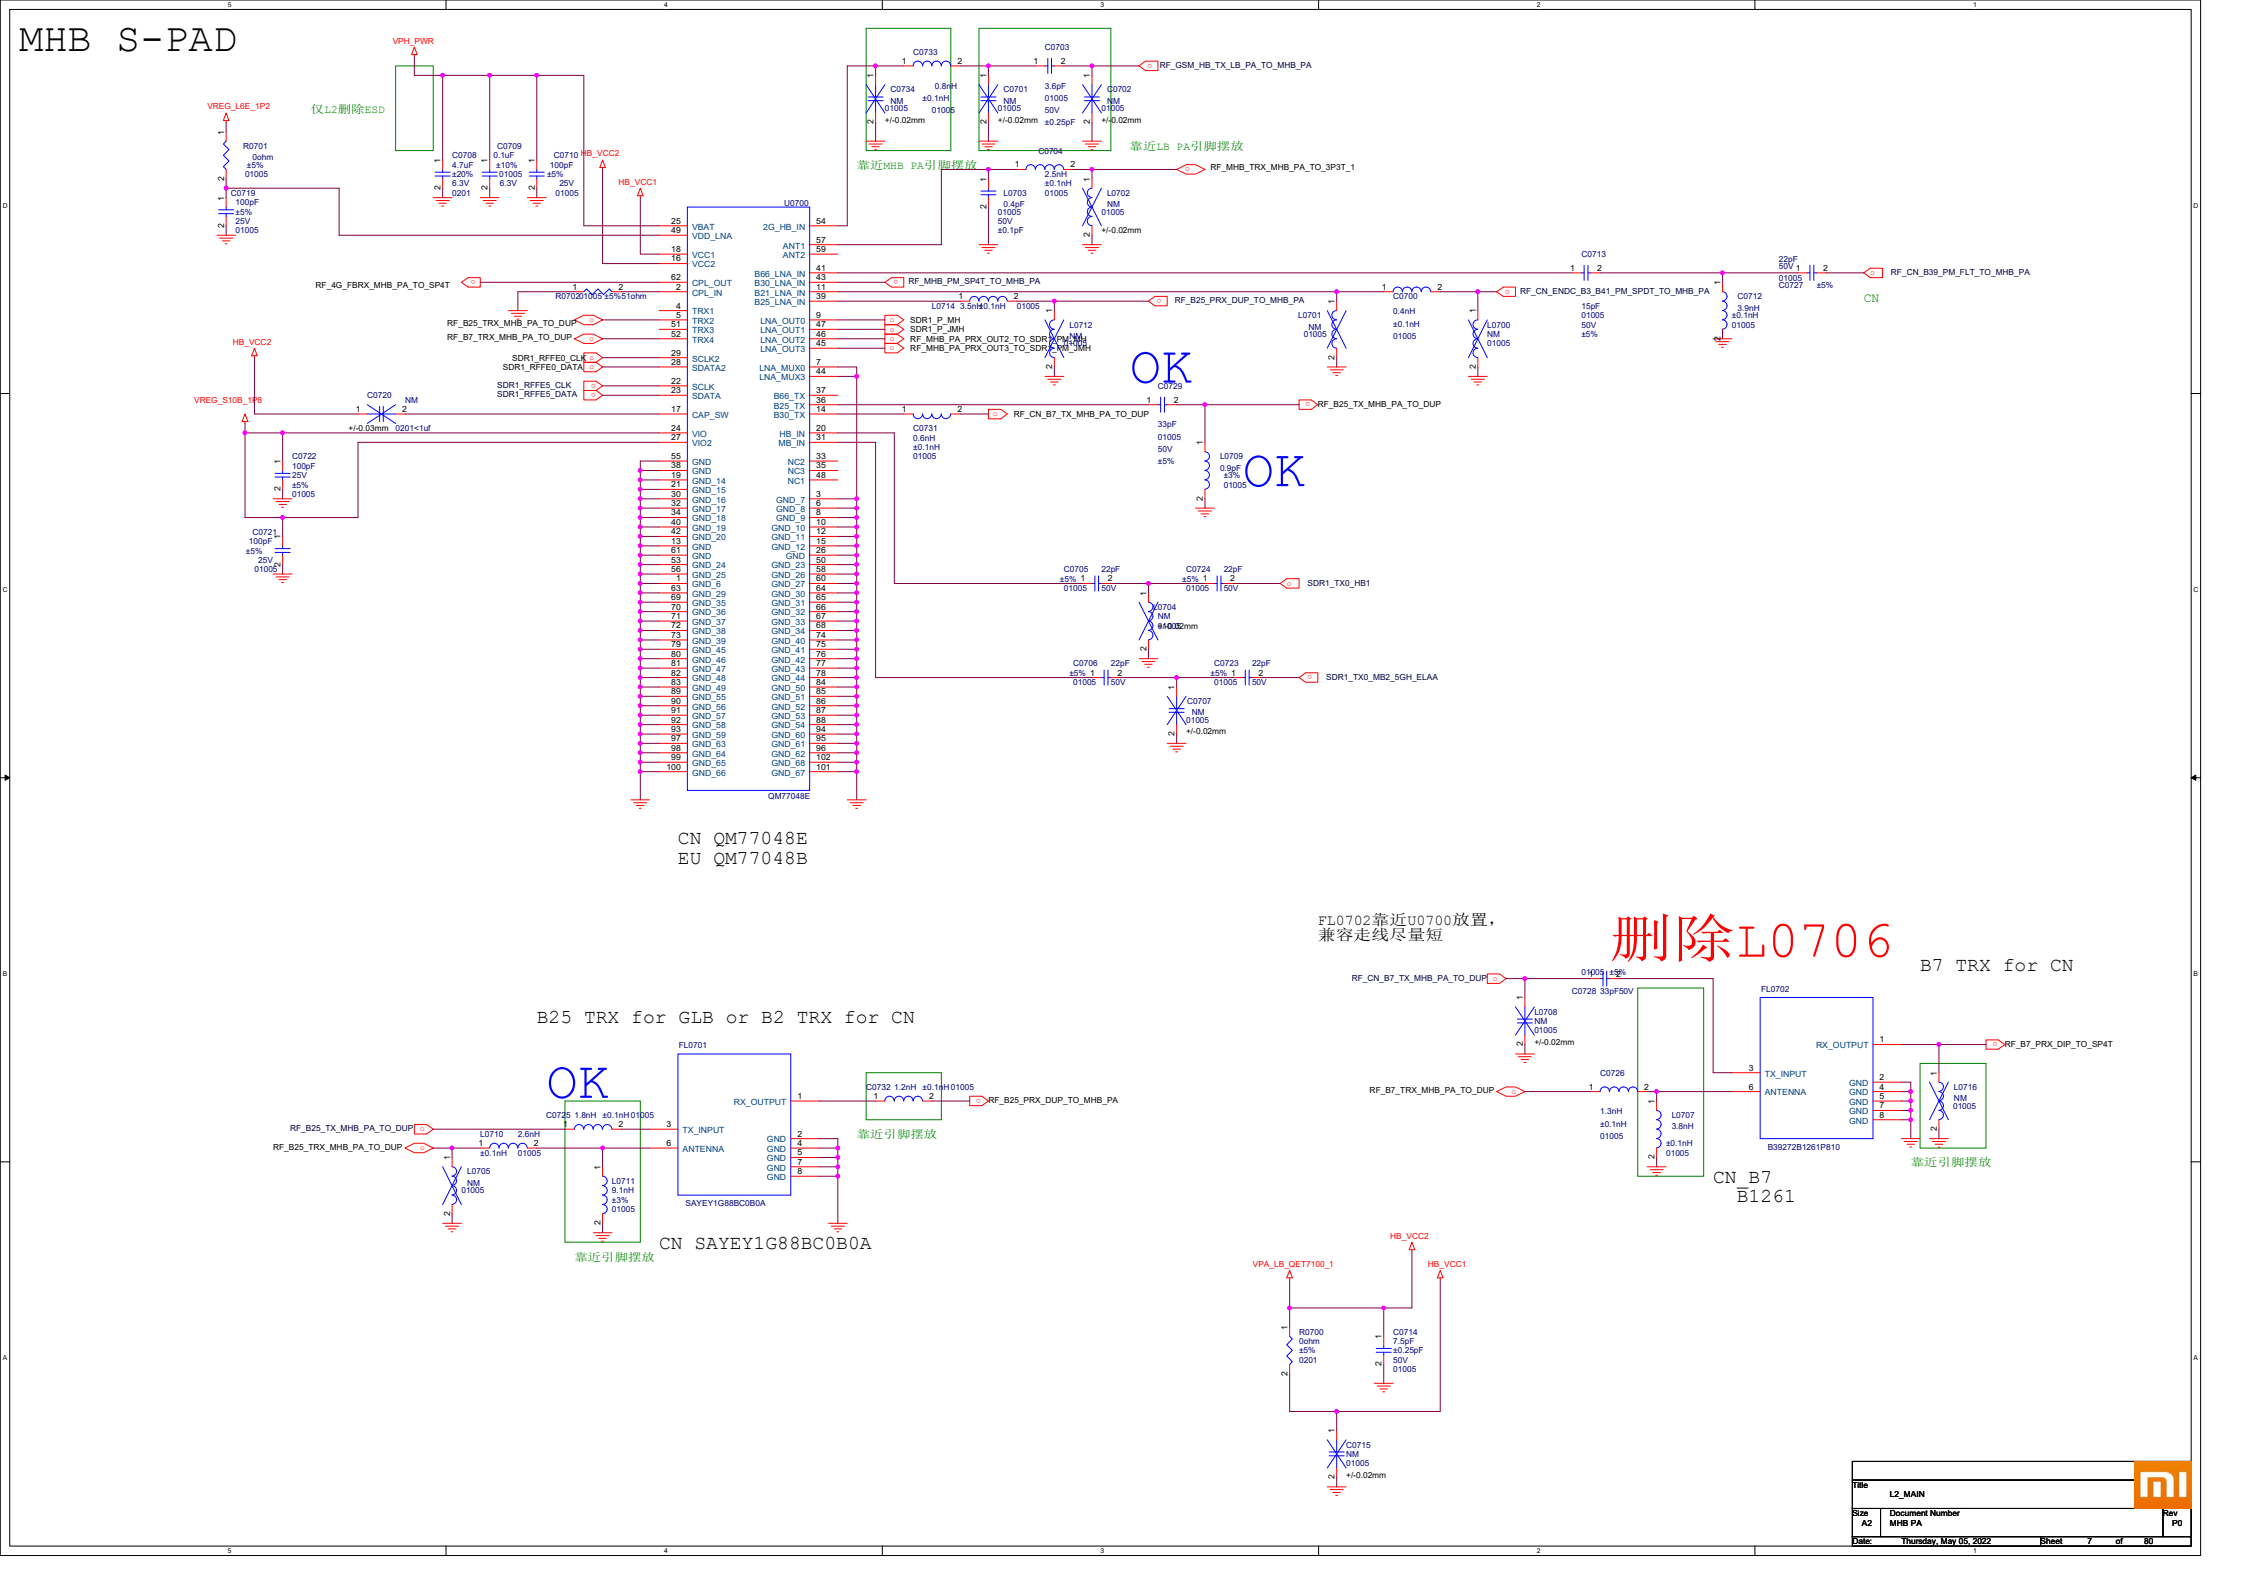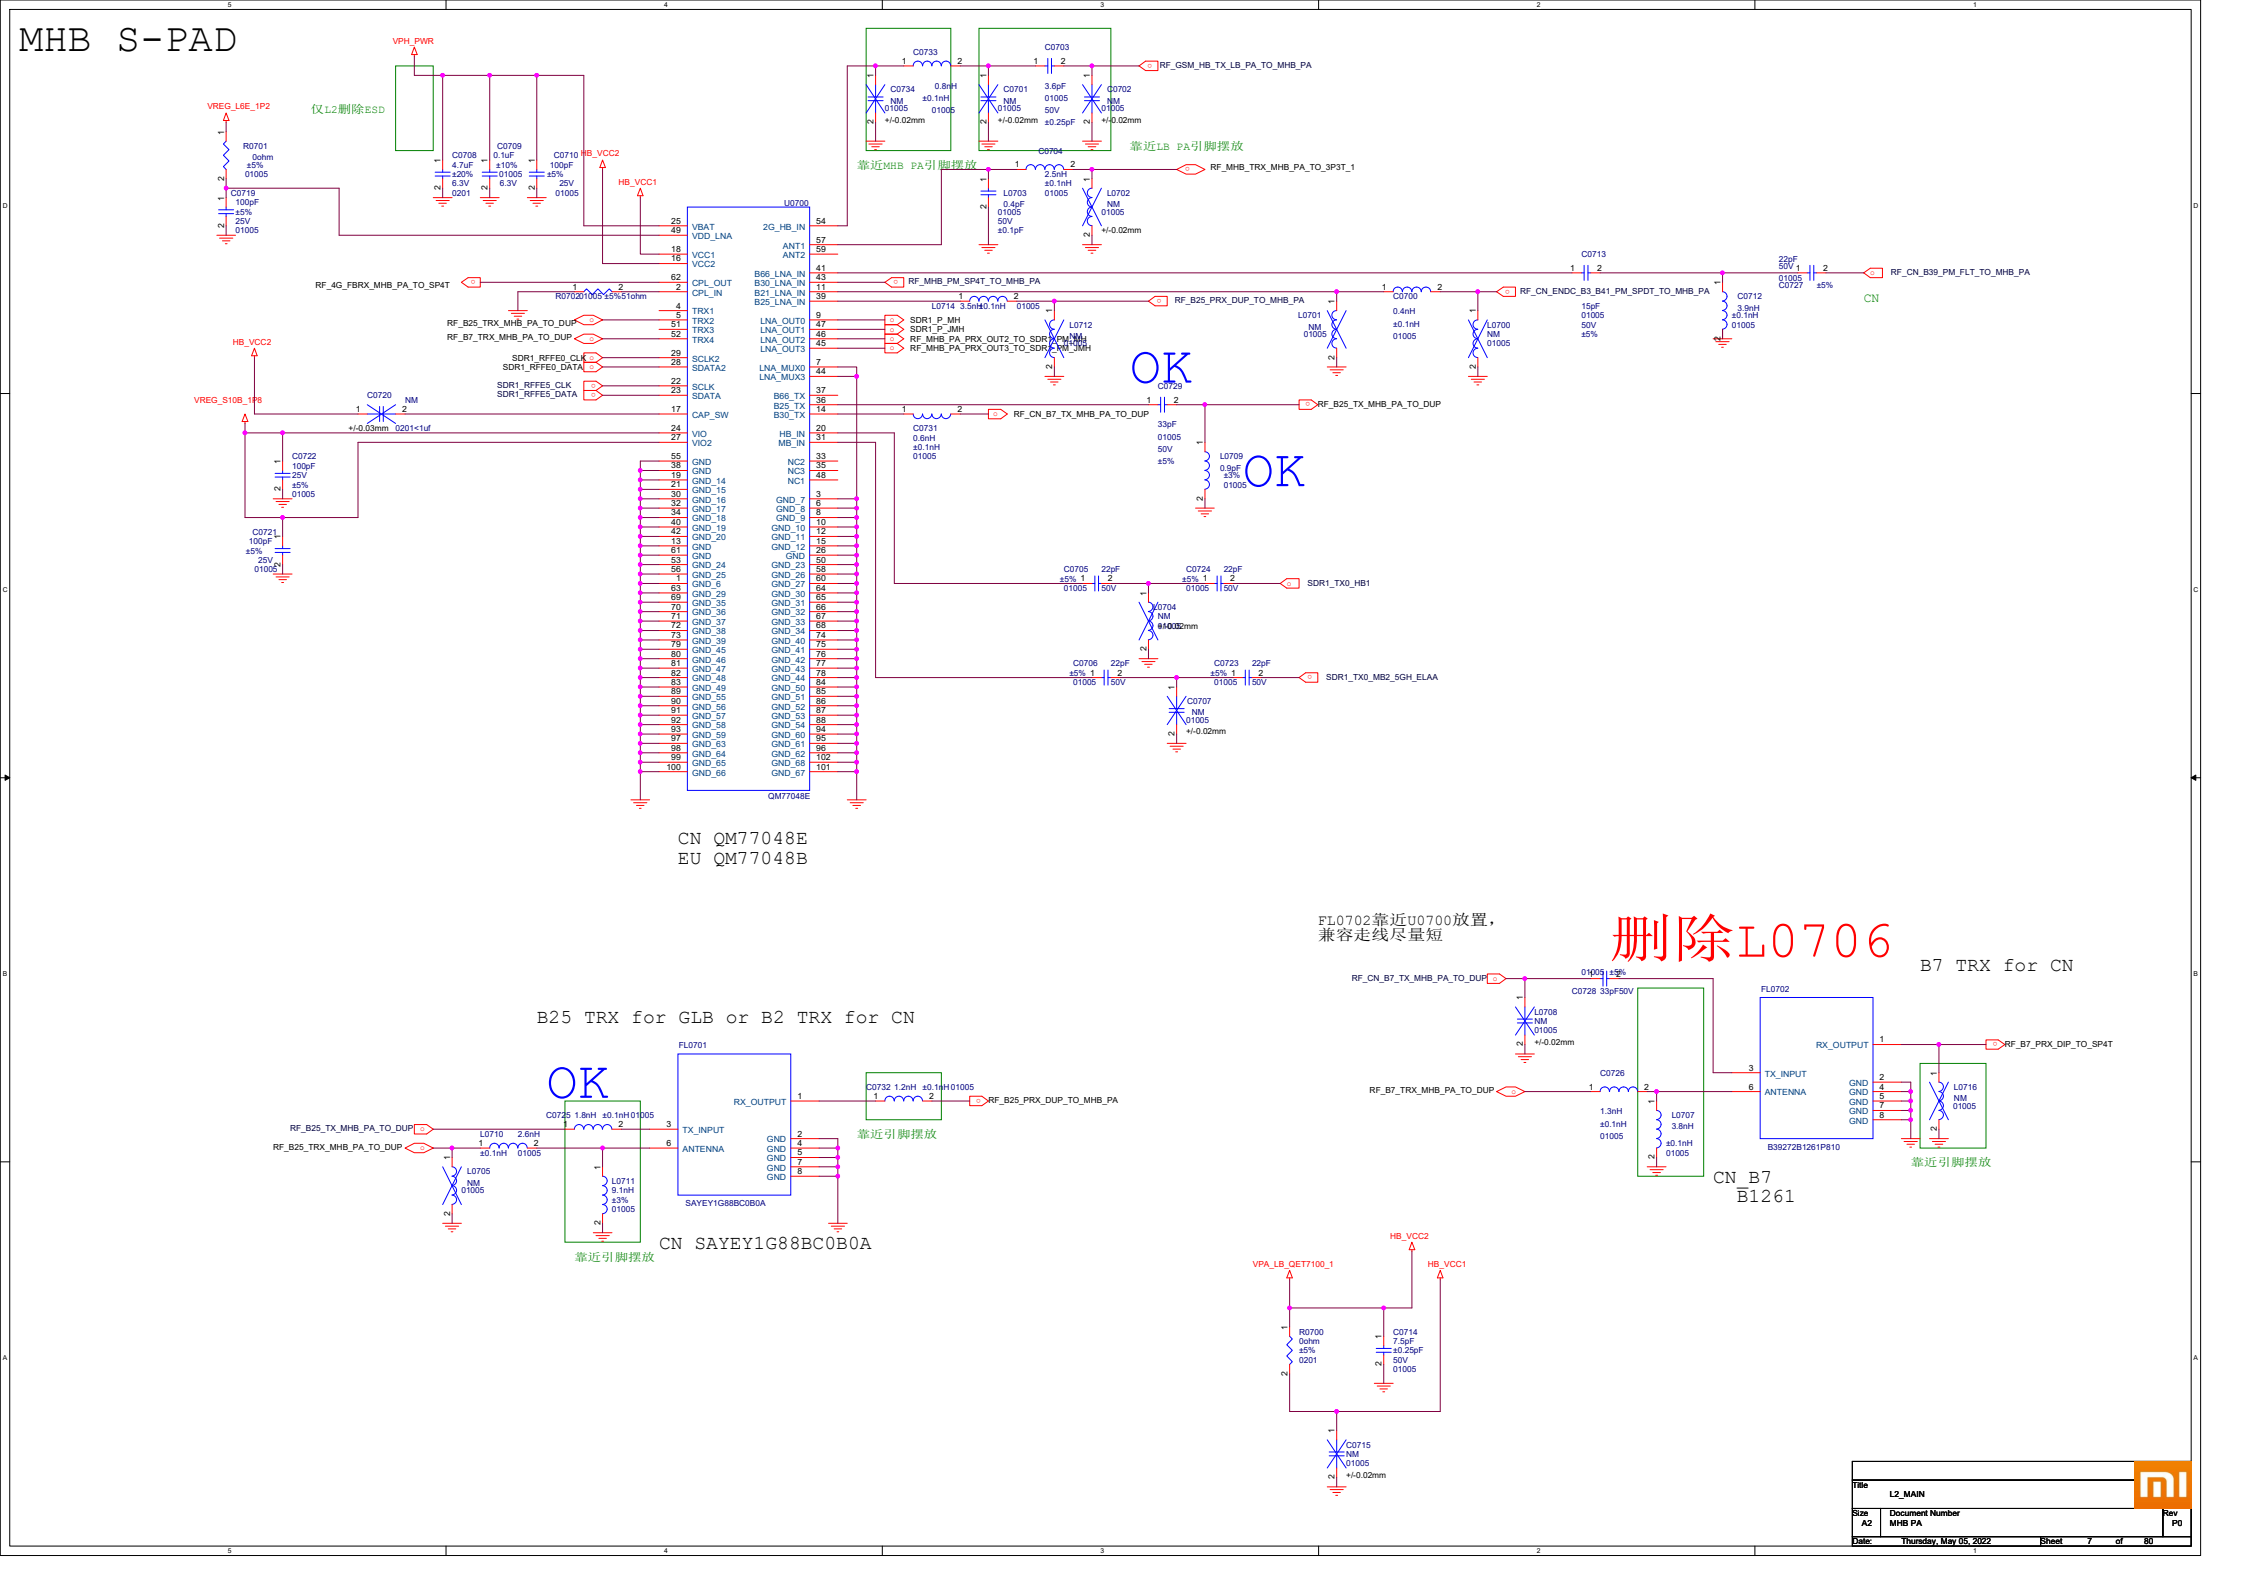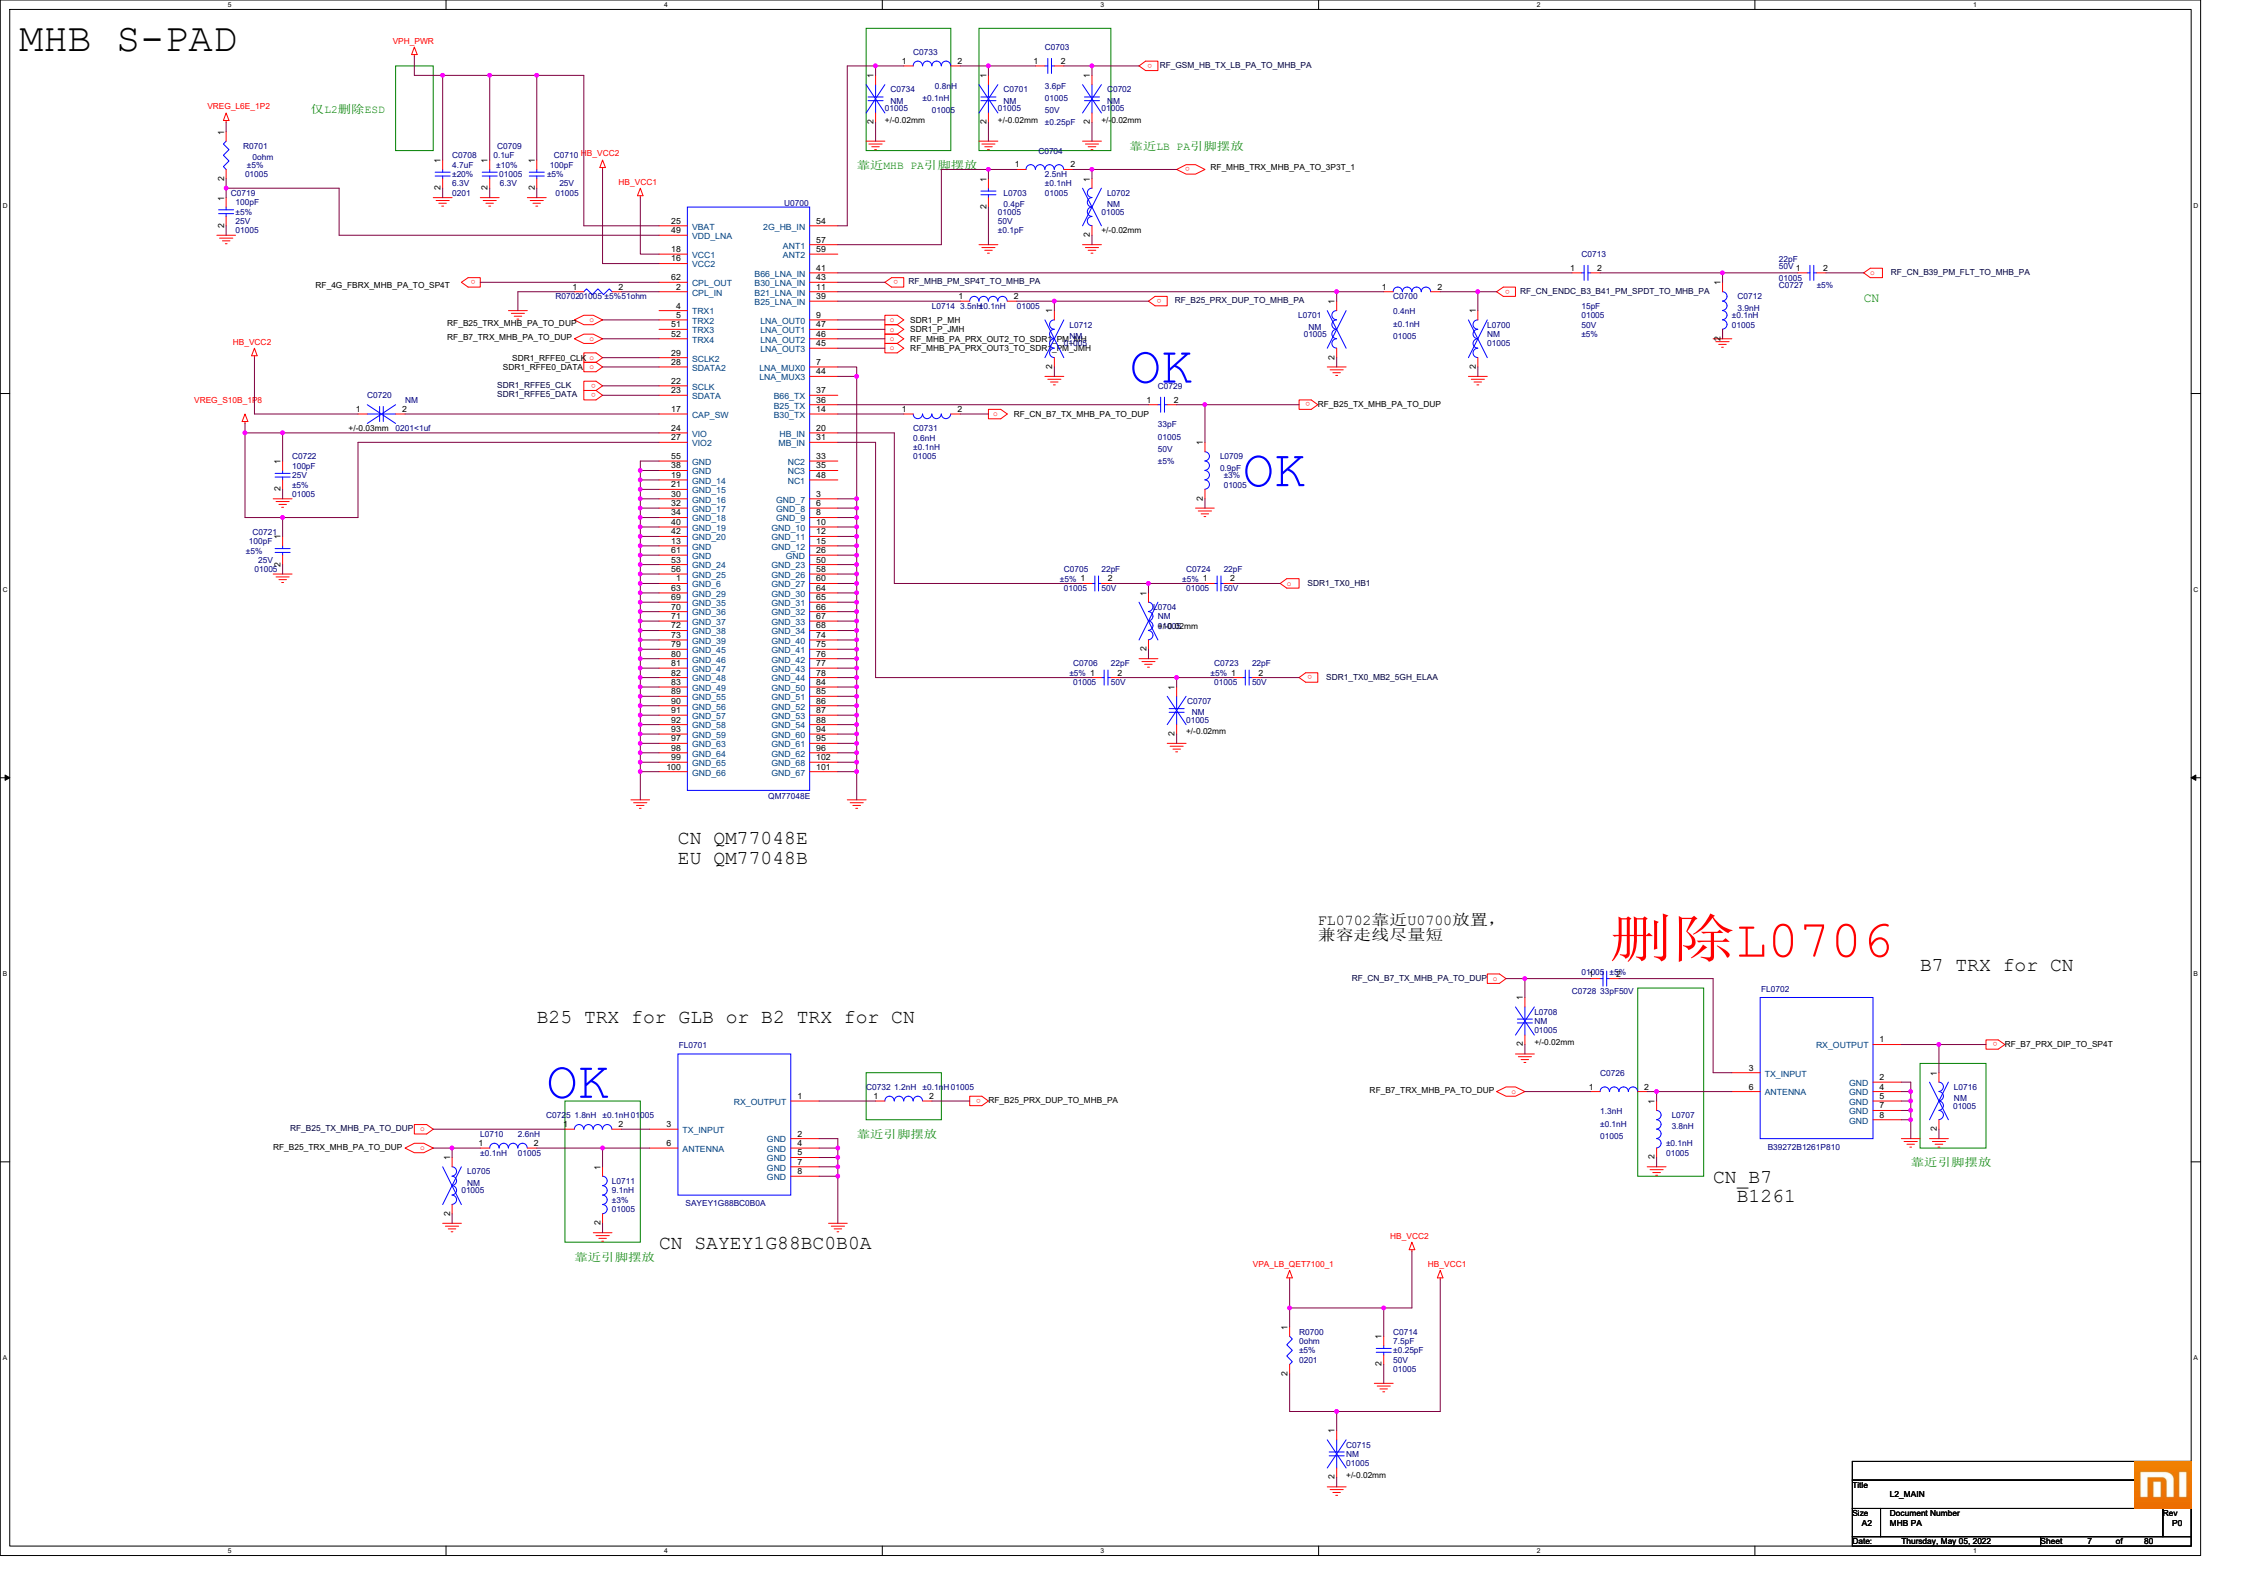
[illegible][illegible][illegible][illegible]

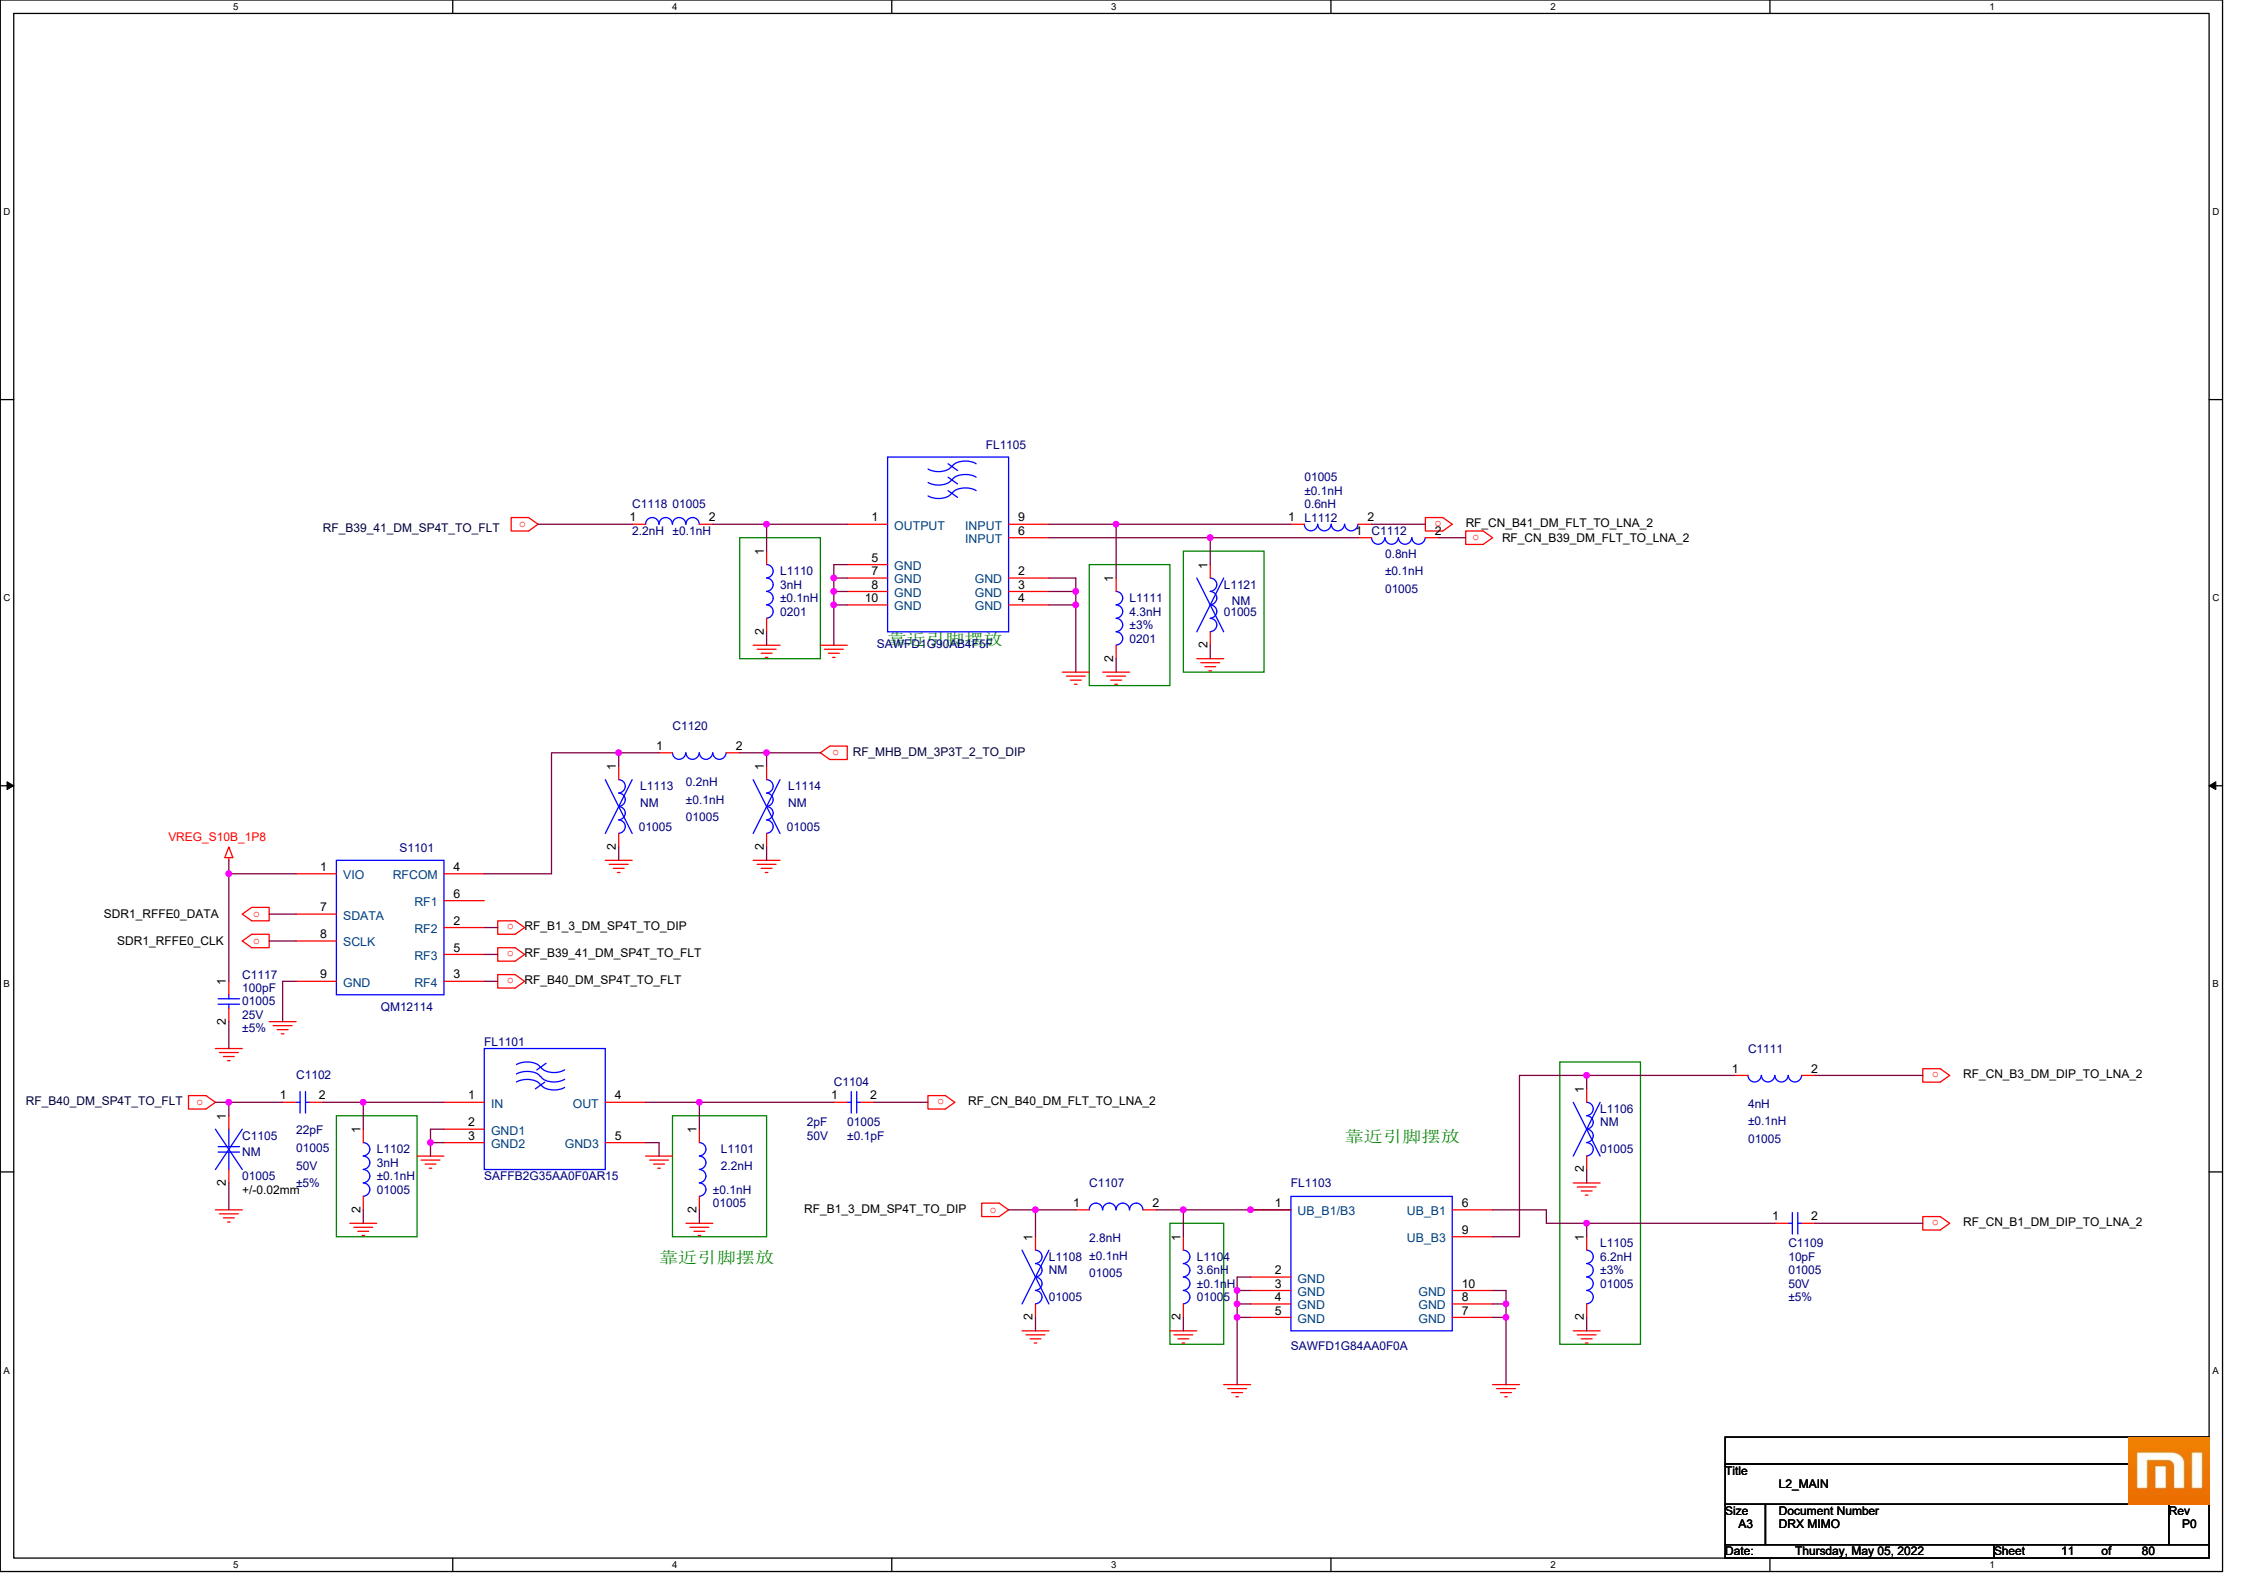







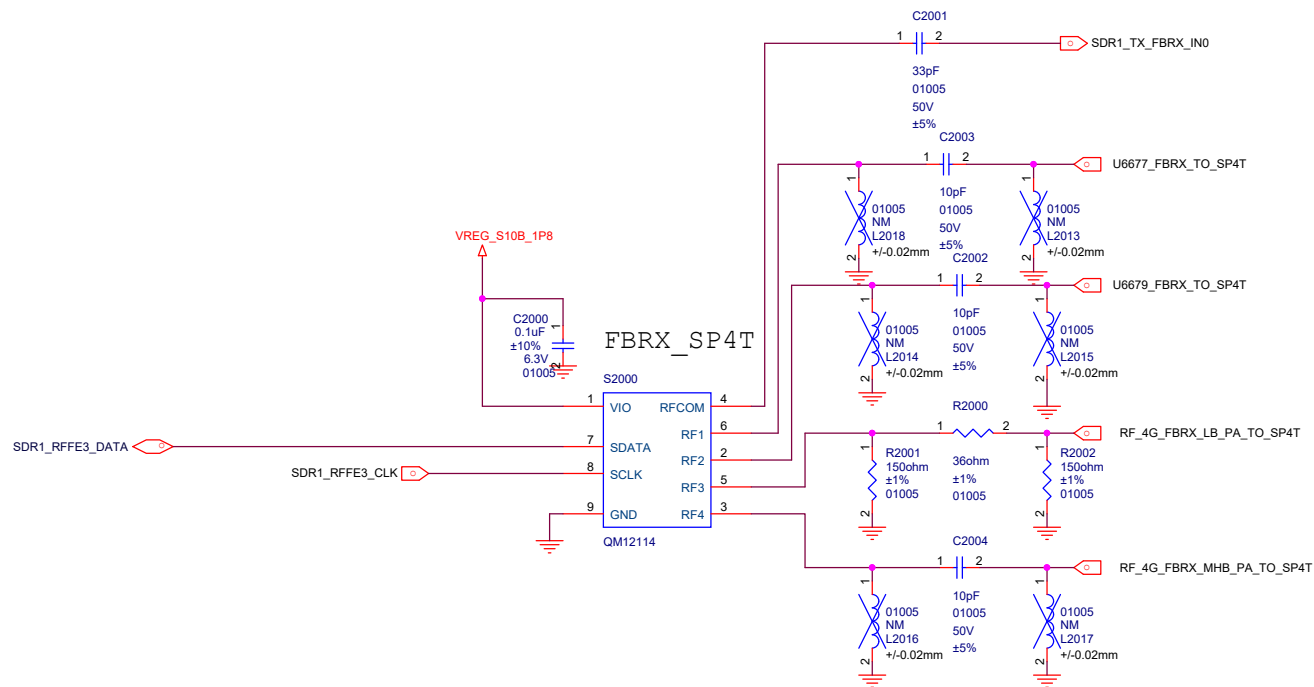


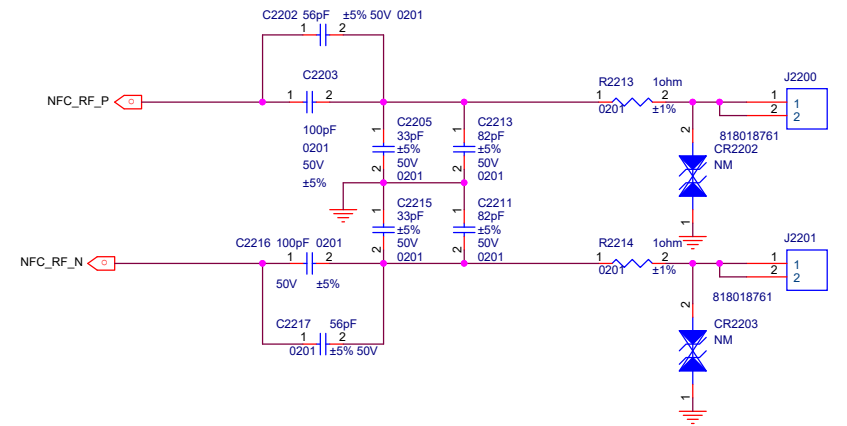



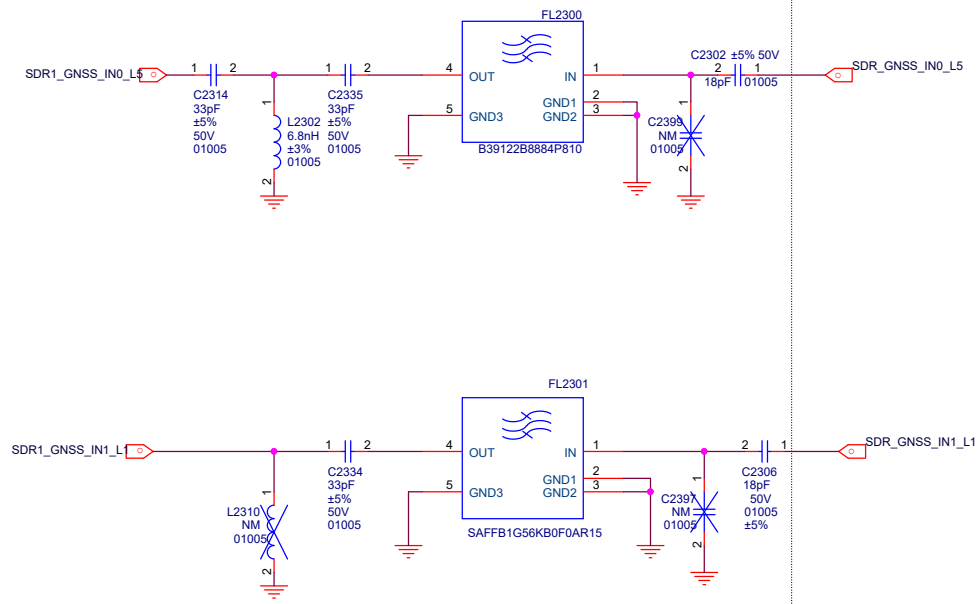





Close2WTR

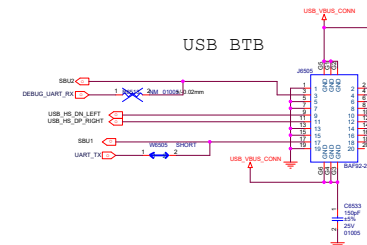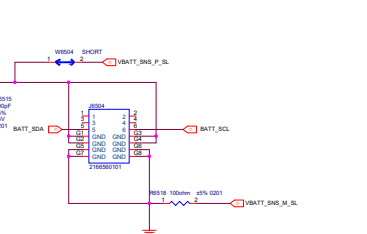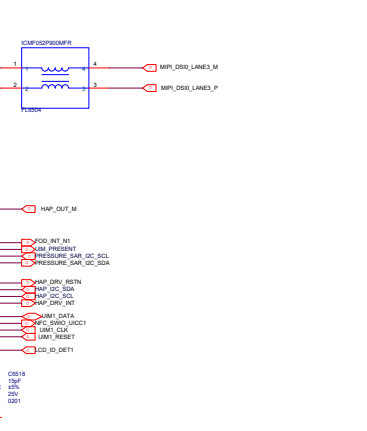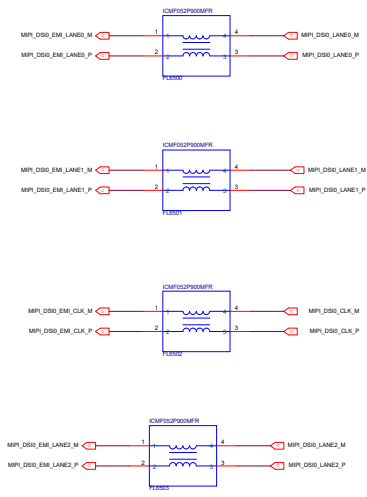


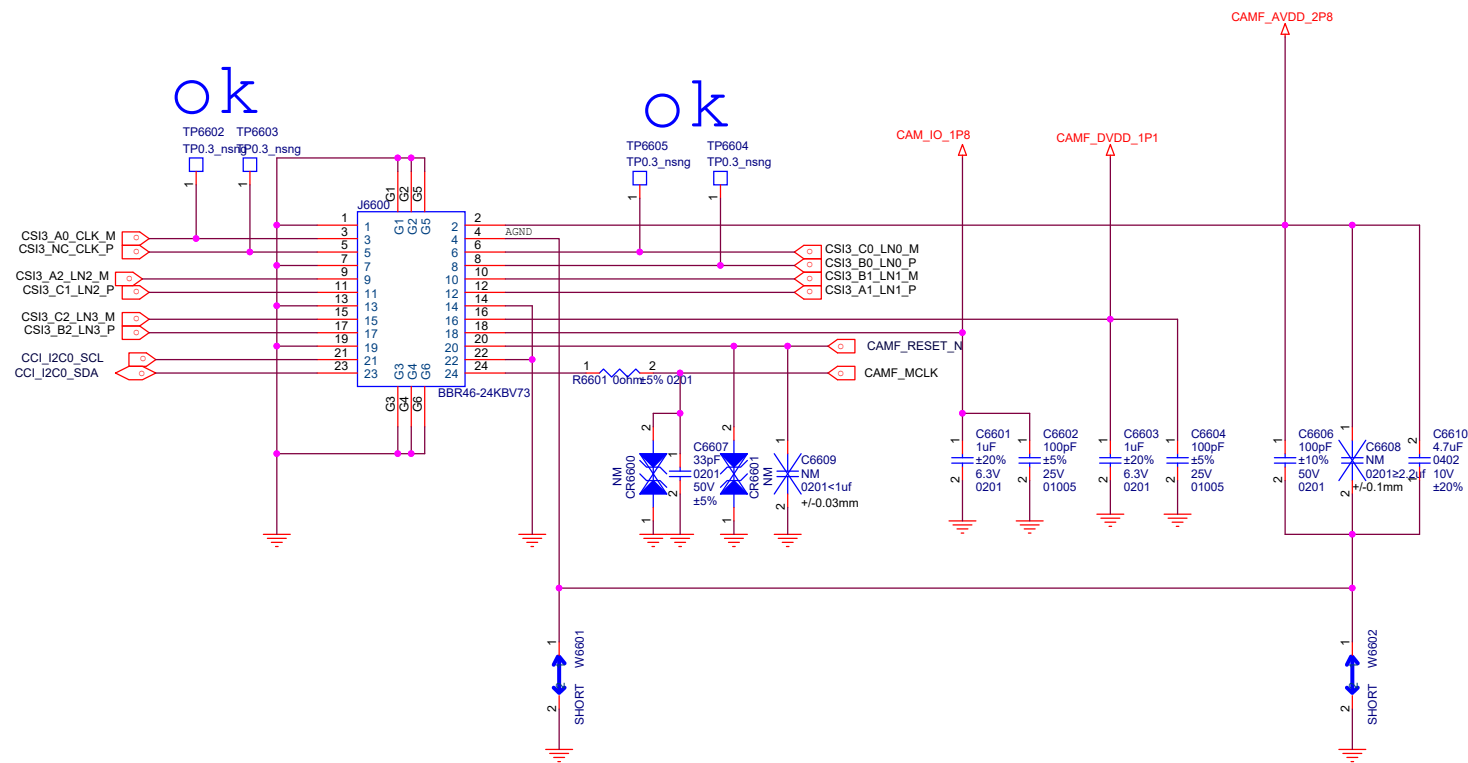


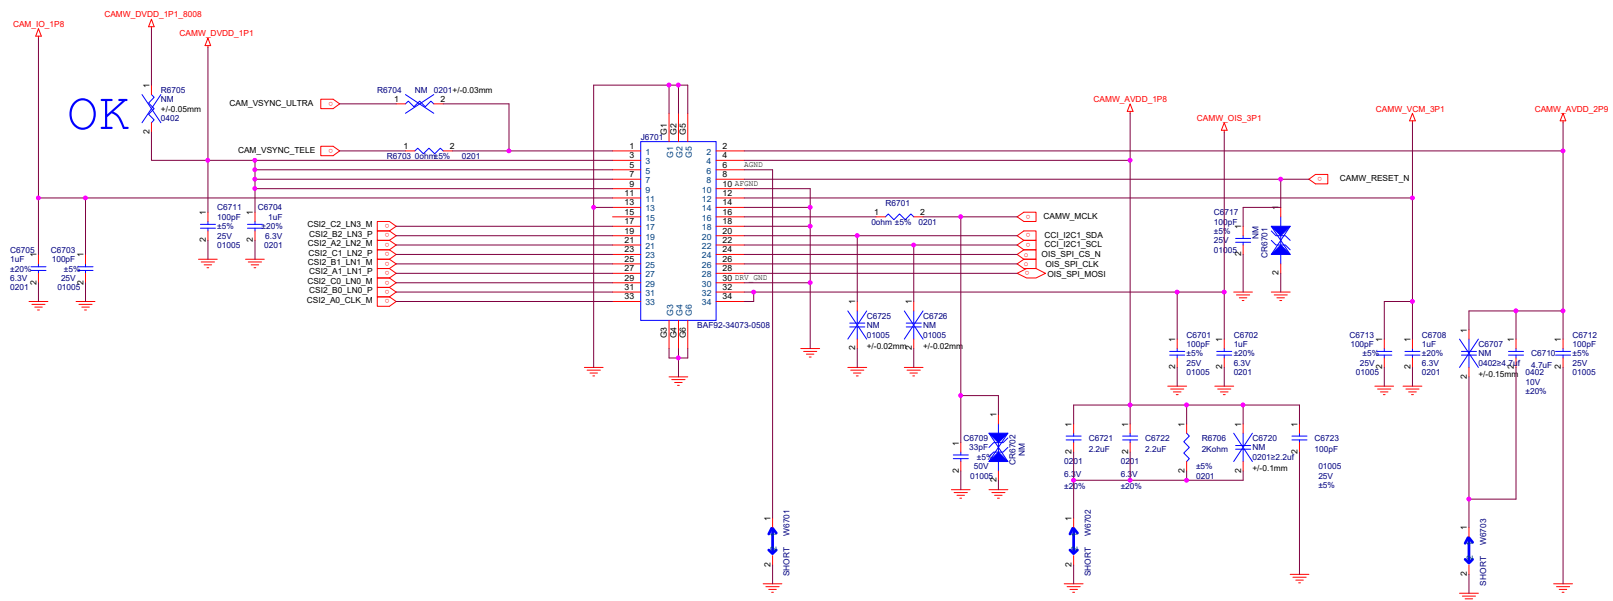

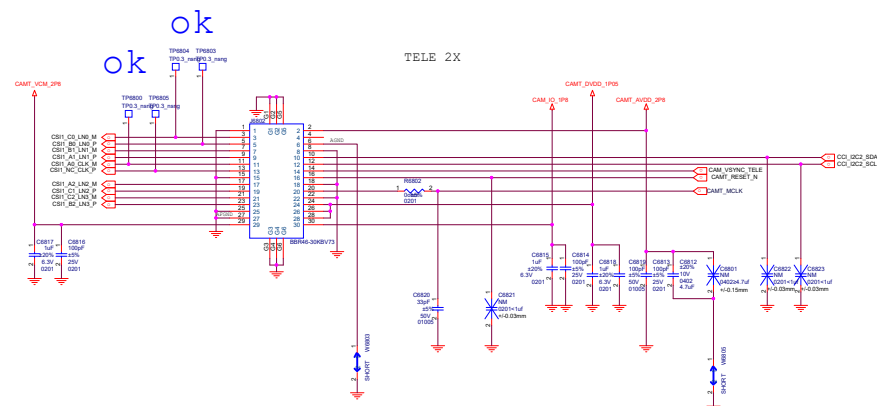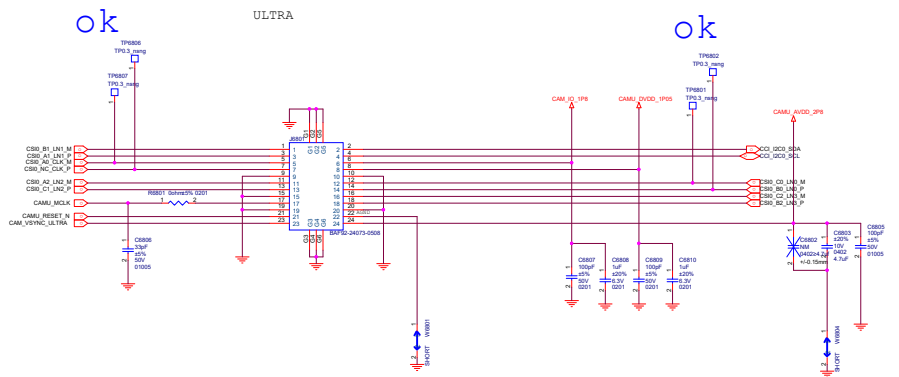


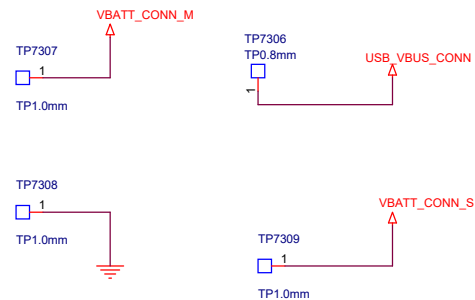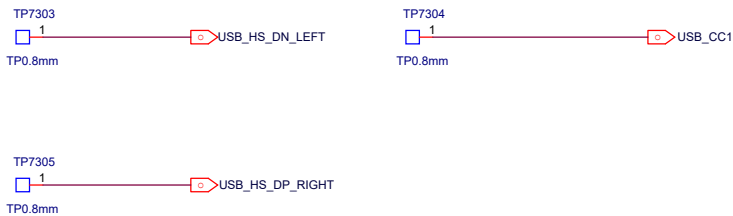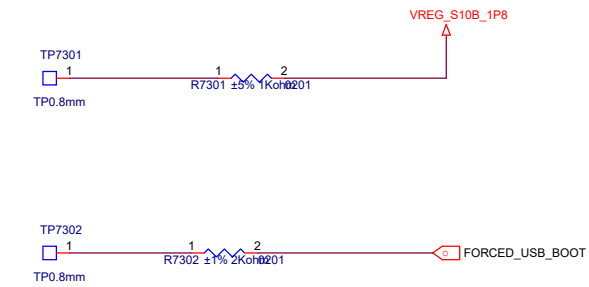

wireless clip

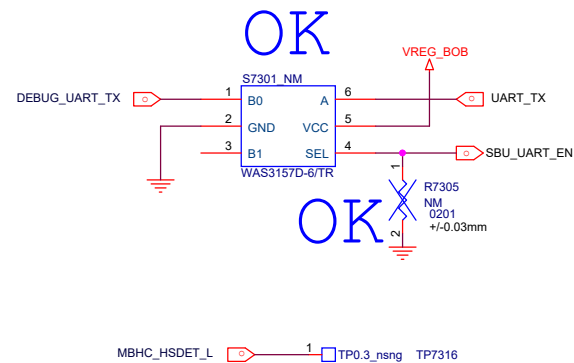

屏蔽罩

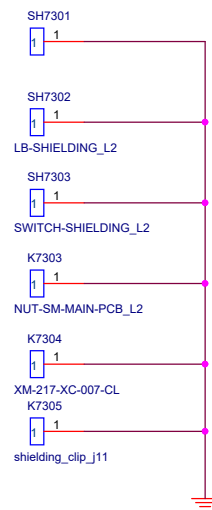

Title		L2_MAIN	
Size	Document Number		
A3	TEST POINT	Rev	P0
Date:	Thursday, May 05, 2022	Sheet	73 of 79

