


ESQUEMATICO


LG-D337

		TXEN	Mode	BS1	BS2
		GSM PA EN	ANT SEL2	ANT SEL1	ANT SEL0
Stanby	Stanby	0	0	0	0
LB TX	G LB TX	1	0	0	1
HB TX	G HB TX	1	0	1	1
TRX1	B1	0	1	0	0
TRX2	B8	0	1	1	0
TRX3	B5	0	1	0	1
TRX4	B2	0	1	1	1
TRX5	G LB Rx	0	0	1	0
TRX6	G HB Rx	0	0	0	1

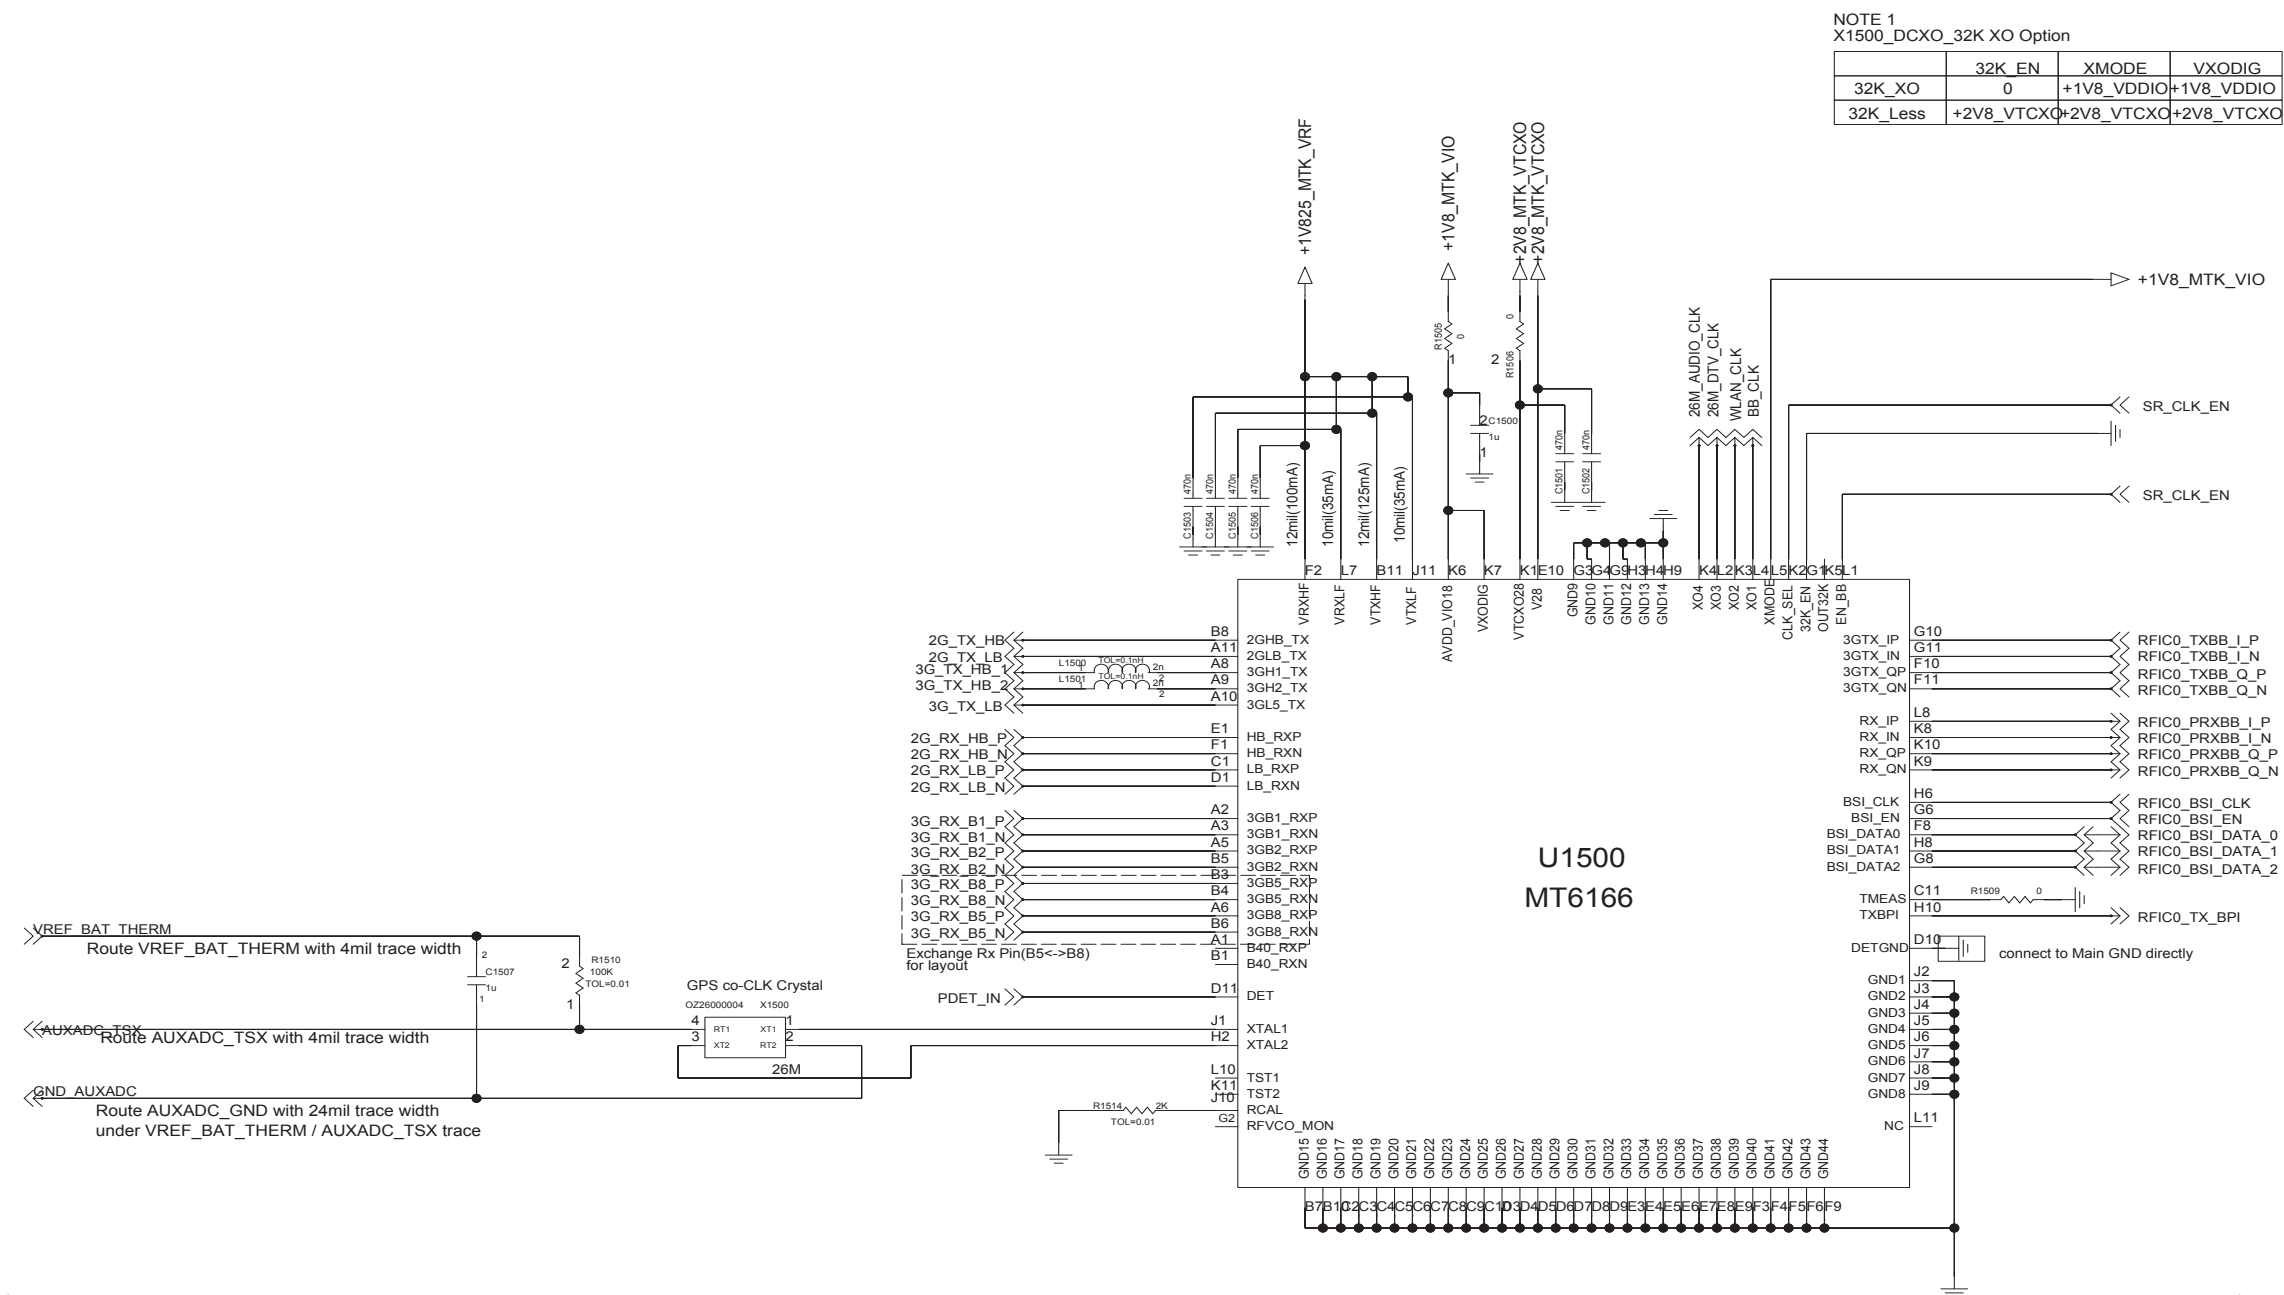

< 1-4-3-4_TRX_B1_B2_B5_B8_Quad band >


Rev_0.3

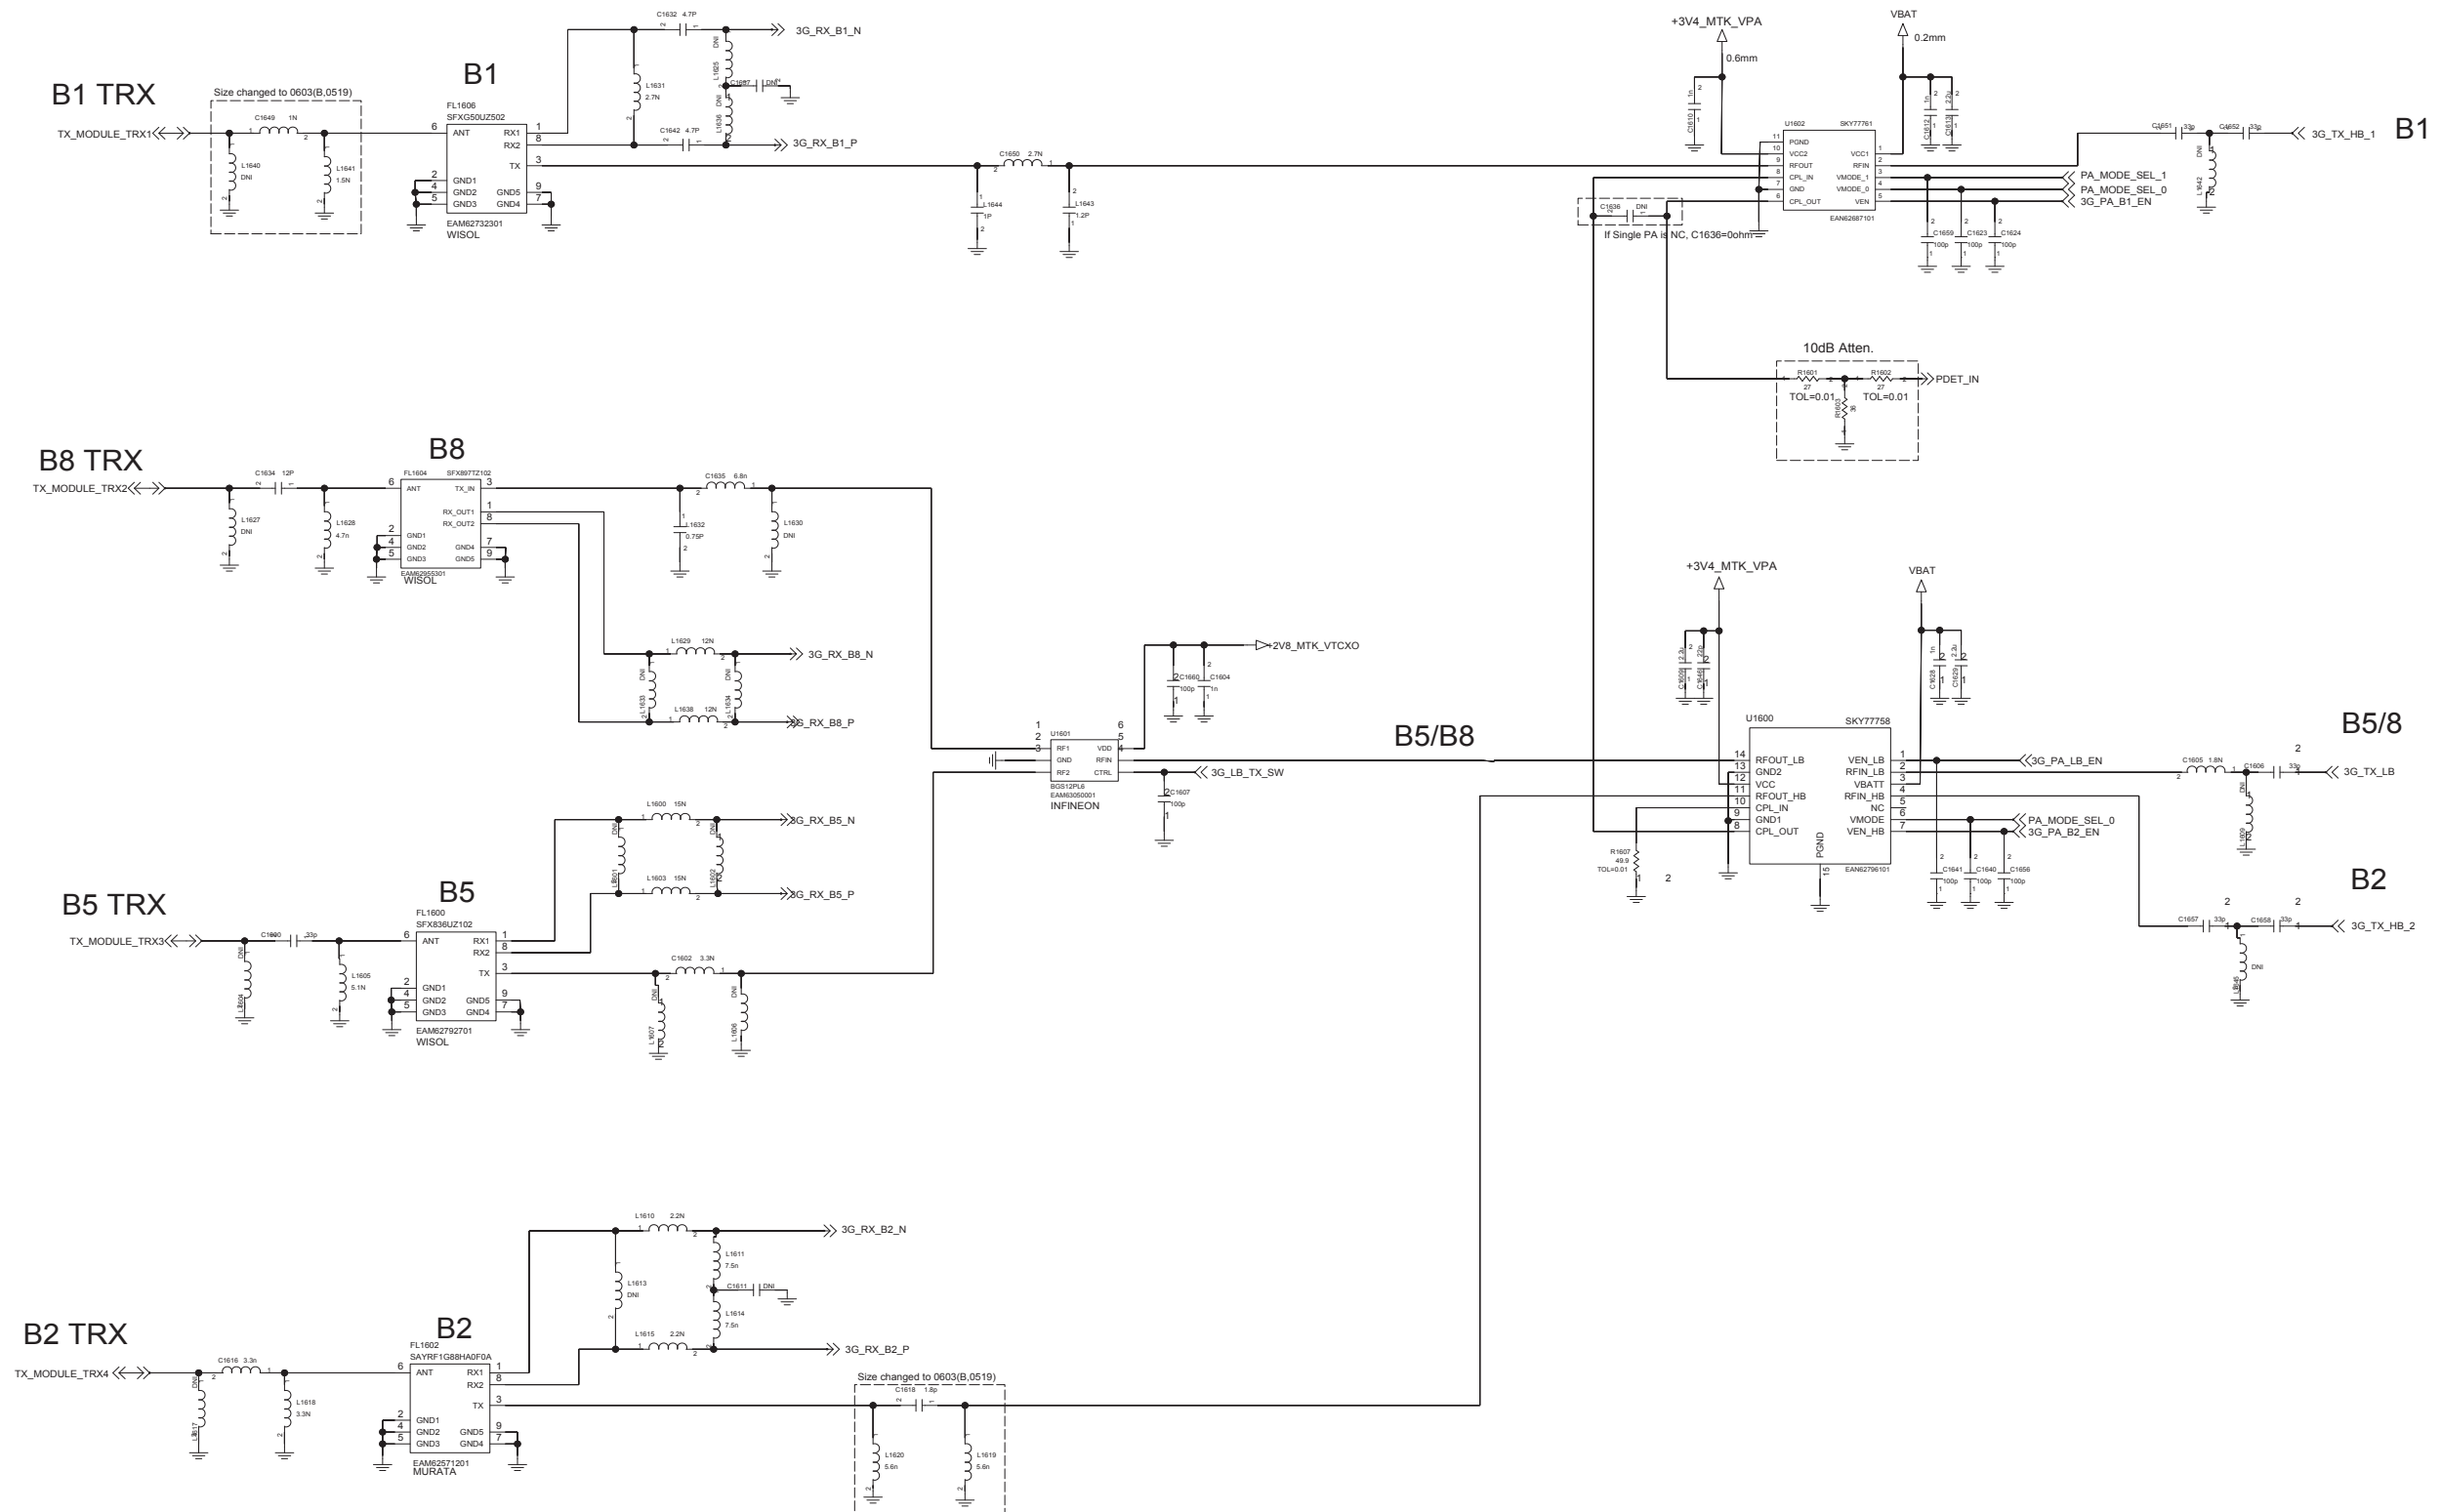


Optional_Using MT3332 version

<5-1-1-11_MT6627_WiFi_BT_GPS_FM>

WiFi/BT ANT

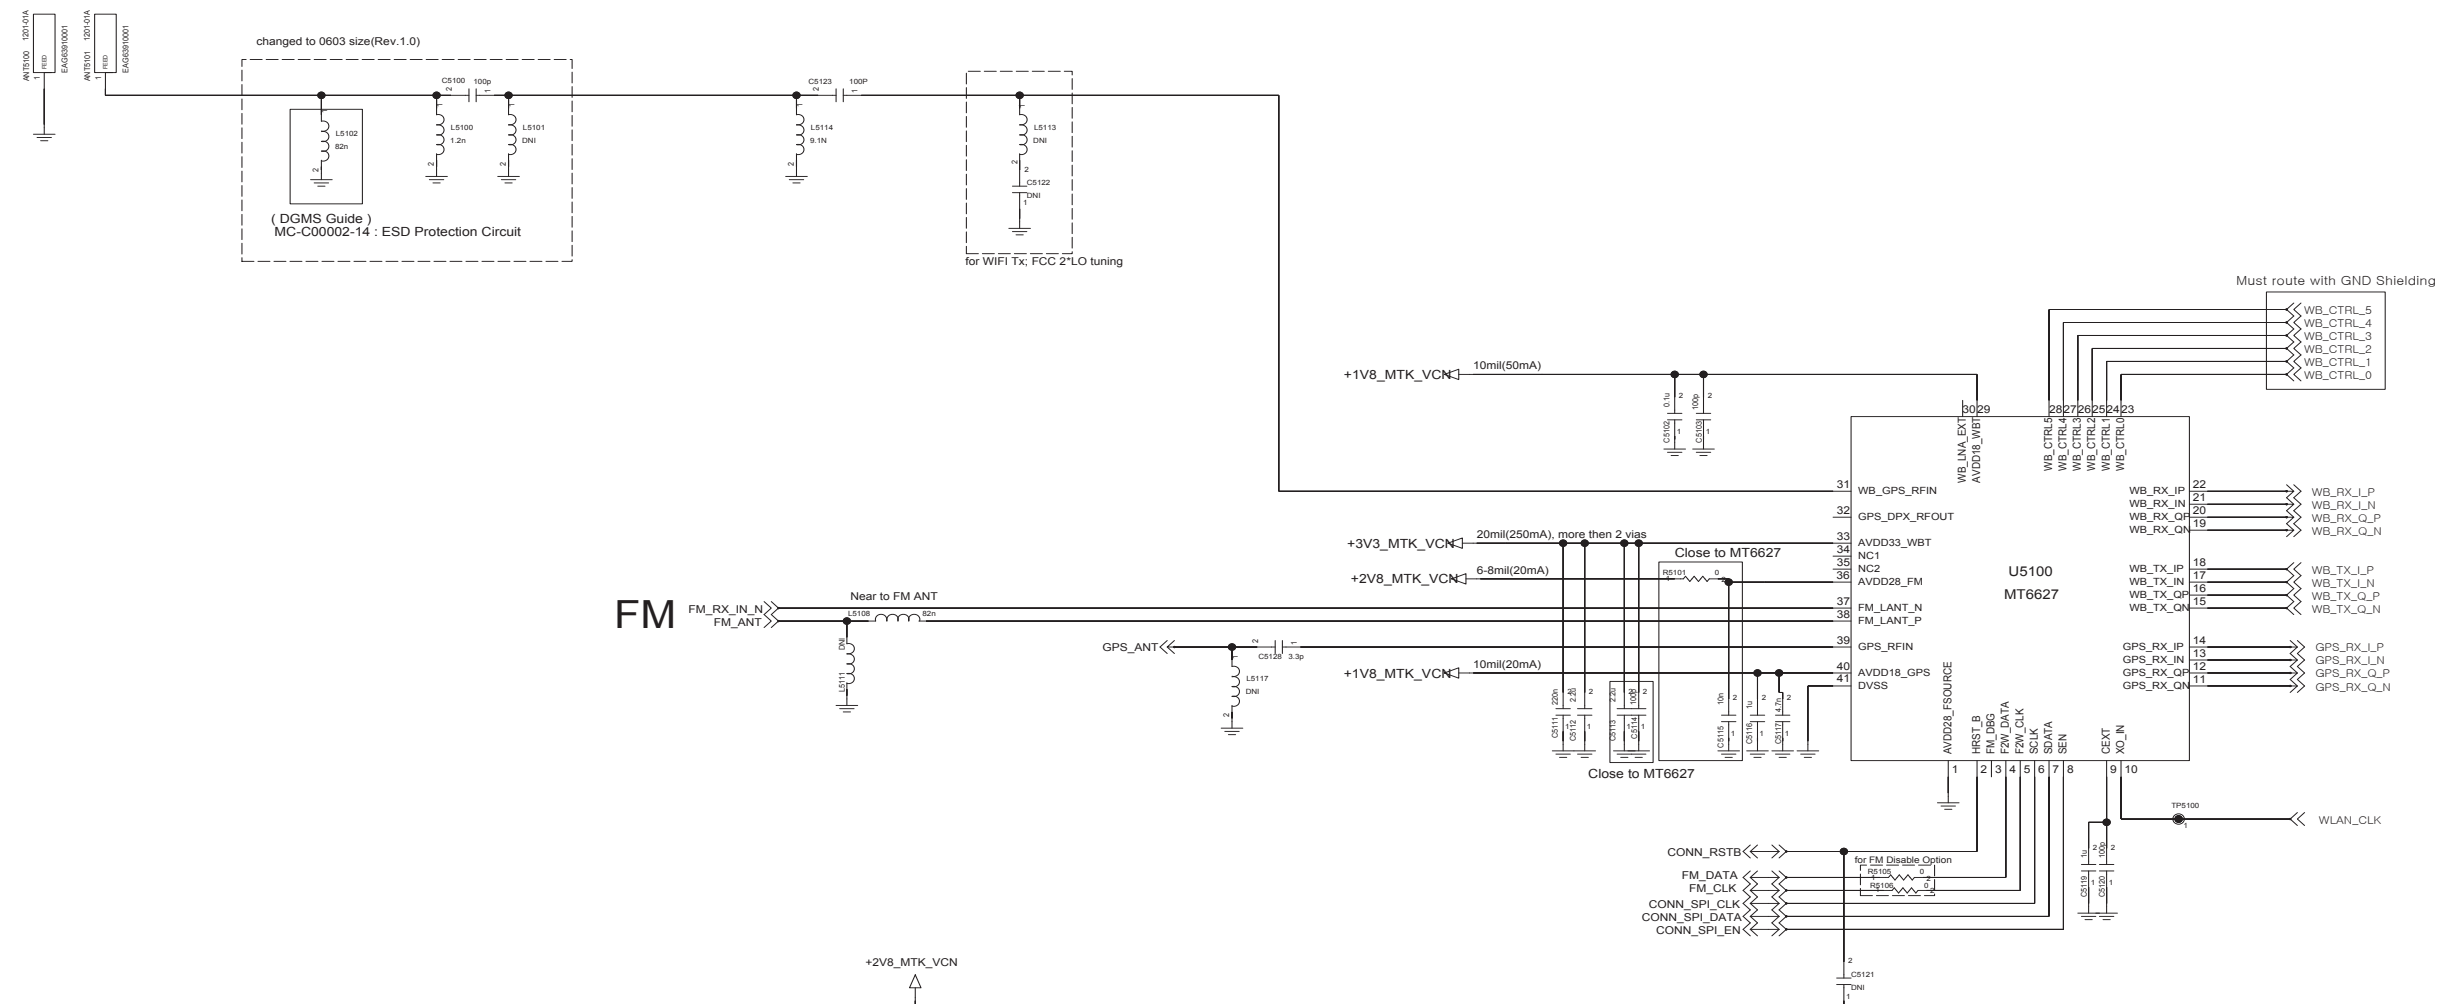


GPS ANT

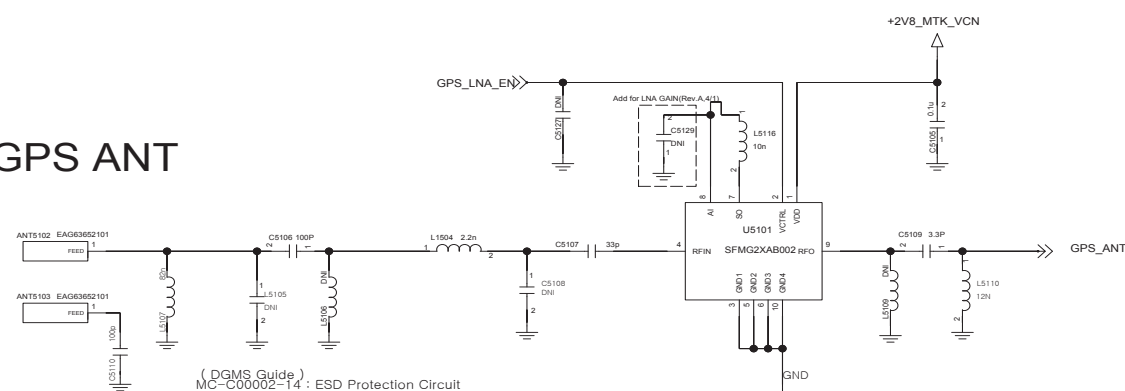


<5-3-1-3_Broadcasting_ONE-SEG_FC8150>

DTV Only


REV 1.0

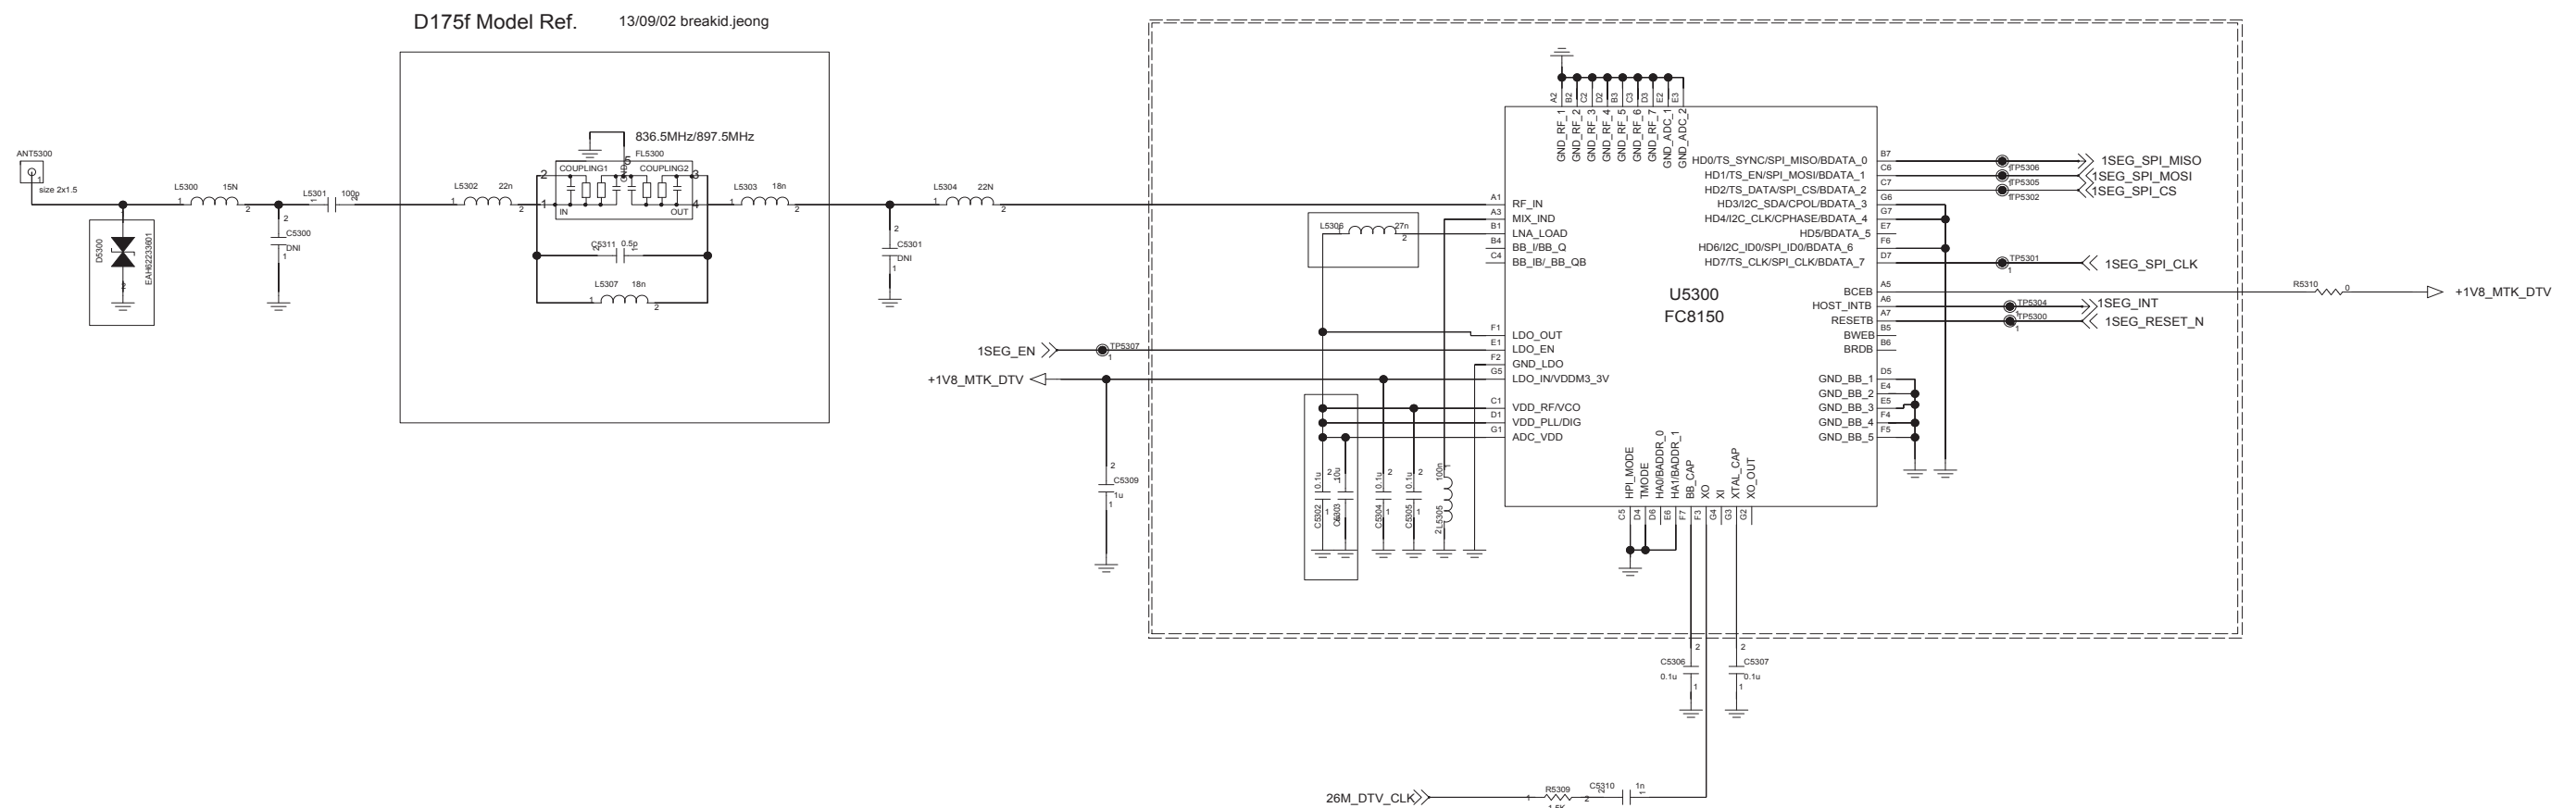

<2-3-3-1-1_MT6582_DATA> Rev.0.3

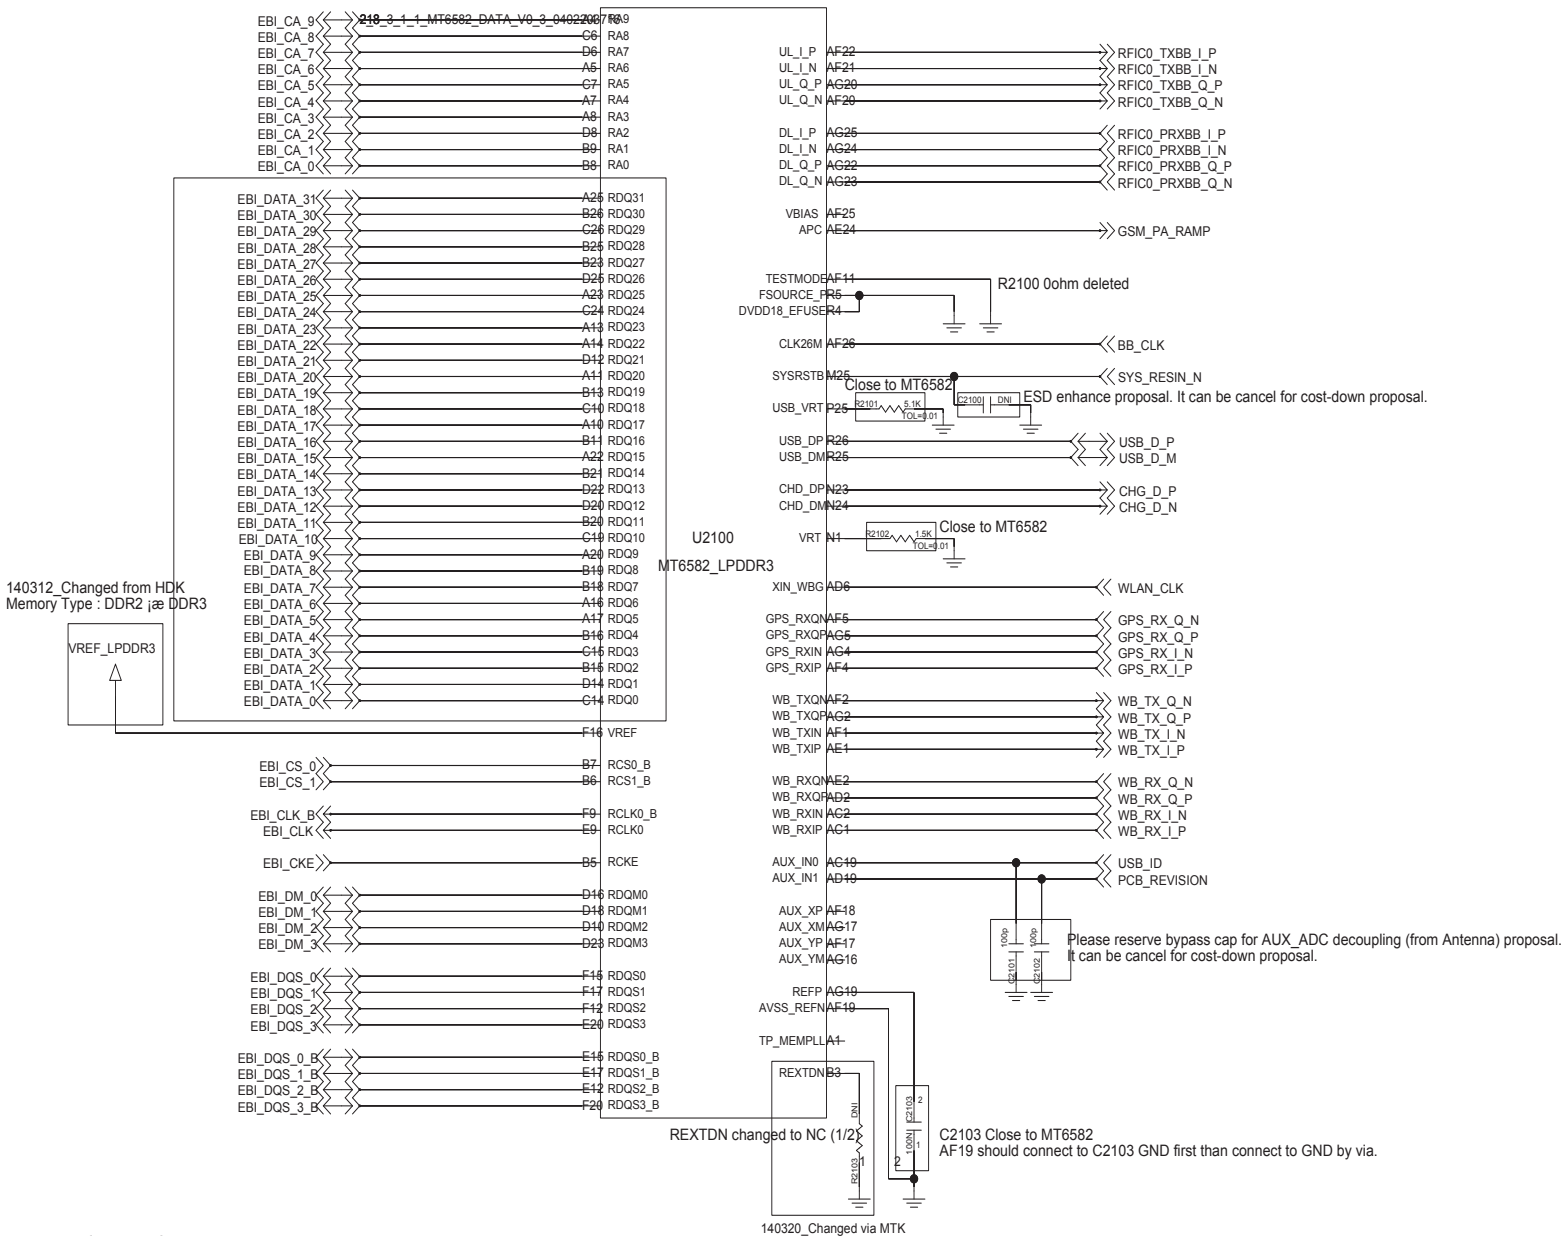


ADC



Revision	R1	R2	ADC Range(HEX.)
0.0	100K	9.1K	0.150
A	100K	30K	0.415
B	100K	51K	0.608
C	100K	82K	0.811
D	100K	130K	1.114
1.0	DNI	100K	0.000
1.1	100K	330K	1.438
1.2	100K	130K	1.114
1.3	100K	200K	1.301

< 9-3-1_JTAG > _DNI
Rev_0.4

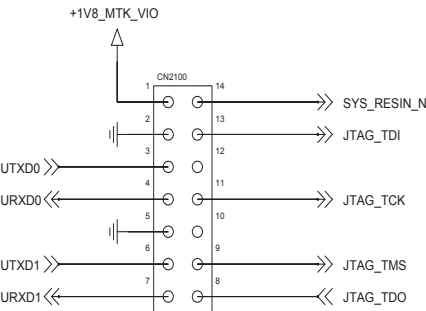

Band_Indicator

SET_Indicator

(for Telstra)

+1V8_MTK_VIO

R2226 10K DMC

R2225 10K DMC

2 2


SET_REVISION_0

SET_REVISION_1

LGE Internal Use Only


< MT6582_POWER >


CCDS# : 2-3-3-1-3 Rev_0.3

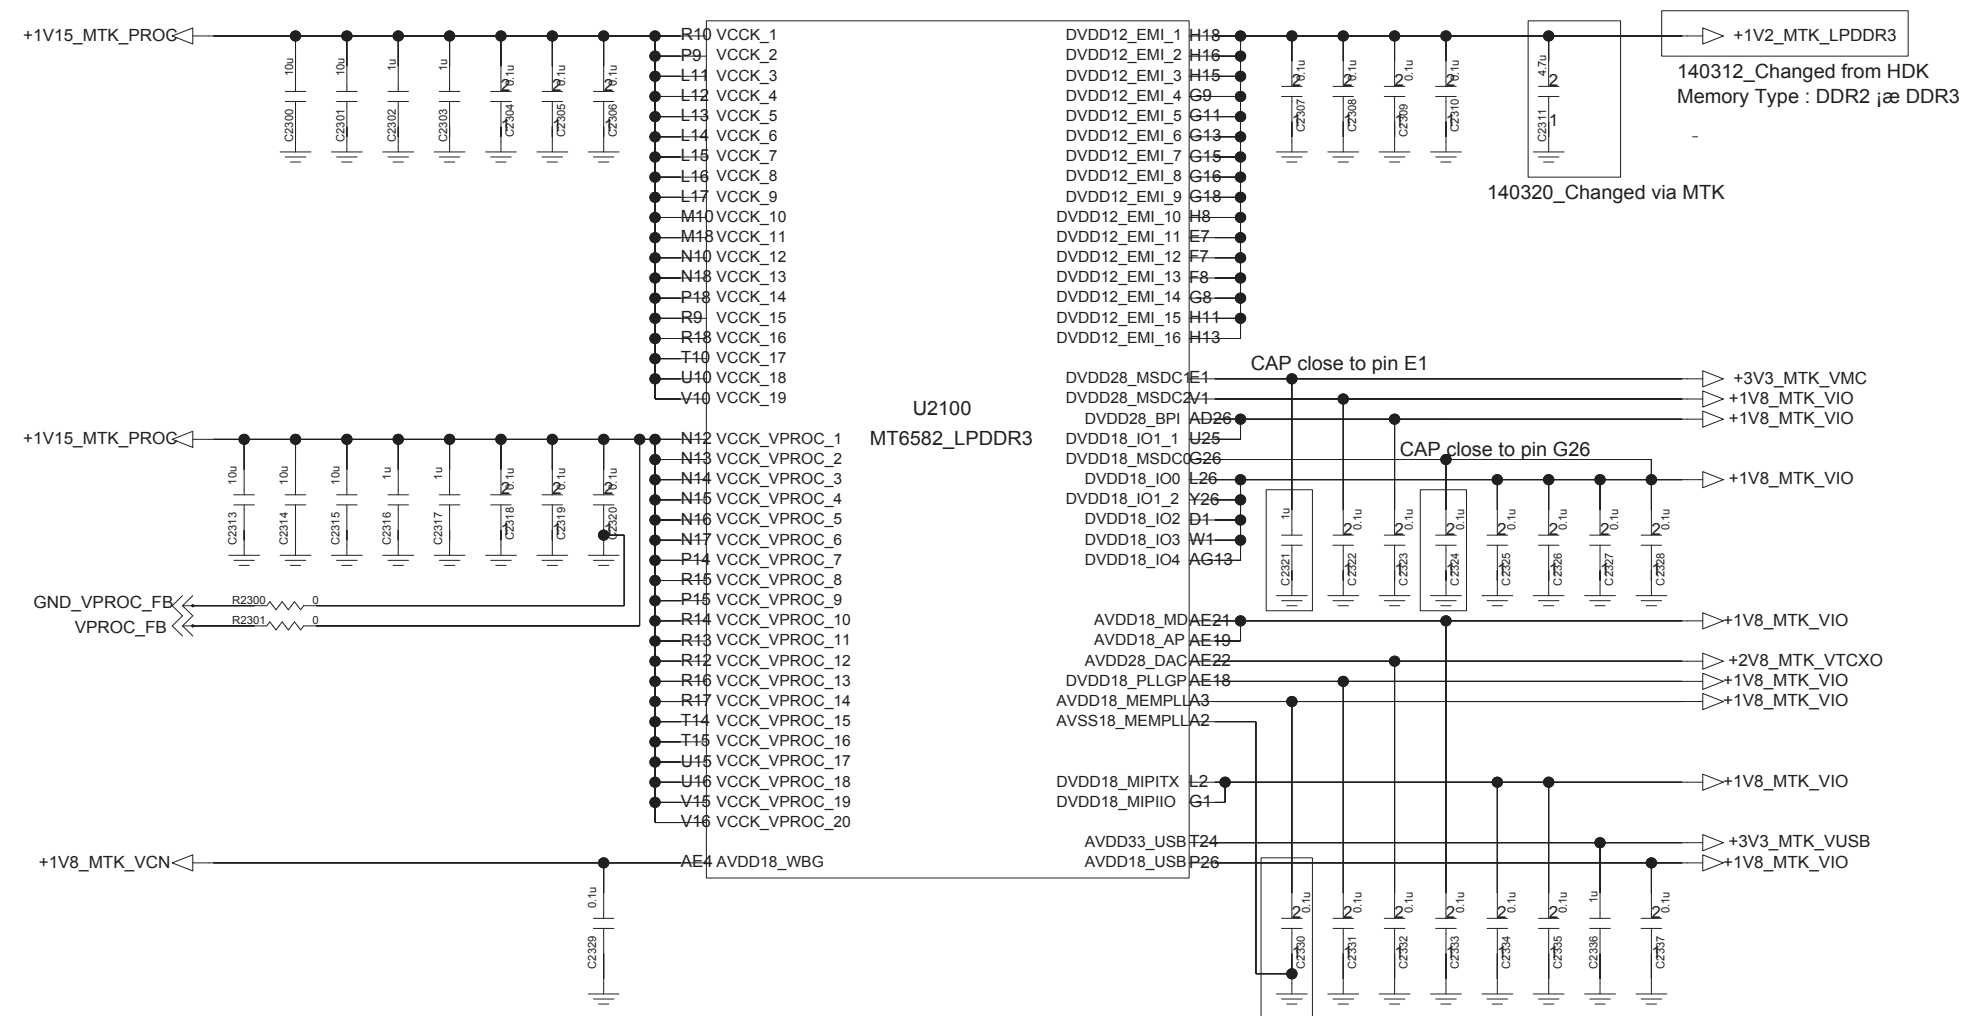


AVDD18_MEMPLL pin and AVSS18_MEMPLL pin should be connected with PCB CAP first, and then connected with PMU and PCB ground. CAP should be near MT6582 as possible as we can.

<2-3-3-1-4_MT6582_GND> Rev.0.3

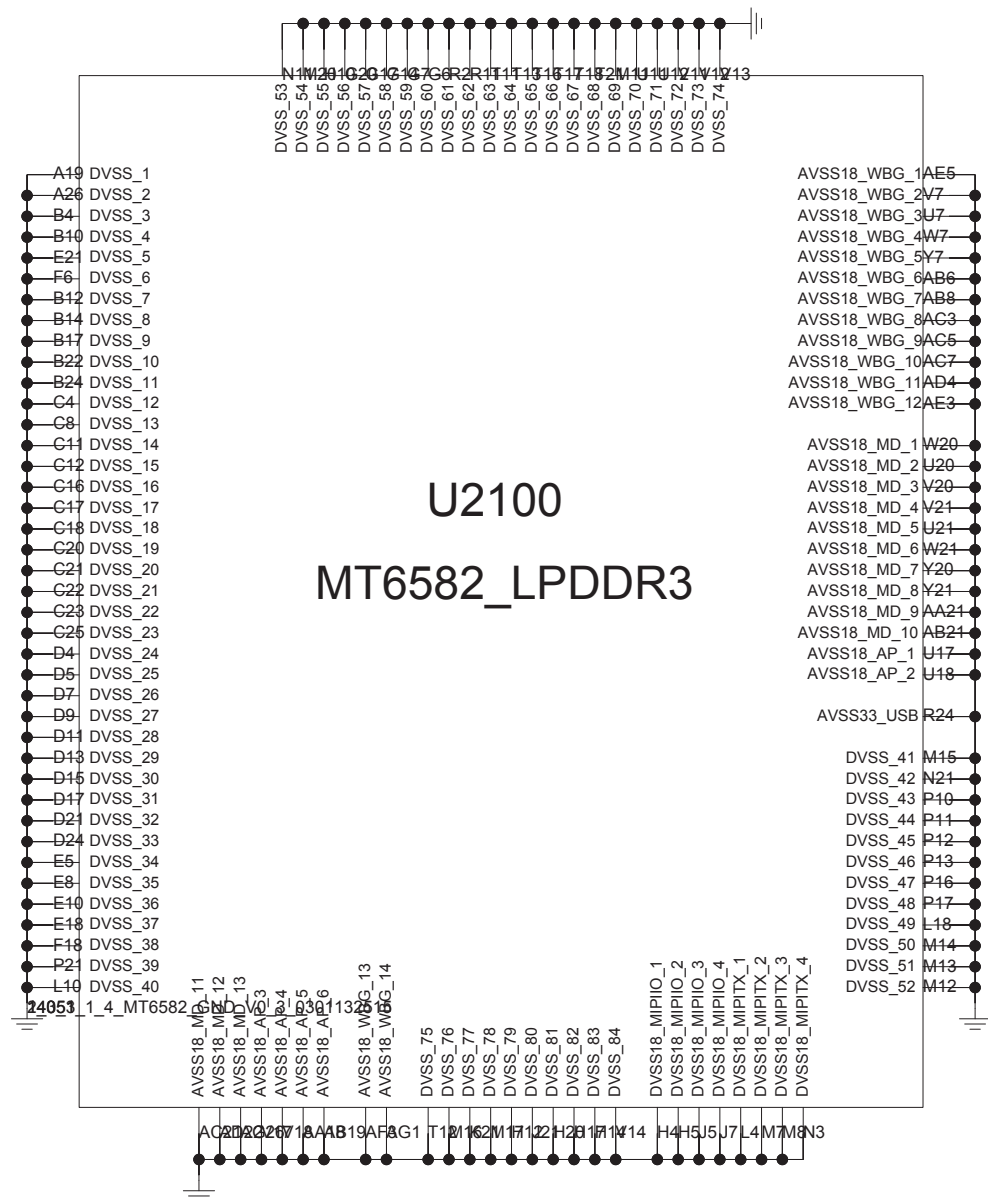





<4-1-7-1_MT6323_DATA> Rev_0.4

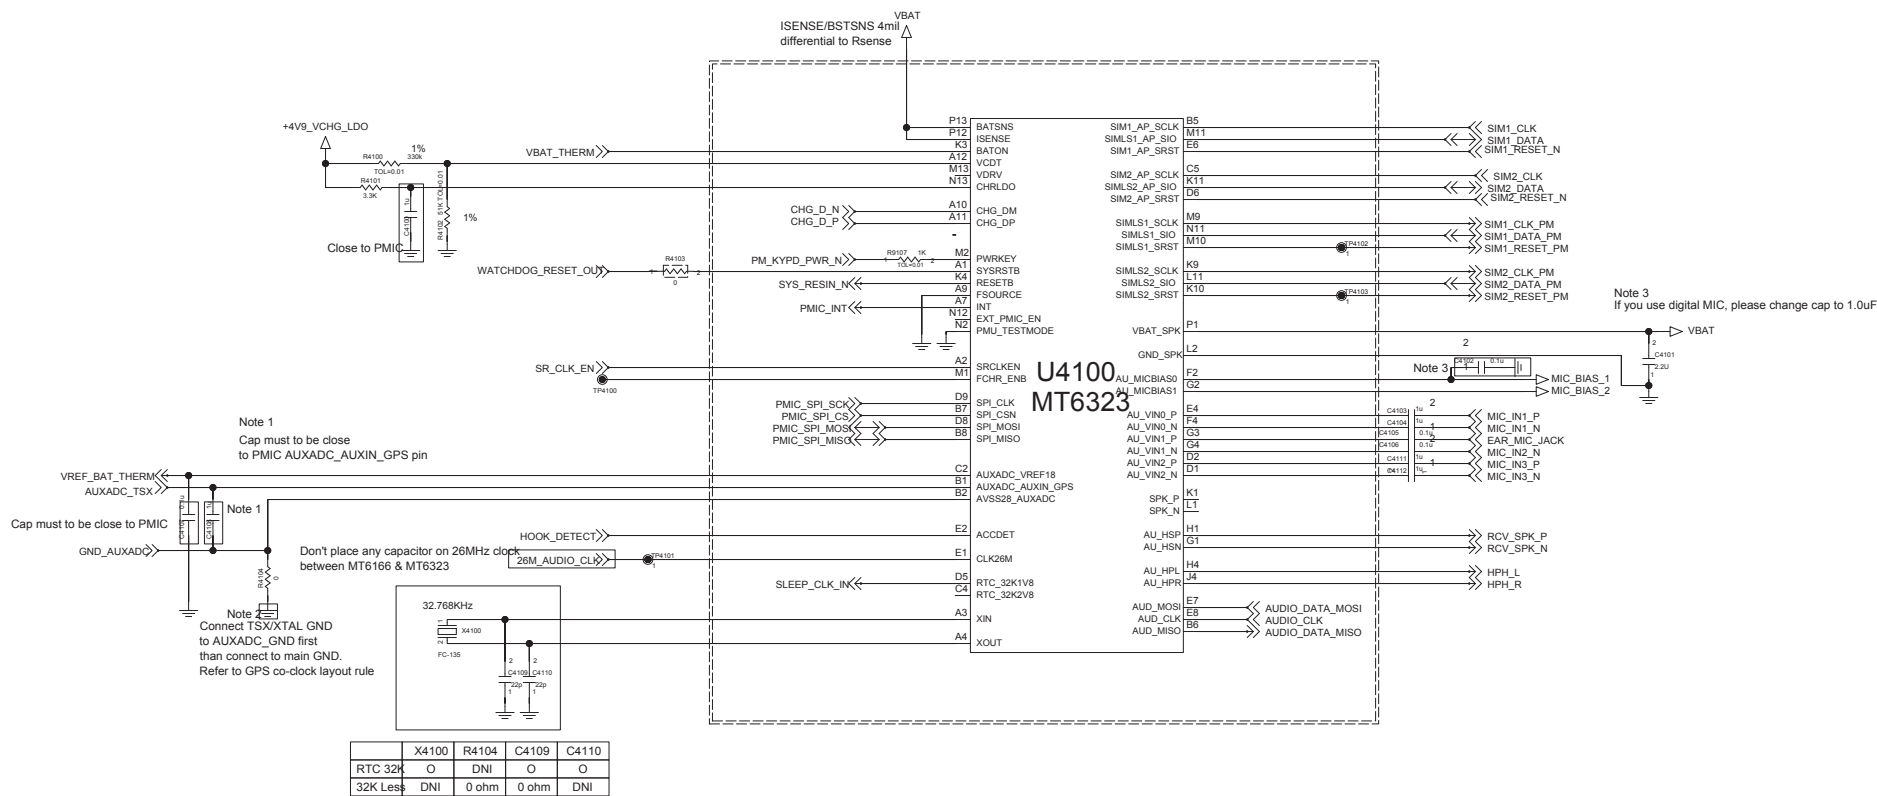


<9-1-2_Battery_CNT_4P> REV.0.4

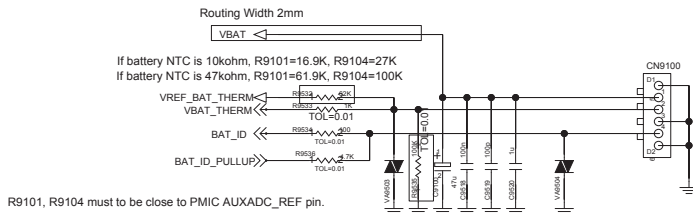


< 9-2-1_IO_USB2.0 > Rev_0.5

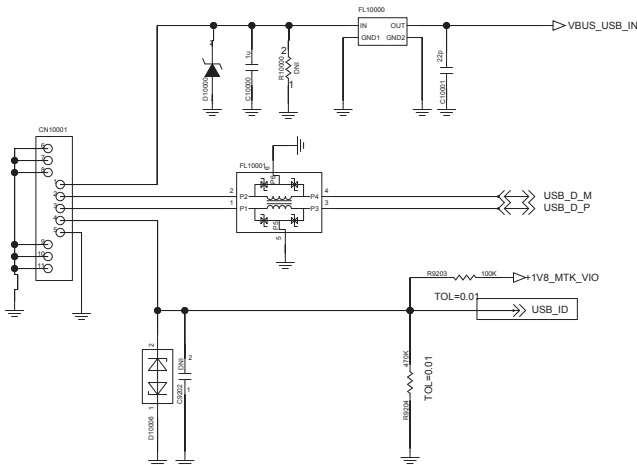


<4-7-1-1_Linear Charger_RT9536> Rev_0.3

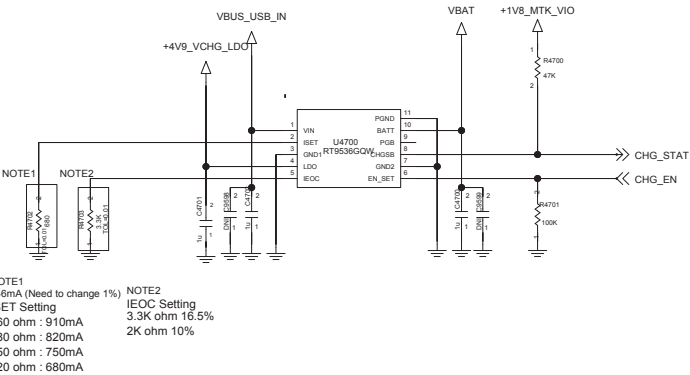


<4-1-7-2_MT6323_POWER> Rev_0.4

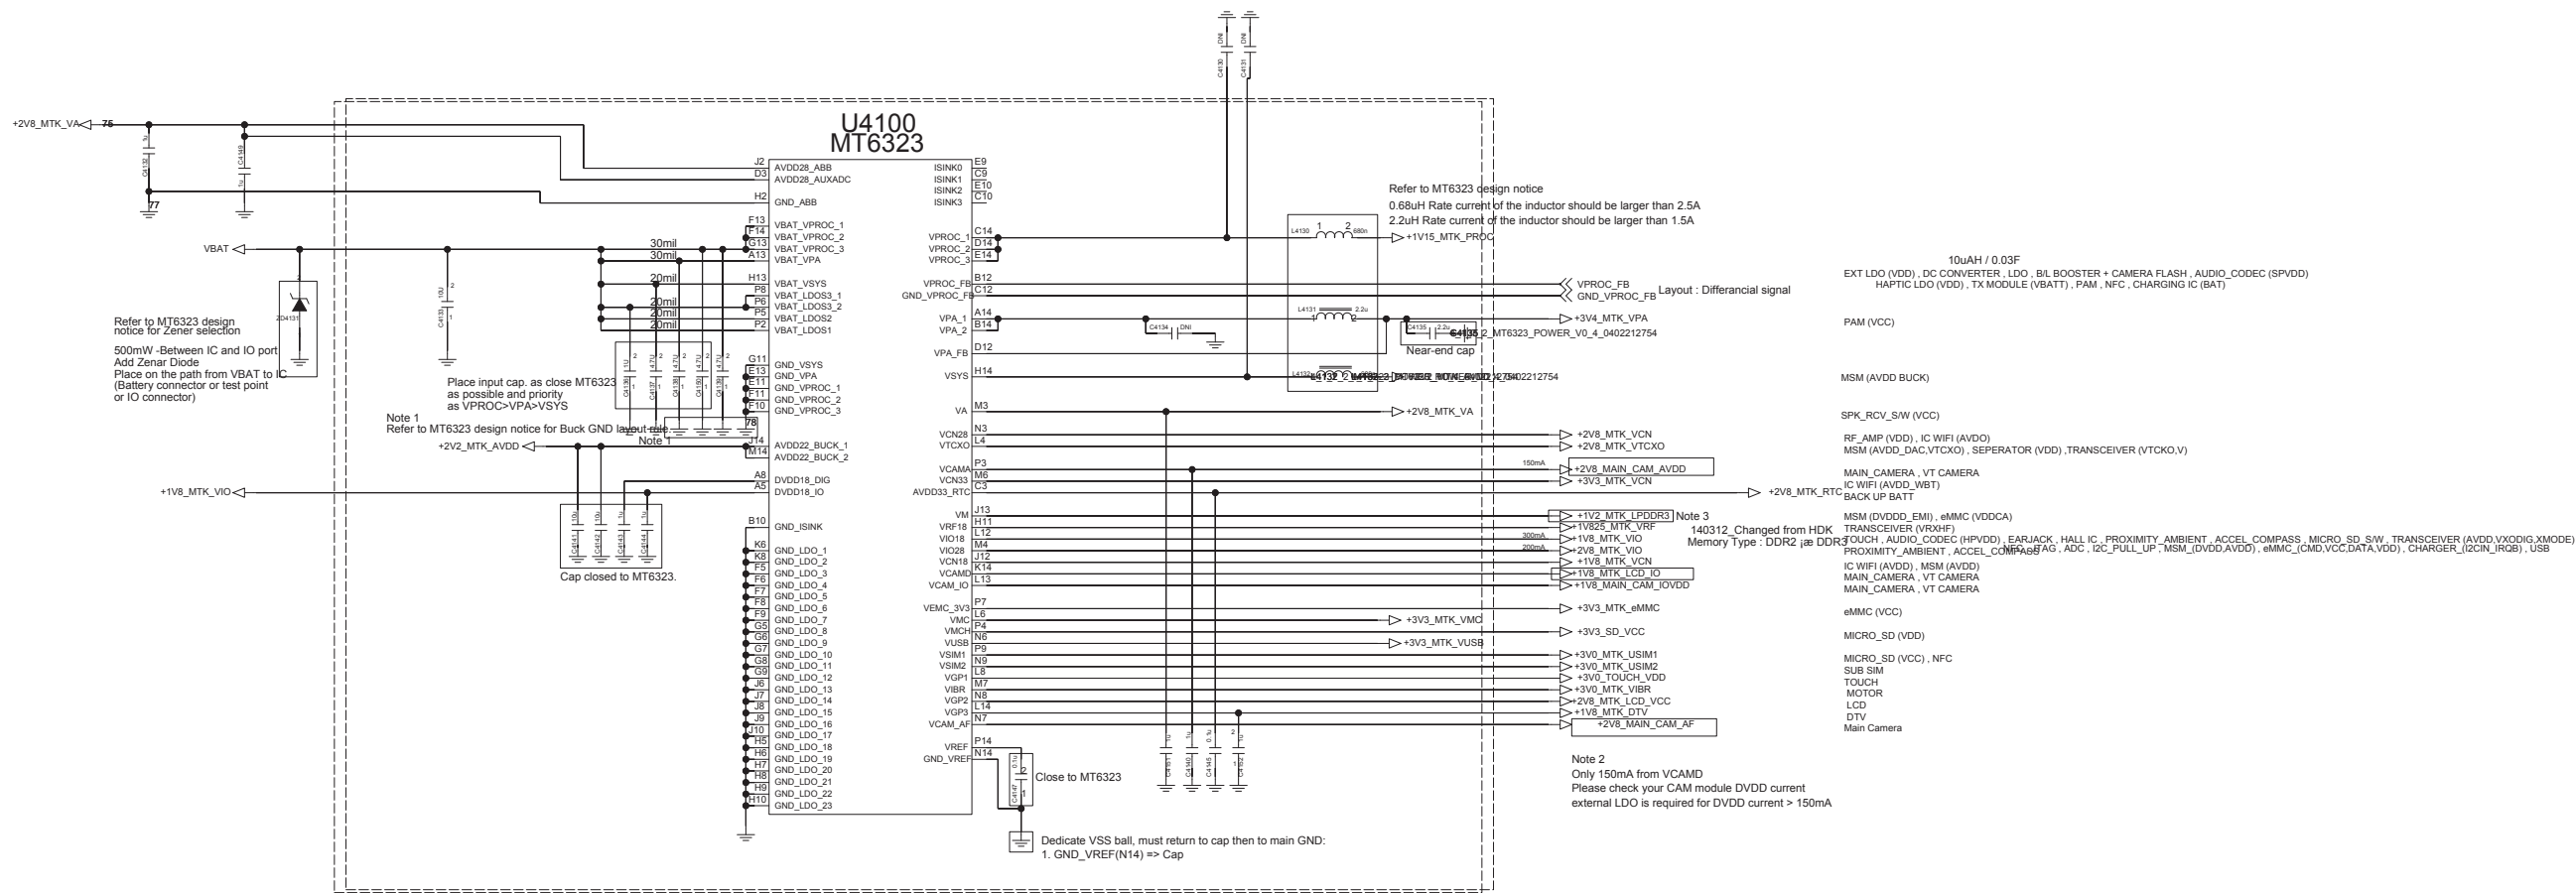

BOT CAN



BACKUP BATT




Buck converter brief specifications

VSYS	0.7-1.3V/1.35V (optional) (6.25mV/step)	2,800	Processor / Digital Core
VSYS	2.2	1,400	System LDO input
VPA	0.5V - 3.4V (0.1V/step)	600	3G power amplifier


LDO types and brief specifications

Type	LDOname	Vout (Volt)	I _{max} (mA)	Application
ALDO	VCN28	2.8	30	RF chip
ALDO	VTCXO	2.8	40	13/26MHz reference clock
ALDO	VA	2.8	150	Analog baseband
ALDO	VCAMA	2.8	150	Analog power for camera module
DLDO	VCN_3V3	3.3/3.4/3.5/3.6	240	WiFi
DLDO	VIO28	2.8	200	Digital IO
DLDO	VSIM1	1.8/3.0	50	1st Sim card
DLDO	VSIM2	1.8/3.0	50	2st SIM card
DLDO	VSUB	3.3	20	USB
DLDO	VGP1	1.2/1.3/1.5/1.8 2.0/2.8/3.0/3.3	100	General purpose LDO
DLDO	VGP2	1.2/1.3/1.5/1.8 2.0/2.5/2.8/3.0	100	General purpose LDO
DLDO	VEMC_3V3	3.0/3.3	400	3.3V EMMC
DLDO	VCAM_AF	1.2/1.3/1.5/1.8 2.0/2.8/3.0/3.3	100	AF application
ALDO	VMC	1.8/3.3	100	SD 2.0/3.0 memory card
ALDO	VMCH	3.0/3.3	400	SD 3.0 memory card
DLDO	VIBR	1.2/1.3/1.5/1.8 2.0/2.8/3.0/3.3	100	Vibrator
PTCLDO	VRTC	2.8	2	Real-time clock
VSYS LDO	VM	1.24/1.38/1.54/1.84	700	Memory power
VSYS LDO	VRF18	1.825	200	RF application
VSYS LDO	VIO18	1.8	300	IO pad power
VSYS LDO	VCAMD	1.2/1.3/1.5/1.8	150	Camera application
VSYS LDO	VCAM_IO	1.8	100	Camera IO application
VSYS LDO	VGP3	1.2/1.3/1.5/1.8	200	General purpose LDO
VSYS LDO	VCN18	1.8	120	General purpose LDO


< 7-1-7-3-1_LCD_5_0inch HD >

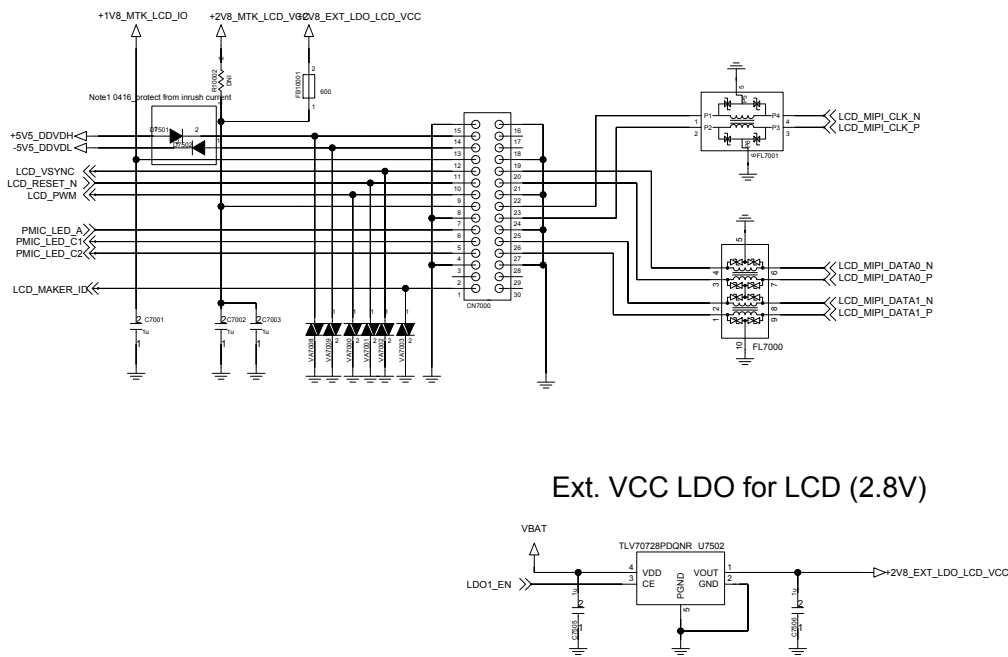


< 7-5-4_DSV_DW8755A > REV_1.1

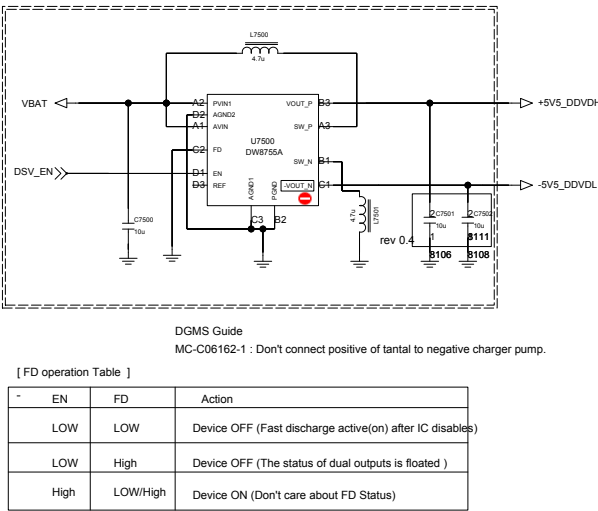


< Main_Camera_30pin_8M >

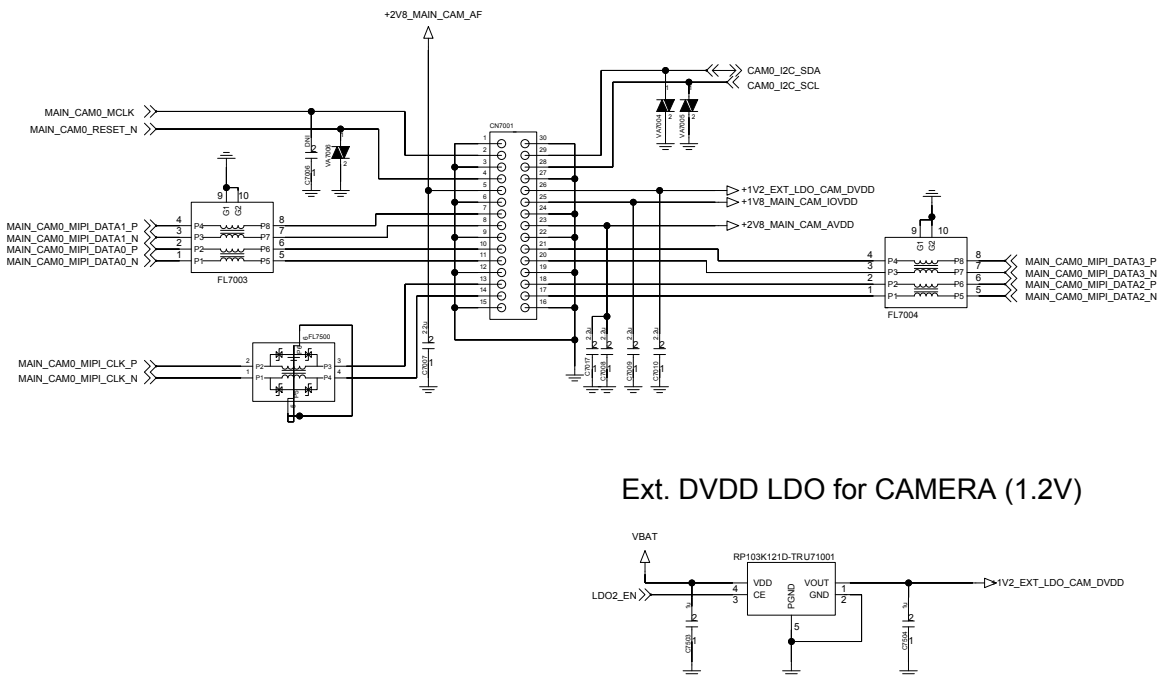


< 7-4-1_VT_Camera_20pin_VGA_1.26M_1.3M_2.4M>

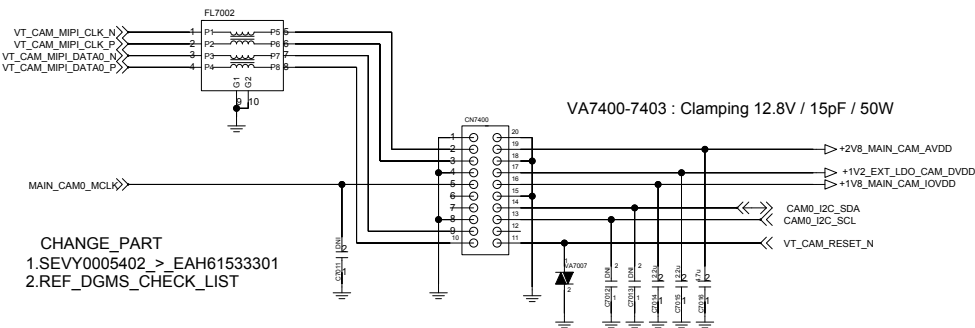


< 6-2-2-2_Audio_Sub_System_TPA2058D3 >
Rev_0.4

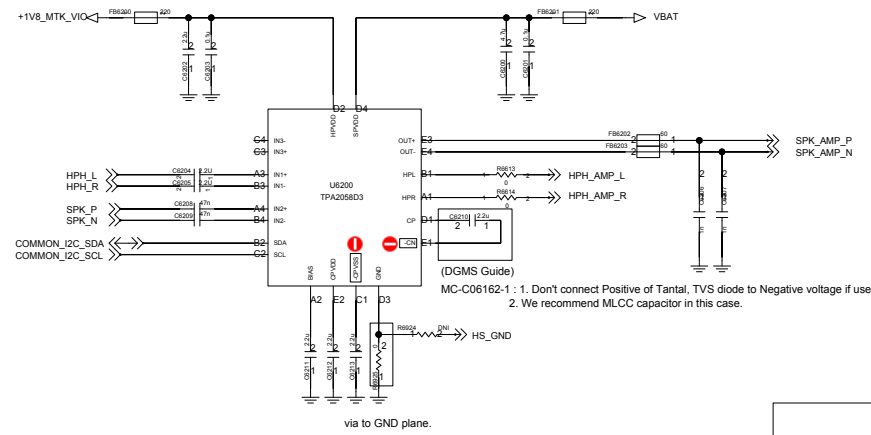


< 6-6-1_Earjack >

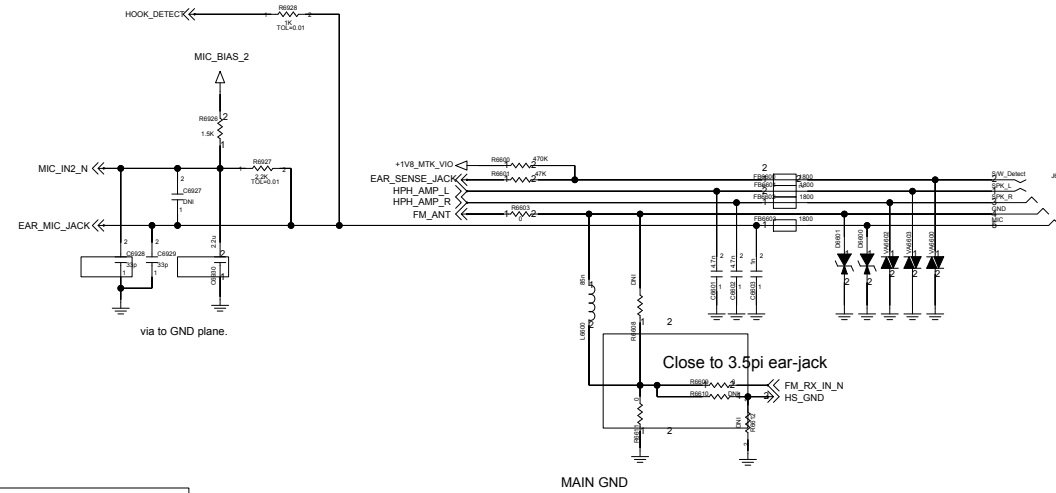

< SPK_RCV_S/W >

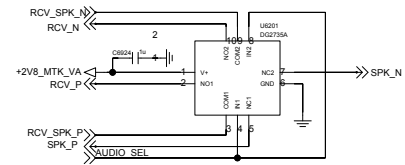


< 6-8-2_ReceiverL Rev_0.4

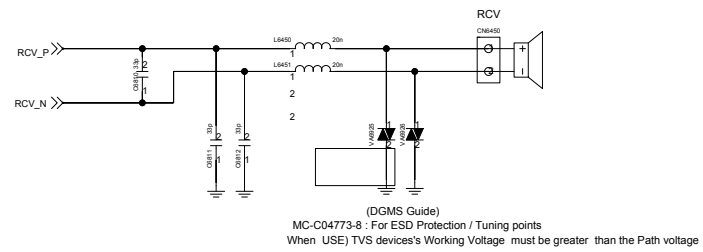


< 6-9-2_2MIC > Rev_0.4

SUB_MIC

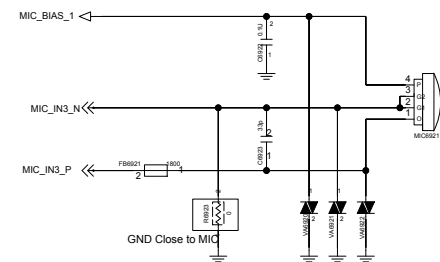


(DGMS Guide)
MC-C00074-11 : For ESD Protection / Tuning points
When USE) TVS devices's Working Voltage must be greater than the Path voltage

MAIN_MIC

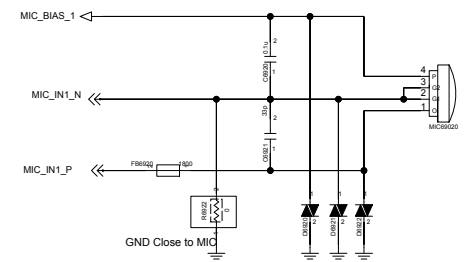


(DGMS Guide)
MC-C00074-11 : For ESD Protection / Tuning points
When USE) TVS devices's Working Voltage must be greater than the Path voltage


< 6-7-1_Speaker > Rev_0.4

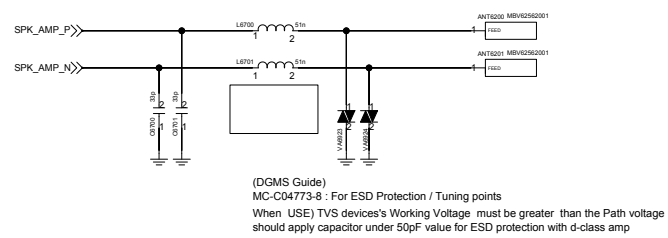


<8-7-1-6_Hall_IC_BU52033NVX> REV.1.0

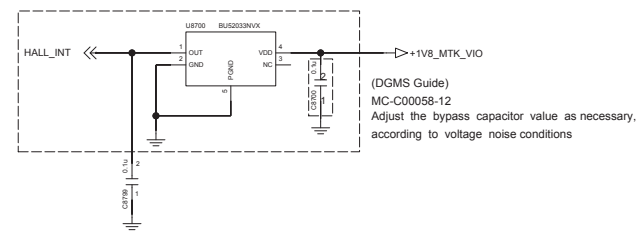


<8-4-1-1_Proximity_APDS-9130> REV.1.0

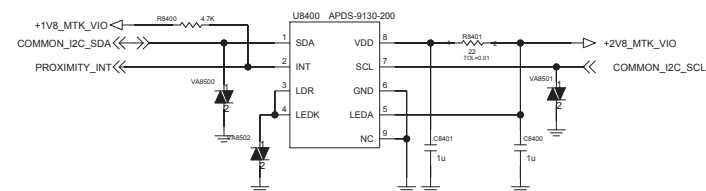


< 9-9-1-1_Motor > Rev_0.3

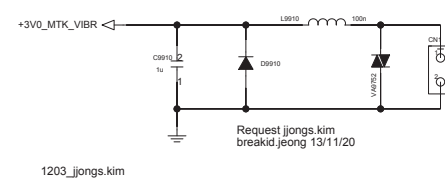


<ACCEL Sensor>

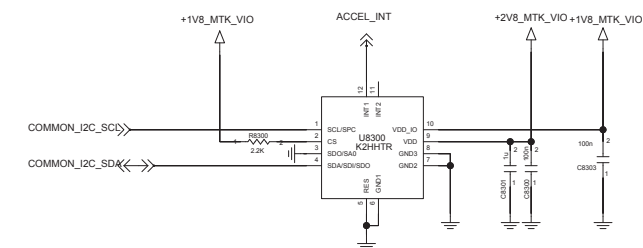


<8-2-1-3_Compass_AK09911> Rev.0.3

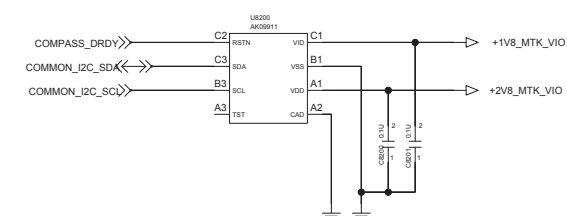


<Sub SIM Connector>

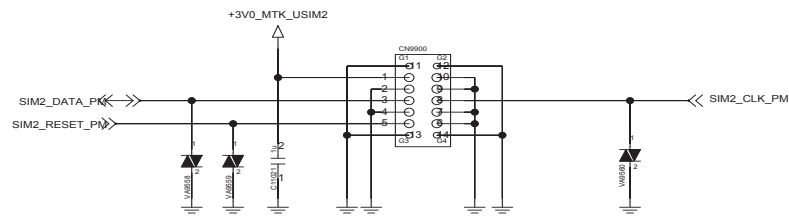

<Back Volume Key>

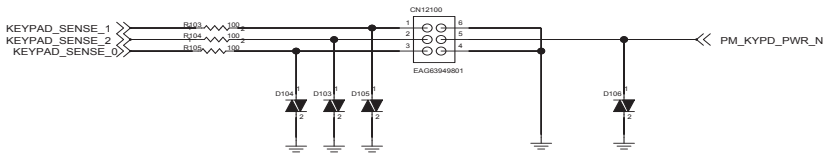

< 9-5-3_Micro_SD_Combo >

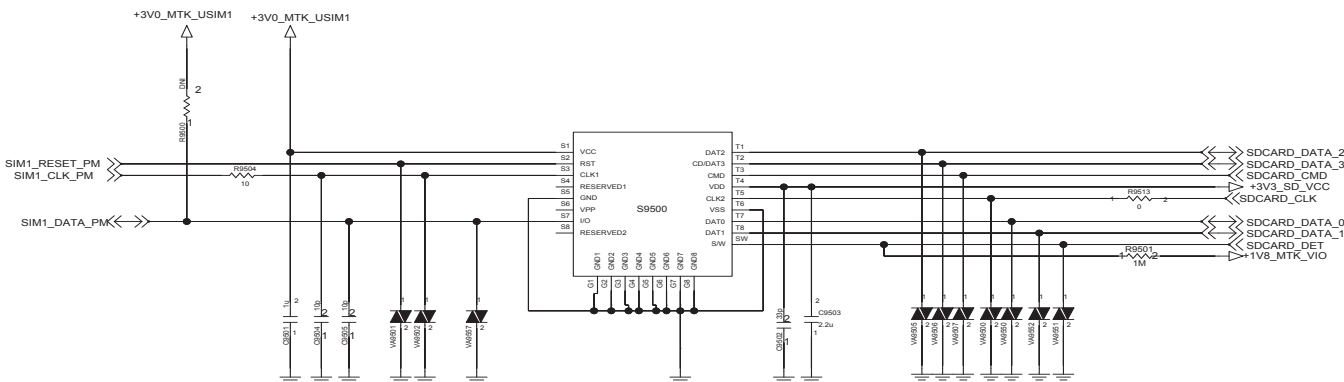

< PID >

Item for Manufacturing

