
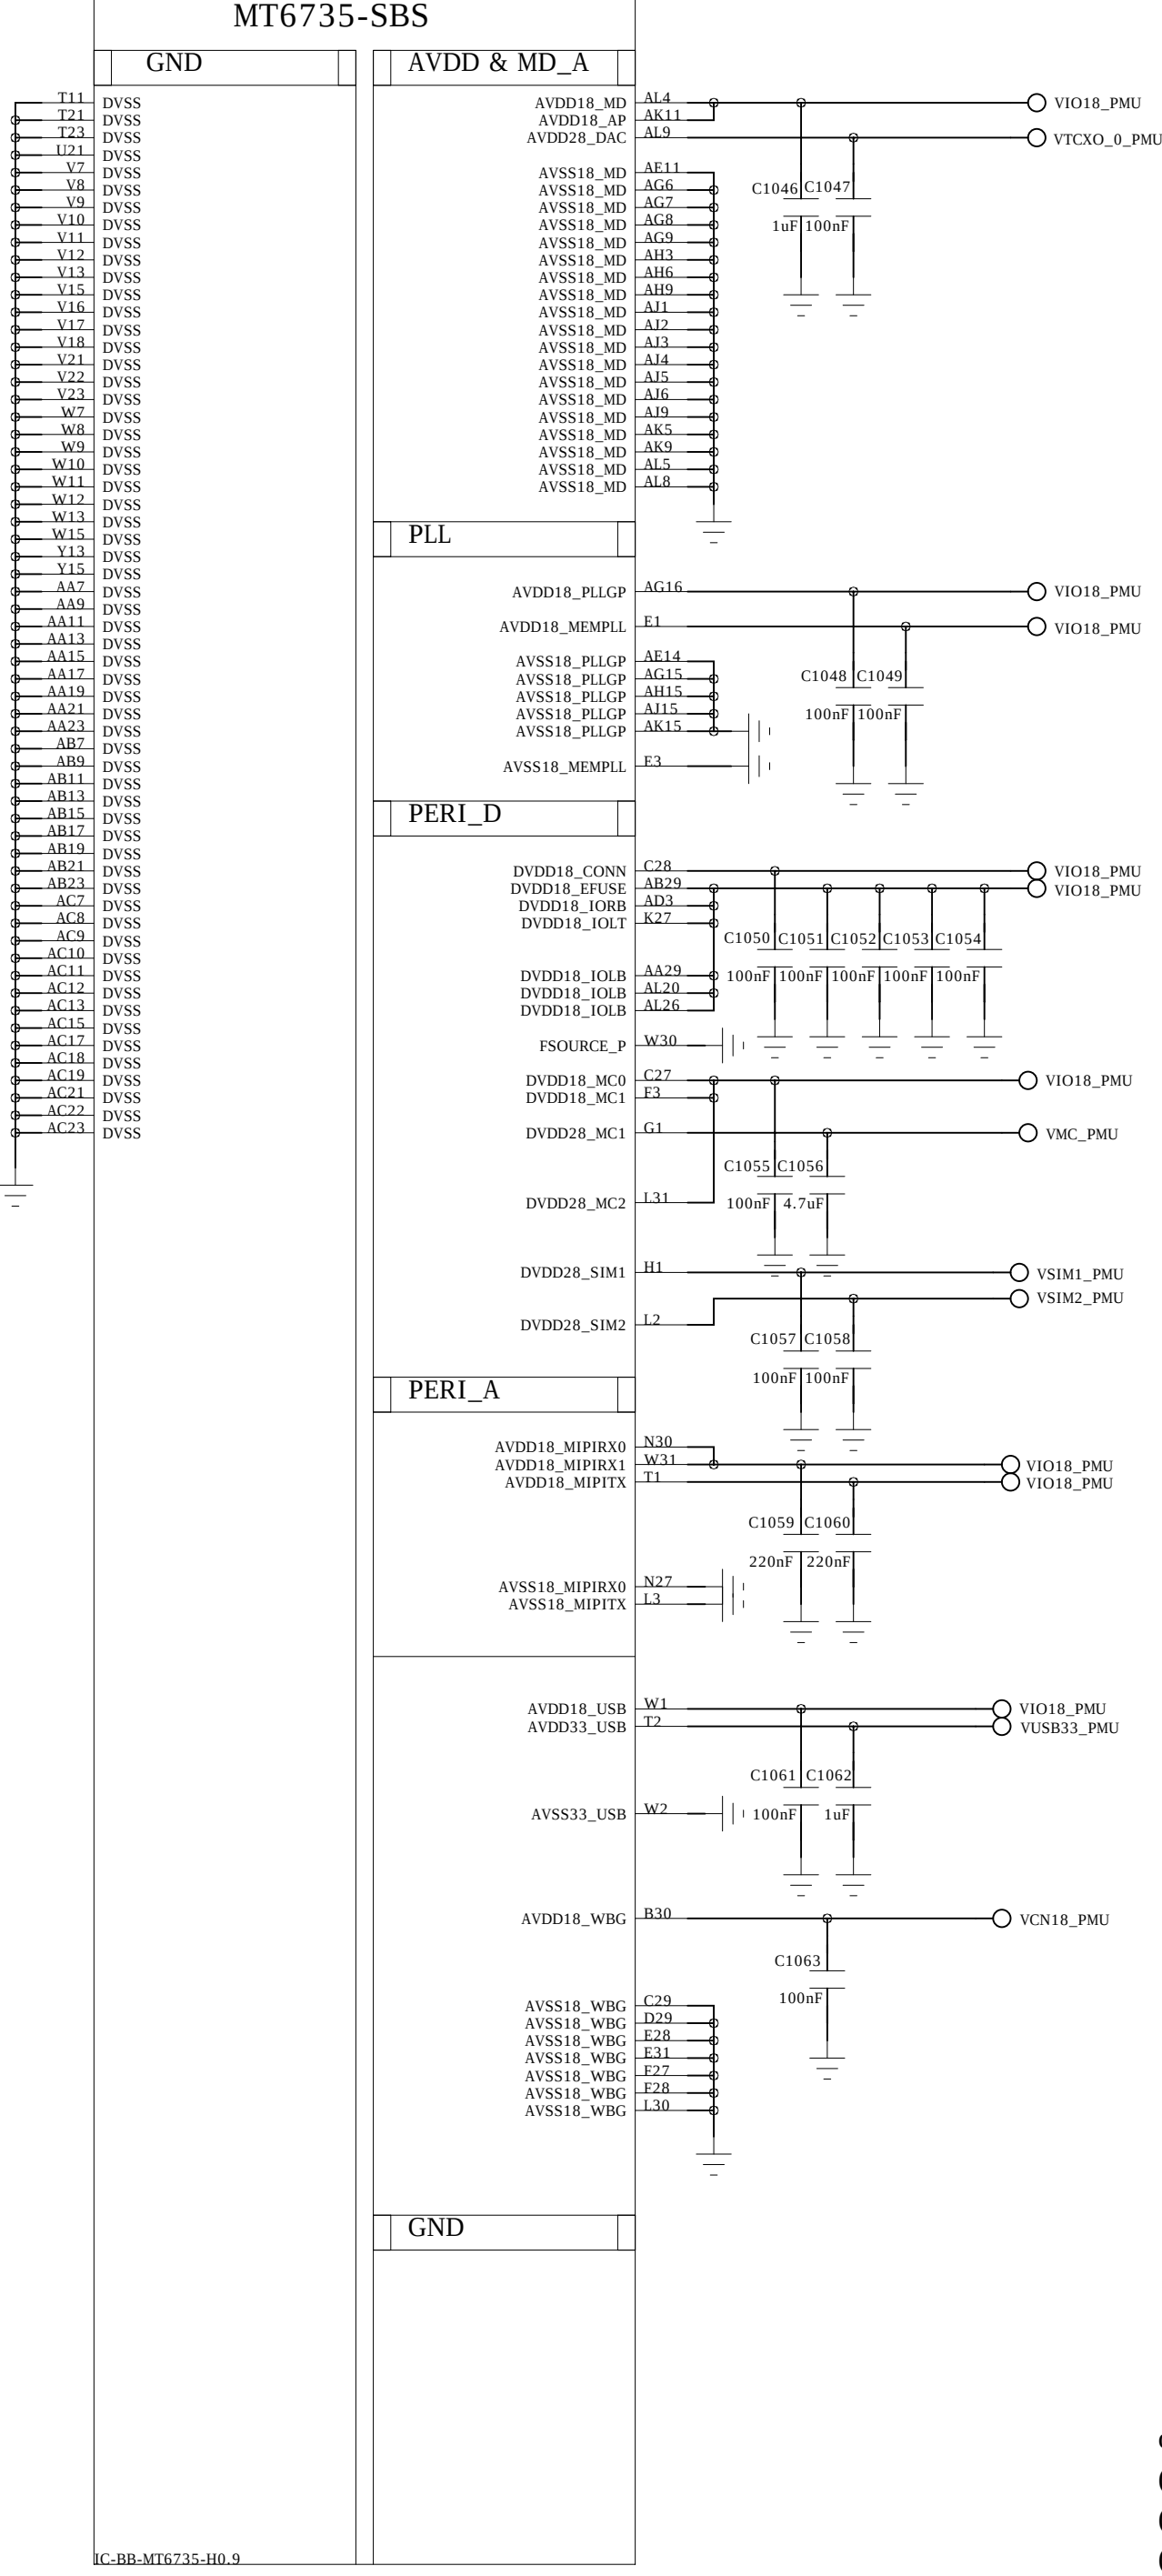


BB_POWER

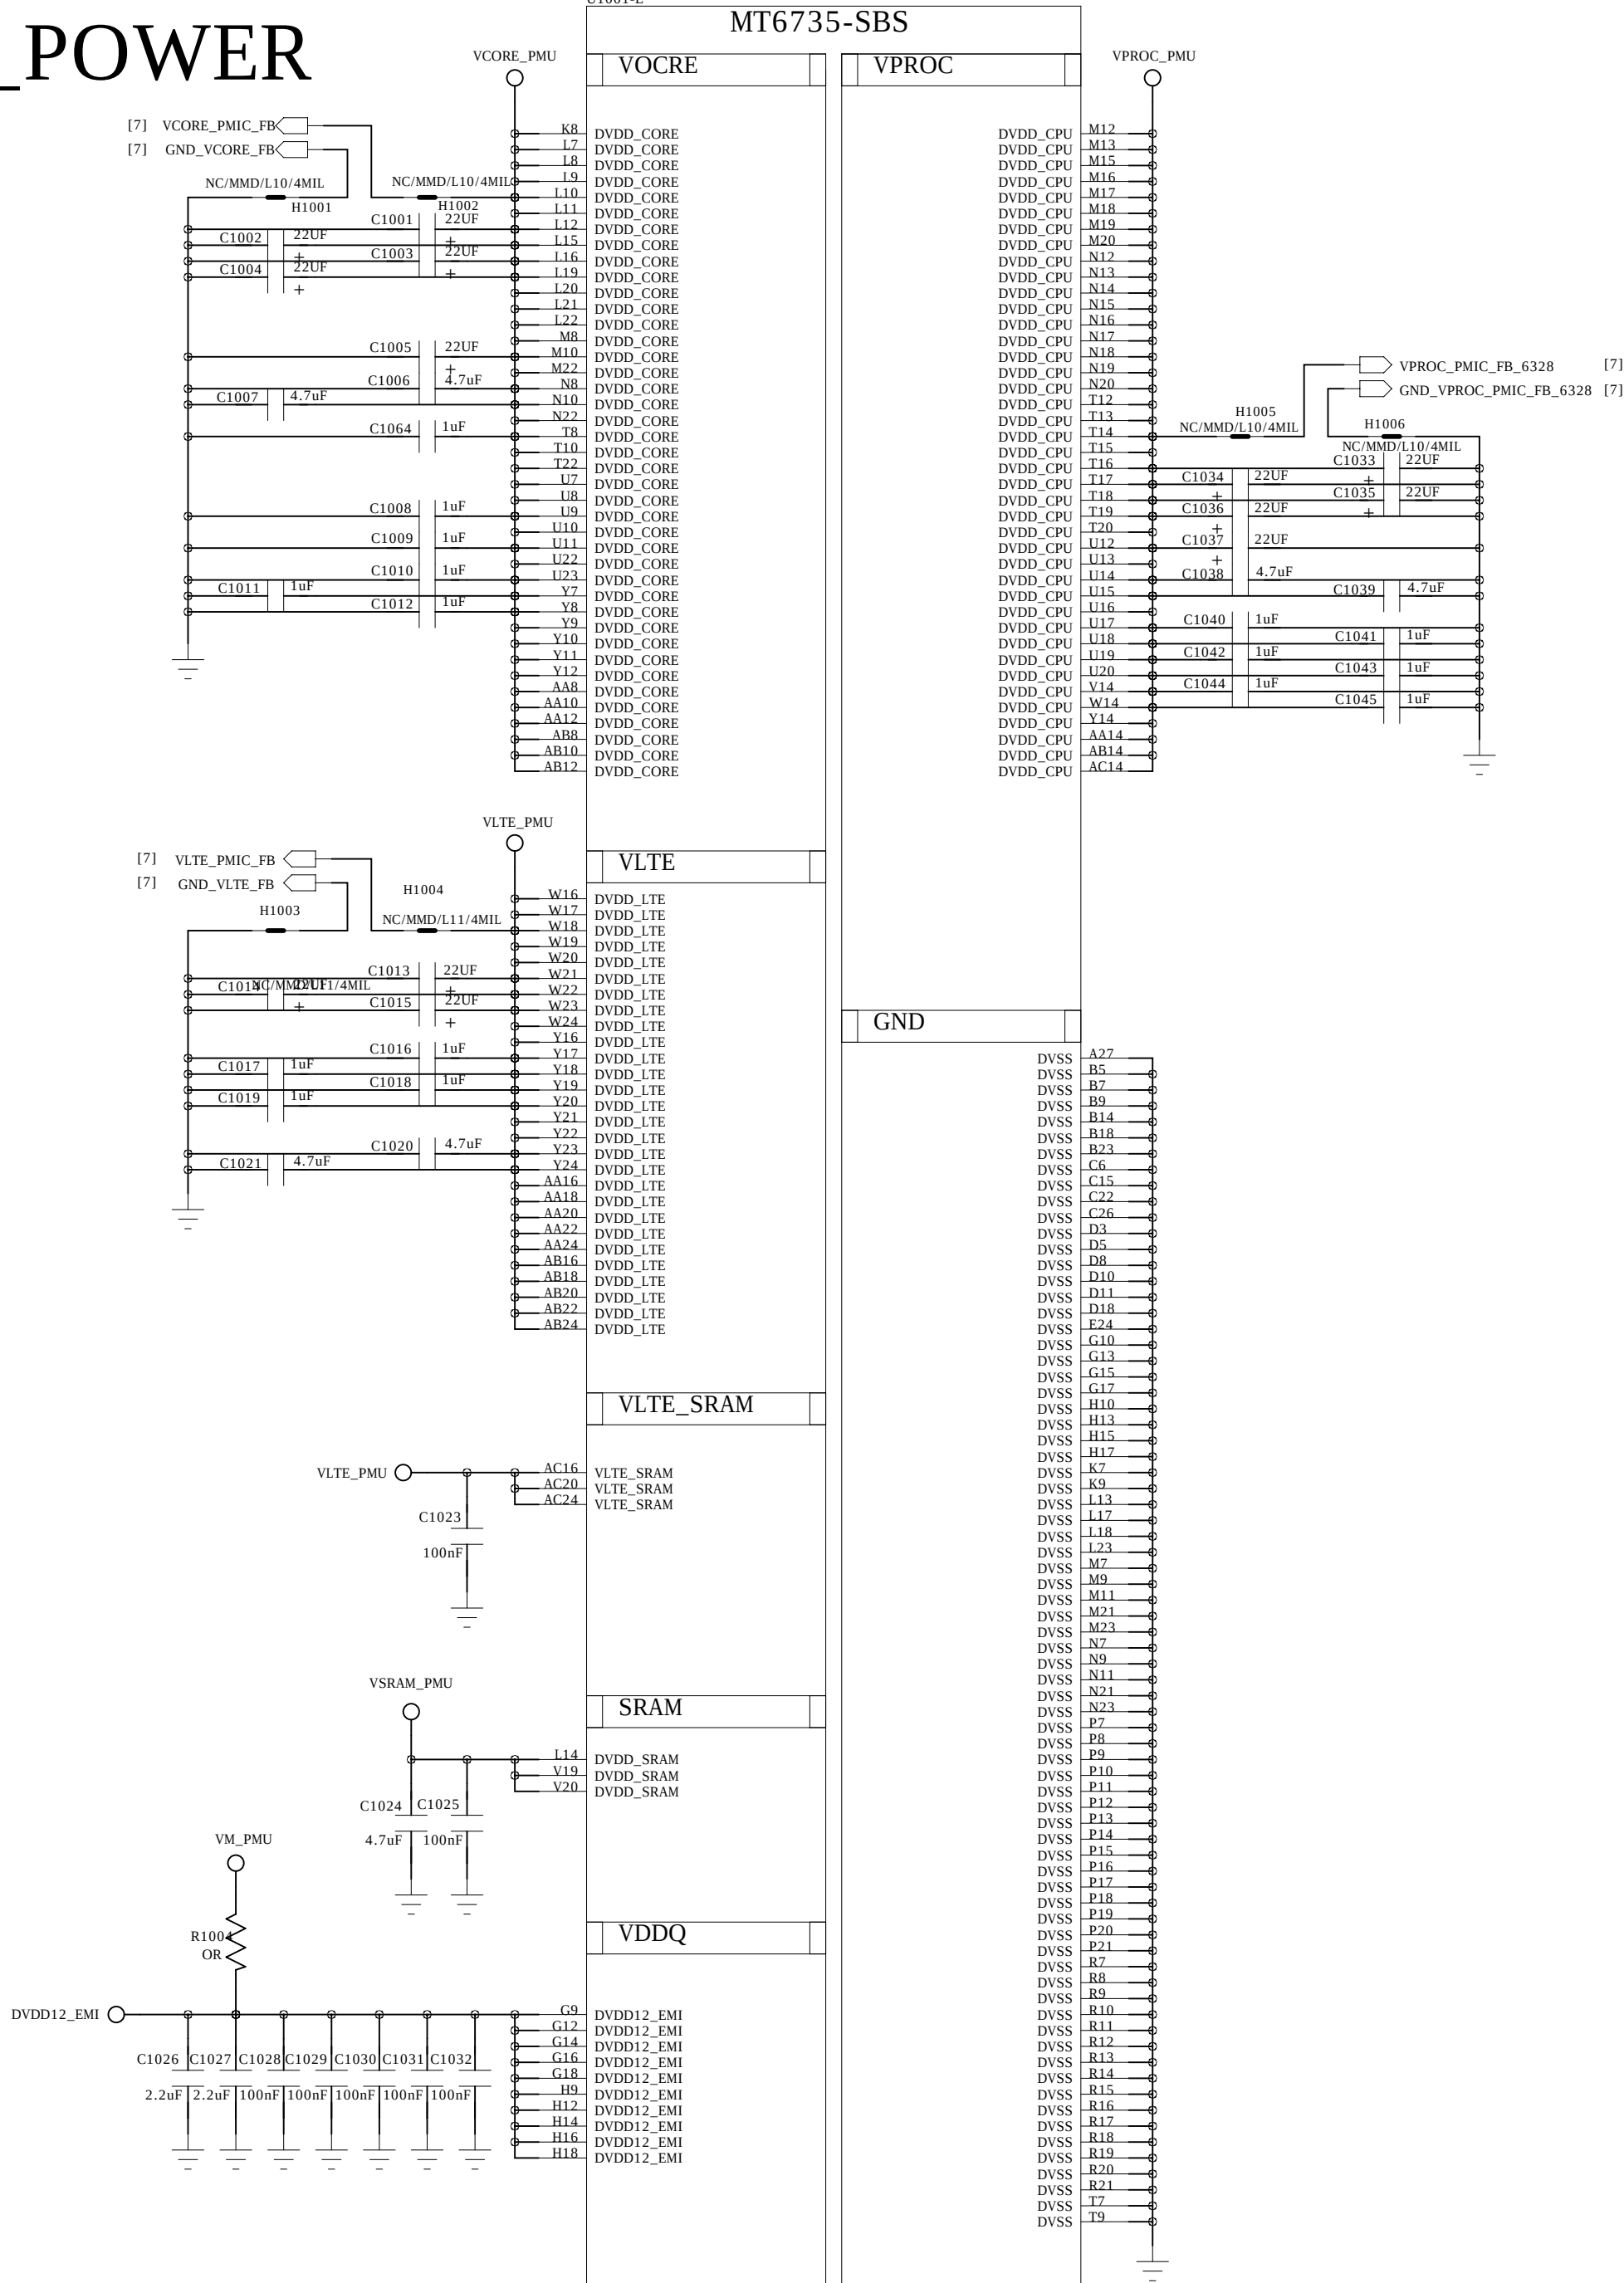

only for EFUSE usage(not share with other application)
(2)W/I EFUSE program, VEFUSE need 1uF bypass cap
(pls refer to ; § LDO output voltage/current table ; ~)
(3)W/O EFUSE program, VEFUSE bypass cap should be NC.

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

COMPANY:

MODEL: H532

Modified Date: 2015/7/27

DRAWN

DATED


TITLE: 10_BB_POWER

VERSION: V1.2





SHEET: 3 OF 21

CHECKED

DATED

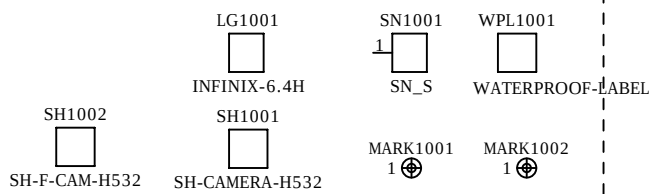



REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

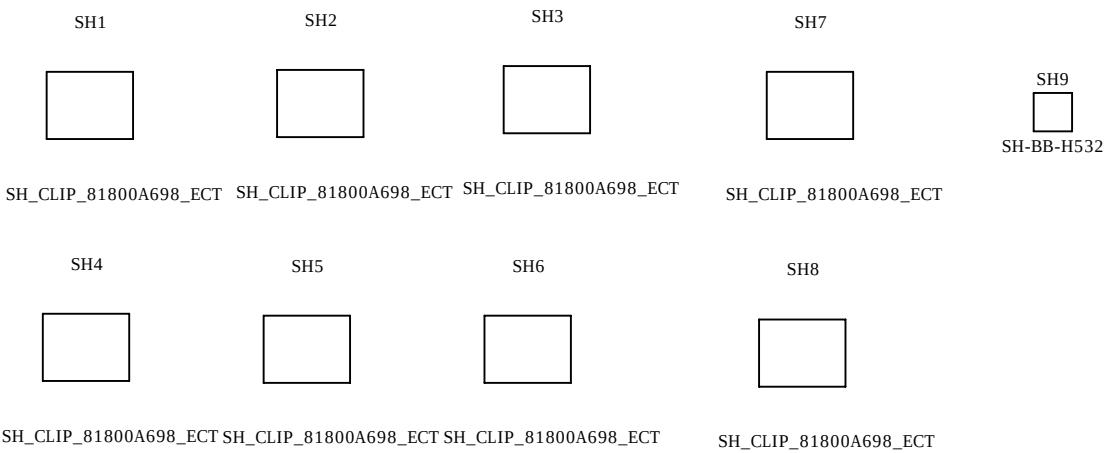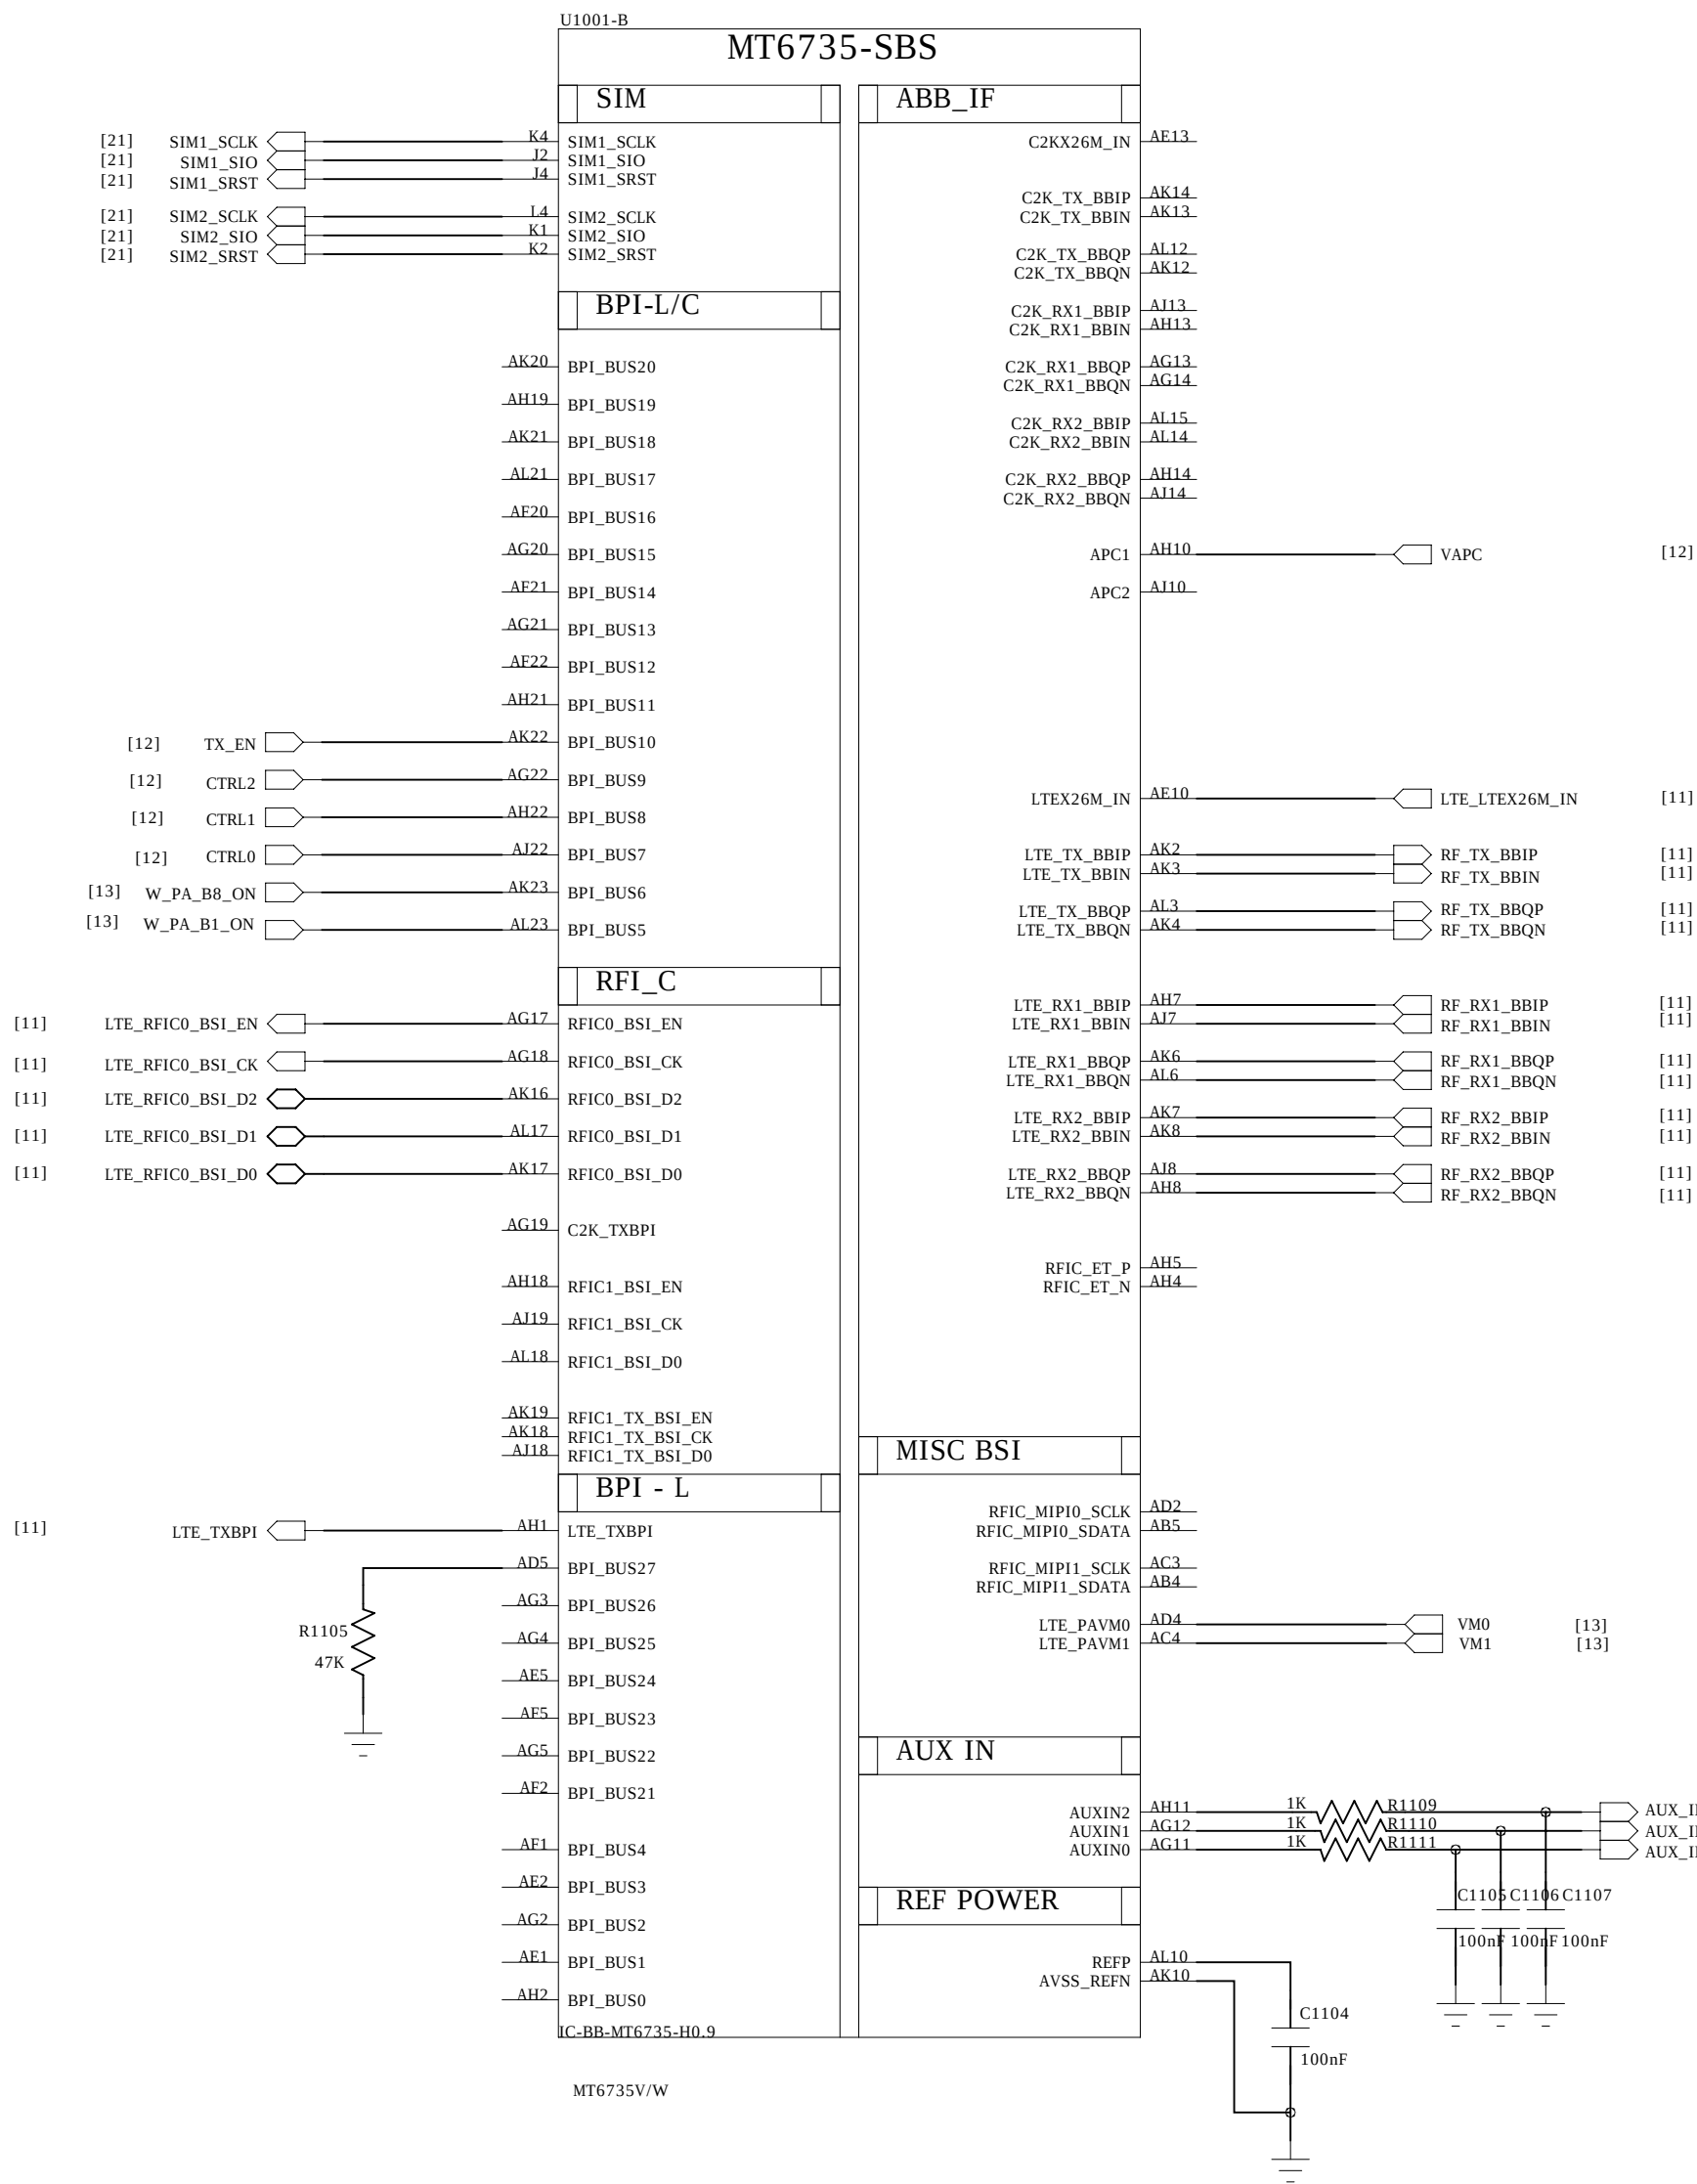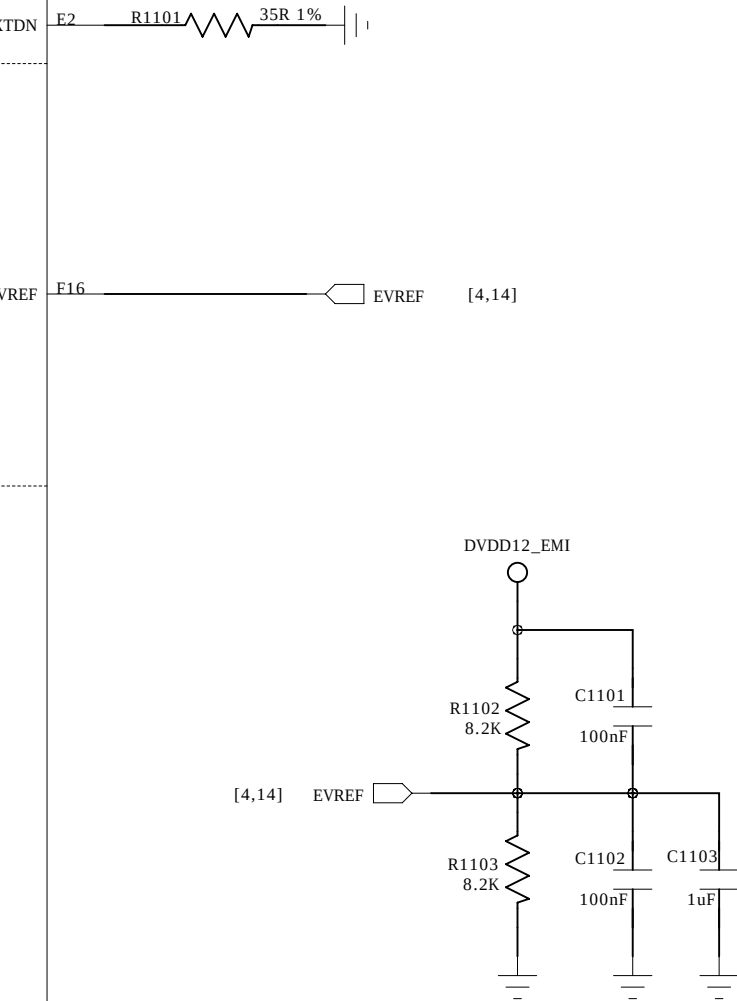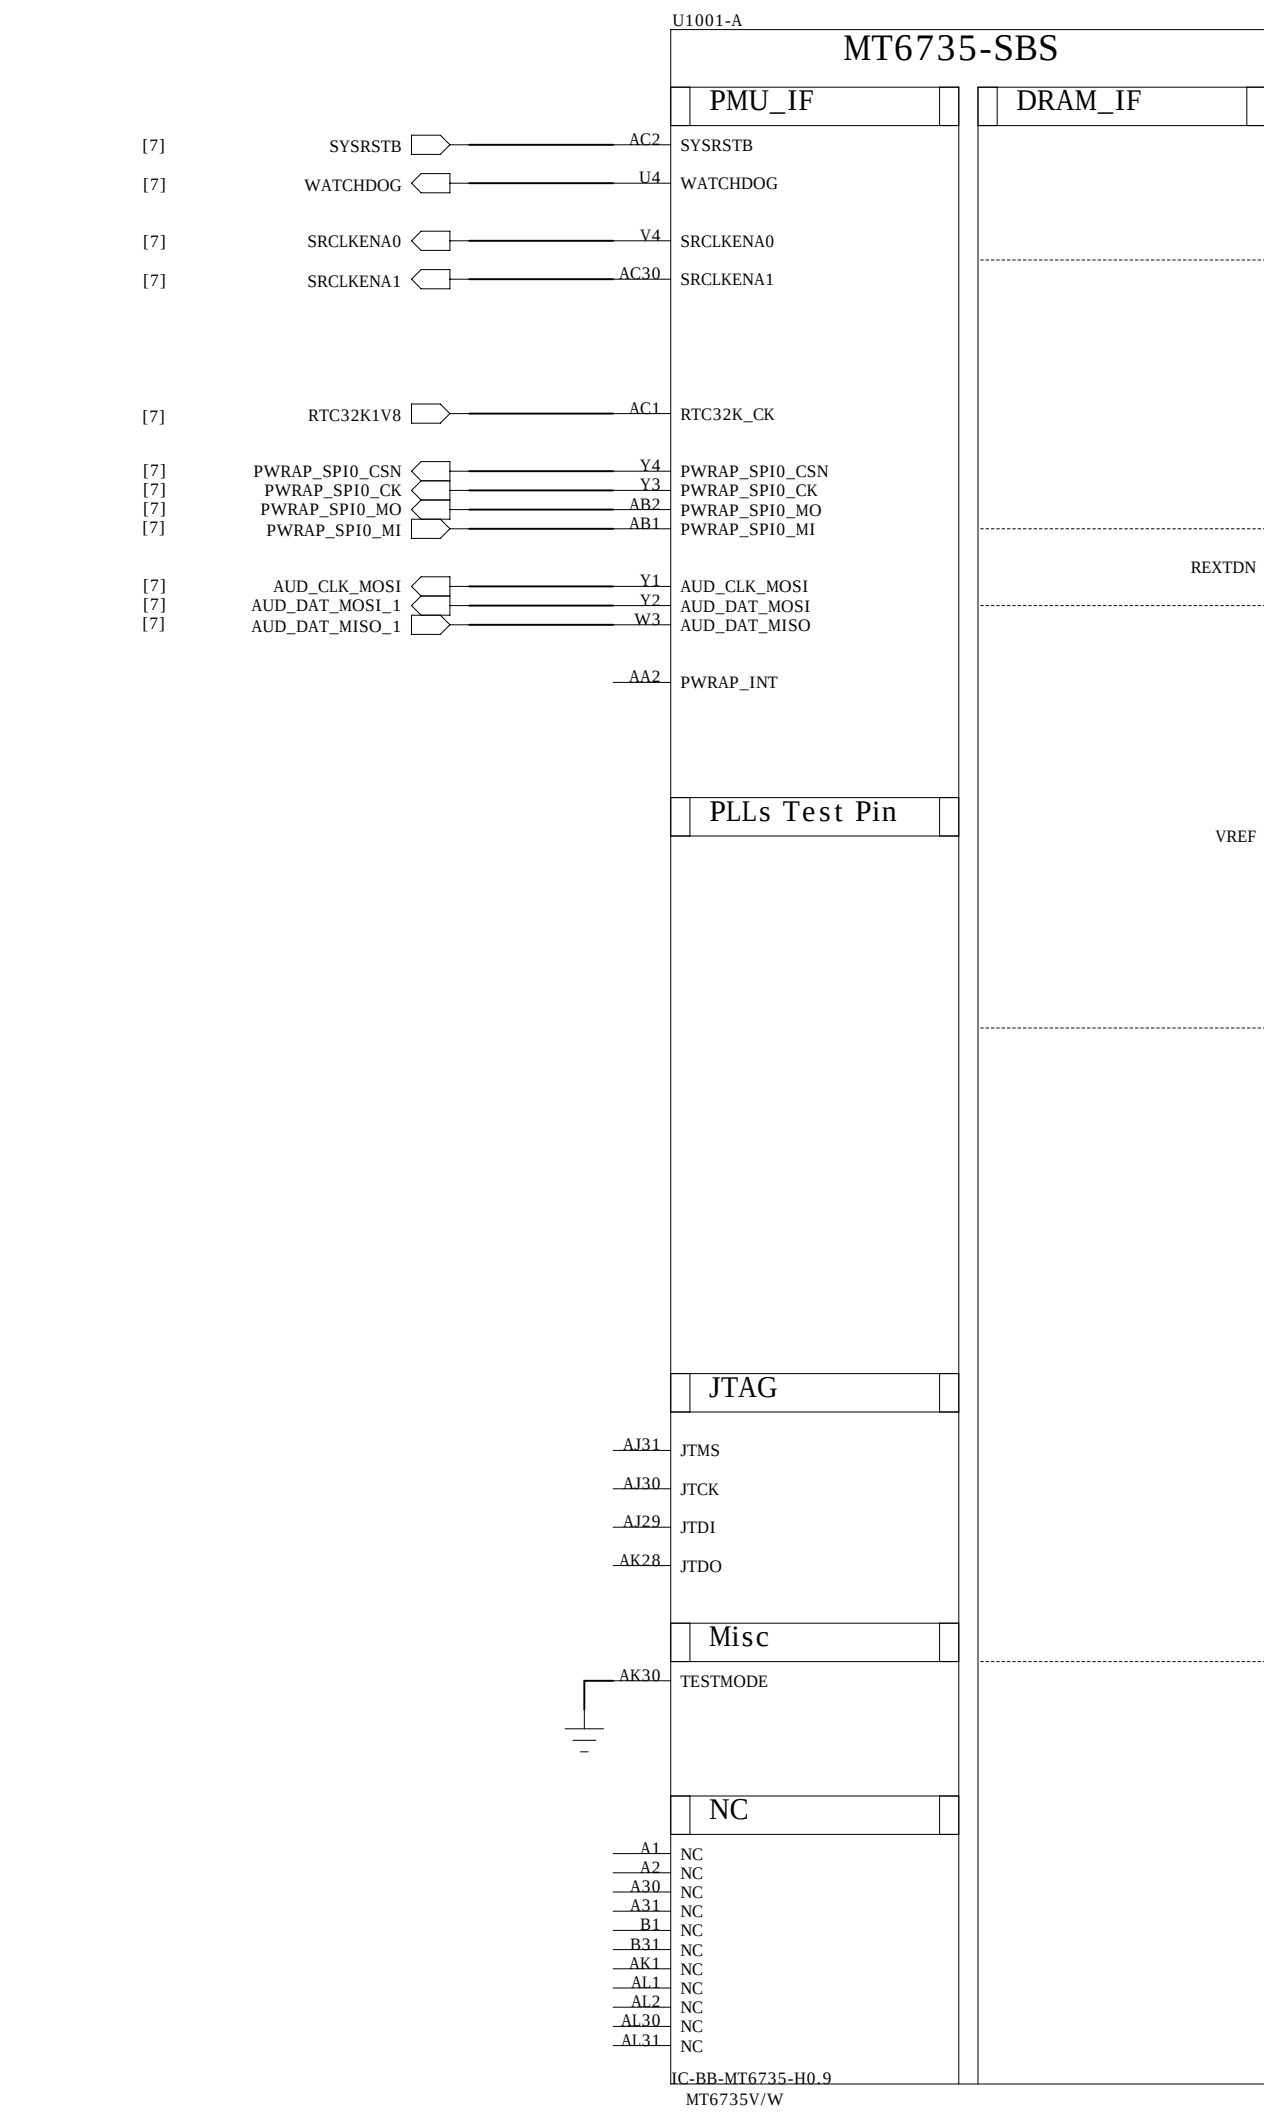

COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 11_BB_I		VERSION: V1.2	SHEET: 4 OF 21
CHECKED		DATED					


BB_II

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

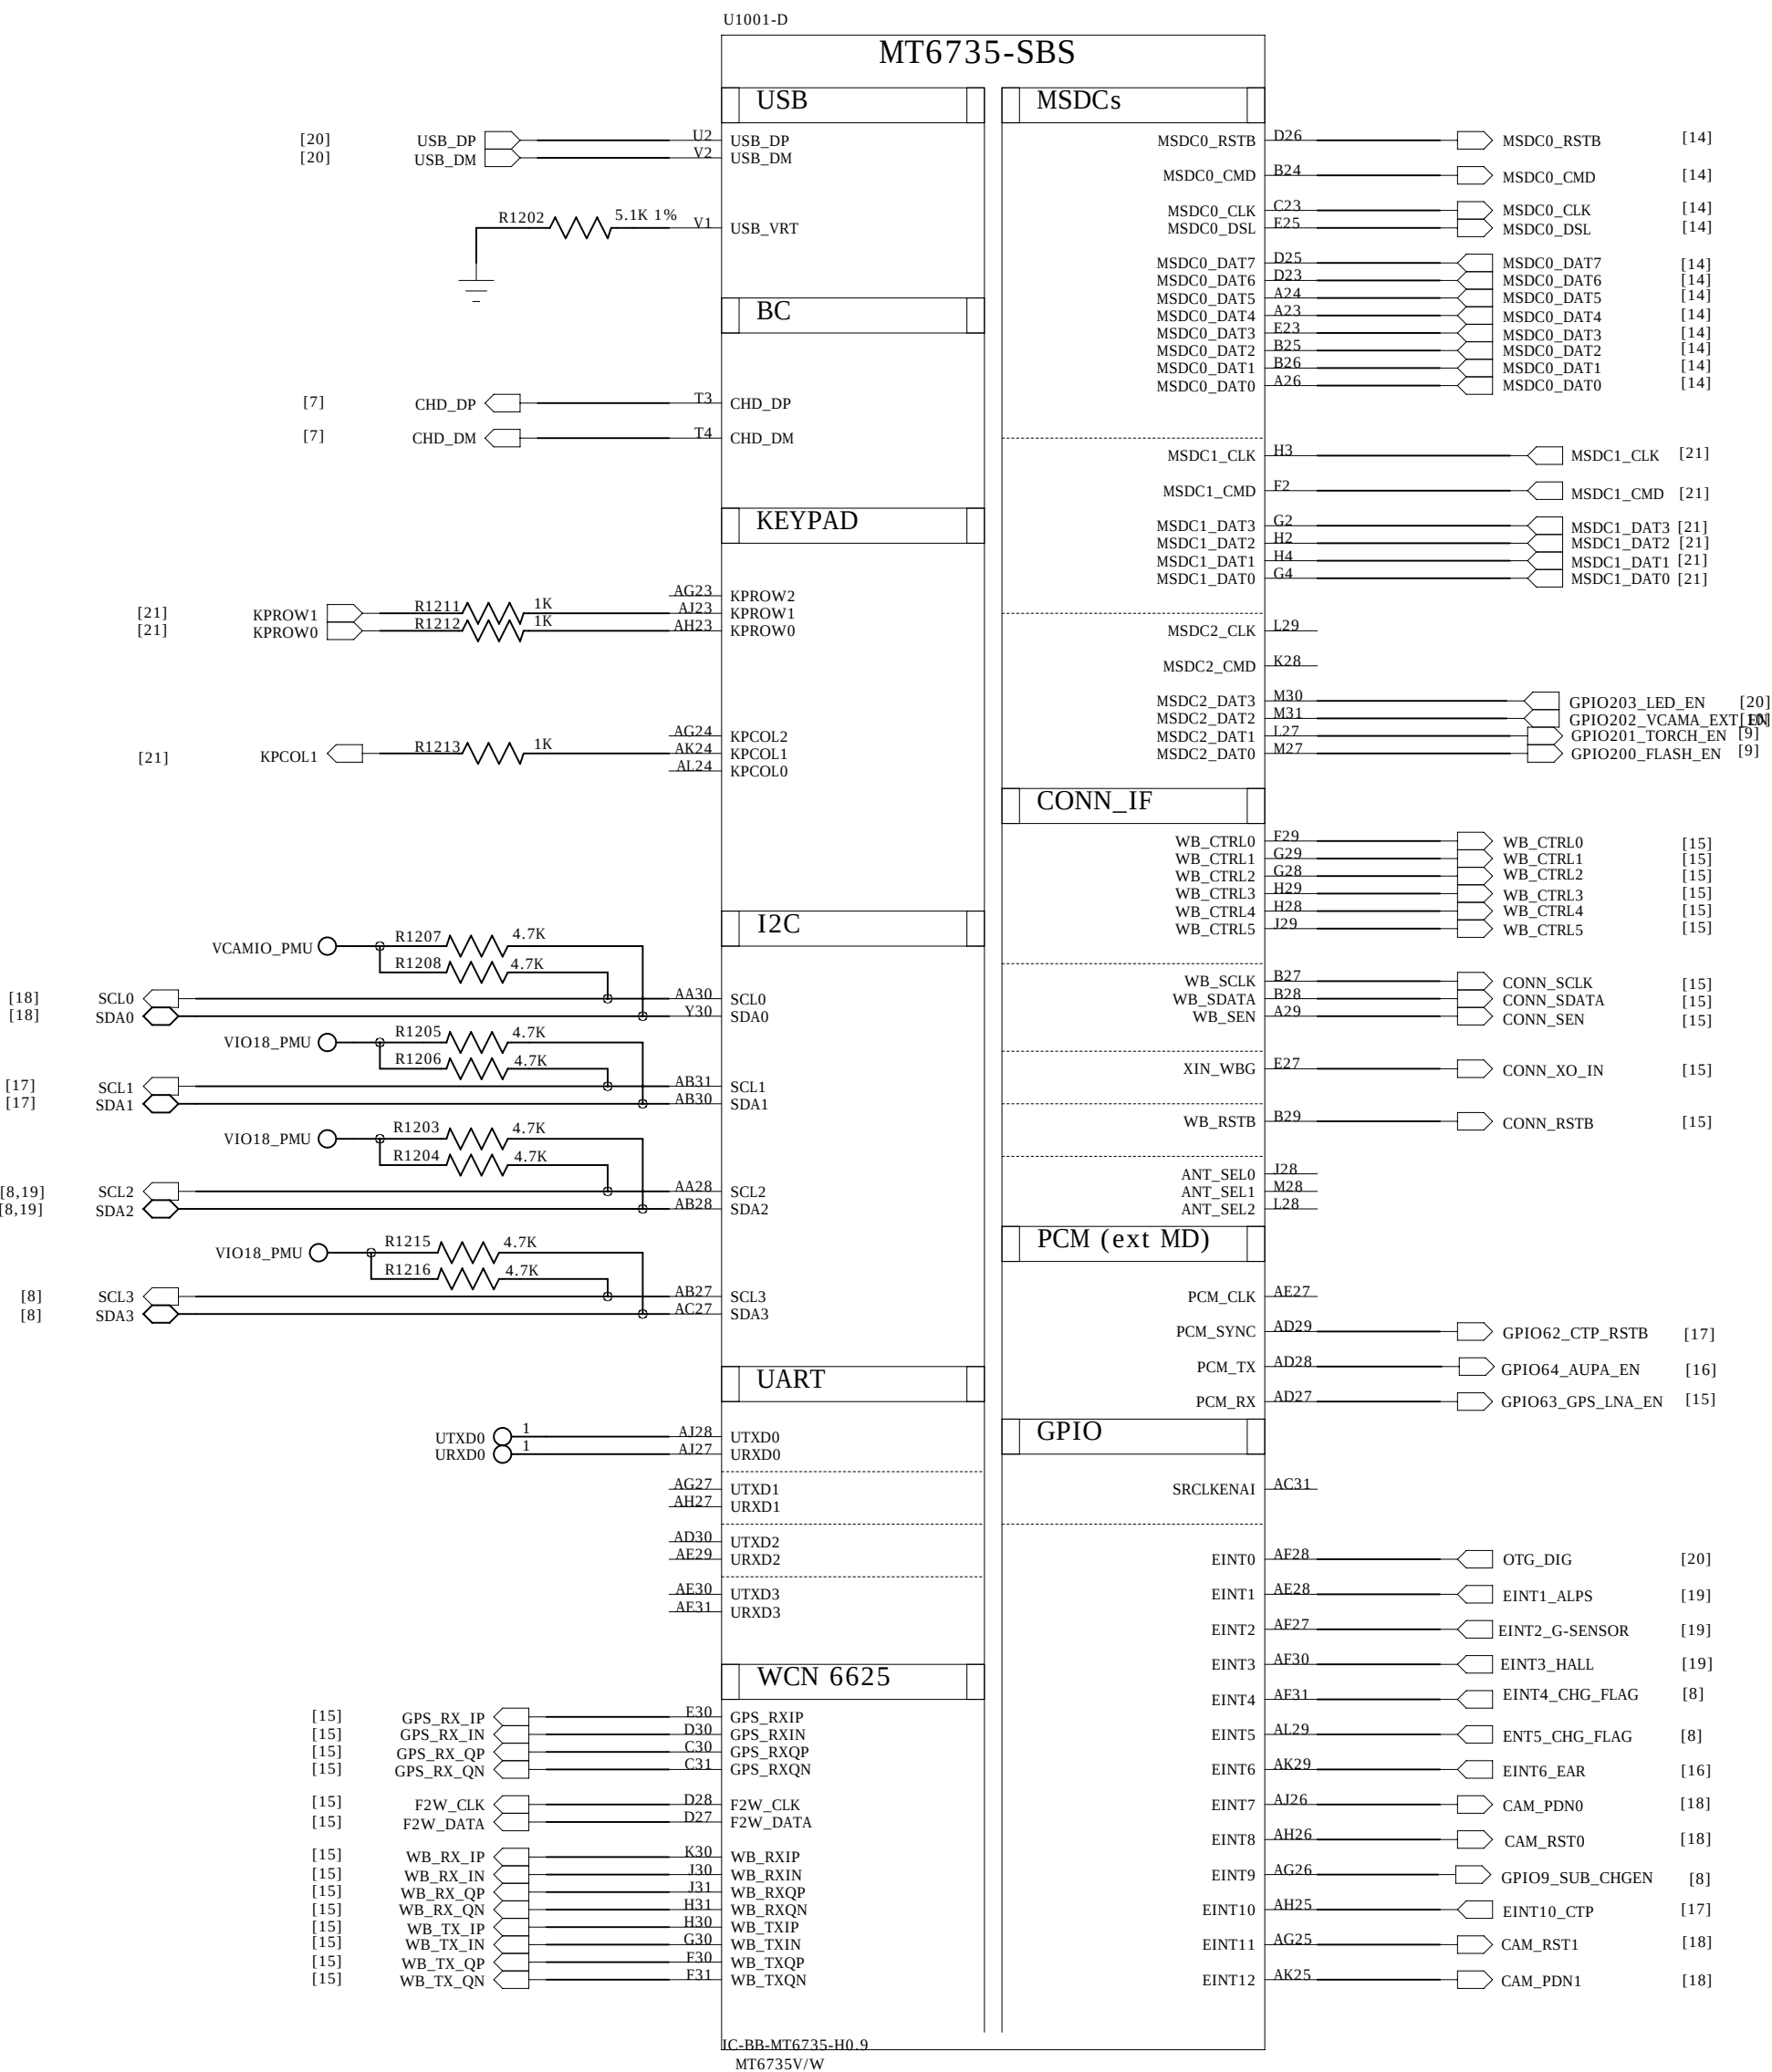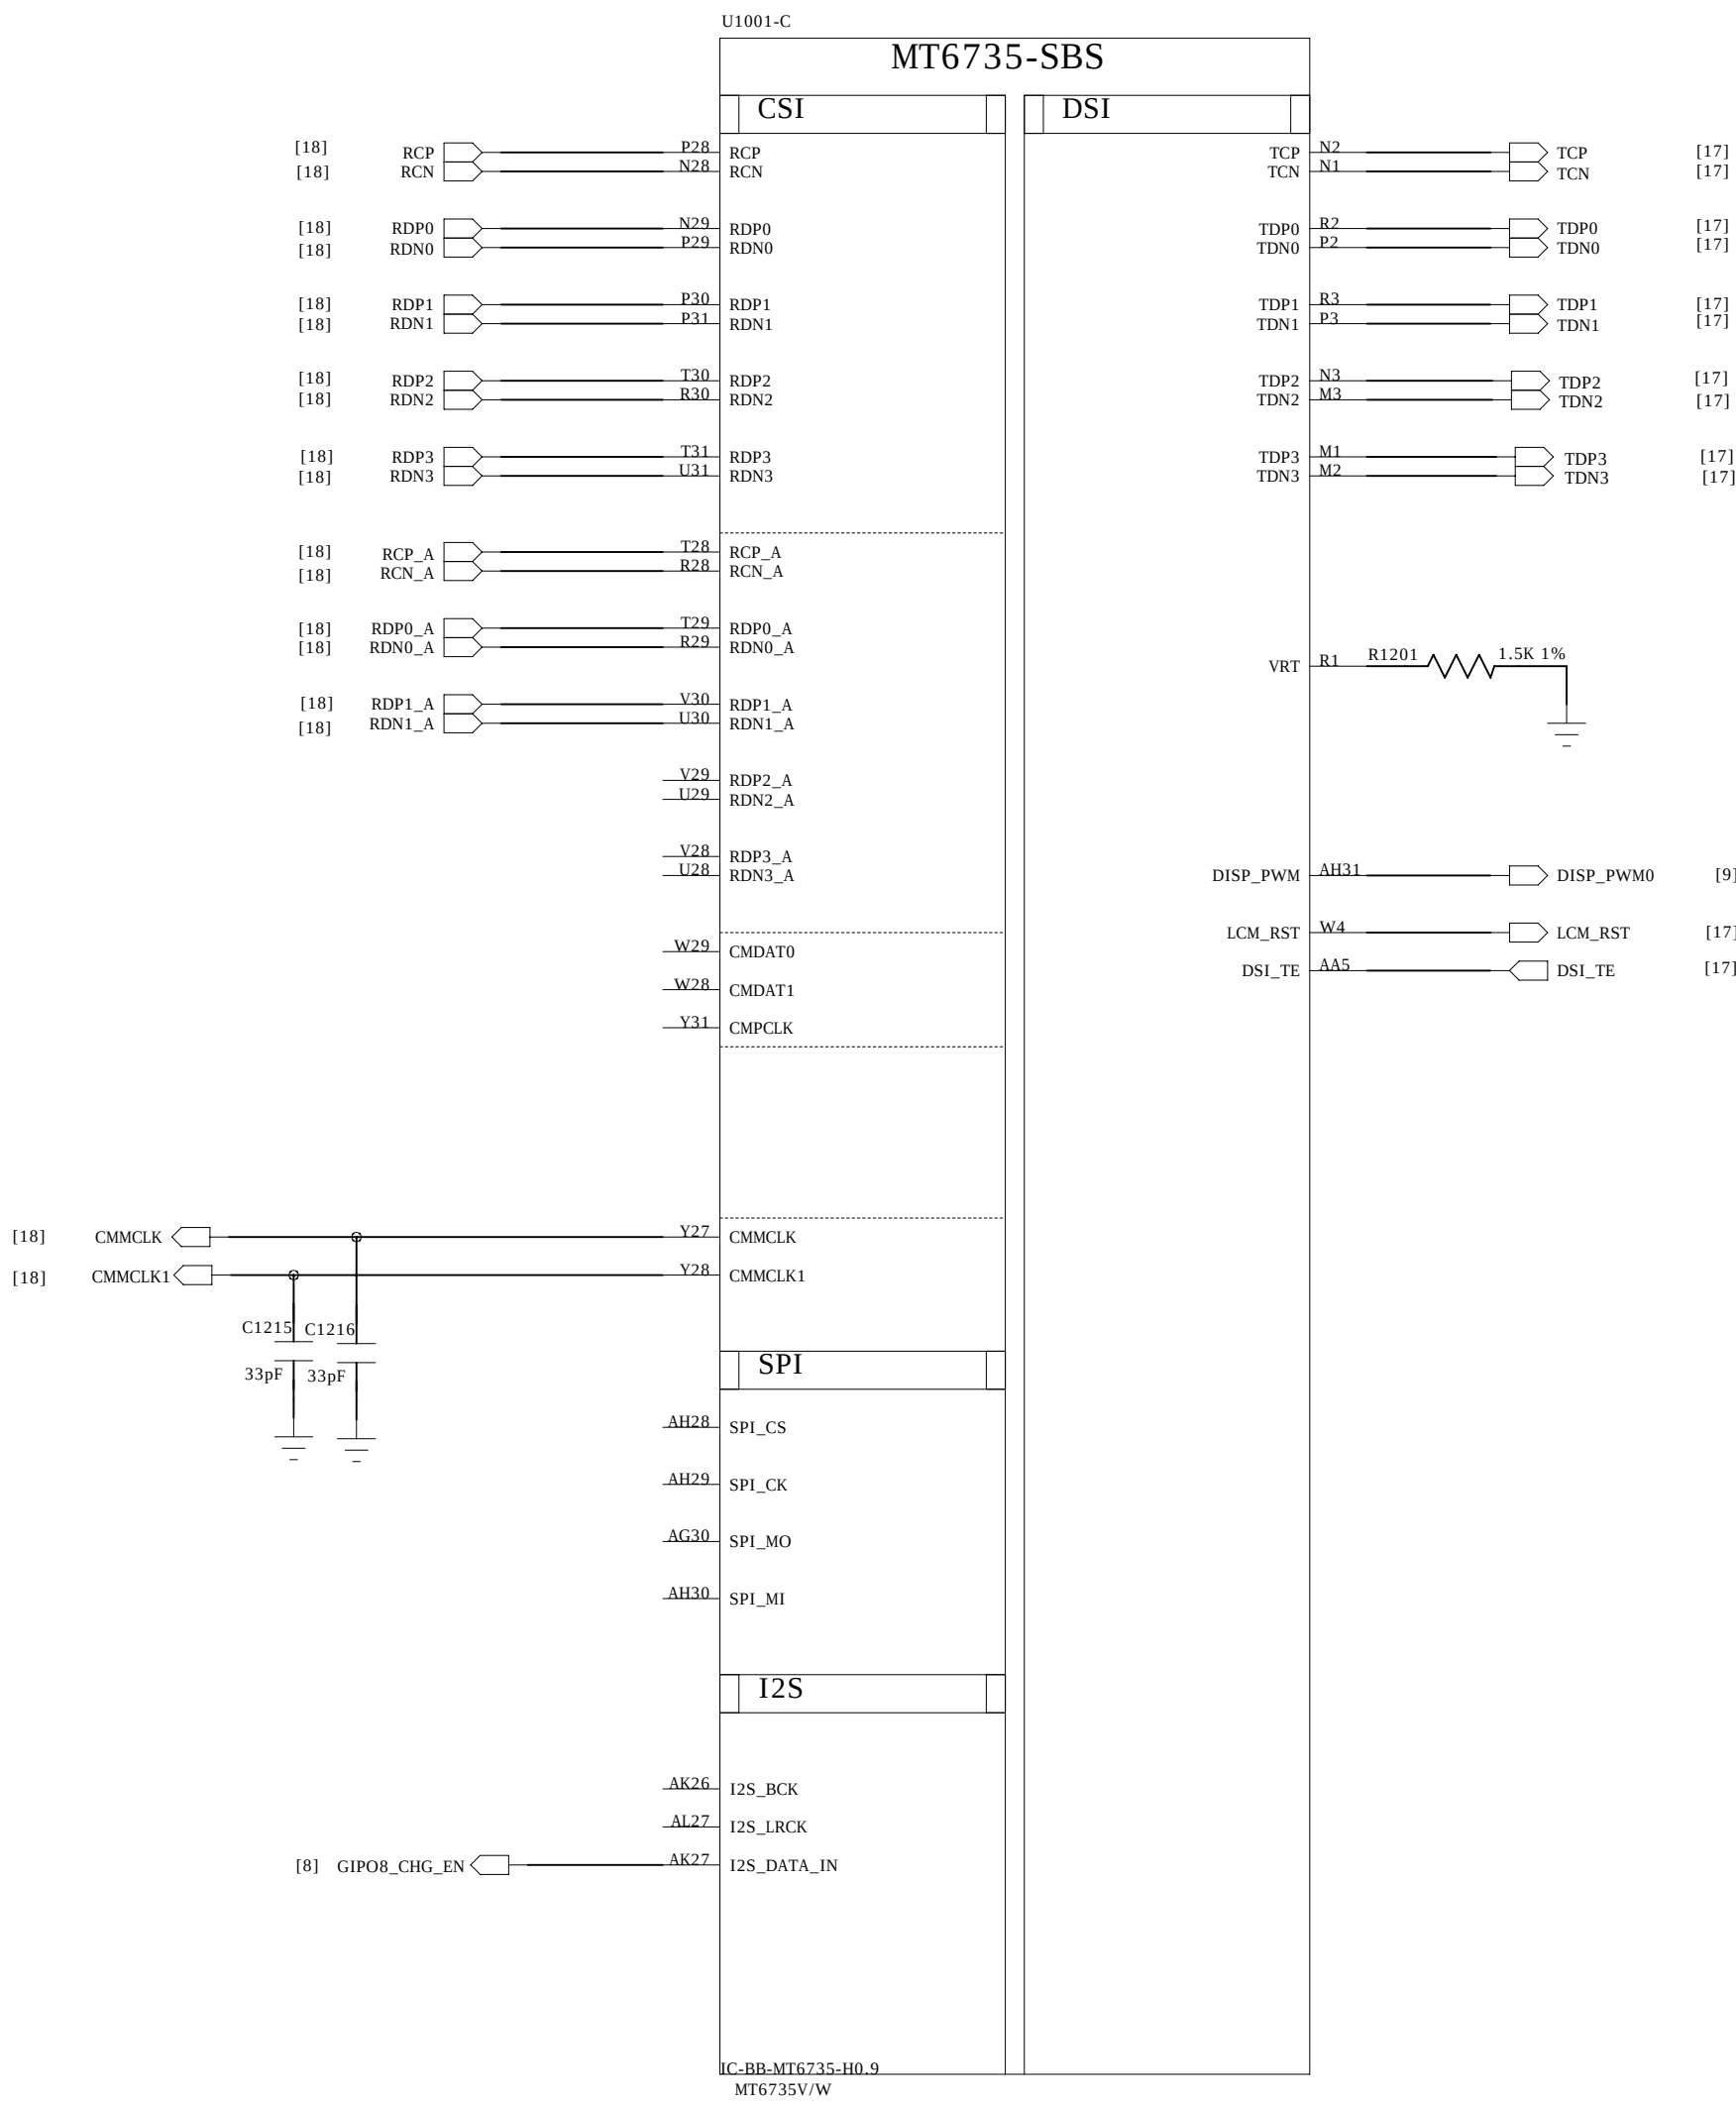



COMPANY:				MODEL: H532	Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 12_BB_II	VERSION: V1.2	SHEET: 5 OF 21
CHECKED		DATED				

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

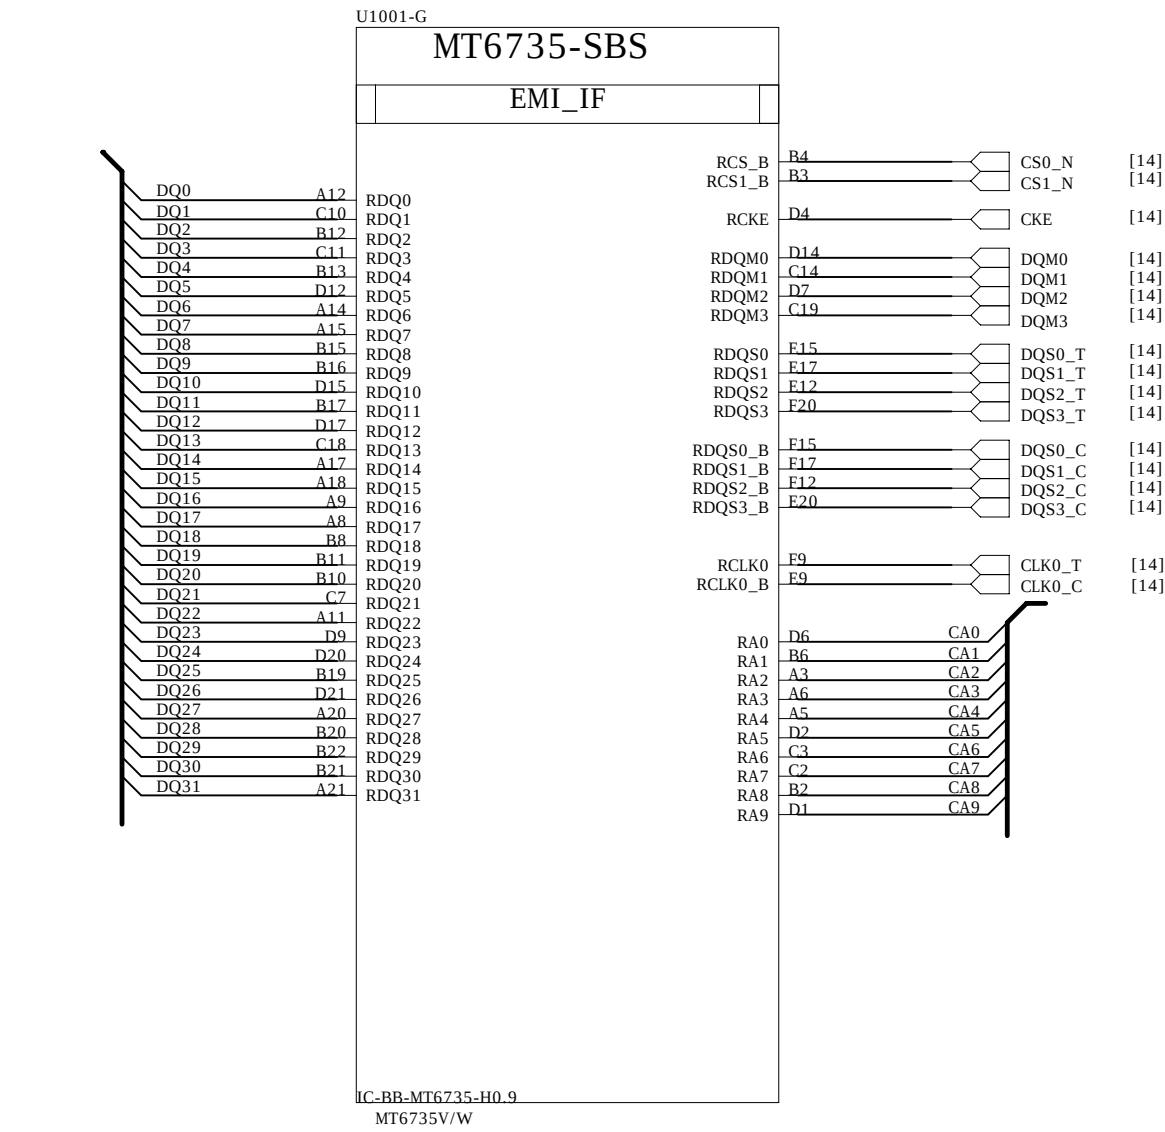

COMPANY:				MODEL: H532	Modified Date: 2015/7/27	
DRAWN		DATED			VERSION: V1.2	SHEET: 6 OF 21
CHECKED		DATED				

POWER_MT6328

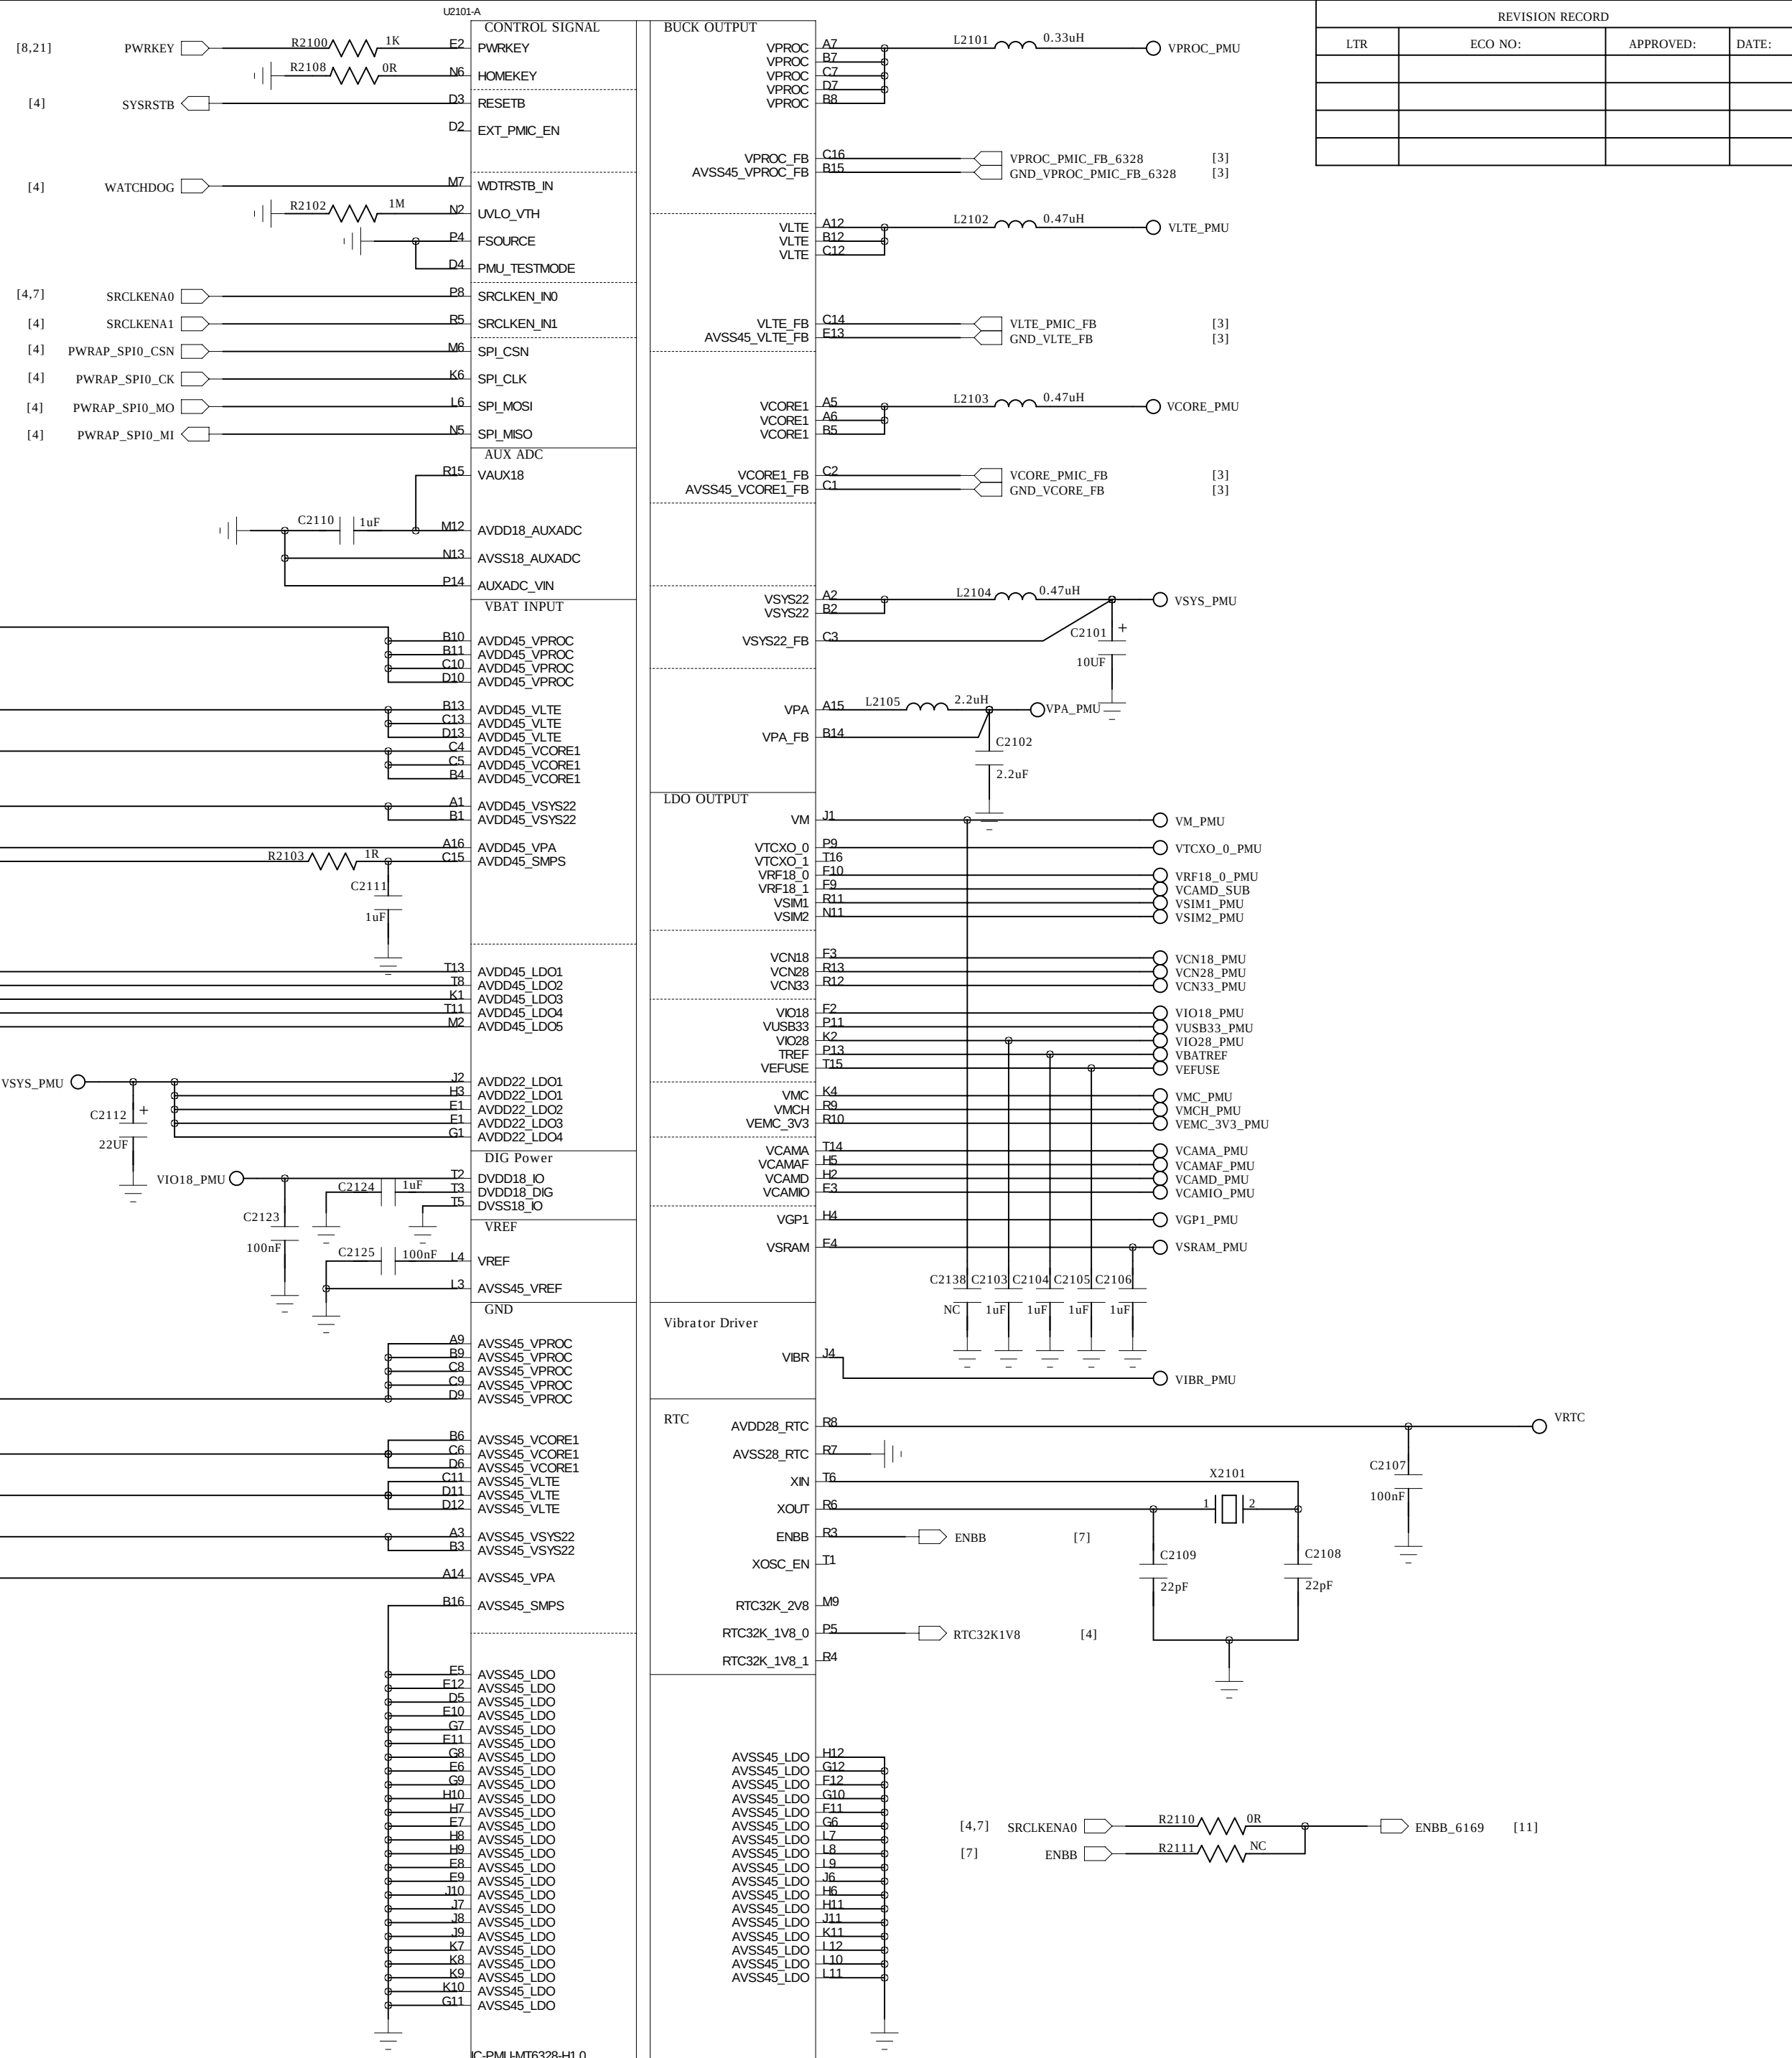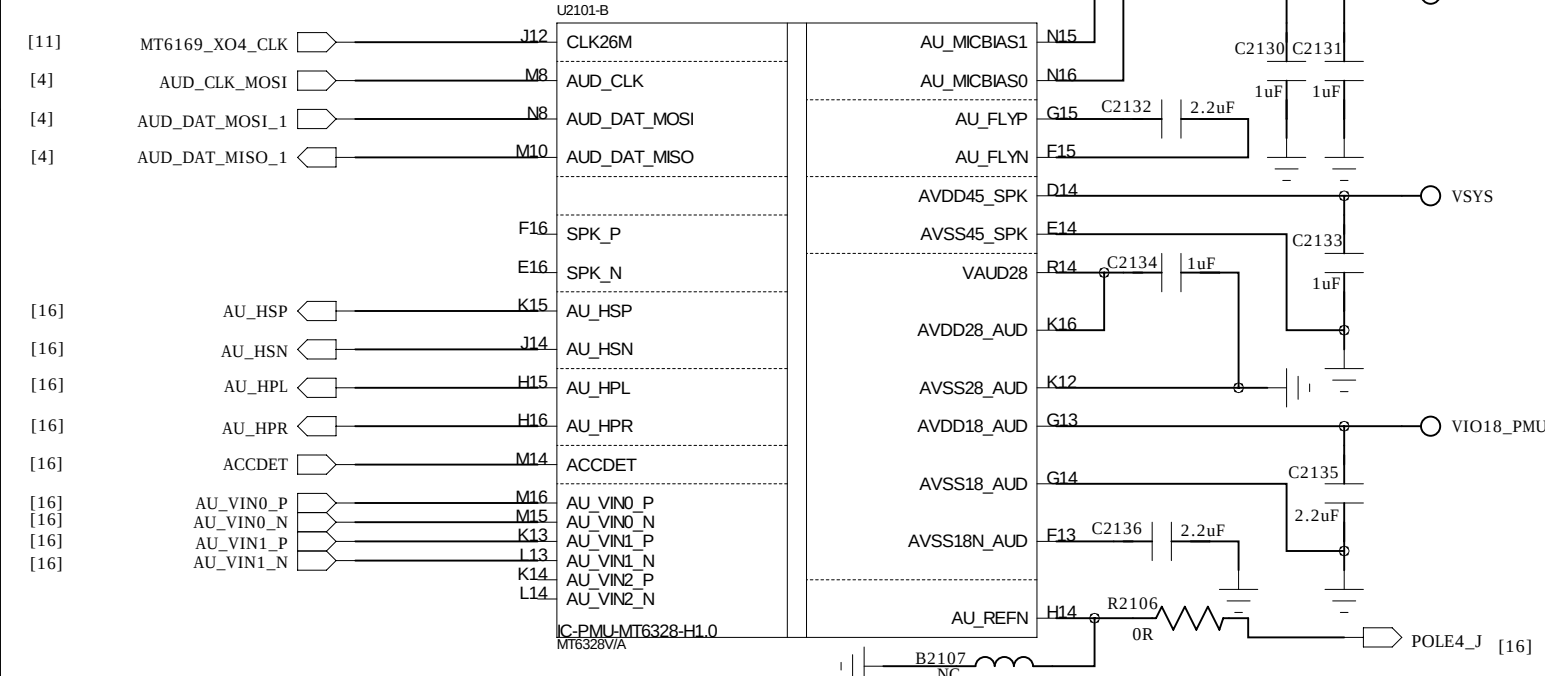


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

COMPANY:				MODEL: MT6328V/A H532	Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 21_POWER_MT6328	VERSION: V1.2	SHEET: 7 OF 21
CHECKED		DATED				

POWER_CHG

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

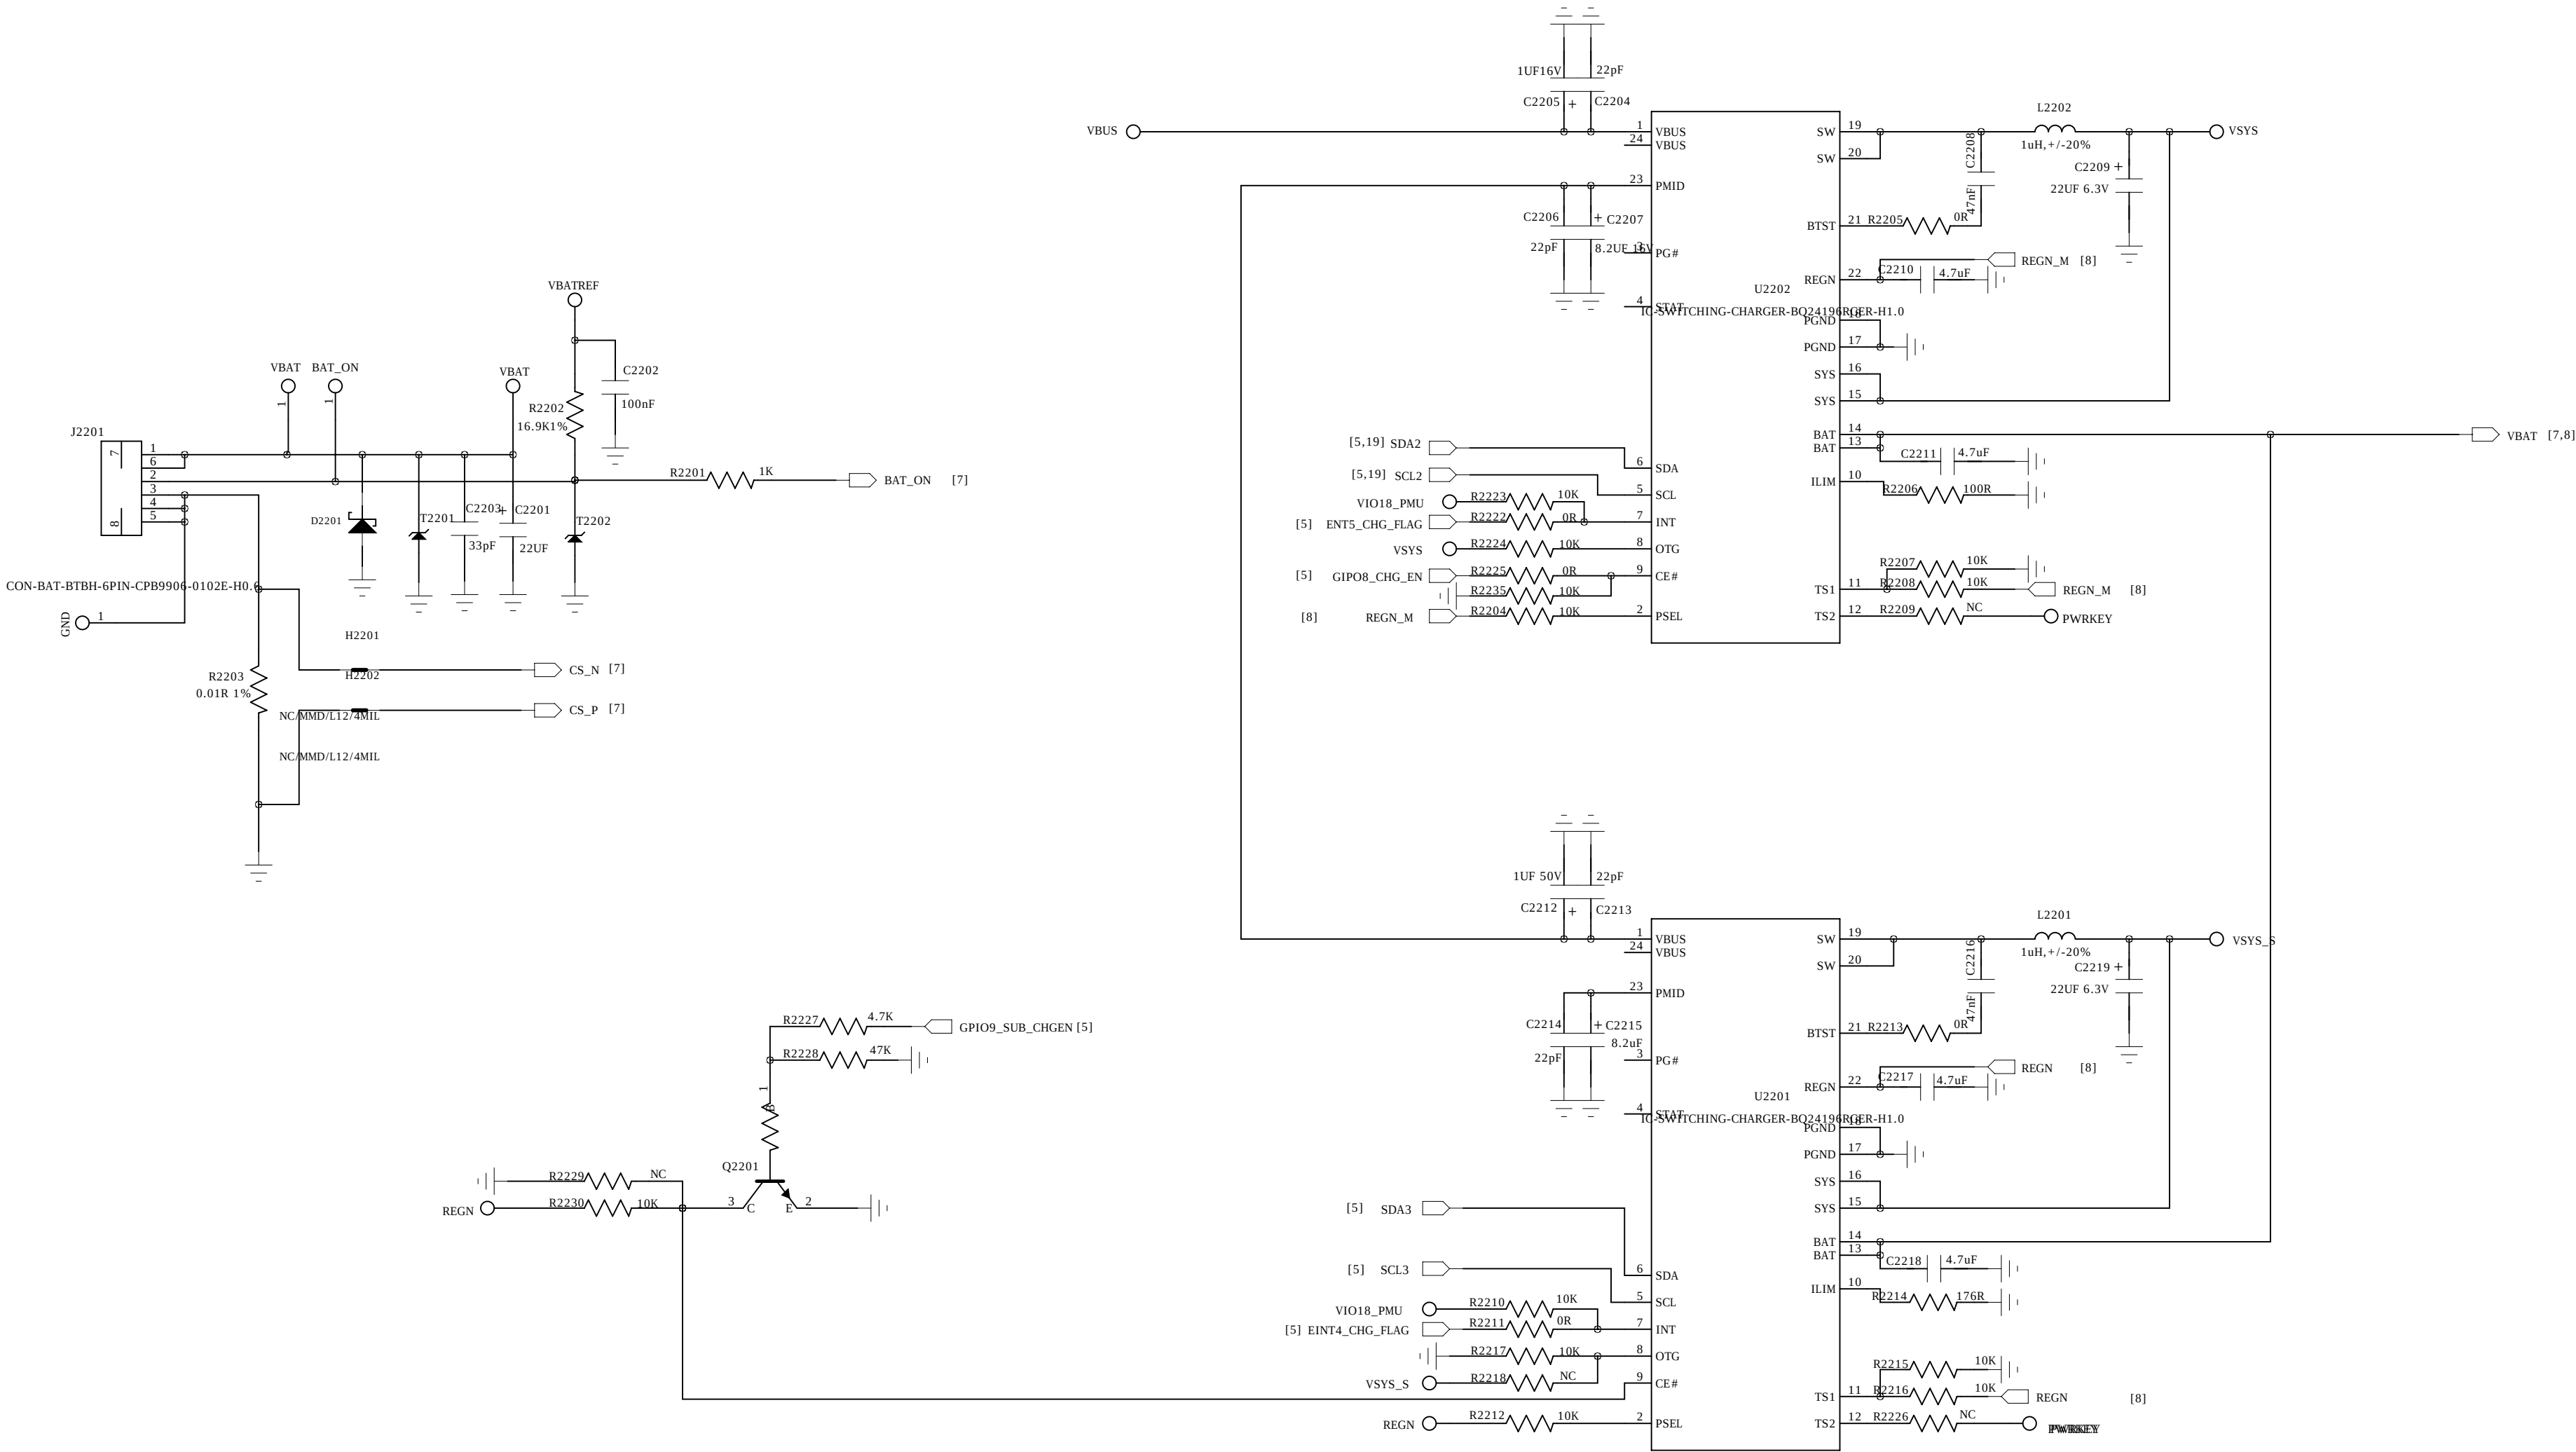


COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 22_POWER_CHG		VERSION: V1.2	SHEET: 8 OF 21
CHECKED		DATED					


POWER_THIRD-PARTY_I

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

LCM Backlight LED Driver

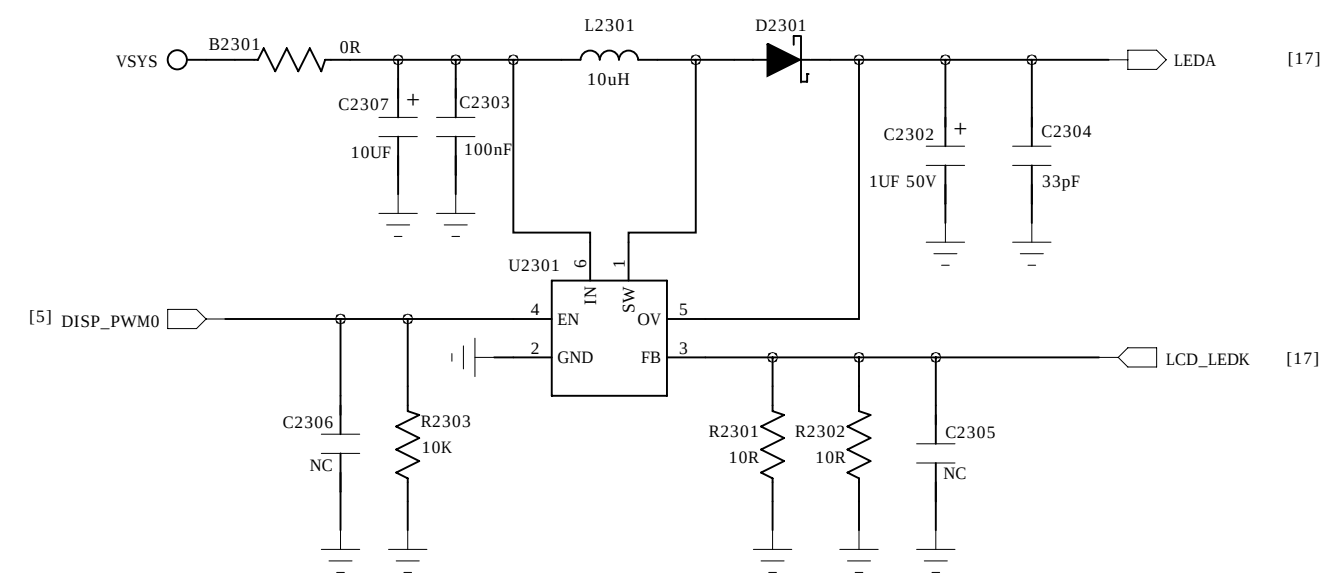


BACK CAMERA FLASH LED

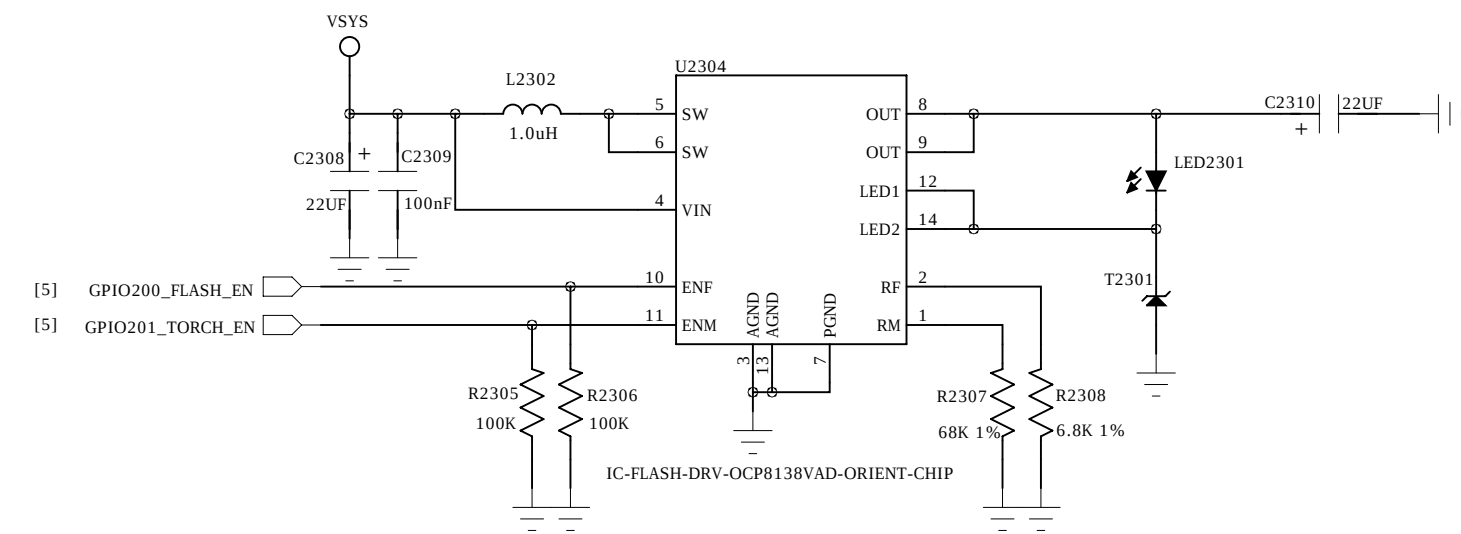

COMPANY:				MODEL: H532	Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 23_POWER_THIRD-PARTY_I	VERSION: V1.2	SHEET: 9 OF 21
CHECKED		DATED				

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


2.8V_VCAMA_EXT for SUB CAM

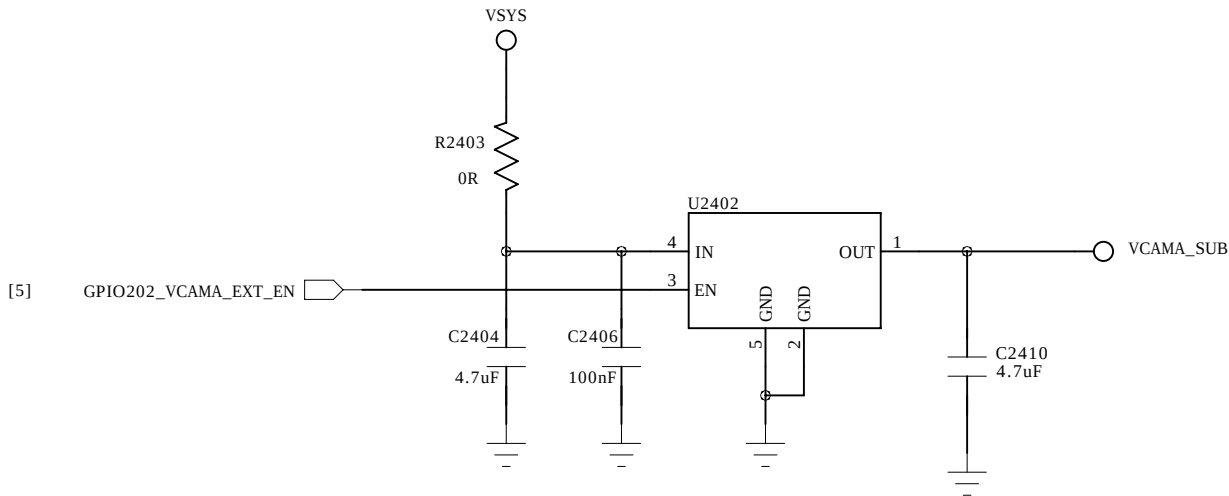

COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 24_POWER_THIRD-PARTY_II		VERSION: V1.2	SHEET: 10 OF 21
CHECKED		DATED					

RF_MT6169_RF_TRX


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

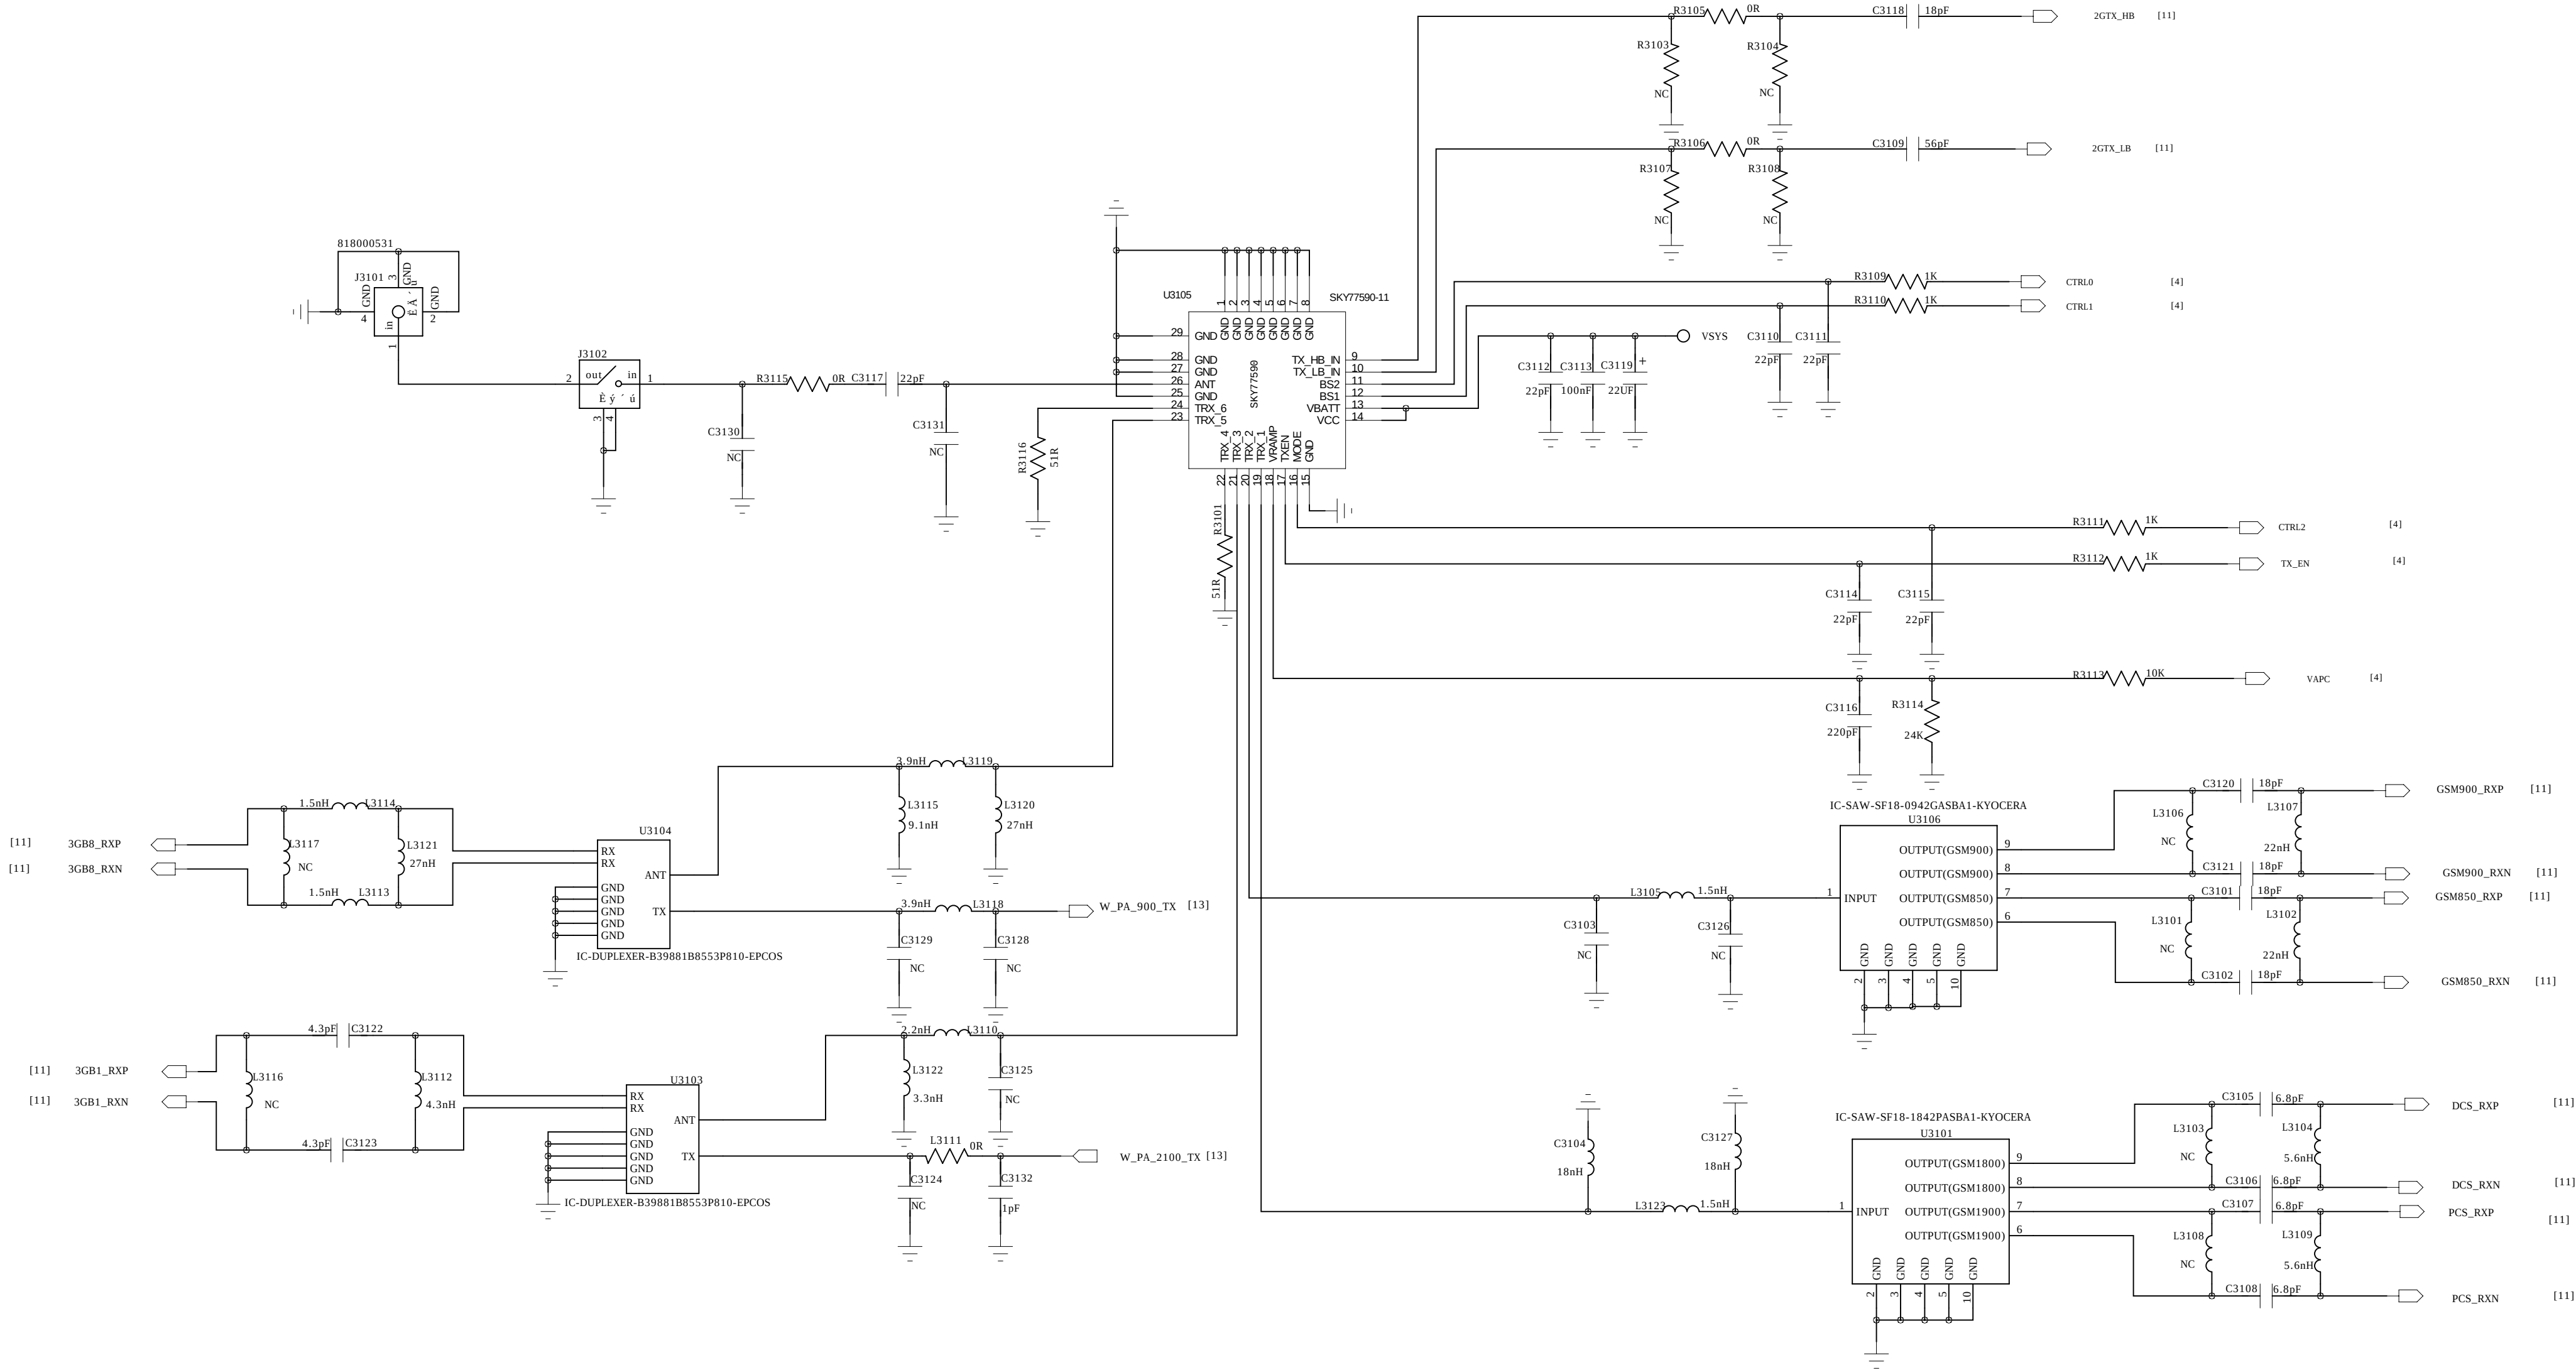

COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 31_RF_MT6169_RF_TRX		VERSION: V1.2	SHEET: 12 OF 21
CHECKED		DATED					

RF_MT6169_RF_WTX


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

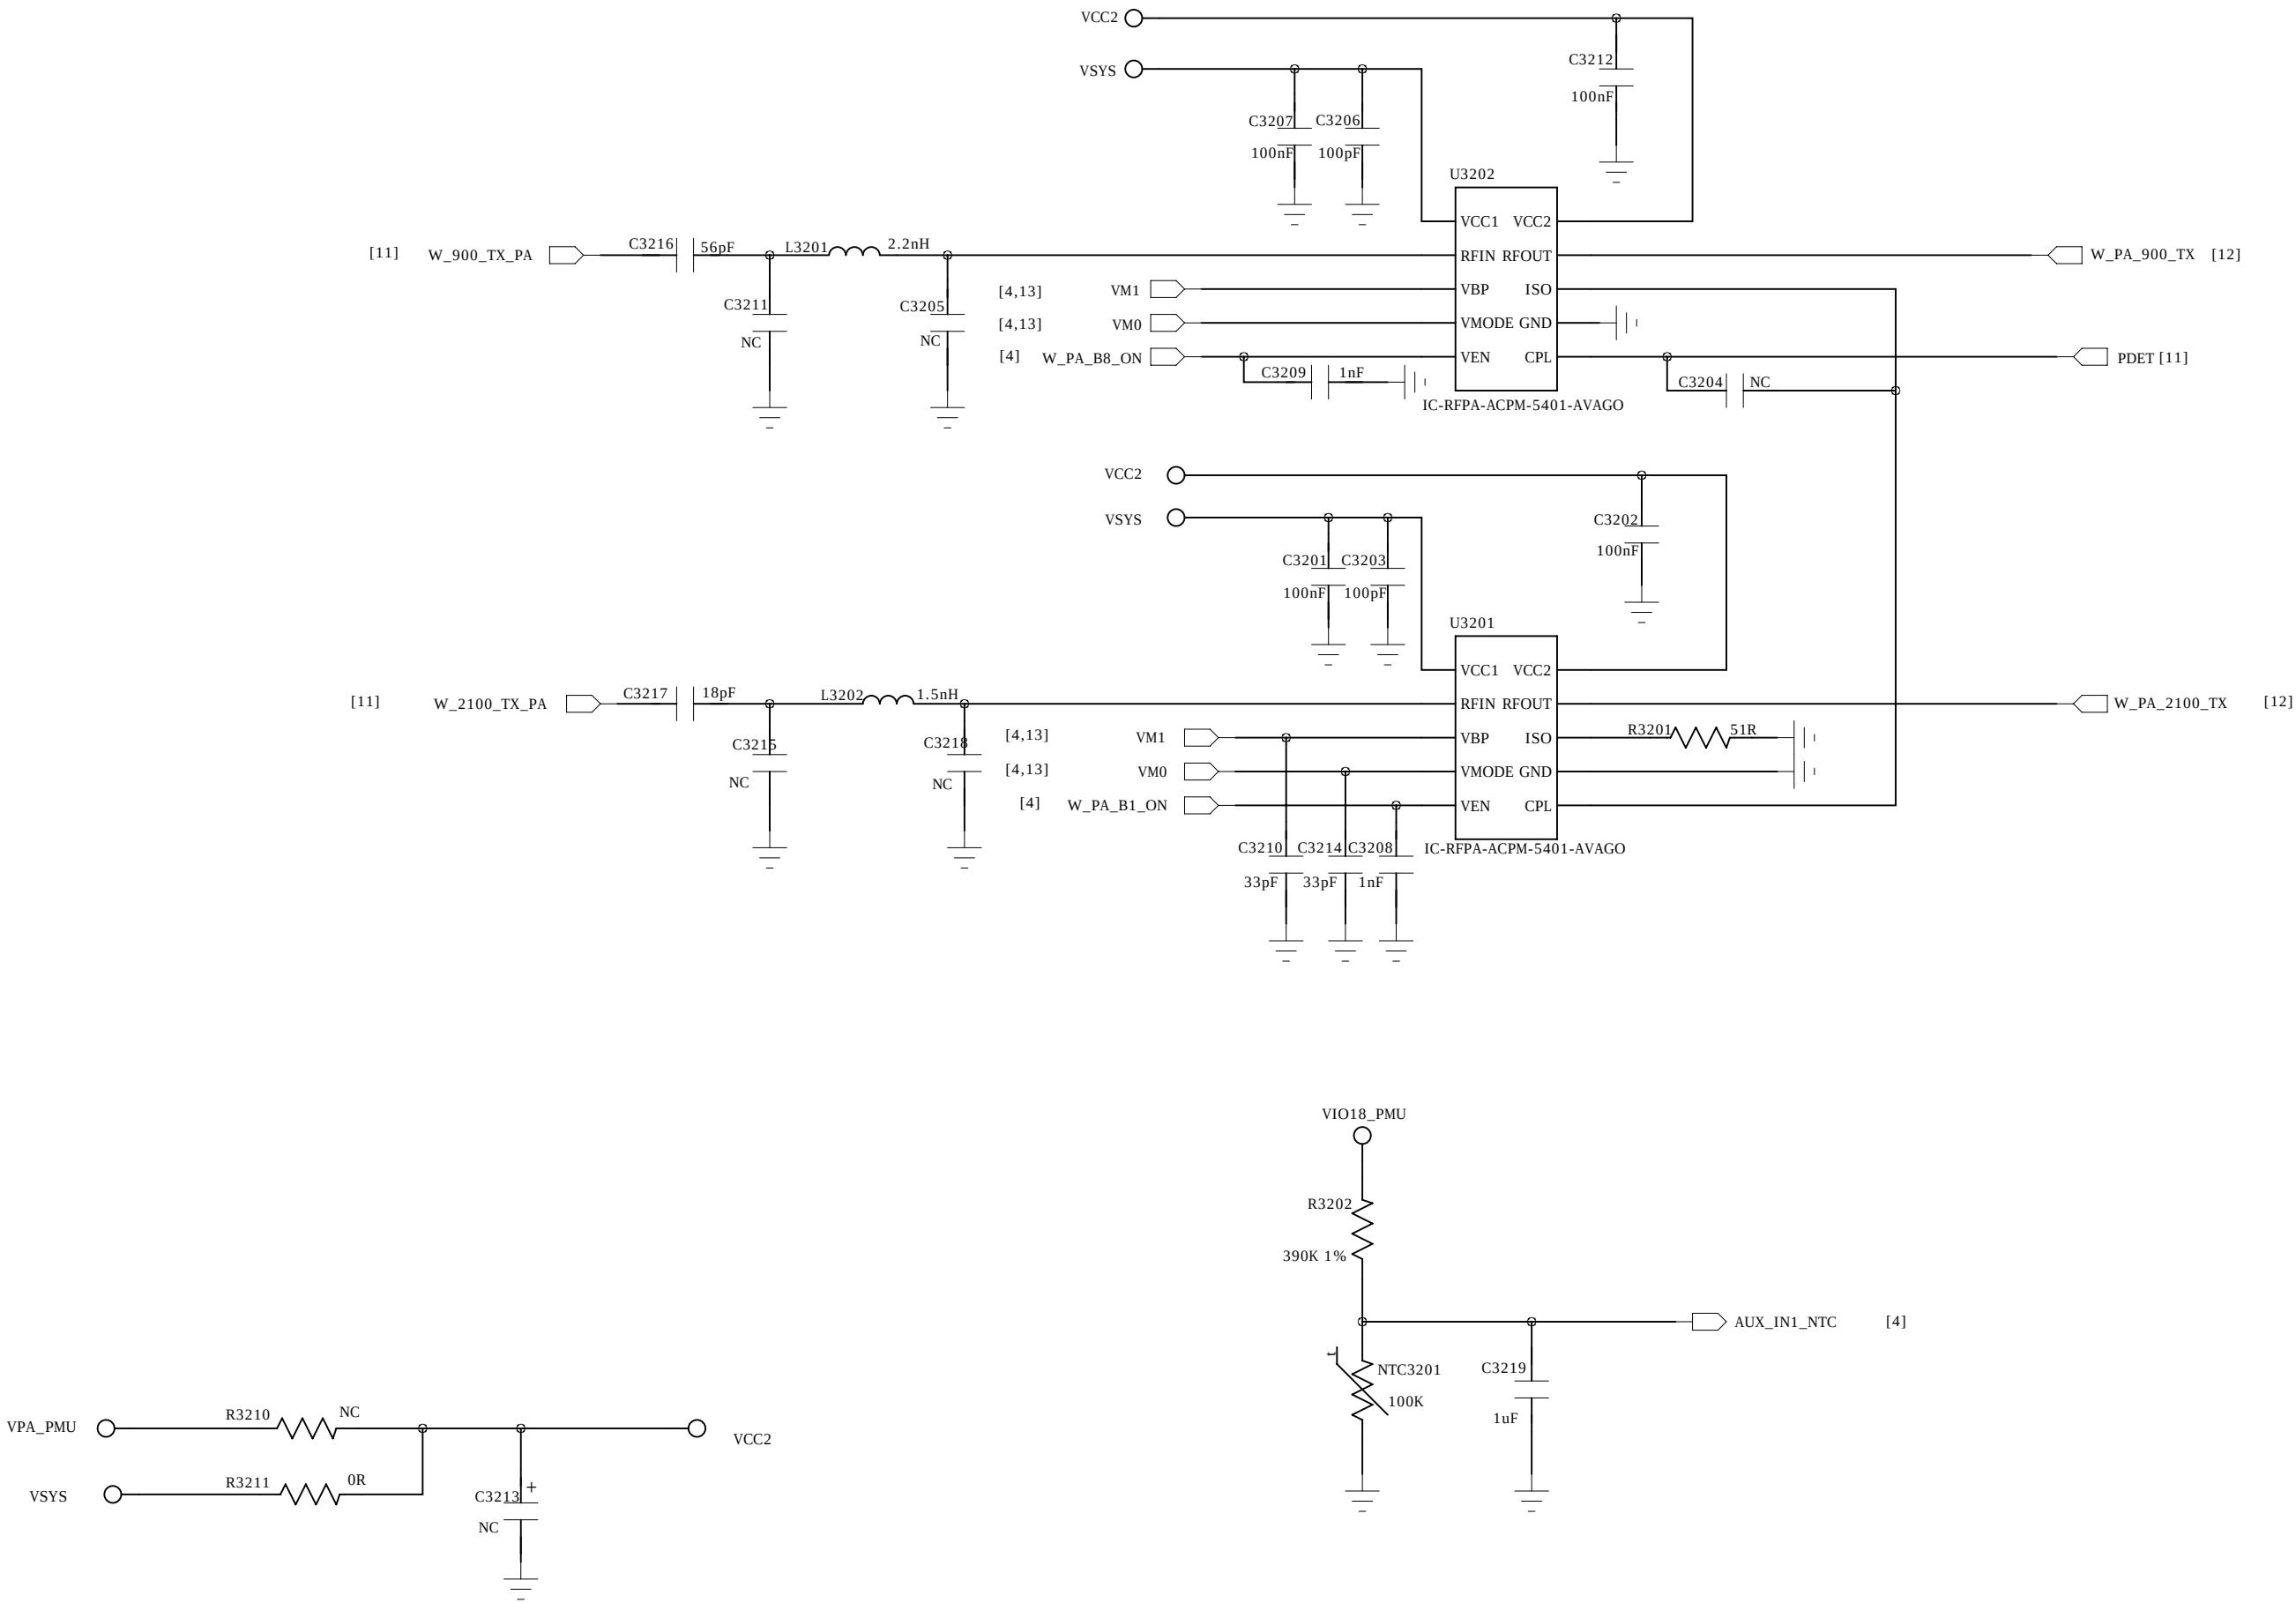

COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 32_RF_MT6169_RF_WTX		VERSION: V1.2	SHEET: 13 OF 21
CHECKED		DATED					

MEMORY_EMMC_LPDDR3


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

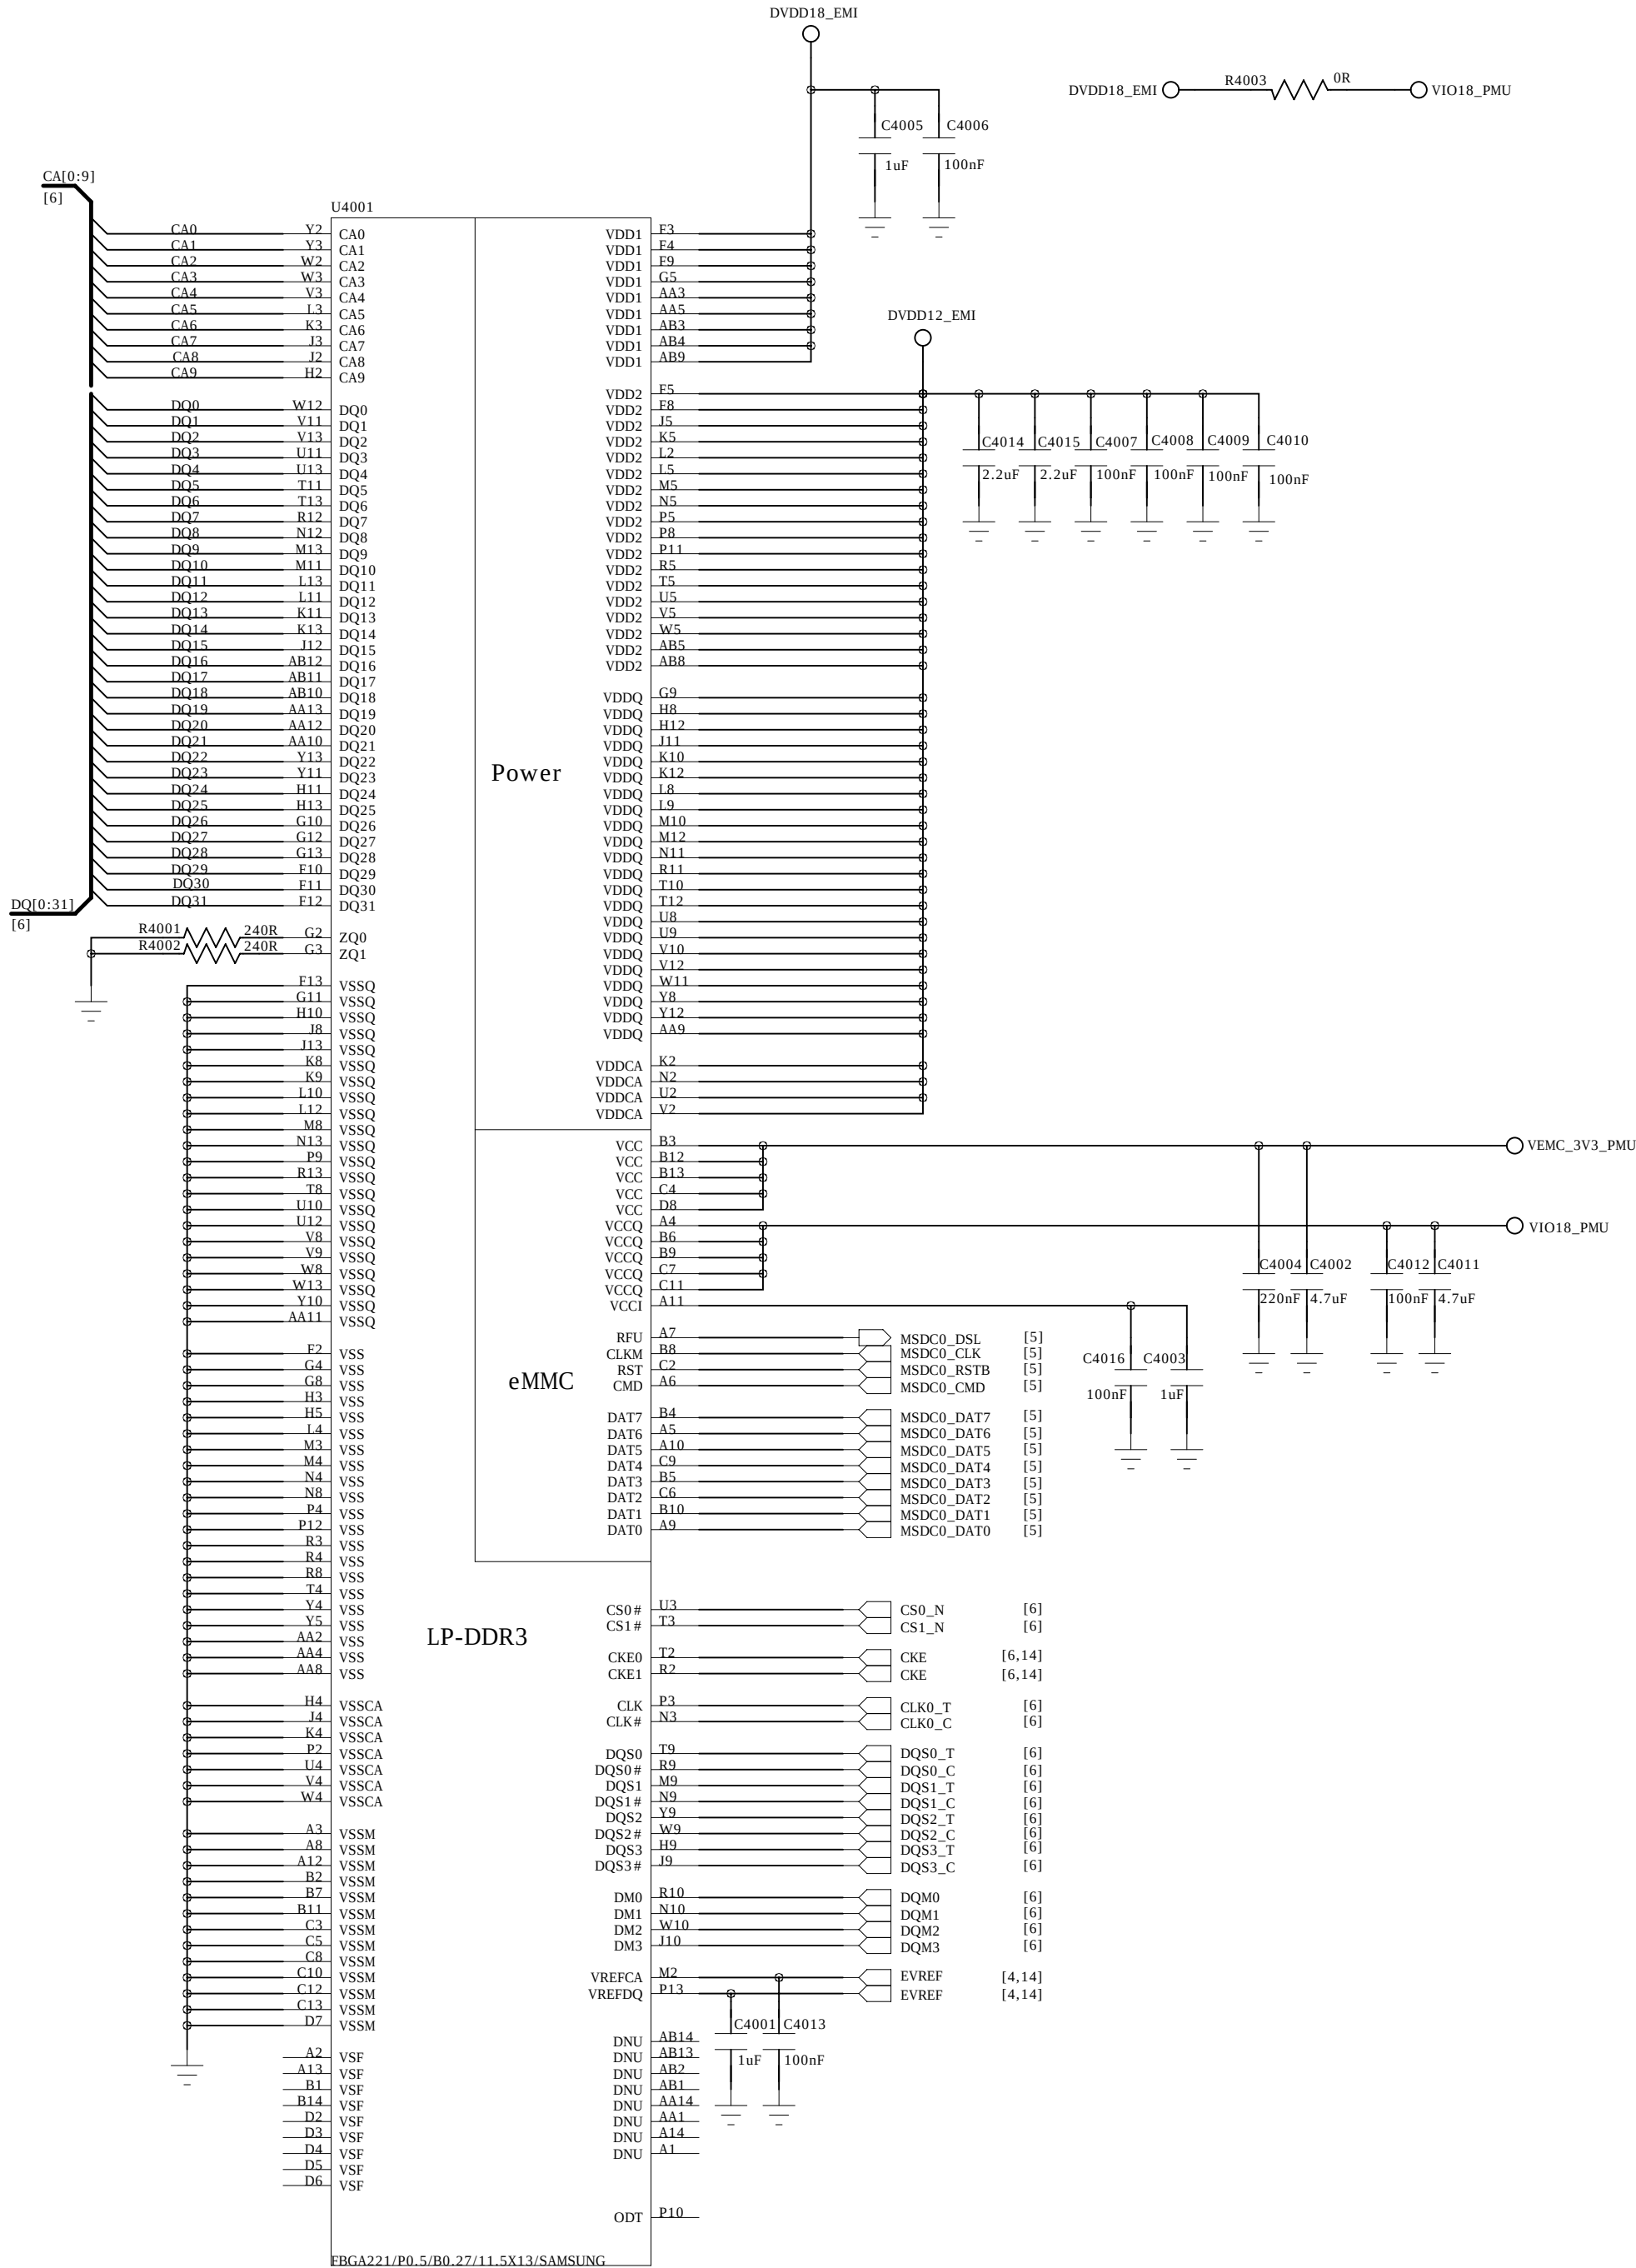

COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 40_MEMORY_EMMC_LPDDR3		VERSION: V1.2	SHEET: 14 OF 21
CHECKED		DATED					

CONNECTIVITY_MT6625

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

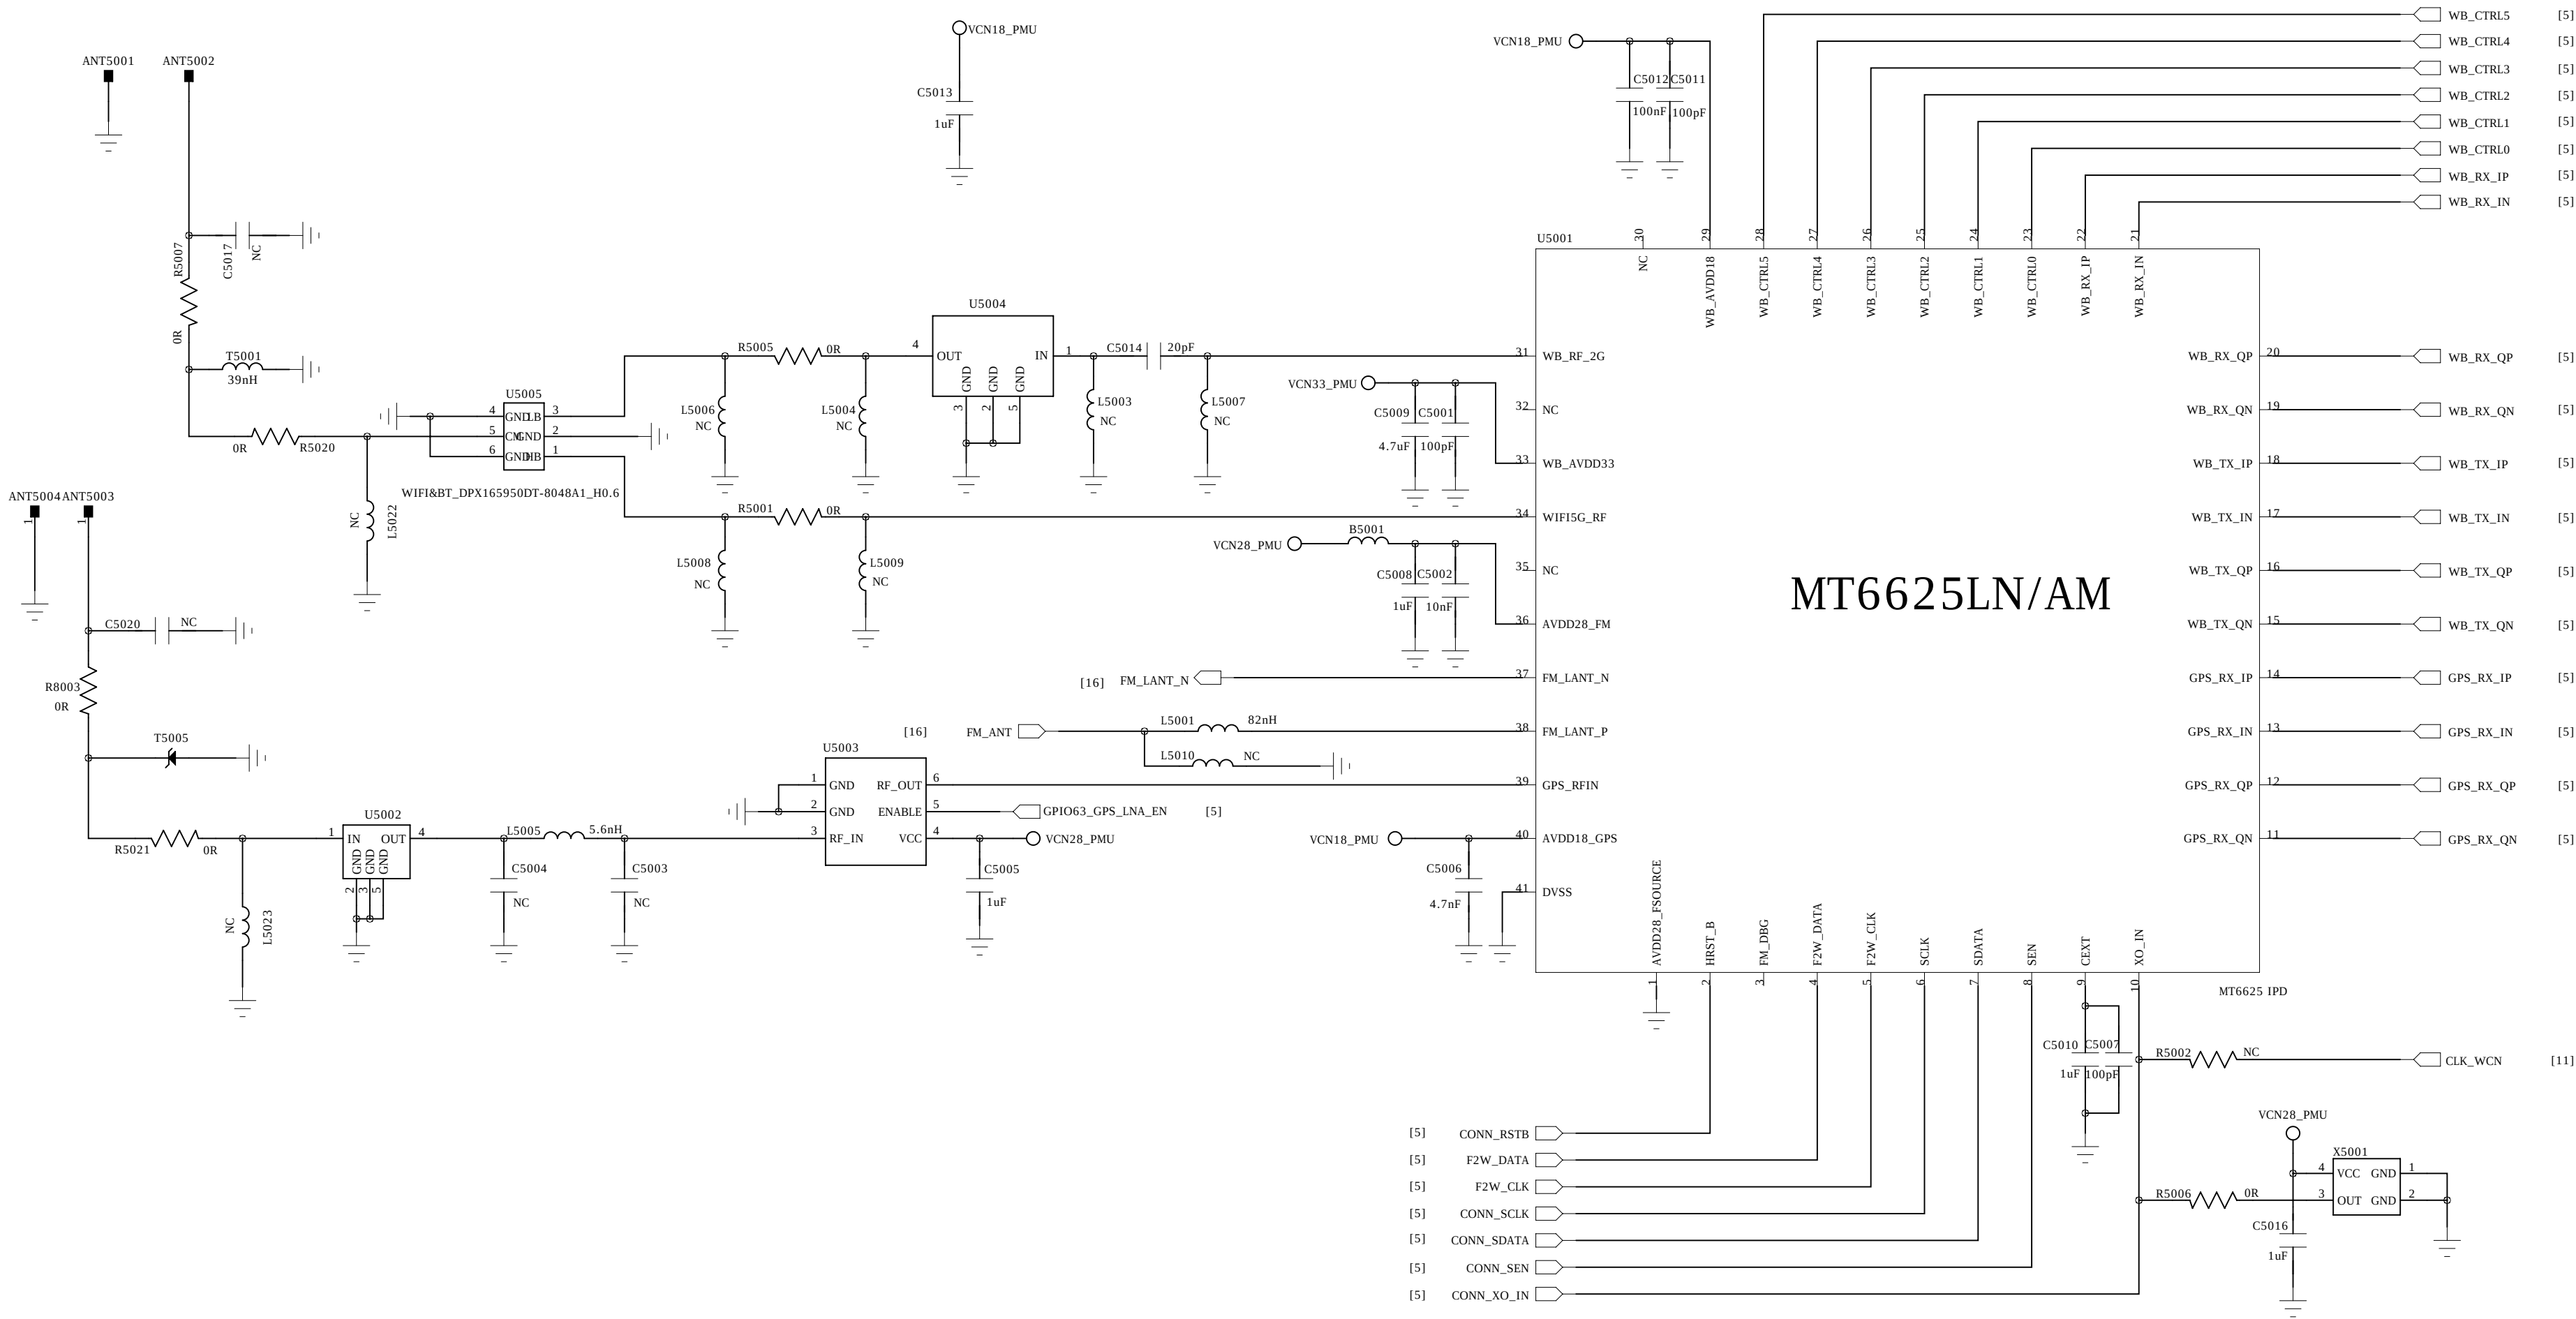


COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 50_CONNECTIVITY_MT6625		VERSION: V1.2	SHEET: 15 OF 21
CHECKED		DATED					

PERI_AUDIO_IO


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

Audio PA

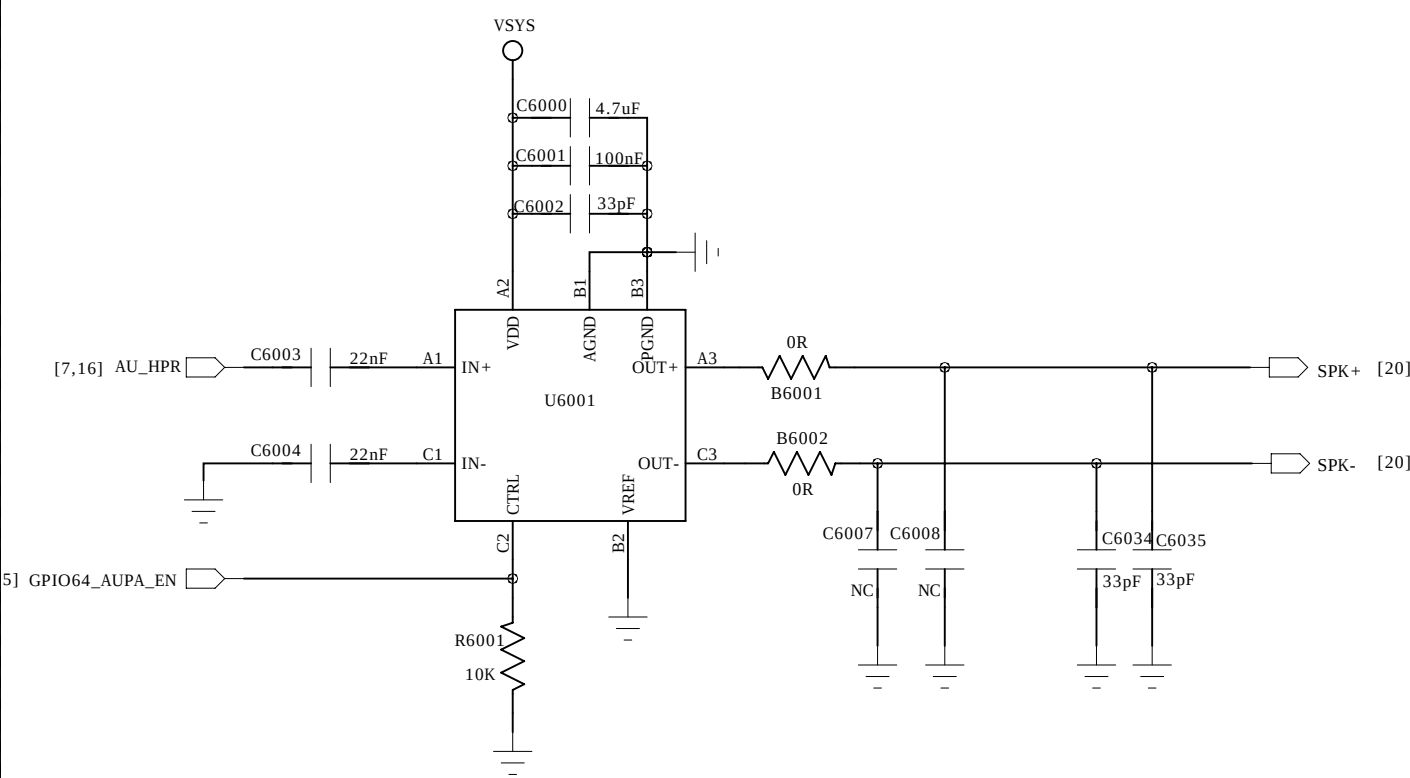


De-noise MICOPHONE


Receiver

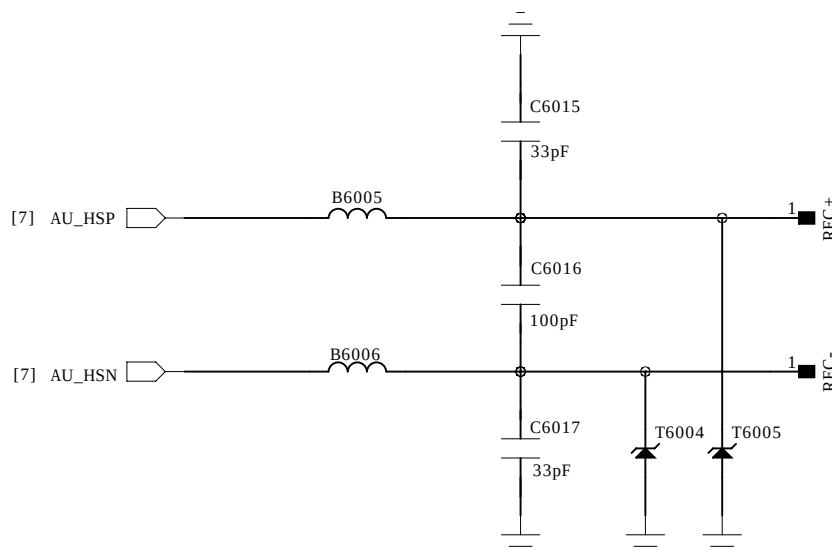


3.5mm Audio Jack

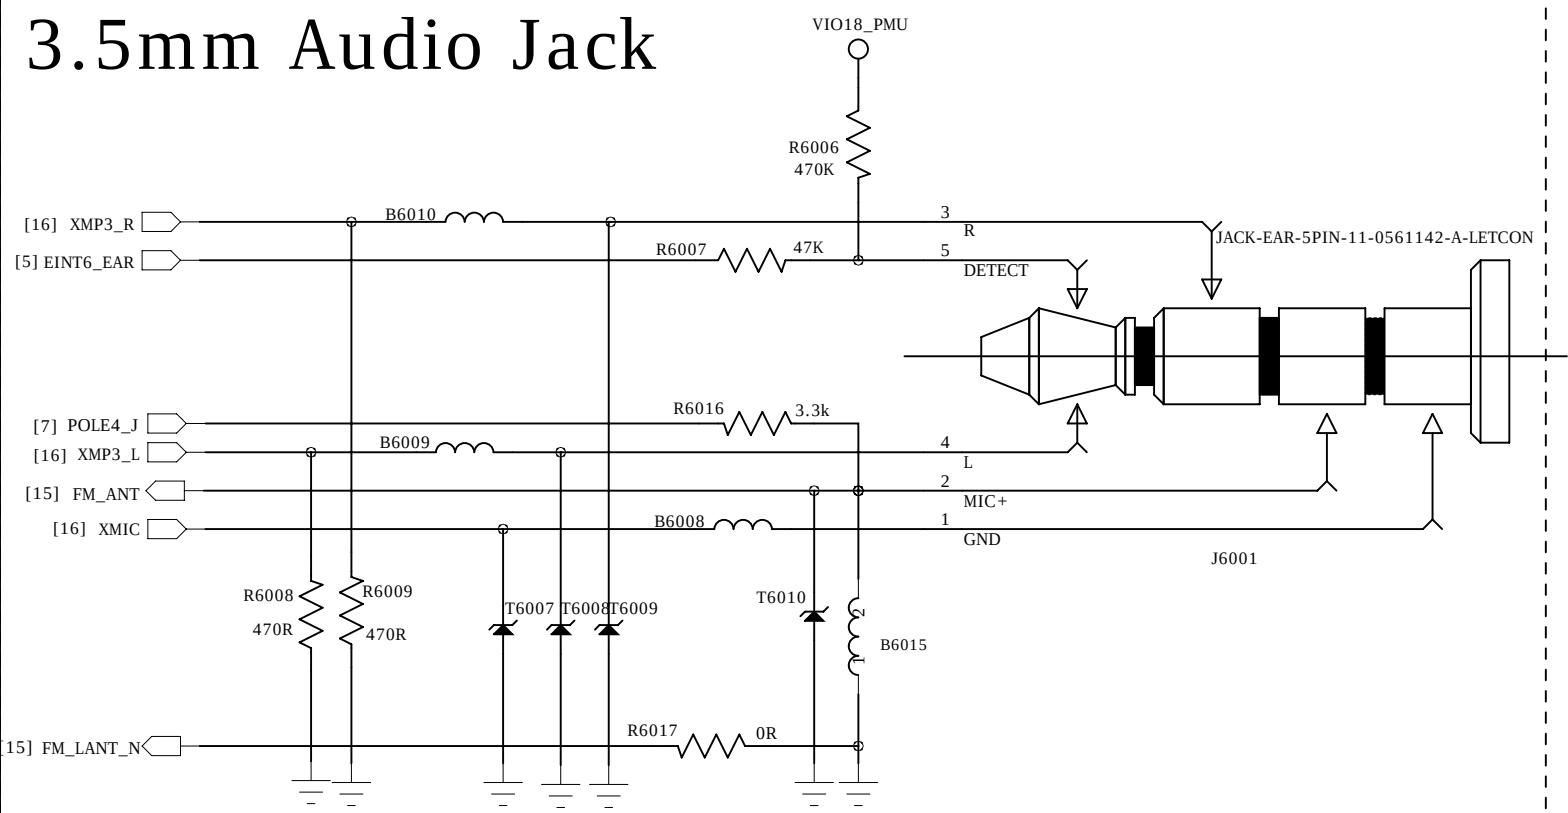


Main MICPHONE



Earphone MICPHONE

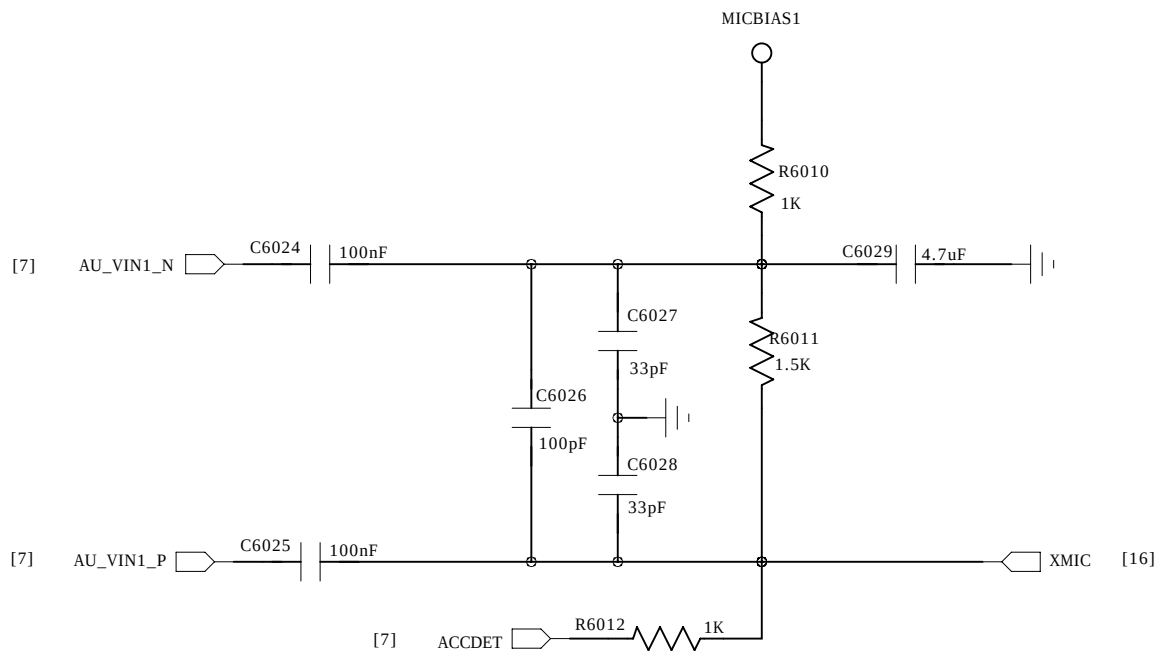


Earphone Receiver

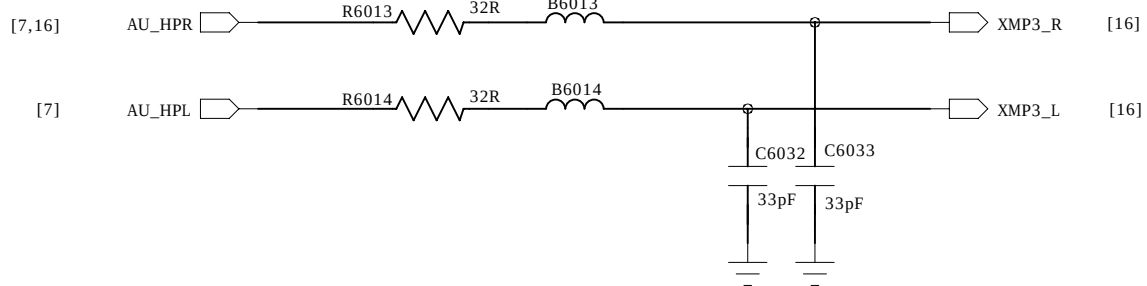


COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 60_PERI_AUDIO		VERSION: V1.2	SHEET: 16 OF 21
CHECKED		DATED					

PERI_LCD_CTP

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

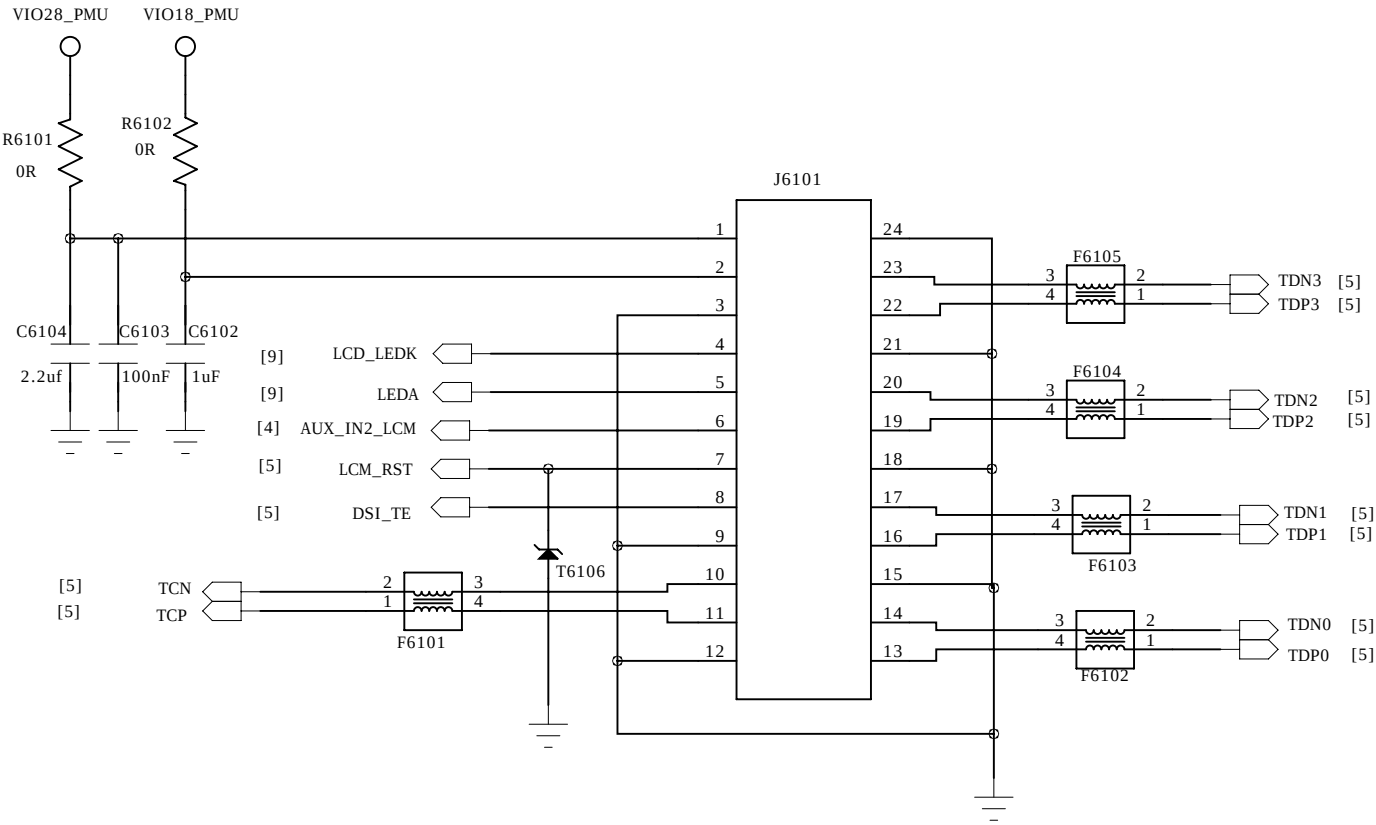



TP

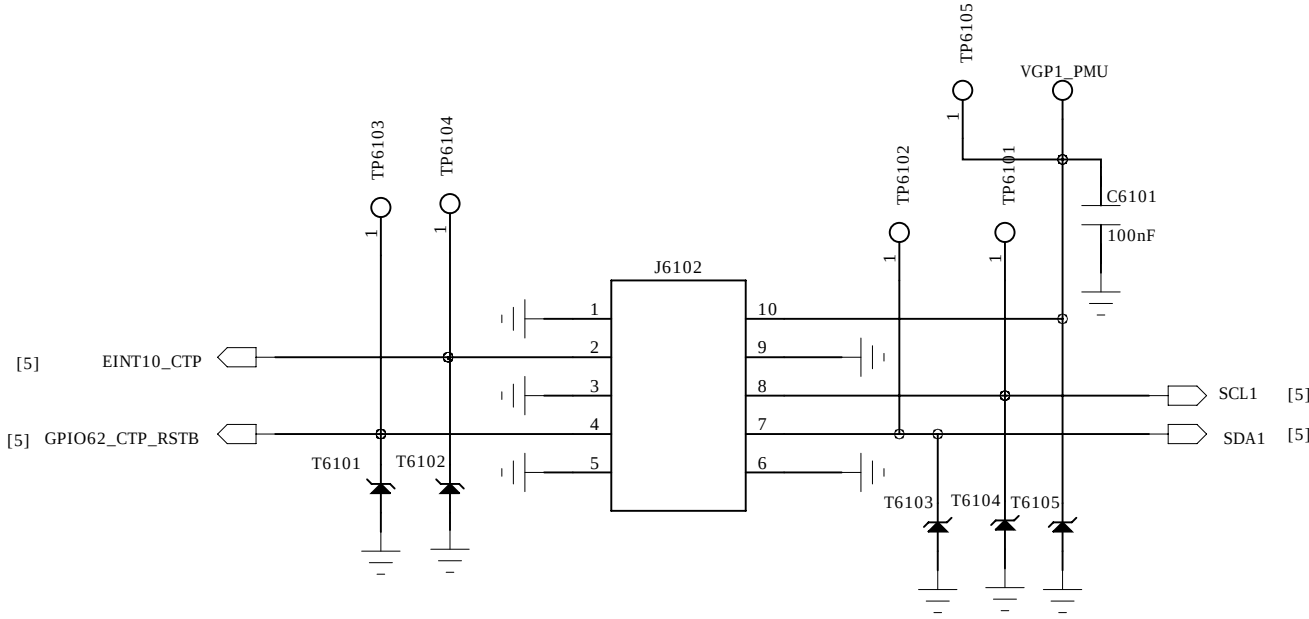

COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 61_PERI_LCD_CTP		VERSION: V1.2	SHEET: 17 OF 21
CHECKED		DATED					

PERI_CAMERA

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

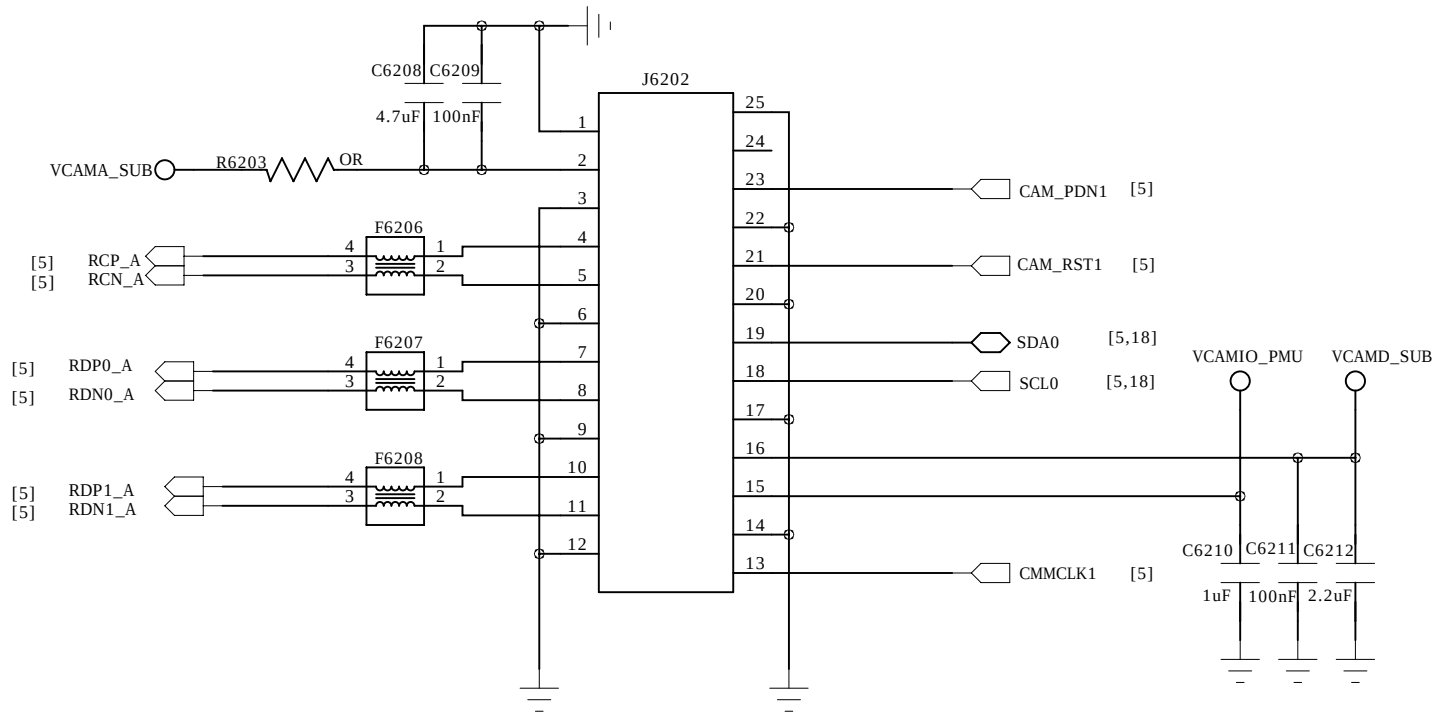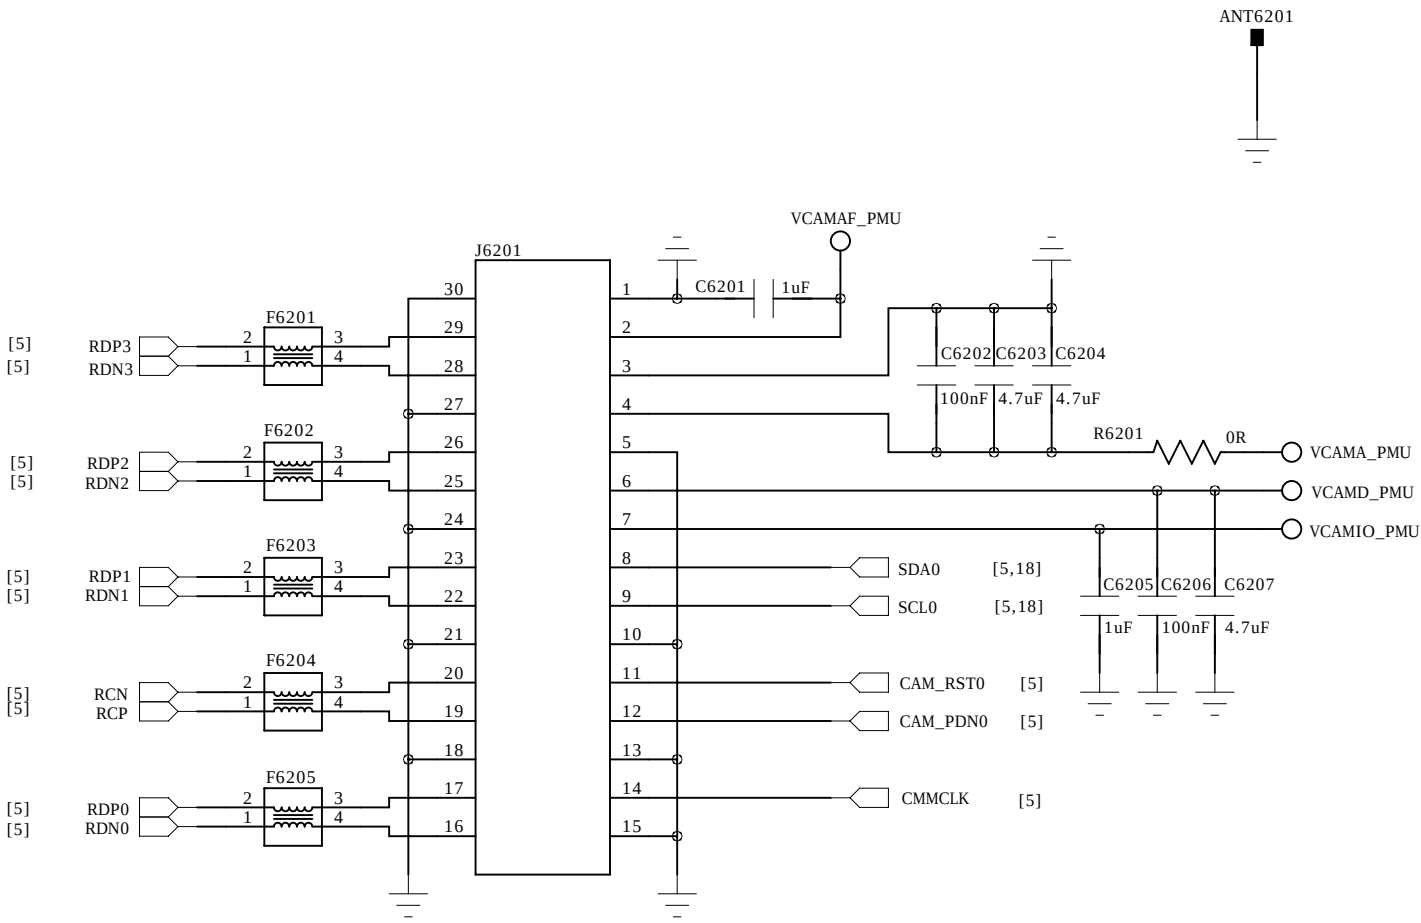


COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 62_PERI_CAMERA		VERSION: V1.2	SHEET: 18 OF 21
CHECKED		DATED					

PERI_SENSORS


REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

G-Sensor (x)


Default KXTJ2-1009:I2C ADDRESS:0x1C(Write)/0x1D(Read)

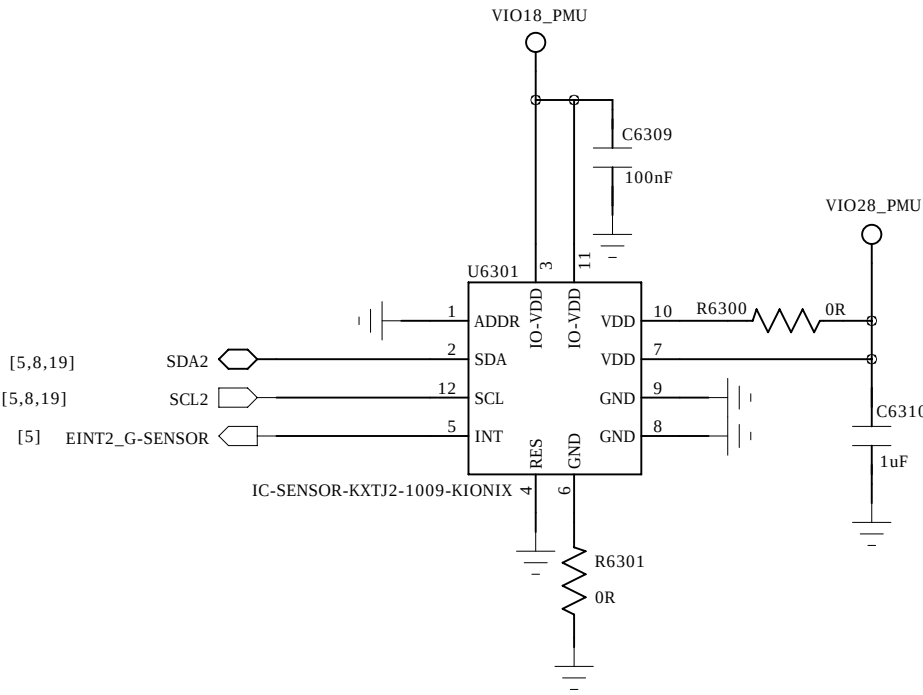


AL& PS Sensor

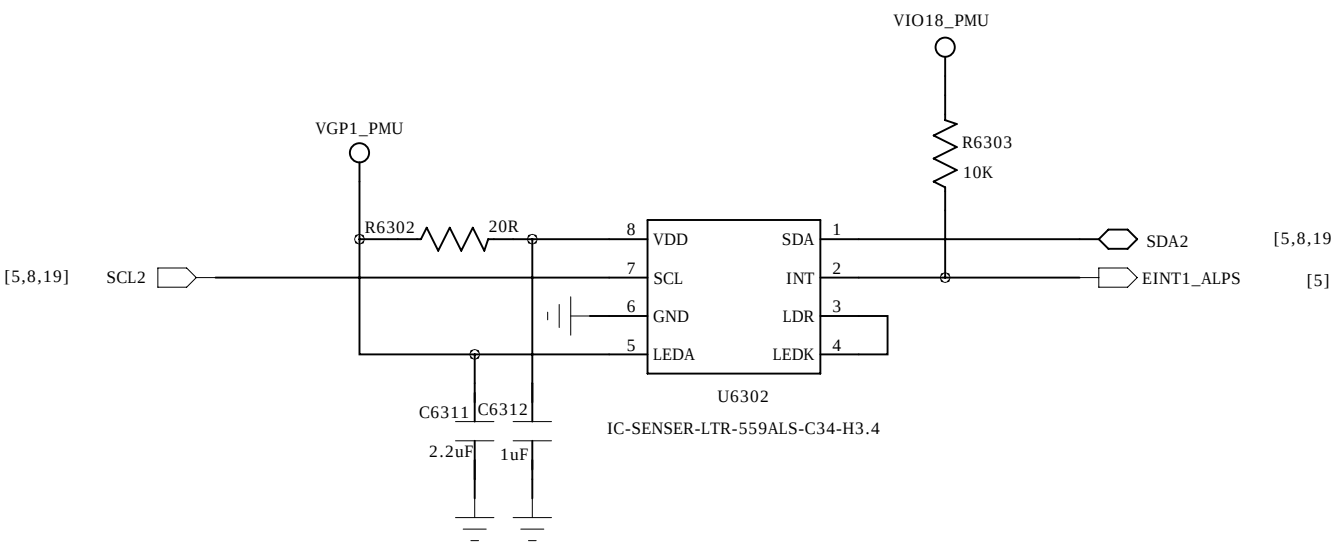

Thermister / To sense board level temperature

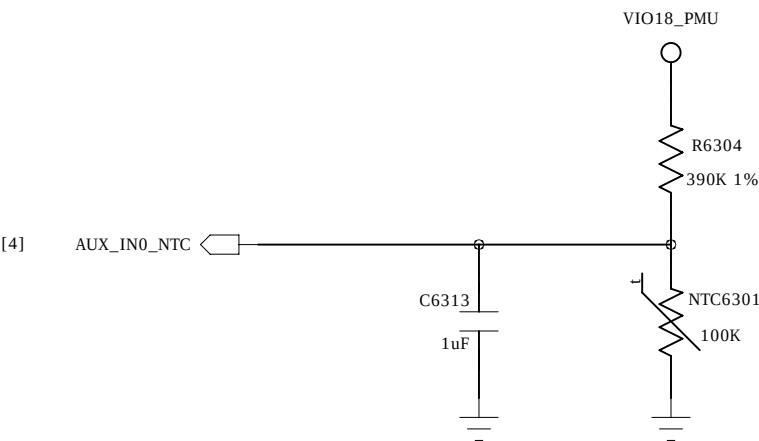

Unipolar HALL



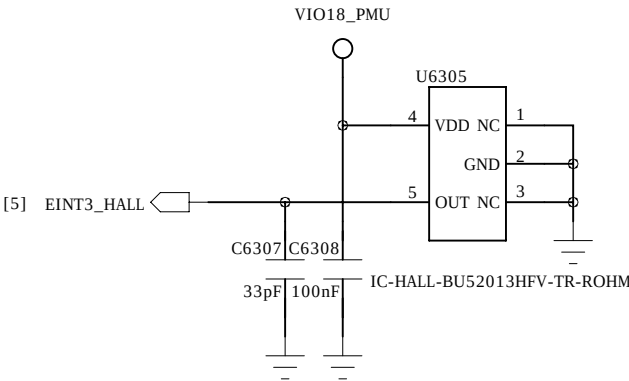


COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 63_PERI_SENSORS		VERSION: V1.2	SHEET: 19 OF 21
CHECKED		DATED					

PERI_EXCH_FINGERPRINT

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

° ô î ü μ Æ

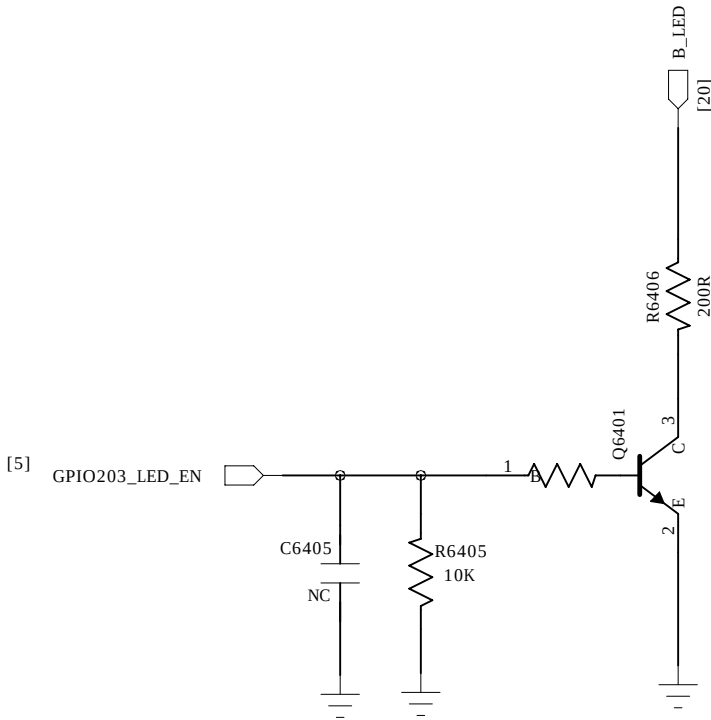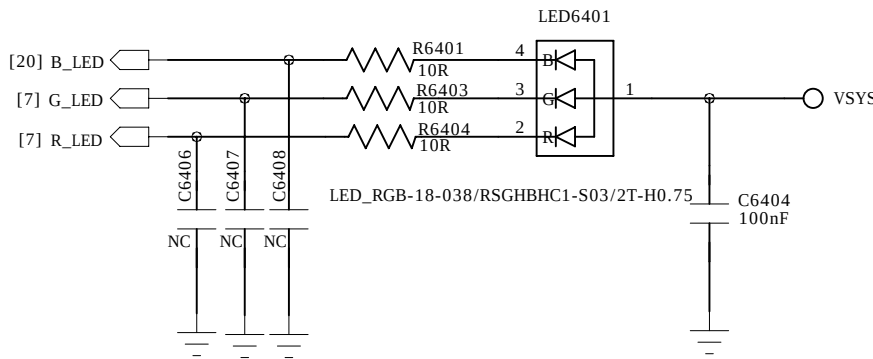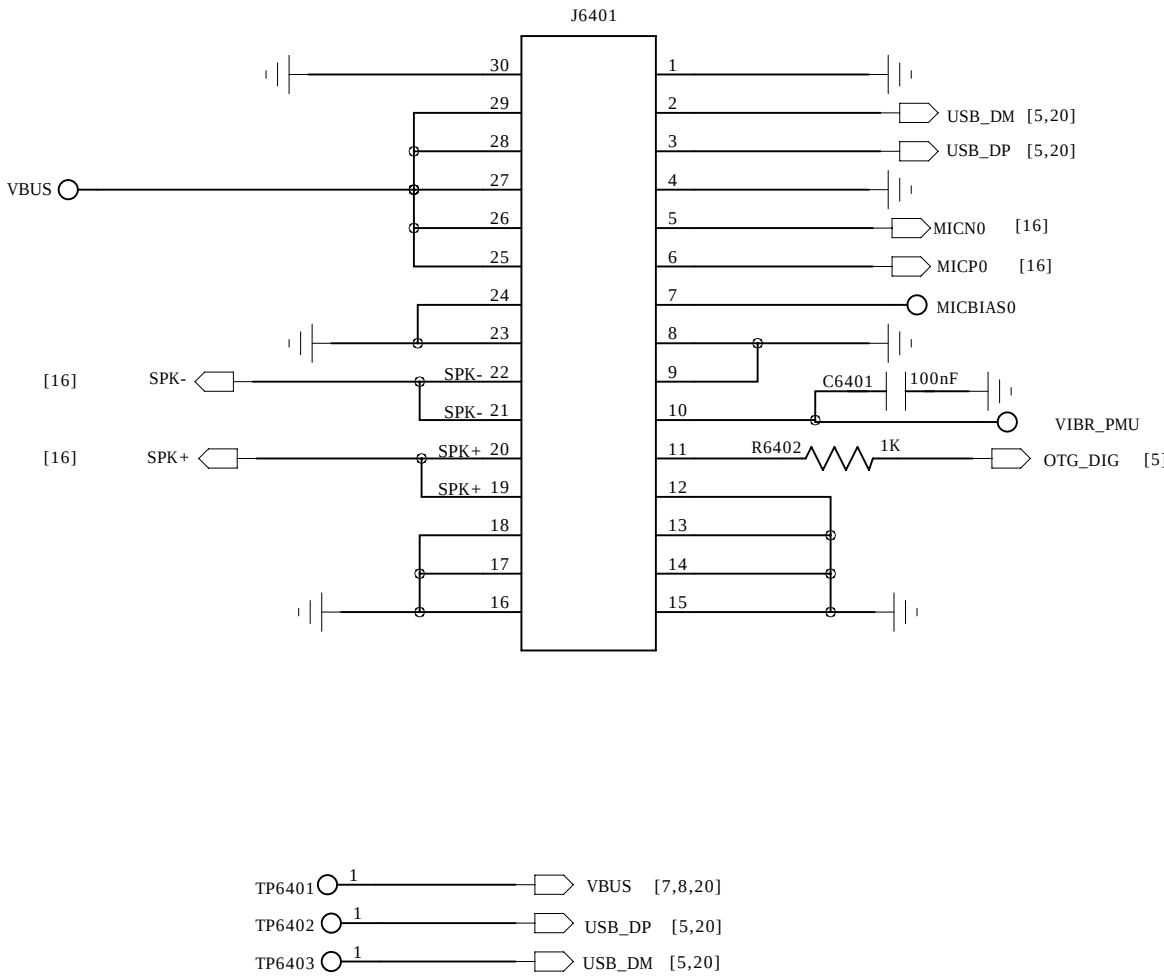


COMPANY: Shanghai ReallyTek Information Technology Co.,Ltd				MODEL: H532		Modified Date: 2015/7/27	
DRAWN	HX	DATED	20141011	TITLE: 64_PERI_EXCH_FP		VERSION: V1.2	SHEET: 20 OF 21
CHECKED	< >	DATED	< >				


PER_SIMI_TF_KEYPAD

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


POWERKEY&SIDE KEY

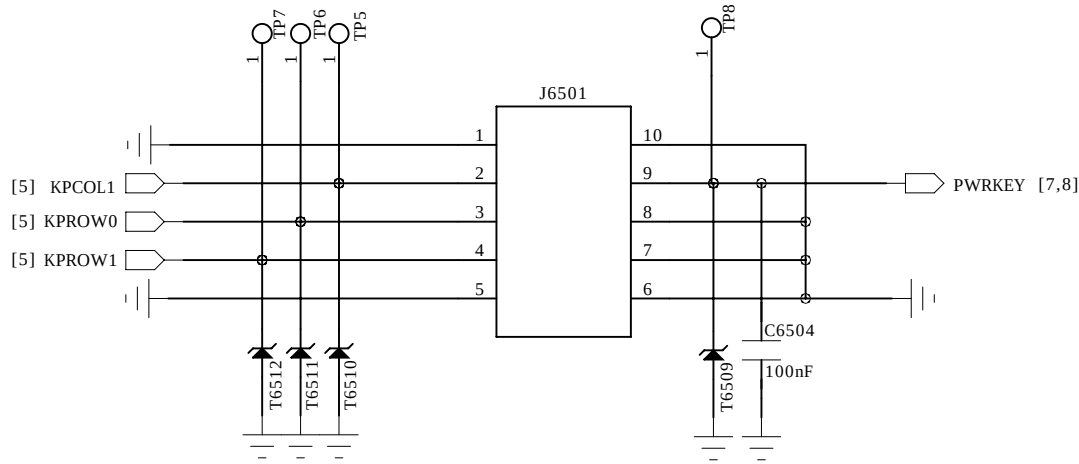


T_Flash

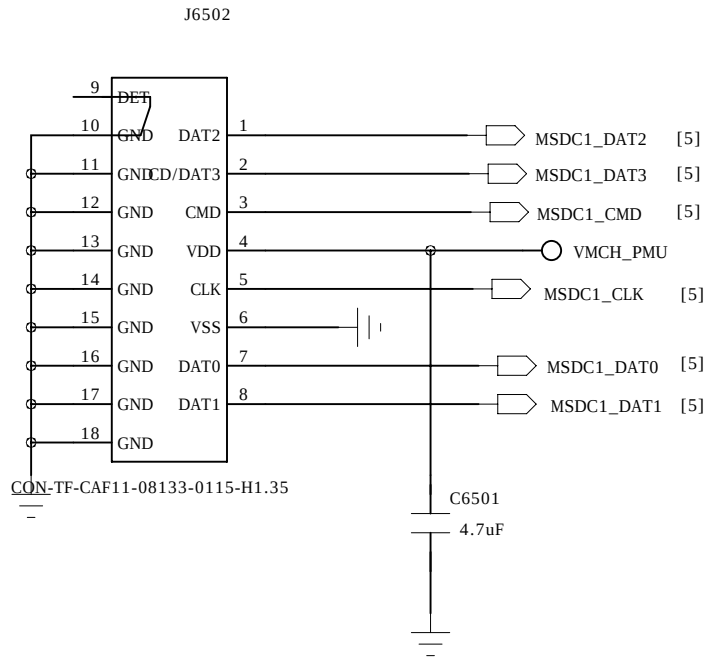

MICRO SIM2

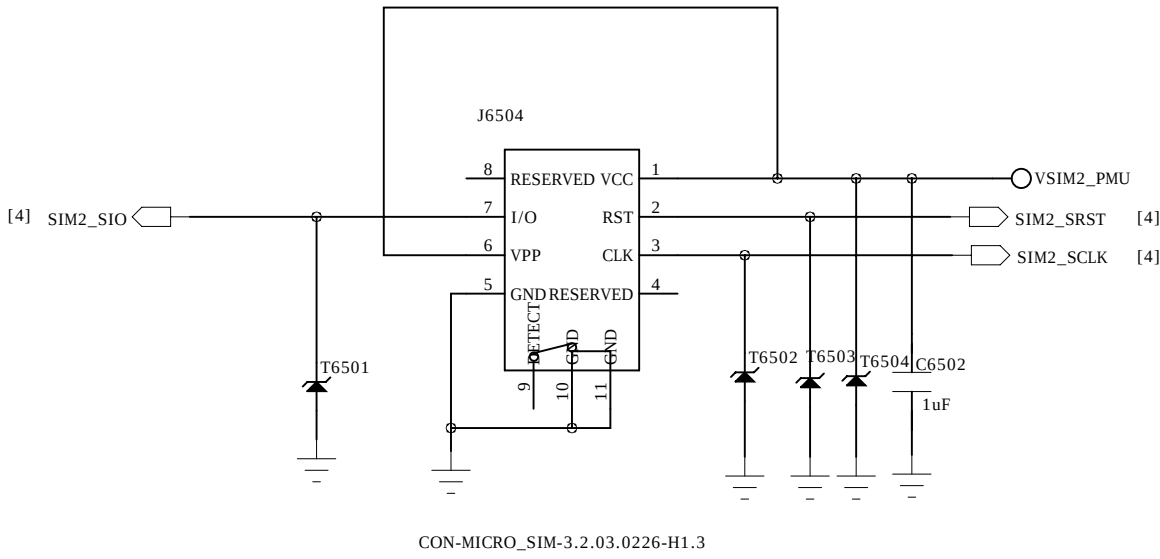

MICRO SIM1

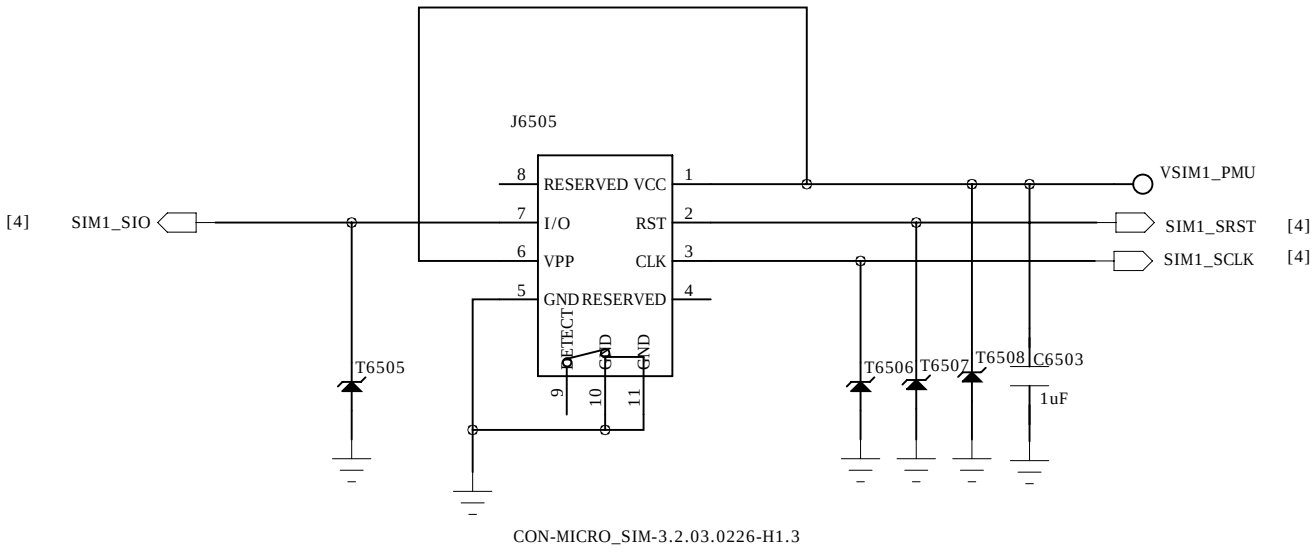

COMPANY:				MODEL: H532		Modified Date: 2015/7/27	
DRAWN		DATED		TITLE: 65_PER_SIMI_KEYPAD		VERSION: V1.2	SHEET: 21 OF 21
CHECKED		DATED					