

I2C Configuration Table

SM-A065F/M



Function	I2C Slave Address (7-bit mode)
Page 15 : Charger IC	
Page 16 : LCM BIAS IC	
Page 21 : SMART PA	
Page 23 : Camera	
E-COMPASS	
ALS&PS SENSOR	
NFC	

华勤通讯 Huaqin Telecom Technology Com., Ltd		
Title 02_I2C_ID_Overview		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 2 of 42

01.Block Diagram
02.I2C_ID_Overview
03.Index
04.BB_POWER_PDN
05.BB_POWER_IO
06.BB_1_GPIO
07.BB_2_GPIO
08.BB_3_EMI
09.BB_AUXADC
10.POWER_MT6357_Buck
11.POWER_MT6357_LDO
12.POWER_MT6357_IF
13.POWER_MT6357_Audio
14.POWER_BAT_CON
15.CHARGE_IC+CC
16.LCD BACKLIGHT+LCD BIAS
17.FLASHLED DRIVER
18.Memory_eMMC_LPDDR3
19.POWER_ThirdParty_Powers
20.Audio_EARJACK
21.Audio_MIC_Receiver
22.Audio_K8_PA
23.LCM_FPS
24.CAMERA
25.LINK
26.SIM_SD
27.SideKey_Flash_LED
28.Sensor
29.Test Point_JTAG
30.RF_MT6177_Pin_Out
31.RF_MT6177_RF_TX
32.RF_MT6177_RF_PRX
33.RF_MT6177_RF_DRX
34.RF_ANT
35.WCN_FEM
36.CONNECTIVITY_CONSYS_MT6631
37.SAR_Sensor

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 03_Index		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 3 of 42

HQ11230533000	PNM6N30V15H	芯導
TNM1230J	晶揚	
HQ163010005X0	EMR13N03C	ETEK

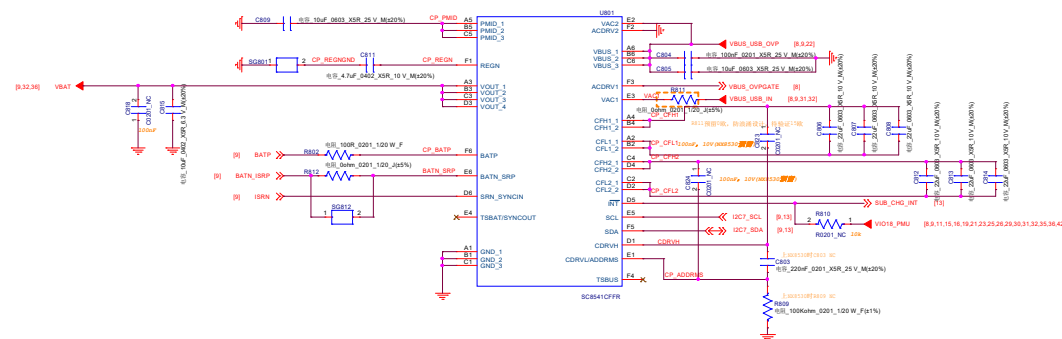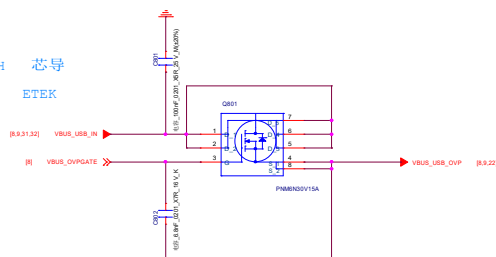

	U803	C822	R1203	R813
上USB防烧	SMT	SMT	NC	390
不上USB防烧	NC	NC	SMT	NC

备注：默认NC1导通，即检测FLASHLED NTC1

主供: HQ1115557000, DIO1520LP10, 帝奥微

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 08_Charge_Pump			
Size D	Project A06_AL7160A		Rev v1
Date: Friday, May 24, 2024		Sheet 8 of 42	

CS_P、CS_N 平行走线，宽度4mil，两边包地






Figure 1: USB2.0 to RS485 module circuit diagram. The diagram shows a USB2.0 interface on the left connected to an RS485 interface on the right. Key components include a USB2.0 connector (J1), a USB2.0 to RS485 converter chip (U1), and an RS485 transceiver chip (U2). The USB2.0 interface includes D+, D-, D+, and D- pins, as well as VBUS, GND, and NC pins. The RS485 interface includes A, B, and C pins. The circuit includes various resistors (R1, R2, R3, R4, R5, R6, R7, R8, R9, R10, R11, R12, R13, R14, R15, R16, R17, R18, R19, R20, R21, R22, R23, R24, R25, R26, R27, R28, R29, R30, R31, R32, R33, R34, R35, R36, R37, R38, R39, R40, R41, R42, R43, R44, R45, R46, R47, R48, R49, R50, R51, R52, R53, R54, R55, R56, R57, R58, R59, R60, R61, R62, R63, R64, R65, R66, R67, R68, R69, R70, R71, R72, R73, R74, R75, R76, R77, R78, R79, R80, R81, R82, R83, R84, R85, R86, R87, R88, R89, R90, R91, R92, R93, R94, R95, R96, R97, R98, R99, R100) and capacitors (C1, C2, C3, C4, C5, C6, C7, C8, C9, C10, C11, C12, C13, C14, C15, C16, C17, C18, C19, C20, C21, C22, C23, C24, C25, C26, C27, C28, C29, C30, C31, C32, C33, C34, C35, C36, C37, C38, C39, C40, C41, C42, C43, C44, C45, C46, C47, C48, C49, C50, C51, C52, C53, C54, C55, C56, C57, C58, C59, C60, C61, C62, C63, C64, C65, C66, C67, C68, C69, C70, C71, C72, C73, C74, C75, C76, C77, C78, C79, C80, C81, C82, C83, C84, C85, C86, C87, C88, C89, C90, C91, C92, C93, C94, C95, C96, C97, C98, C99, C100). The circuit is powered by a 5V USB supply and a 3.3V regulator. The RS485 interface is configured for differential signaling between pins A and B.

Charger

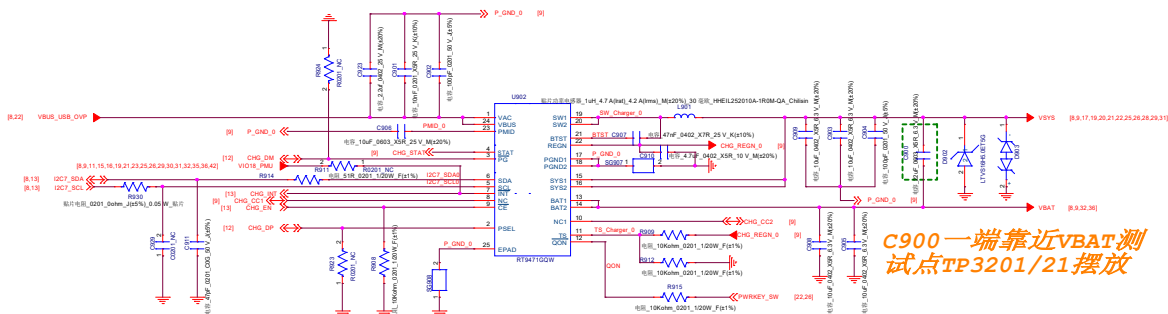

Ship Mode Det

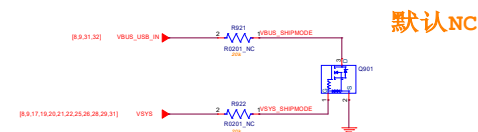

华勤通讯 Huaqin Telecom Technology Com.,Ltd


Title	09 BAT_CHG_PD
-------	---------------

Size	Project
D	A06 AL7160A

Rev
V1

Date: Friday, May 24, 2024

Sheet 9 of 42

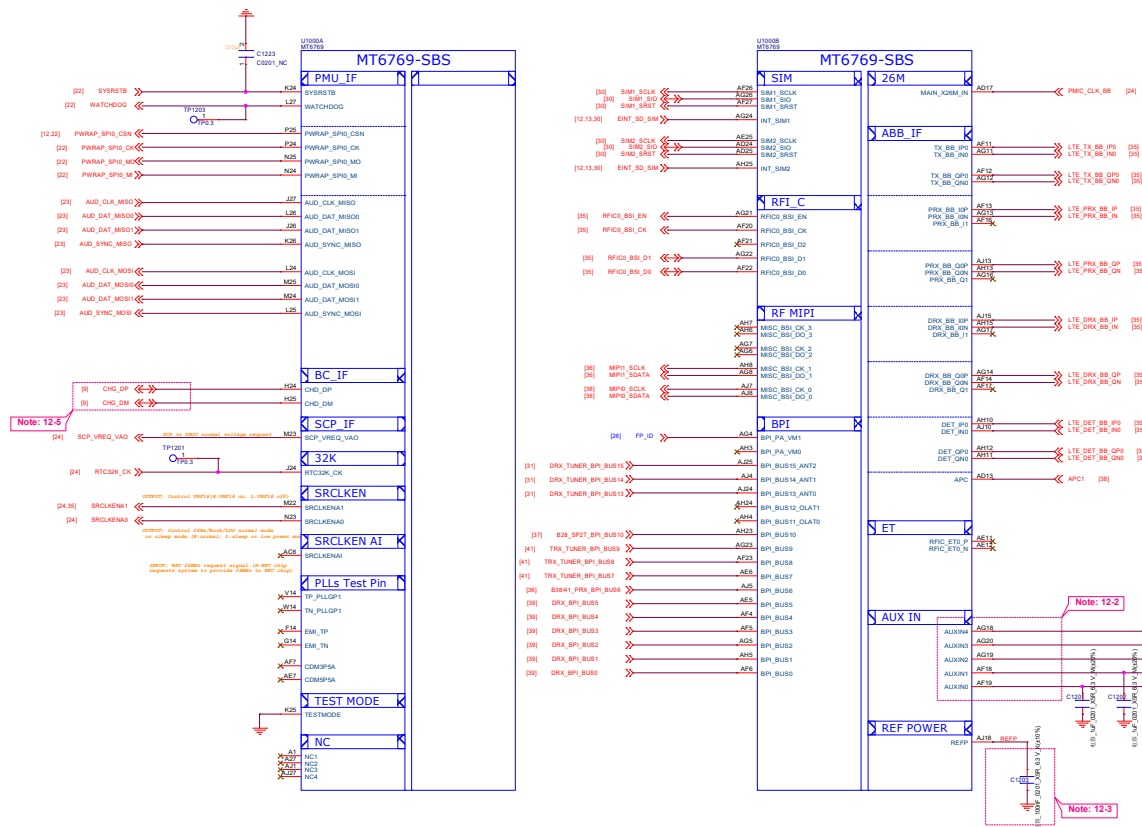

Schematic design notice of "12_BB_1" page:

Note 12-1: PWRAP_SPI0_CSN and "AUD_DAT_MOSIO" are bootstrap pins to select which interface will be the JTAG pin out

JTAG Function		JTAG Function	
PWRAP_SPI0_CSN	AUD_DAT_MOSIO	AP_JTAG	MD_JTAG
default=PU	default=PD	N/A	N/A
HI	LO	N/A	N/A
HI	HI (by ext. PU)	SPI0 + EINT8	SPI2 + SPI3
LO (by ext. PD)	LO	N/A	N/A
LO	HI (by ext. PD)	N/A	N/A

Note 12-2: To shunt a 1uF capacitor in the AUXIN ADC input to prevent noise coupling. It should be placed as close to BB as possible. Connect the unused AUX ADC input to GND.

Note 12-3: The de-coupling cap. for REFP (AJ18 ball) have to be placed as close to BB as possible.

Note 12-4: HW pin for DDR type feature in bootstrap (refer to BB HW design Notice)

AUD_SYNC_MISO	AUD_CLK_MISO	CAM_PDN3	PMIC 6358 voltage	DDR Type
default=PD	default=PD	default=PD	VDRAM1 / VDRAM2	DDR
No ext. pull	No ext. pull	No ext. pull	1.125v / 0.6v	LP4X eMCP
No ext. pull	12K pull to VIO18	No ext. pull	OFF / 1.8v	Reserved
12K pull to VIO18	No ext. pull	No ext. pull	1.225v / 0.6v	LP3 eMCP
12K pull to VIO18	12K pull to VIO18	No ext. pull	1.125v / 1.8v	Reserved



Note 12-5: Charger must have D+/D- pin for charger type USB detection. Charger must have at least 500mA USB current for All charger type.

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 12_BB_1

Size D Project A06_AL7160A Rev v1

Date: Friday, May 24, 2024 Sheet 12 of 42

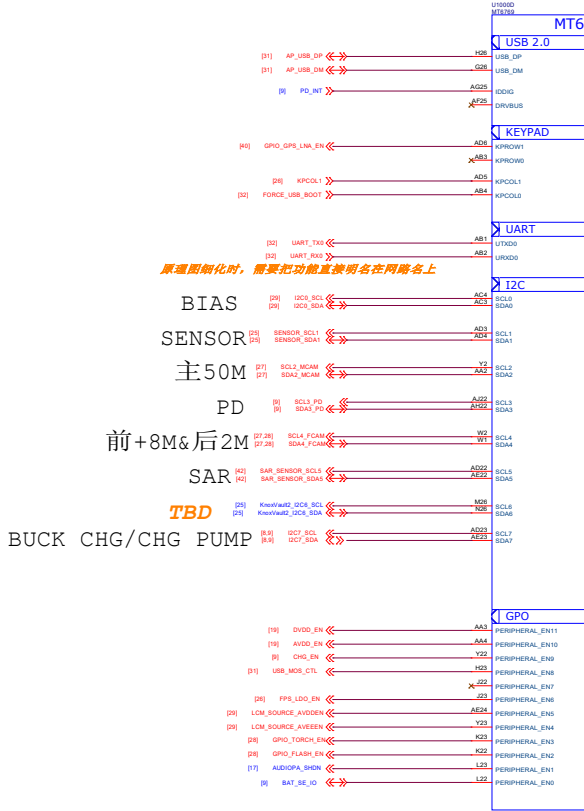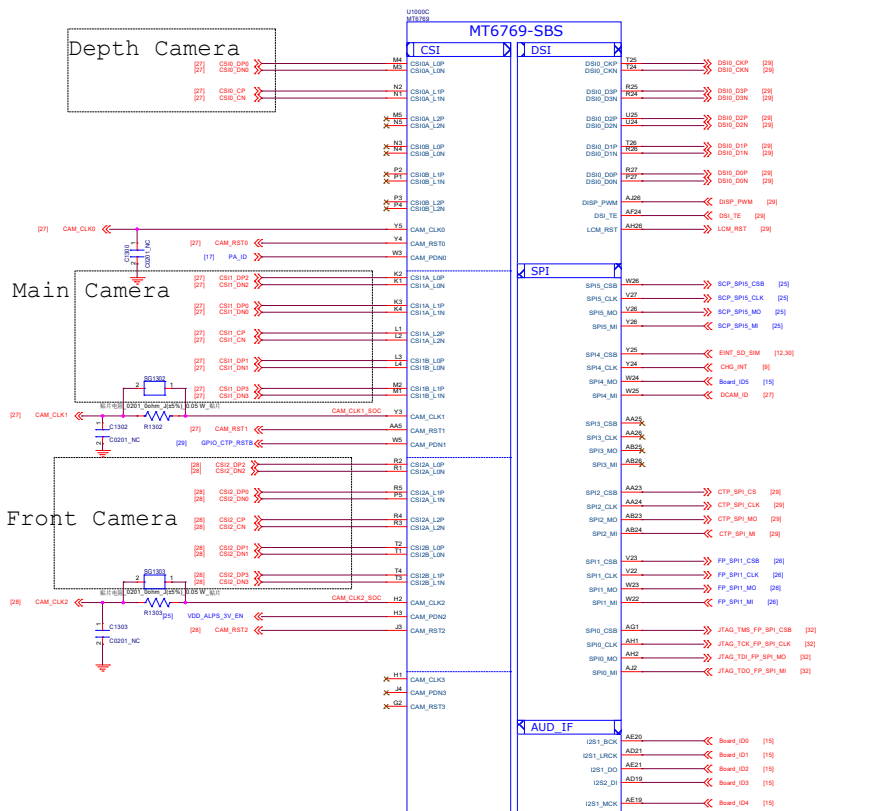


BIAS
SENSOR
主50M
PD
前+8M&后2M
SAR
TBD
BUCK CHG/CHG PUMP

原通圖細化時，需要把功能直接明名在網路名上


華勤通訊 Huaqin Telecom Technology Com.,Ltd		
Title 13_BB_2		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 13 of 42

Thermal/Board ID

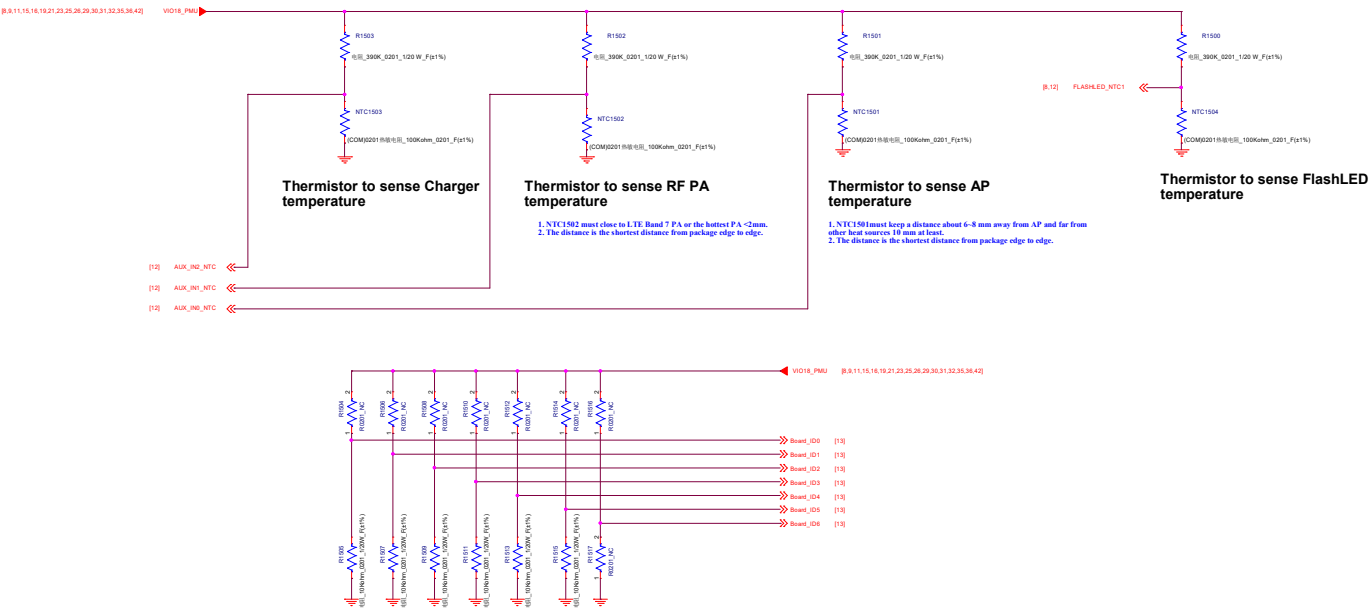


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 15_BB_AUXADC_Thermal/Board ID		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 15 of 42

K类功放

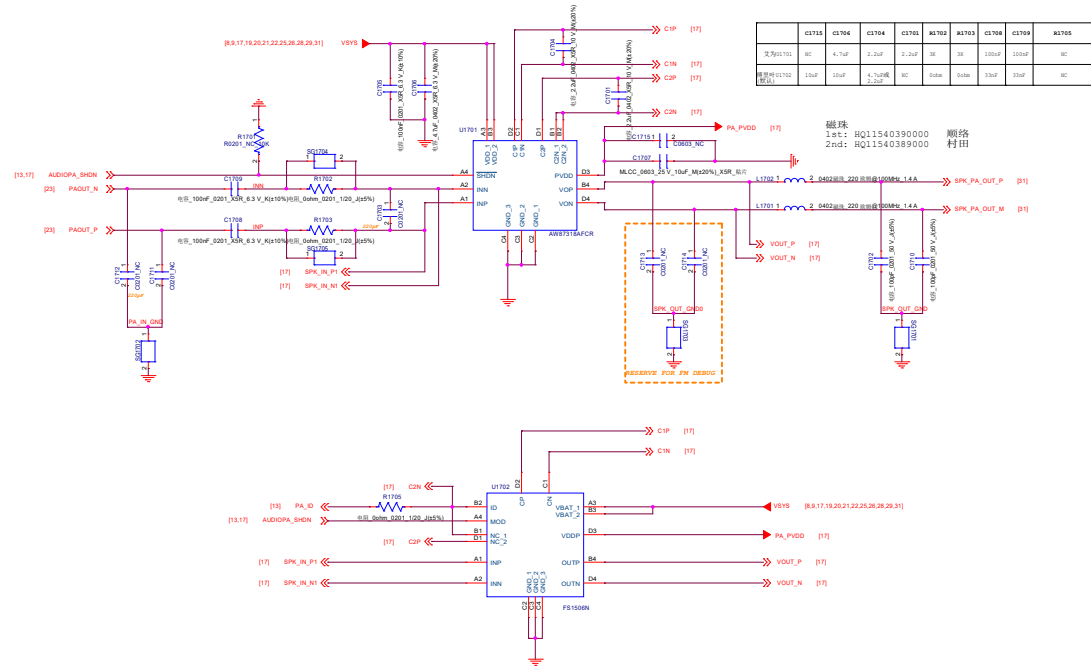


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 17_AUDIO_PA		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024	Sheet 17 of 42	

RECIPIENT

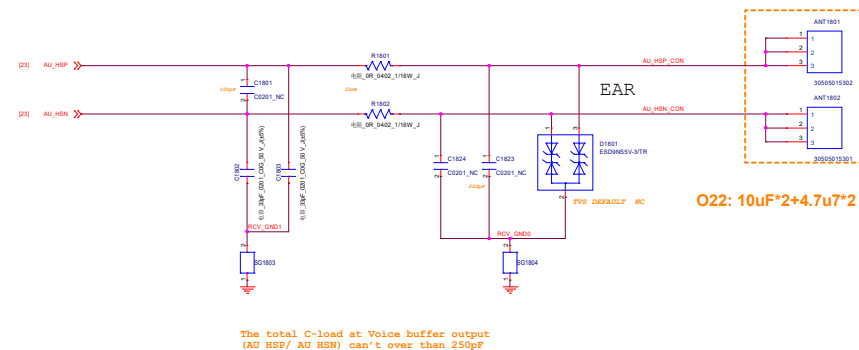


MAIN MIC KB

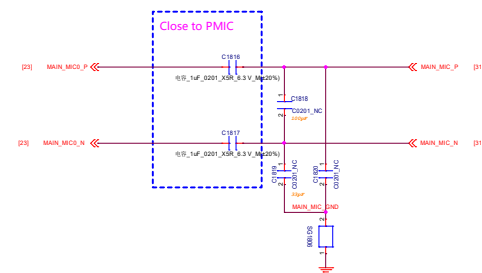


华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 18_MIC/RCV/Earphone			
Size D	Project A06_AL7160A		Rev V1
Date: Friday, May 24, 2024		Sheet 18 of 42	

LDO for Front Camera(VCAMD_EXT1) 1.2V

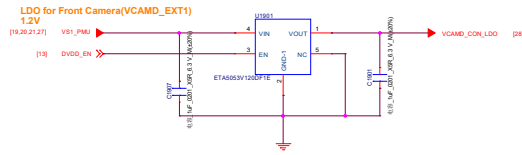


Ext. EMI_VDD1 for LPDDR4X VDD1

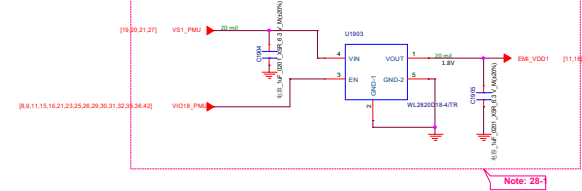

U1903
主供: HQ1152534000, ETA5055V180DF1E, LDO_1.8V_500 mA, ETA (钰泰)
二供: 暂无料号, WR0516-18FF4R, 维安
三供: HQ115555CJ000, ET55618Y1B, LDO_1.8_500 mA_ET55618Y1B, ETEK (力芯微)

LDO for 50M Camera (VCAMA_EXT) 2.8V

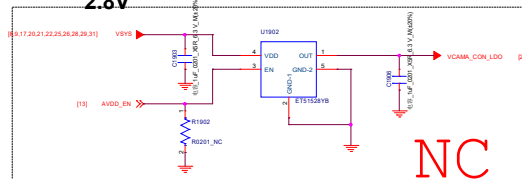

AVDD 兼容LDO
使用平台 LDO NC

Schematic design notice of "28_POWER_ThirdParty_Powers" page:


Note 28-1: Refer to BB design notice for LP4X VDD1 LDO selection guide

华勤通讯 Huaqin Telecom Technology Com.,Ltd



Title A19_POWER_ThirdParty_Powers

Size D	Project A06_AL7160A	Rev v1
--------	---------------------	--------

Date: Friday, May 24, 2024	Sheet 19 of 42
----------------------------	----------------

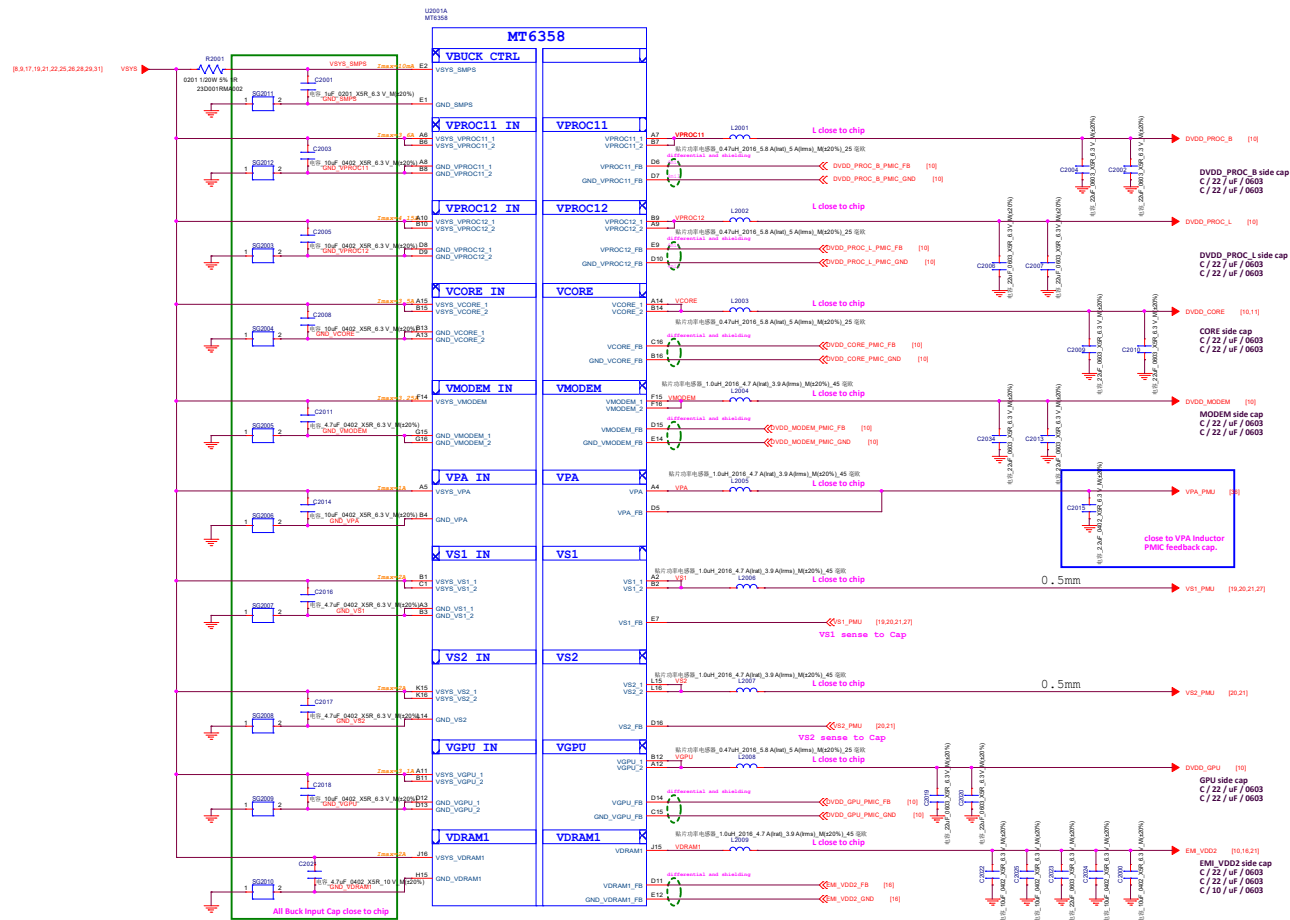


华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 20_POWER_MT6358_BUCK			
Size D	Project A06_AL7160A		Rev v1
Date: Friday, May 24, 2024		Sheet 20 of 42	

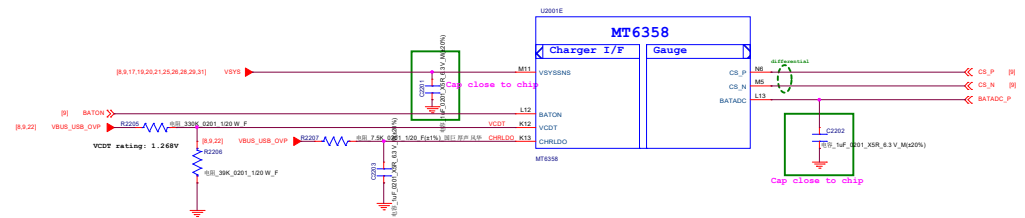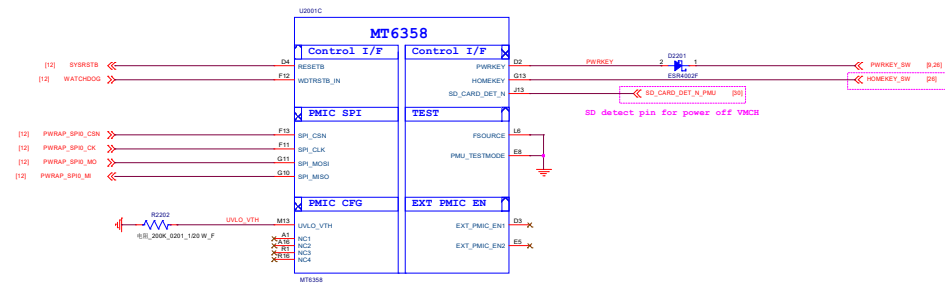

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 22_POWER_MT6358_IF		
Size D	Project A06_AL7160A	Rev V1
Date: Friday, May 24, 2024		Sheet 22 of 42


eCOMPASS

G SENSOR

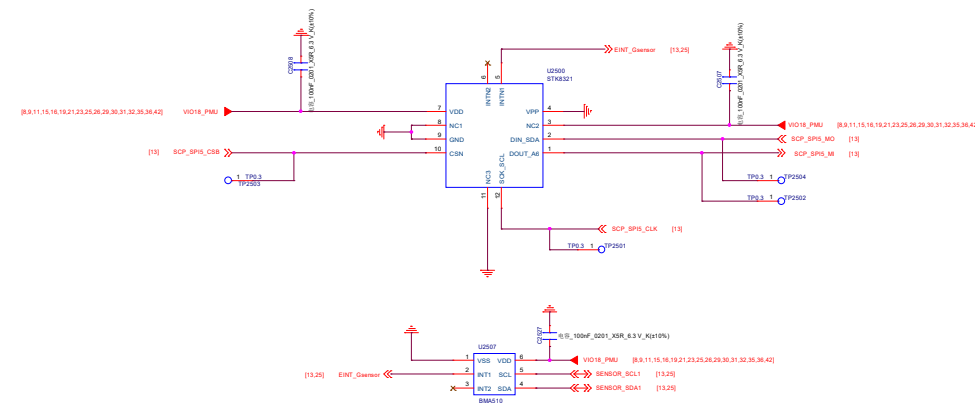


U2507为小封装兼容方案，
若贴U2507，则U2500及所有外围均NC
若不贴U2507，则U2500及外围器件全部上件

ALPS Sensor

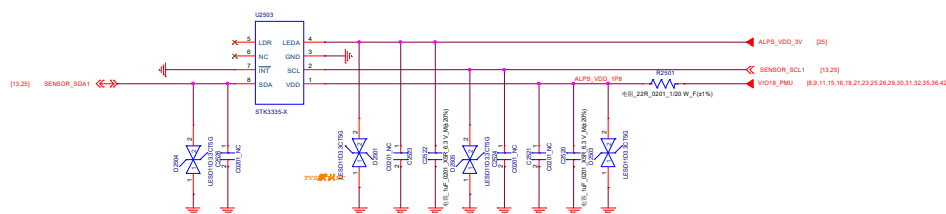


LDO For ALP

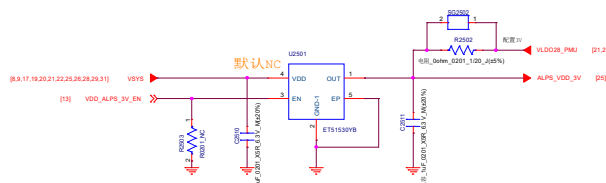

LDO For ALP, 设置平台电压3V, 若有问题, 则上3V LDO

	R2502	U2501	C2510	C2511
平台供电 (默认)	SMT	NC	NC	NC
LDO供电	NC	SMT	SMT	SMT

Security IC

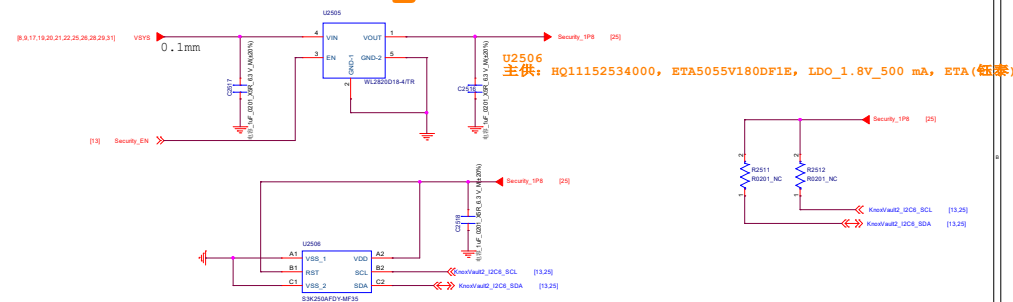

U2506
主供: HQ133010000Y0, S3K250AFDY-MF35, Samsung (三星电子)


华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 25_SENSOR


Size D Project A06_AL7160A Rev v1

Date: Friday, May 24, 2024 Sheet 25 of 42

Finger Print

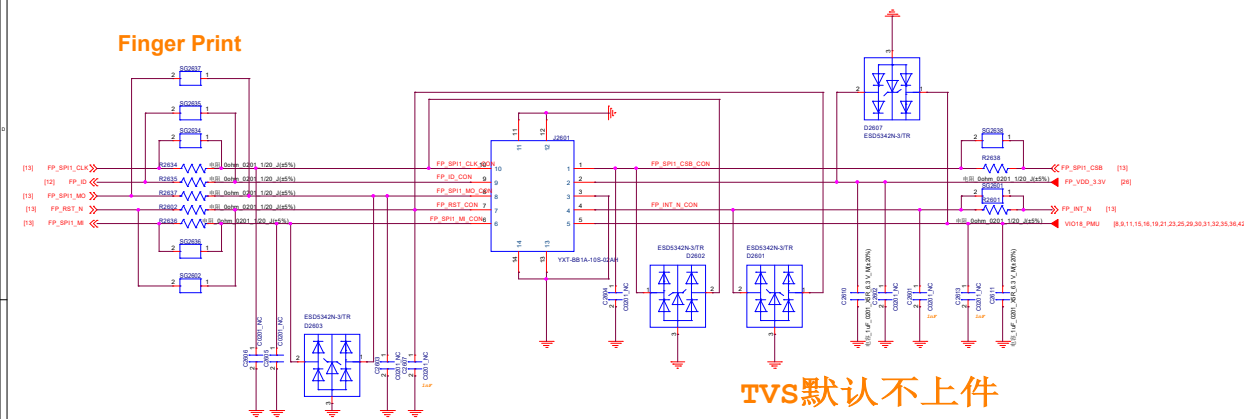


LDO for FPS

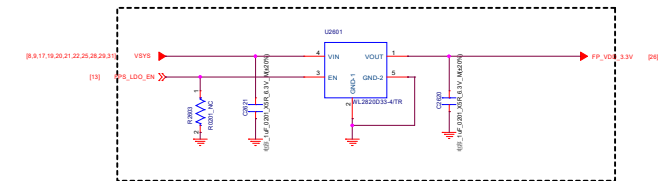

主供: HQ11152105000, ETA5053V330DF1E,
二供: HQ11153588000, WL2820D33-4/TR,
三供: HQ11153571000, AW37030D330DNR,

TVS默认不上件



KEY pad

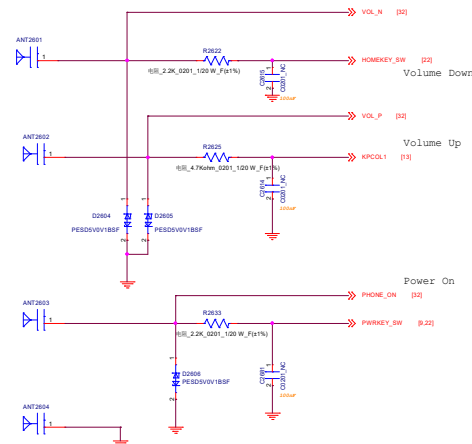


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 26_FP/KEY		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 26 of 42

Front 8M Cam


Front Camera电源走线要求:
AVDD 0.2mm
DVDD 0.3mm
IOVDD 0.1mm

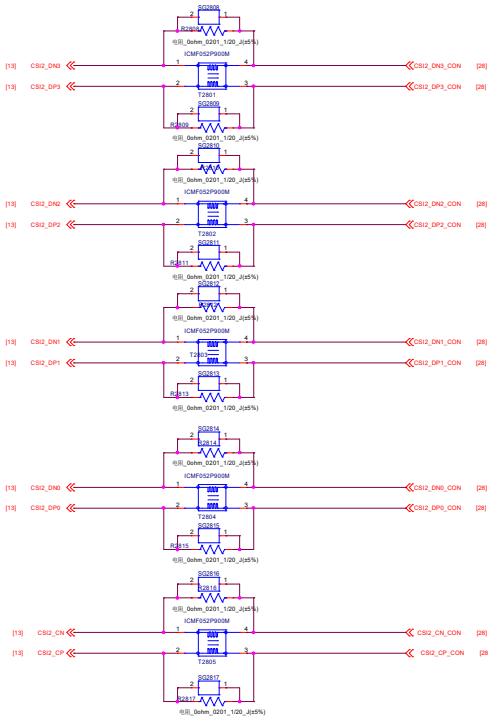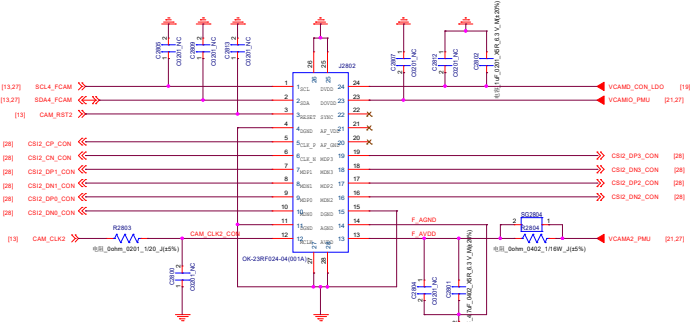

Flash Driver

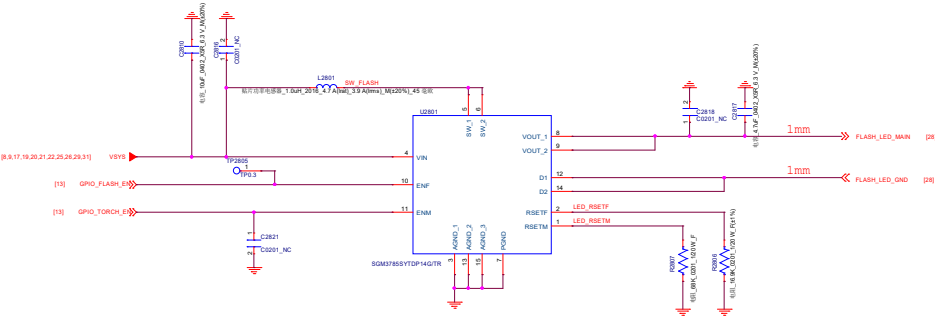

Flash LED


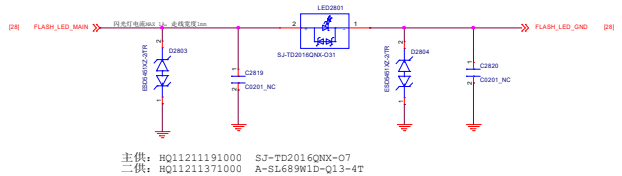


替代关系	料号	型号	供应商	R2807	R2806	If1ash	Itorch	封装类型	封装尺寸(MAX)
主供	HQ111555CH000	SQM37858VTD014G/7B	SGS (意邦微)	68K	12K	1500mA	200mA	TDPN-3*2-14L	3.1*2.1*0.8mm
二供	HQ11154488000	AS658580BNC	Amphenol (昂赛微)	68K	12K	1500mA	800mA	DPN2030-14L	3.1*2.1*0.8mm
三供		AM36501	艾为						


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 28_FRONT_CAM/FLASH		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 28 of 42

3选3卡座


TF CARD

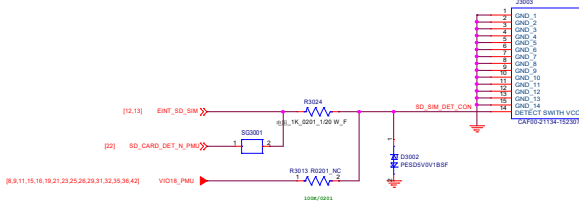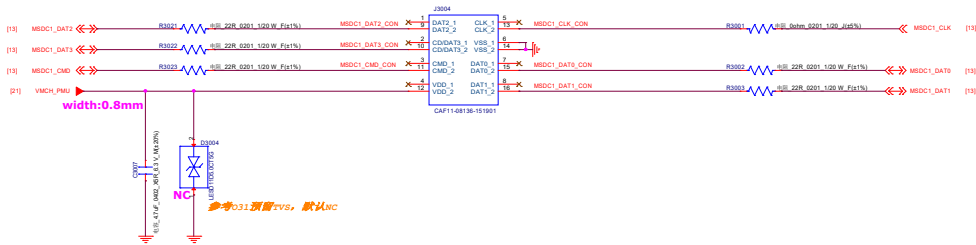

NANO SIM1

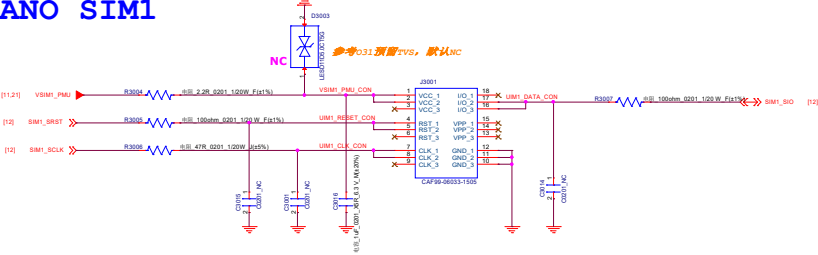


NANO SIM2

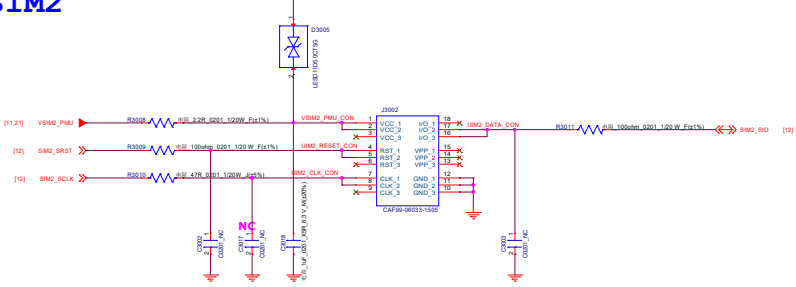


华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 30_SIM&TF		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 30 of 42


LINK

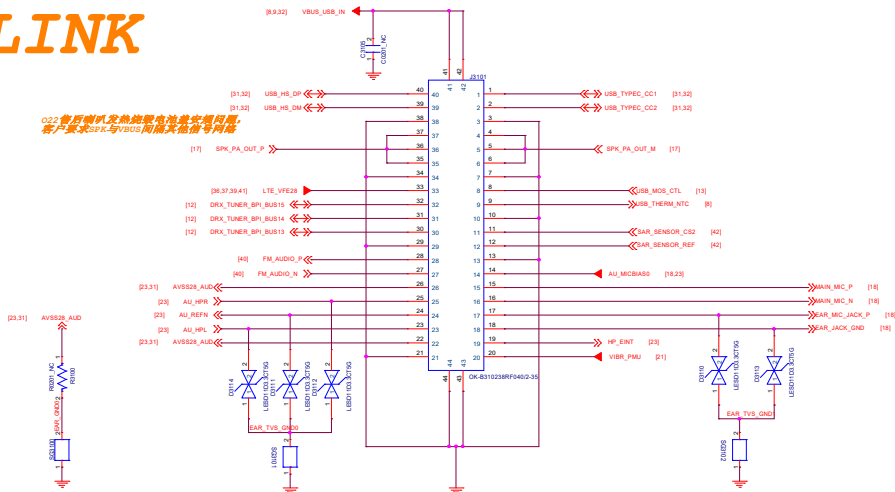

CC&DP/DM

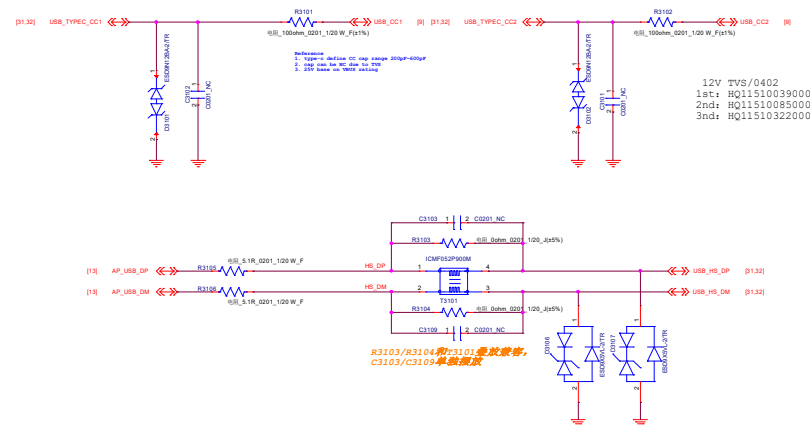

AFC

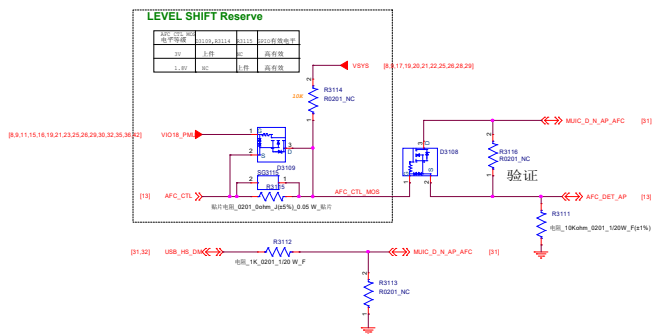

OVP REPLACED BY NMOS

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title		31_LINK&CC&DPDM&AFC	
Size	Project	A06_AL7160A	Rev
D			v1
Date: Friday, May 24, 2024		Sheet 31 of 42	




Shielding GND



MARK



KEYPAD




JTAG Connector




华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 32_TEST_POINT/SHIELD/JTAG			
Size D	Project A06_AL7160A		Rev v1
Date: Friday, May 24, 2024		Sheet 32 of 42	



华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 33_BB_RESERVE		
Size D	Project A06_AL7160A	Rev v1
Date: Friday, May 24, 2024		Sheet 33 of 42

华勤通讯 Huaqin Telecom Technology Com.,Ltd		
Title 34_NFC		
Size D	Project A06_PA9540	Rev v1
Date: Friday, May 24, 2024		Sheet 34 of 42


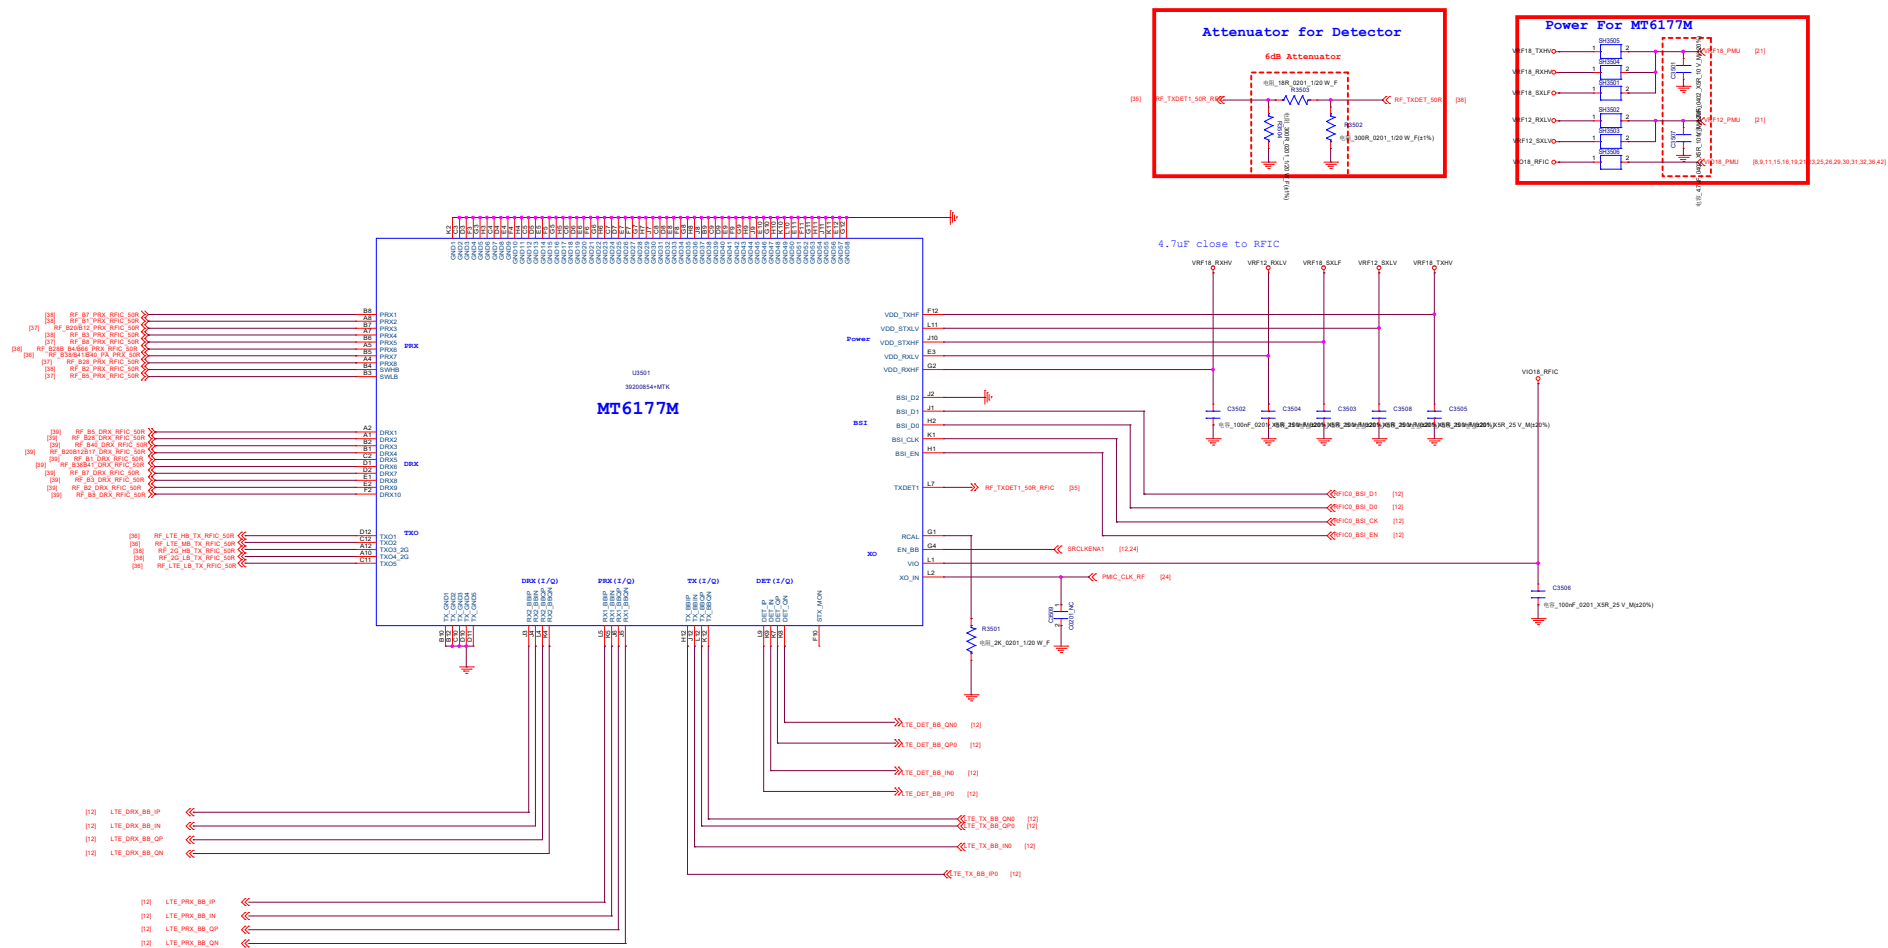


华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 35_RF_MT6177			
Size D	Project A06_PA9540		Rev v1
Date: Friday, May 24, 2024		Sheet 35 of 42	

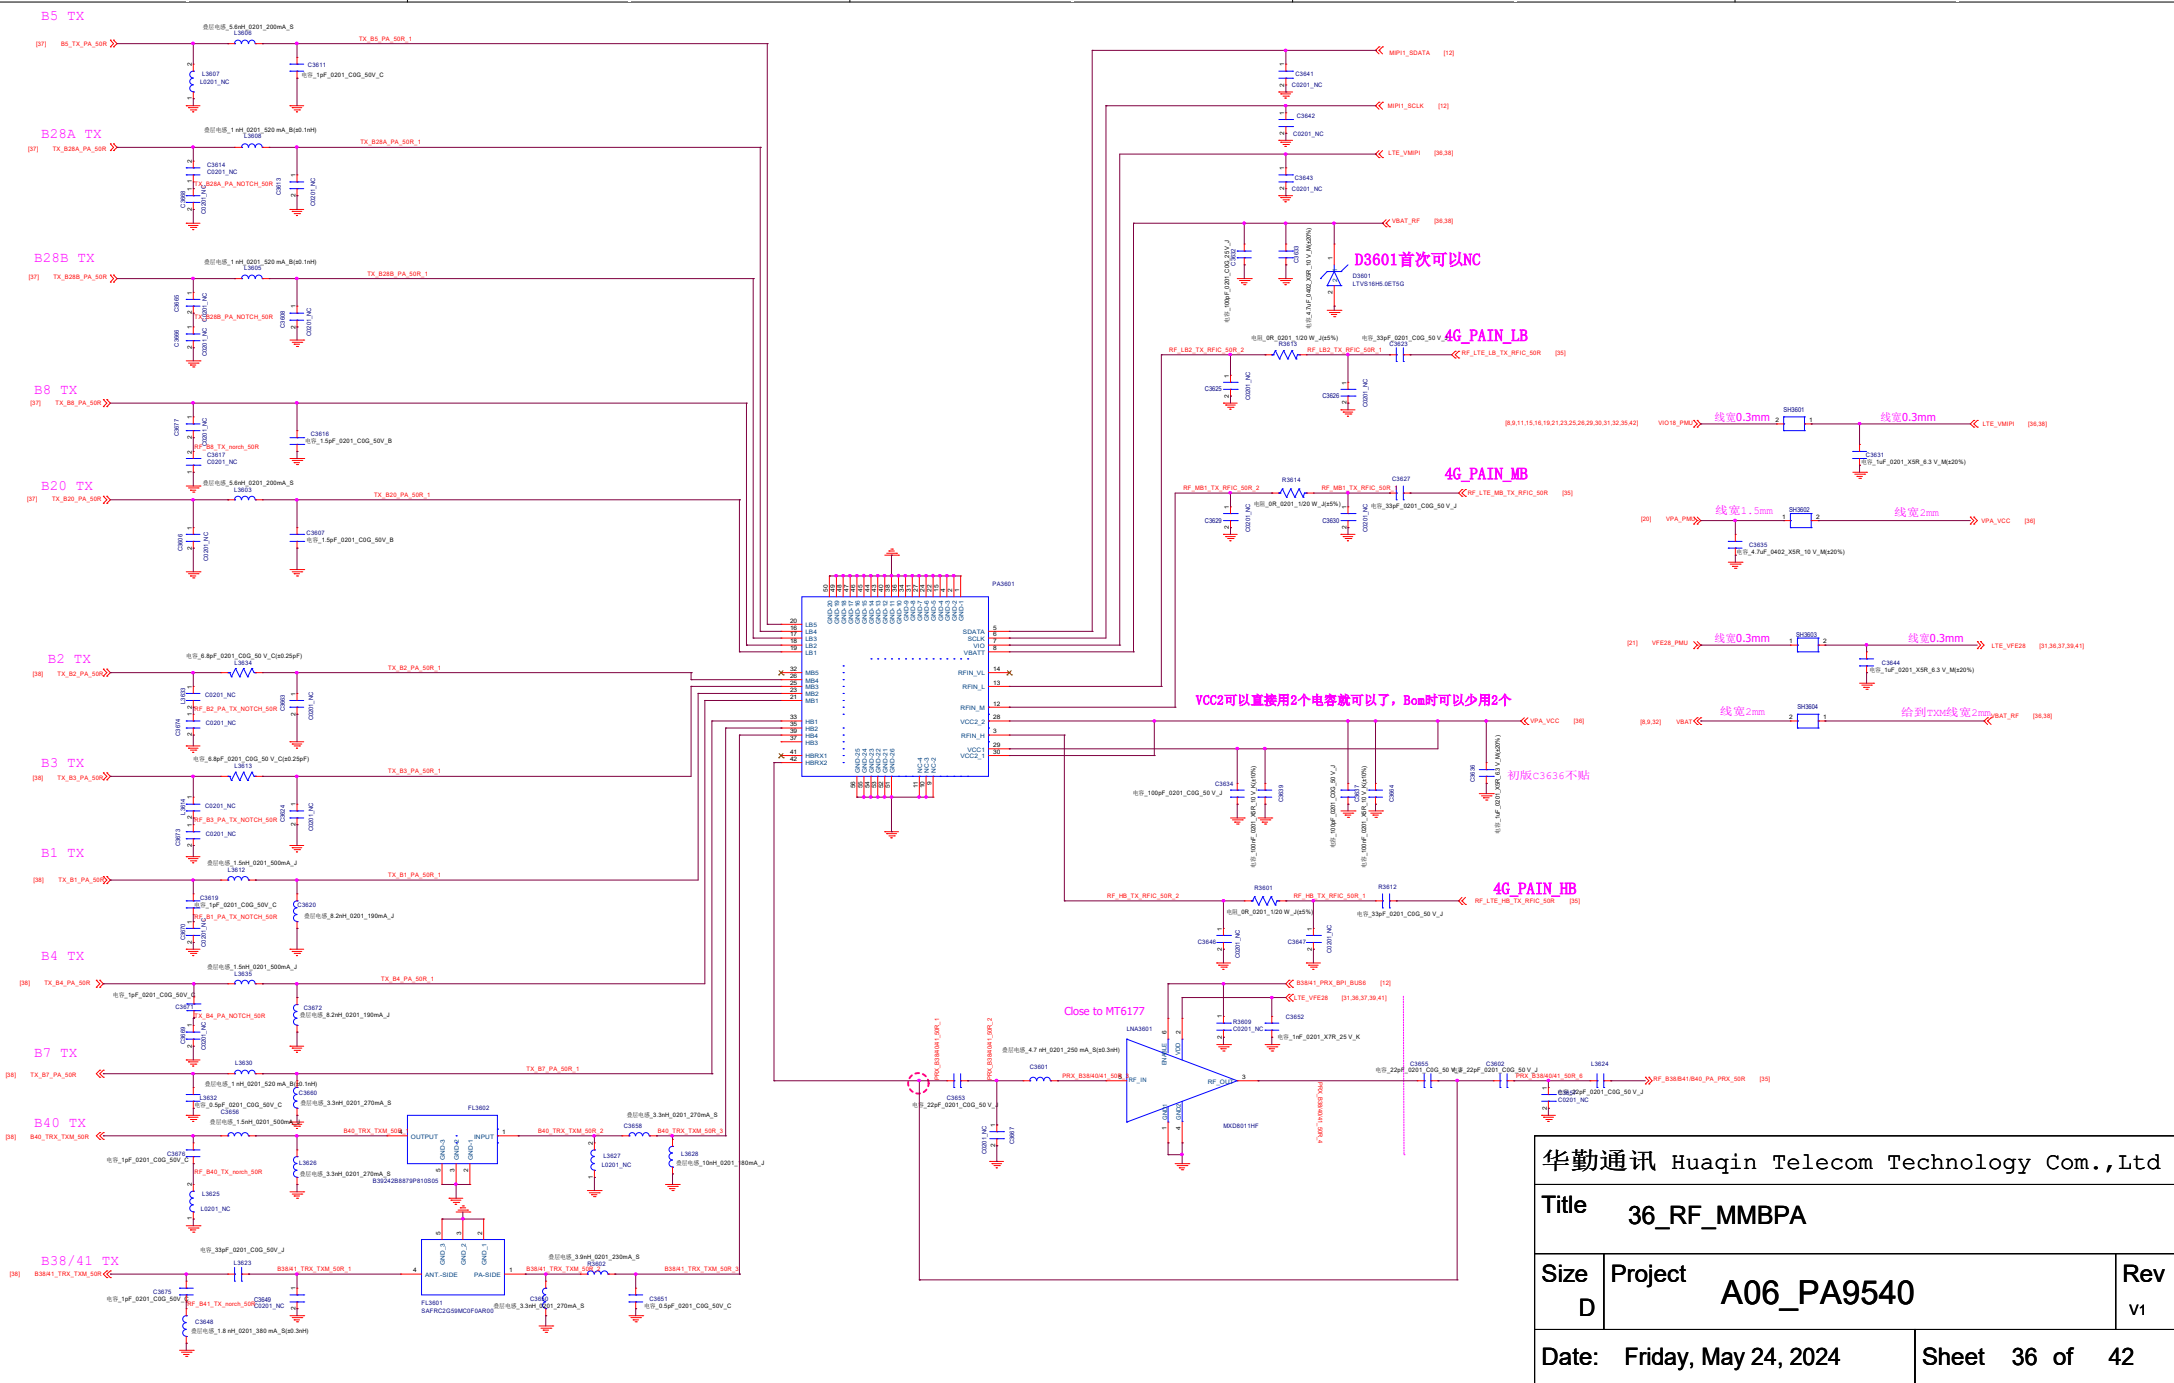

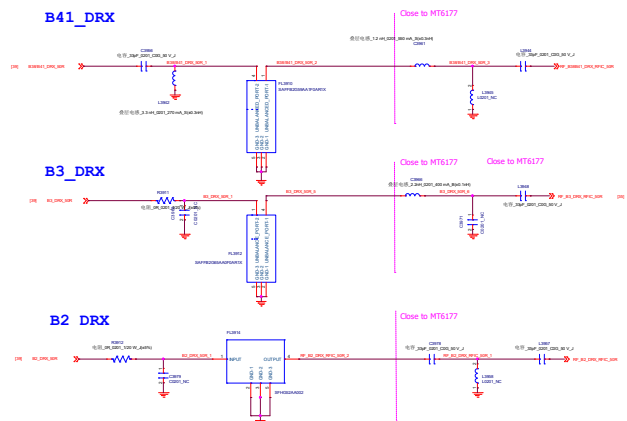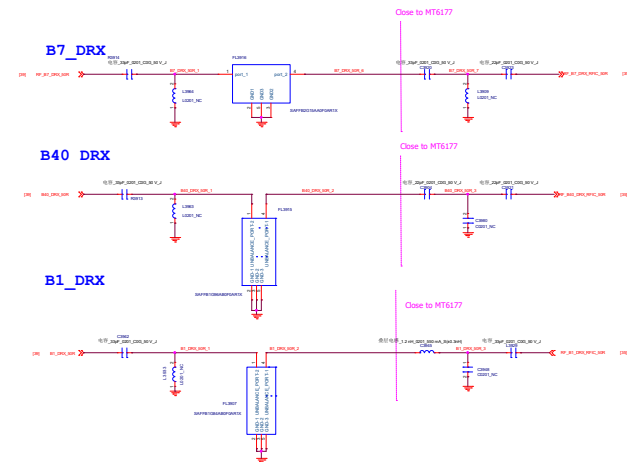

DRX_ANTENNA

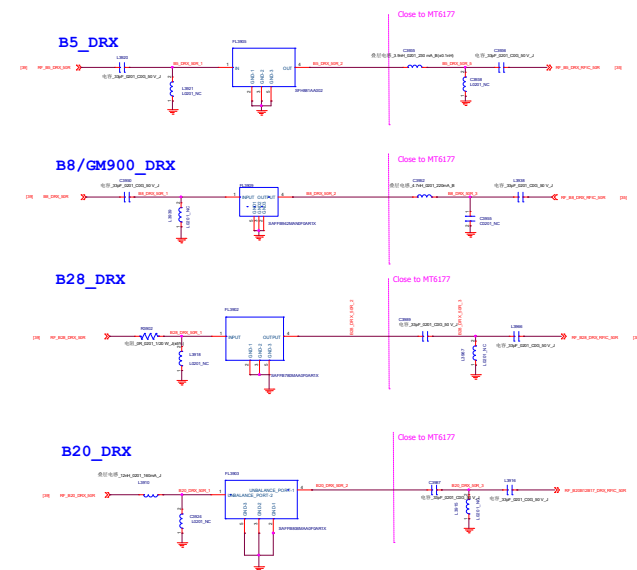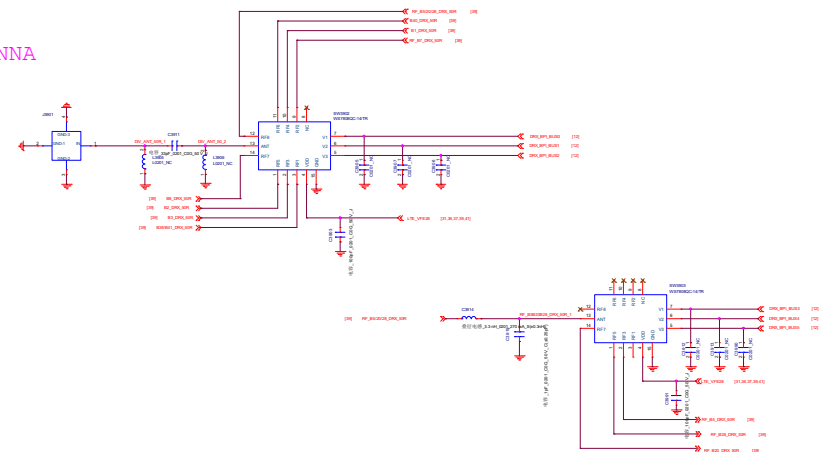

华勤通讯 Huaqin Telecom Technology Com.,Ltd

Title 39_DRX

Size E Project A06_PA9540

Rev v1

Date: Friday, May 24, 2024

Sheet 39 of 42

[illegible]

TUNER

[illegible]

华勤通讯 Huaqin Telecom Technology Com.,Ltd			
Title 41_ANT			
Size D	Project A06_PA9540		Rev V1
Date: Friday, May 24, 2024		Sheet 41 of 42	

