




DJI MINI3 PRO 5.8GHZ


DIGITAL BOARD, ESQUEMAS DIGITALIZADOS

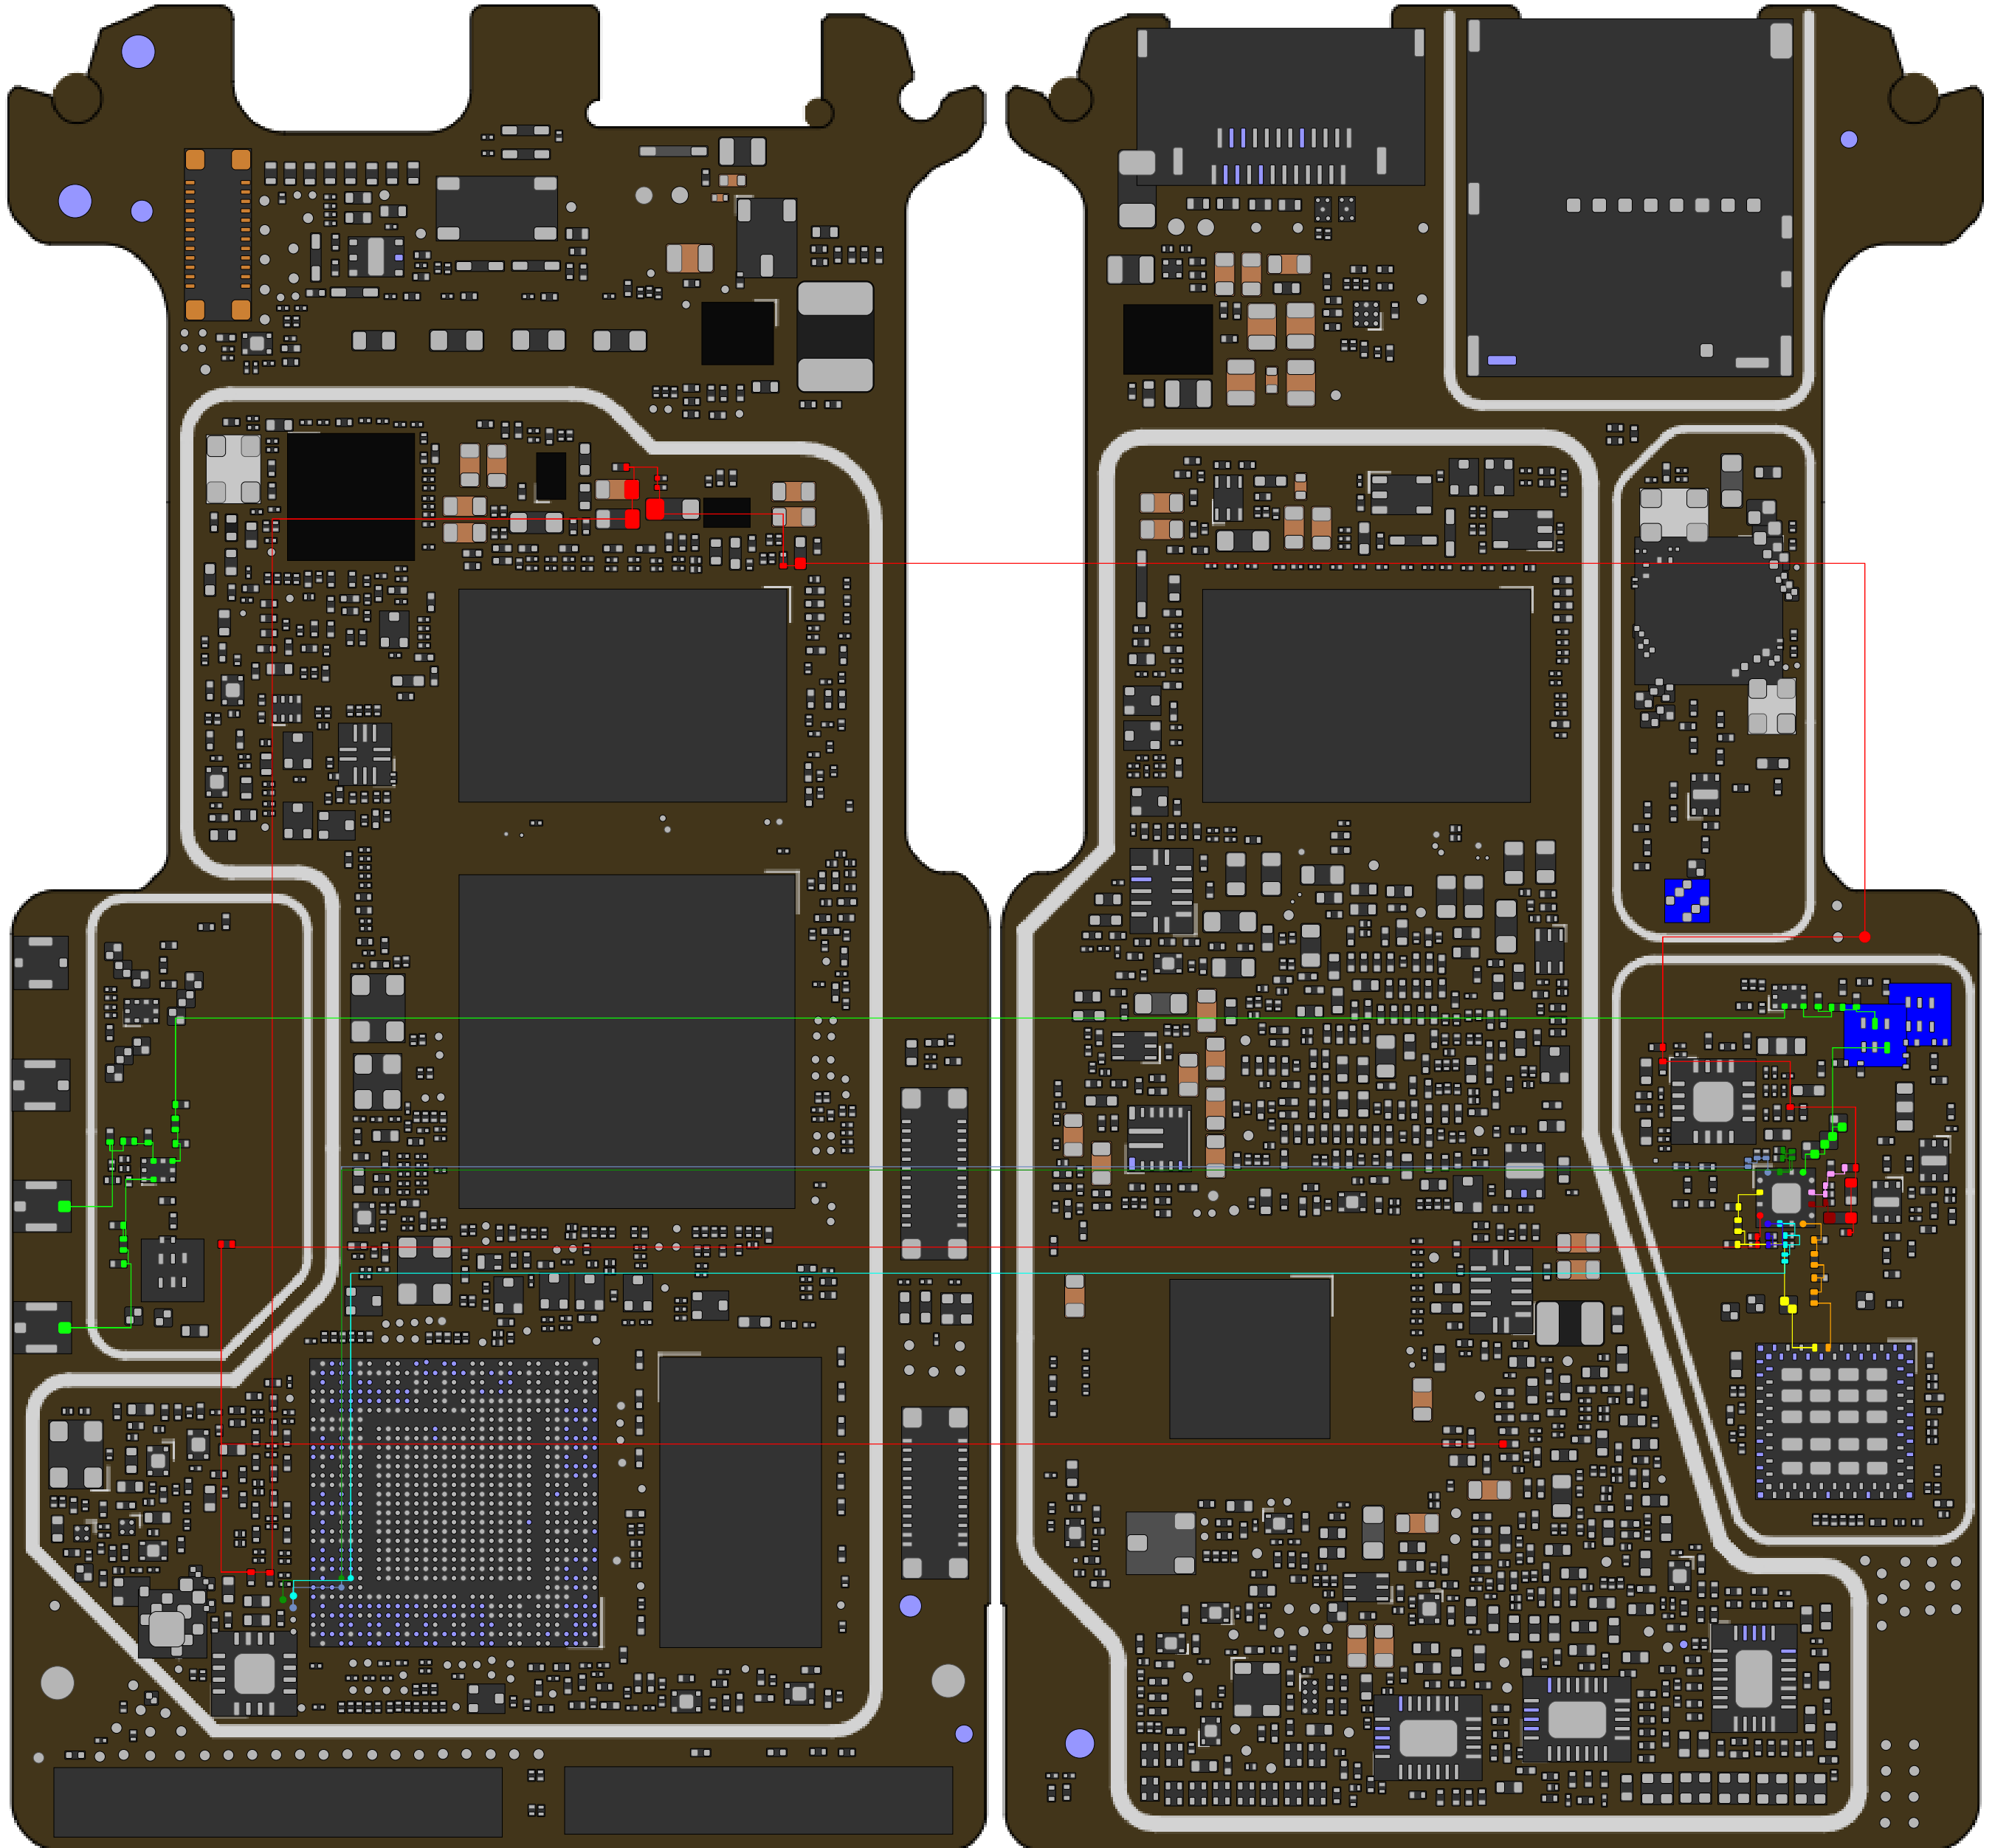

VDD_IN RX_C1 LNA_EN C_RX ANT VCC2 VCC1 TX_C1 PA_EN PDET



+55(33)98444-4376 - DIGITAL BOARD

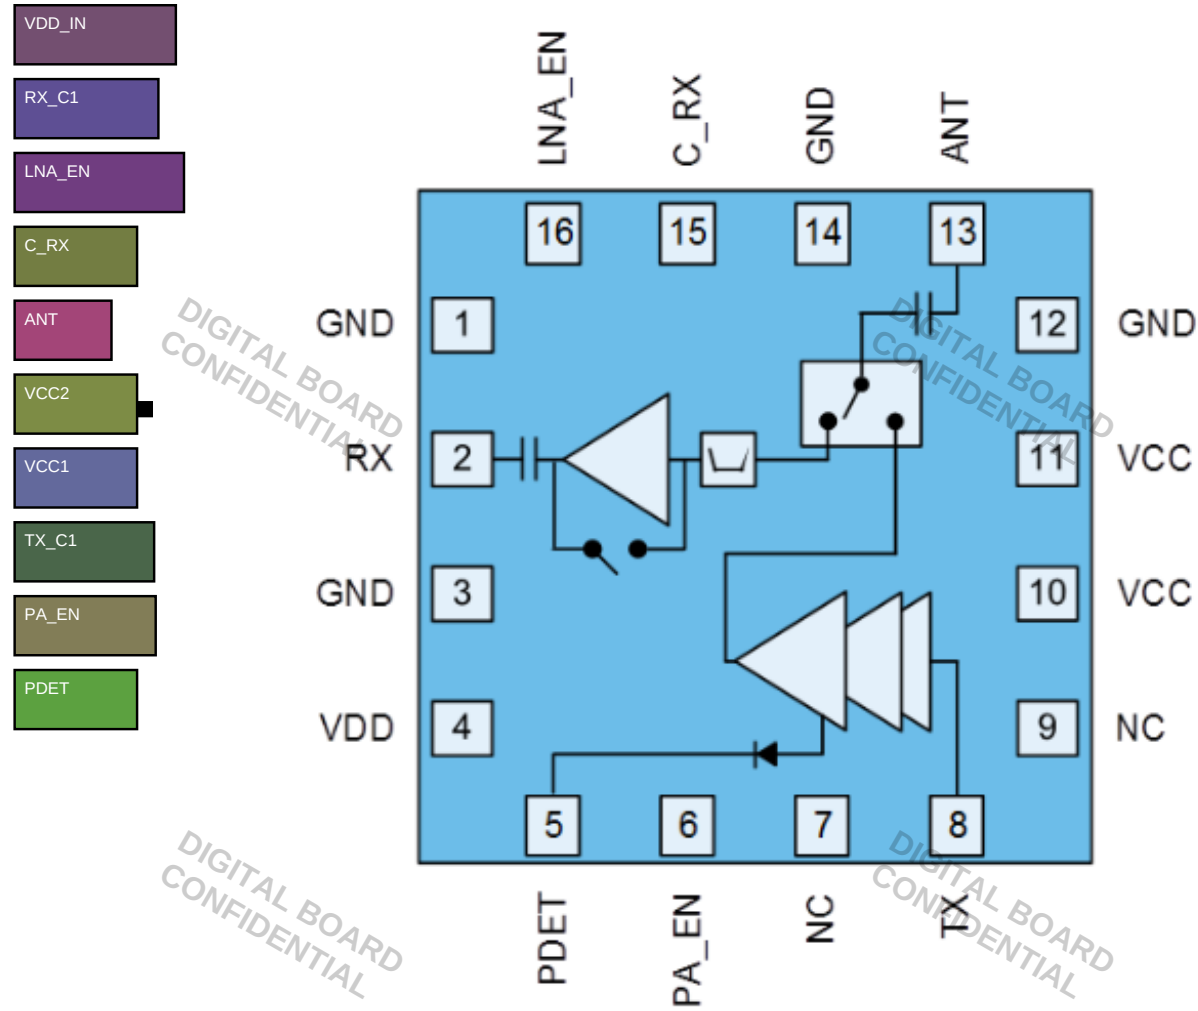

Key Features

- 5150 – 5925 MHz
- $P_{OUT} = +15\text{dBm}$ MCS11 HE160 -43dB Dynamic EVM
- $P_{OUT} = +16\text{dBm}$ MCS11 HE80 -43dB Dynamic EVM
- $P_{OUT} = +20.5\text{dBm}$ MCS9 VHT80 -35dB Dynamic EVM
- $P_{OUT} = +24.5\text{dBm}$ MCS0 HT20 Spectral Mask Compliance
- Optimized for +5 V Operation
- 30 dB Tx Gain
- 2.1 dB Noise Figure
- 13.5 dB Rx Gain & 8 dB Bypass Loss
- 30 dB 2.4 GHz Rejection on Rx Path

Product Overview

The Qorvo® QPF4550 is an integrated front end module (FEM) designed for Wi-Fi 6 (802.11ax) systems. The compact form factor and integrated matching minimizes layout area in the application.


Performance is focused on optimizing the PA for a 5 V supply voltage that conserves power consumption while maintaining the highest linear output power and leading edge throughput.

Integrated die level filtering for 2nd and 3rd harmonics as well as 2.4 GHz rejection for DBDC operation are included.

The QPF4550 integrates a 5 GHz power amplifier (PA), single pole two throw switch (SP2T) and bypassable low noise amplifier (LNA) into a single device.

MINI3PRO-5.8GHZ.pdf

QPF4550

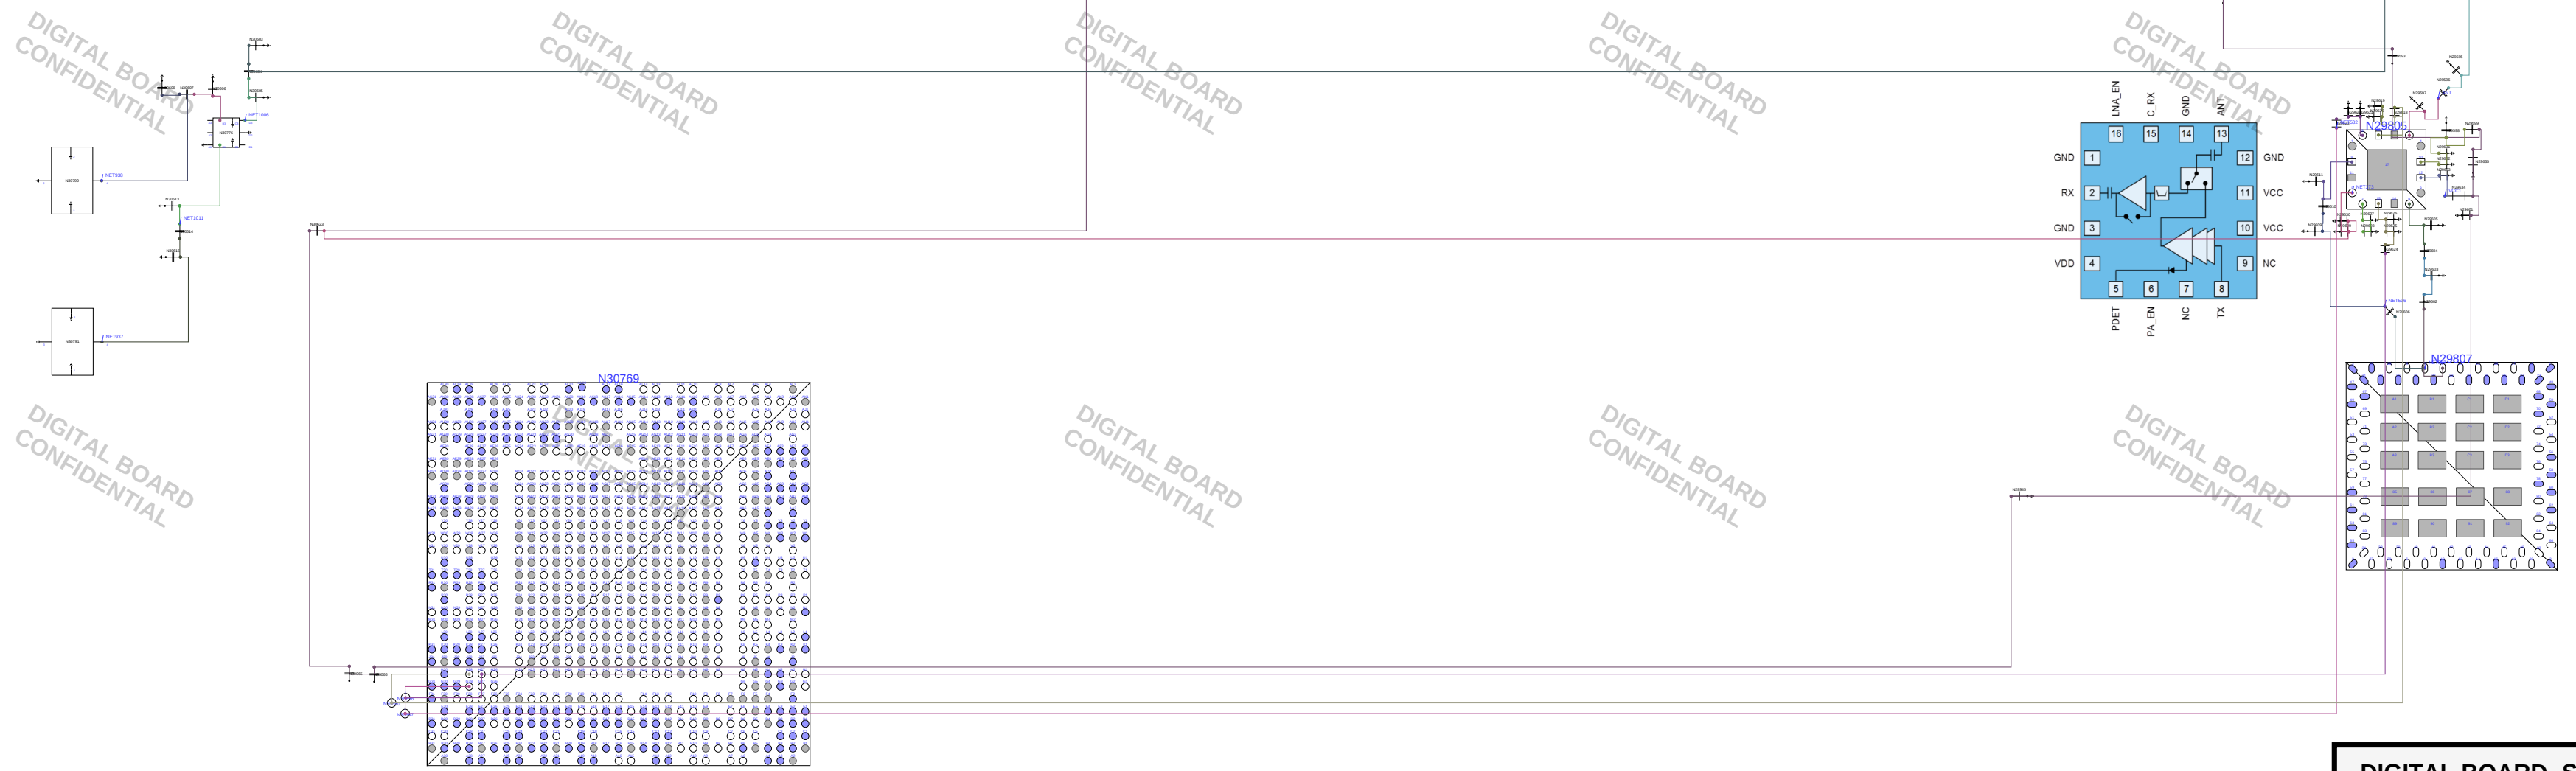

DIGITAL BOARD- SCHEMATIC
DATE: 01/03/2026
MODEL: MINI3 PRO
SECTOR: 5.8GHZ
OBS: (CONFIDENTIAL)