


## 2.

Parts:


- 6 x MR84ZZ
- 6 x M3 x 4mm x 10mm  
Socket Head Shoulder  
Machine Screws
- 6 x M3 Carbon Steel Self  
Locking Hex Nut

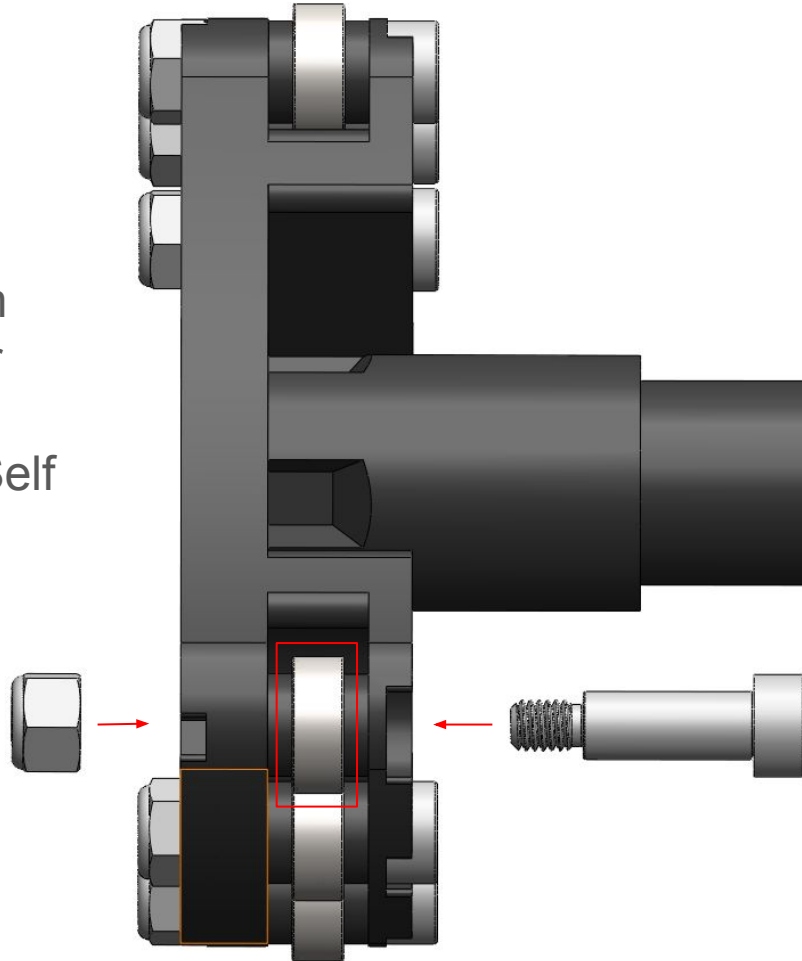

3.

Parts:


- 4 x M3 Carbon Steel Self Locking Hex Nut

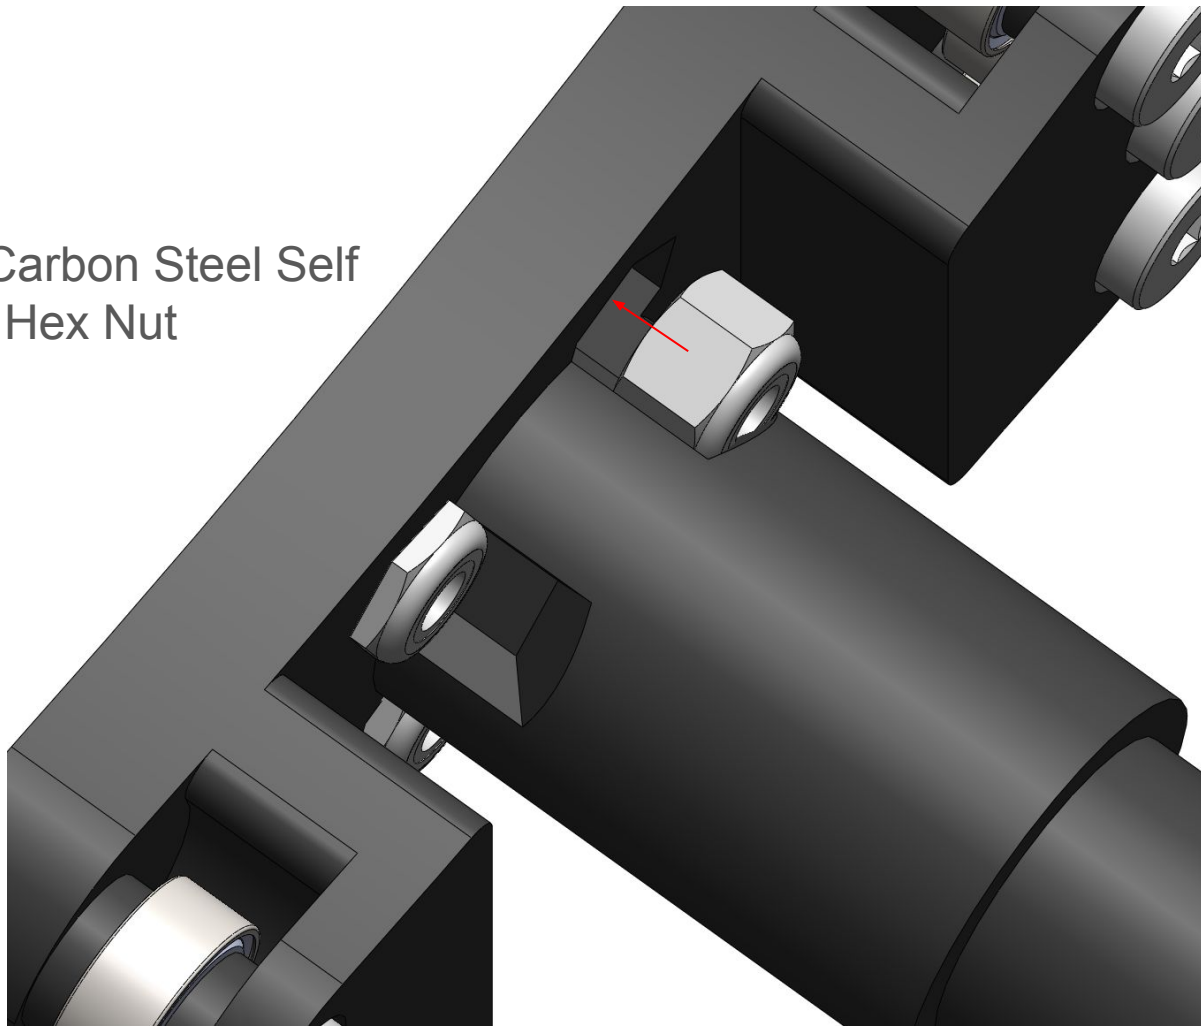

4.


Parts:

- 4 x M3 x 8mm Socket Head Cap Machine Screws

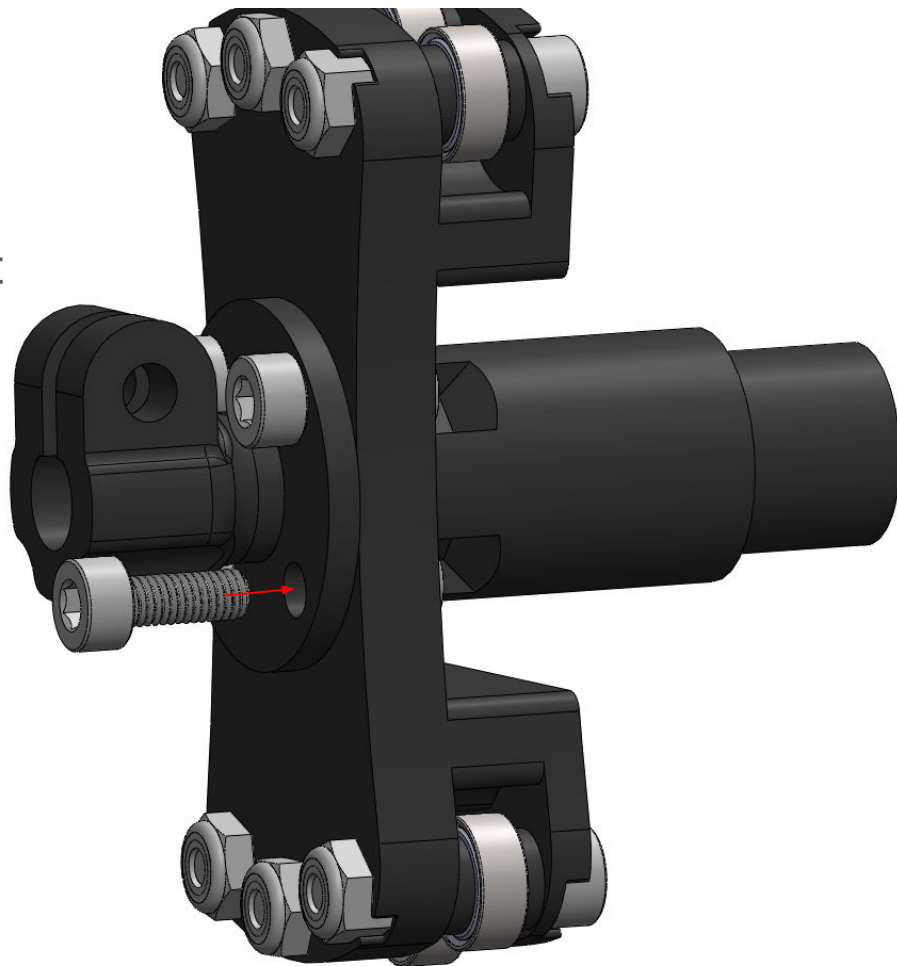

5.


May require some force to  
press motor into face plate

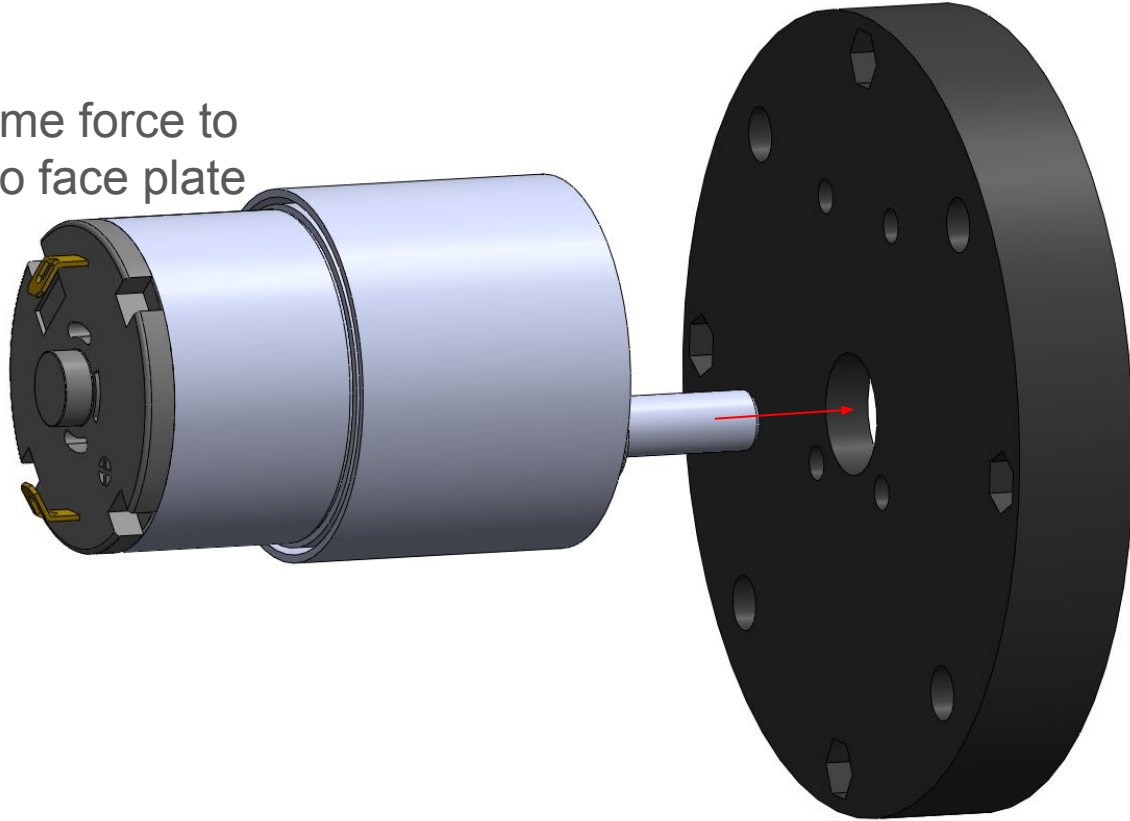

6.


Parts:

- 4 x M3 x 6mm Socket Head Cap Machine Screws

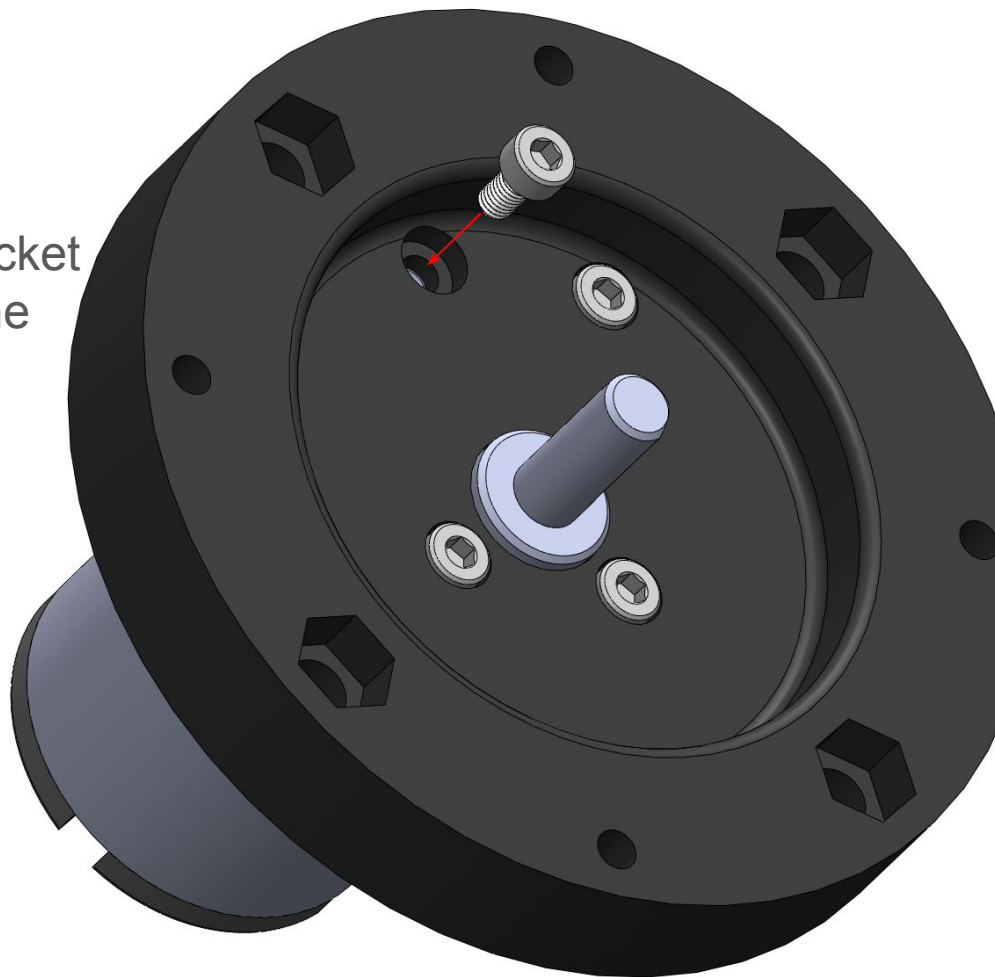

7.


The flat on the motor shaft  
should align with the flat on the  
flange

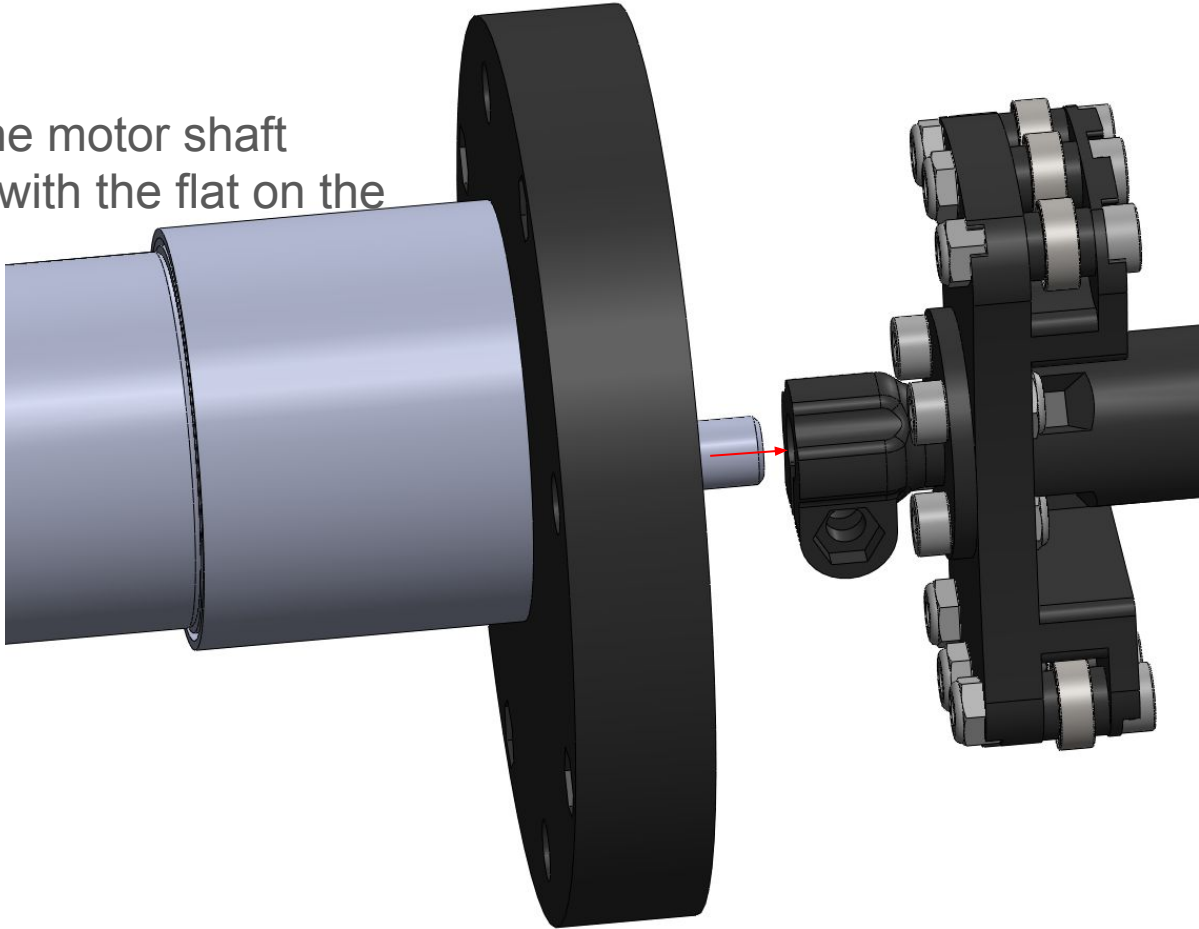

8.

Parts:

- 1 x M3 x 8mm Socket Head Cap Machine Screws
- 1 x M3 Carbon Steel Self Locking Hex Nut

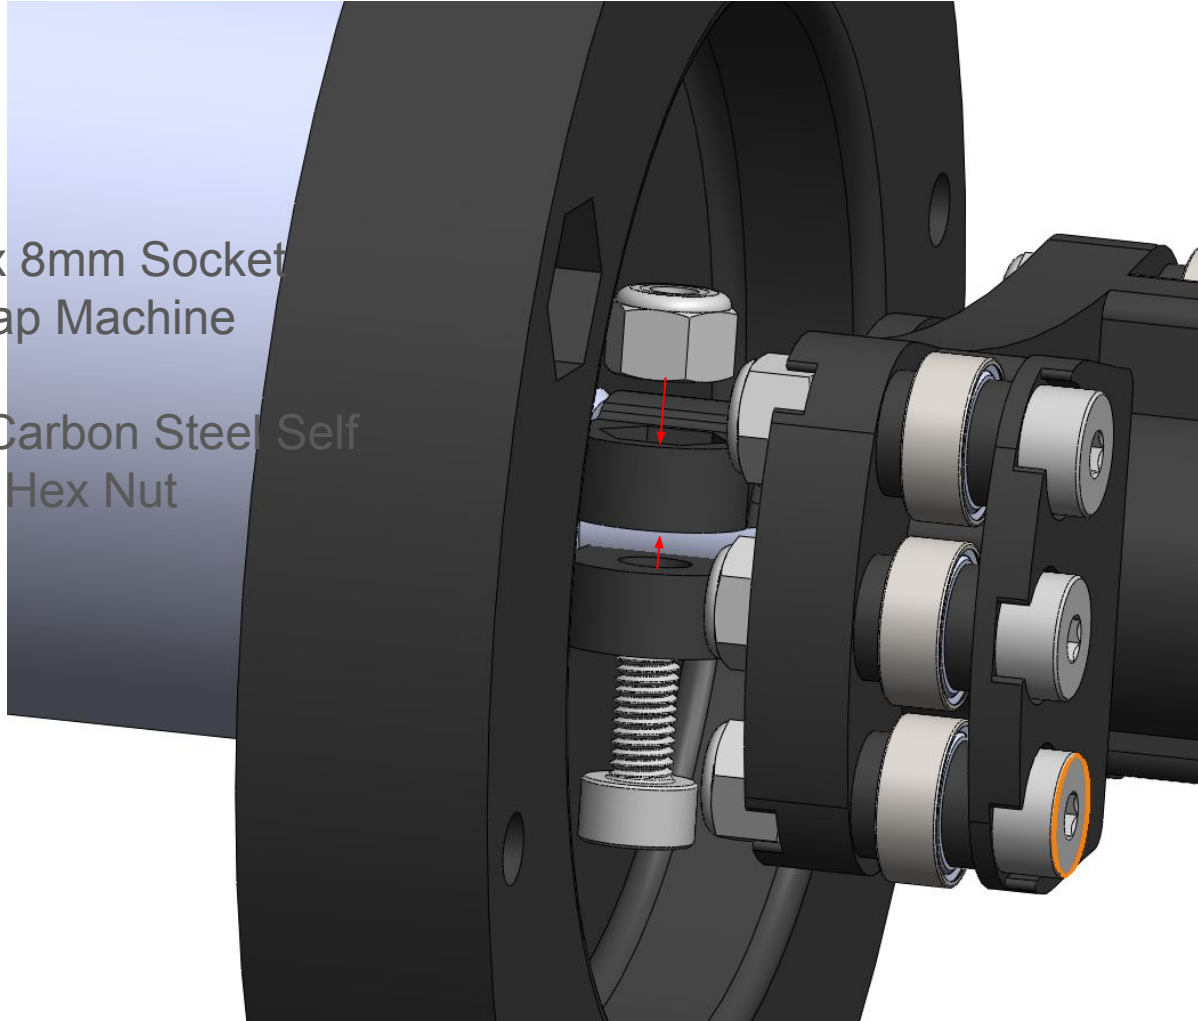




9.

Parts:

- Deep Groove Ball Bearing  
35mm x 47mm x 7mm

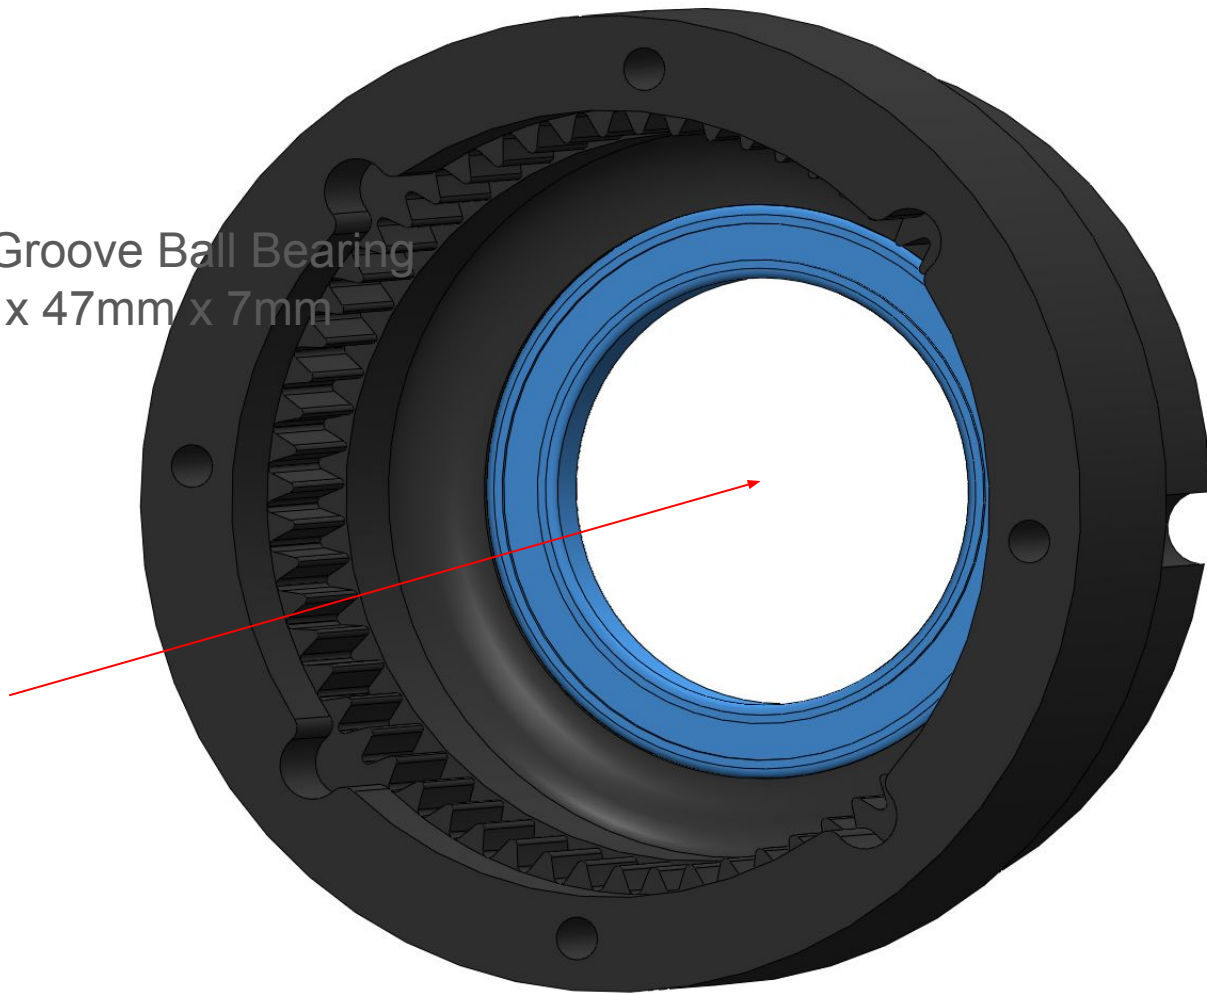

10.

Parts:


- Deep Groove Ball Bearing  
12mm x 18mm x 4mm
- 4 x M3 Carbon Steel Self  
Locking Hex Nut



11.




12.

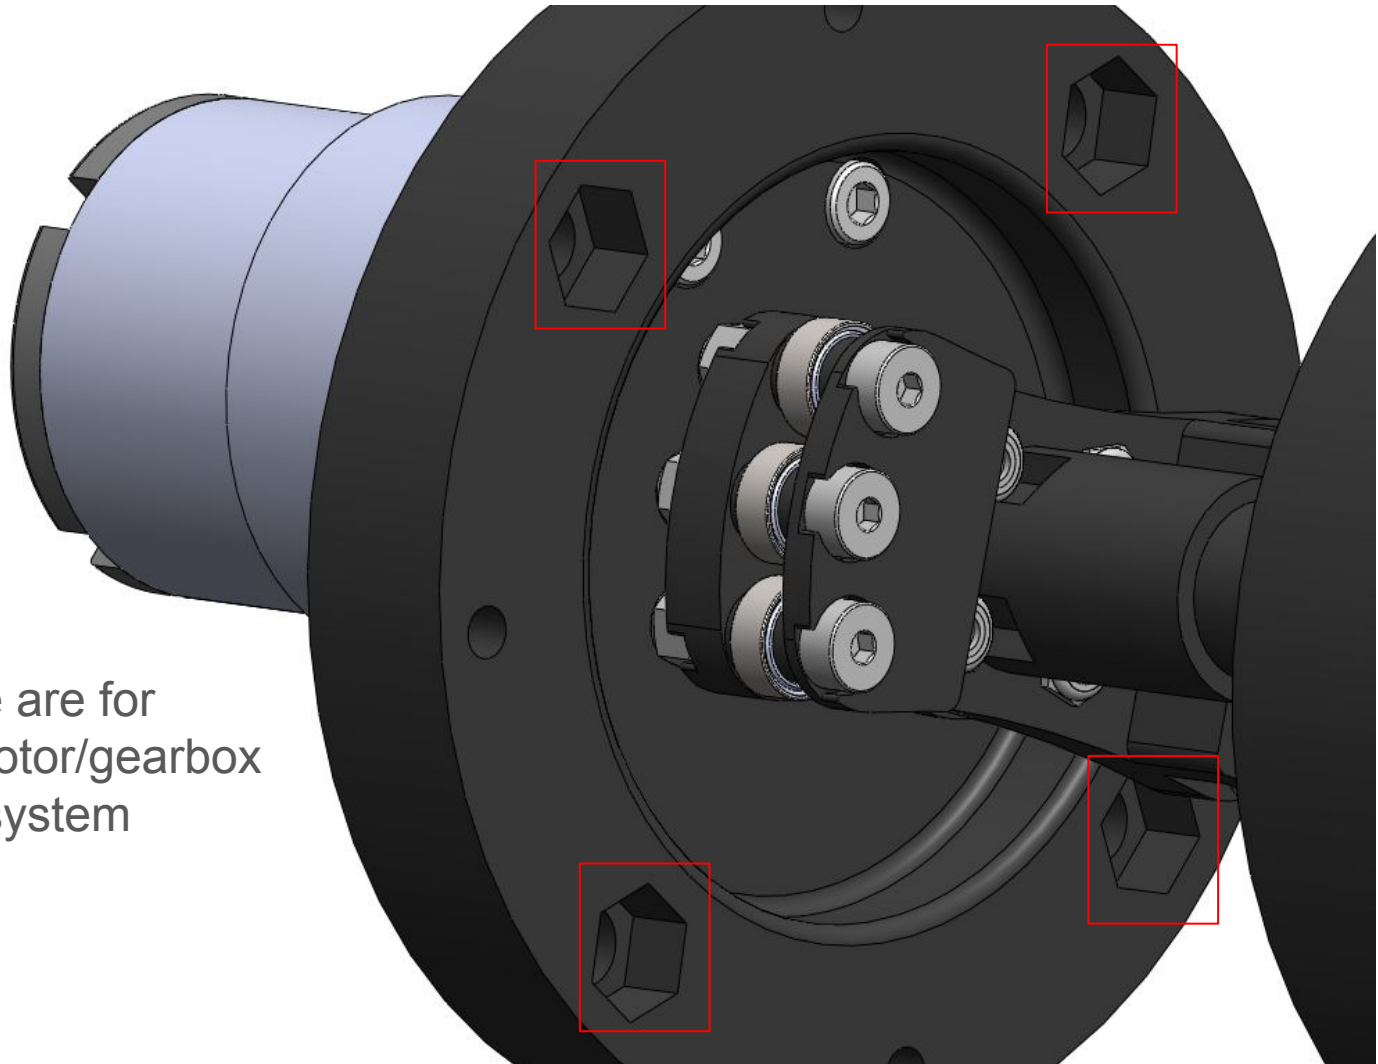

Note:

M5 hex hole are for  
mounting motor/gearbox  
to external system

13.

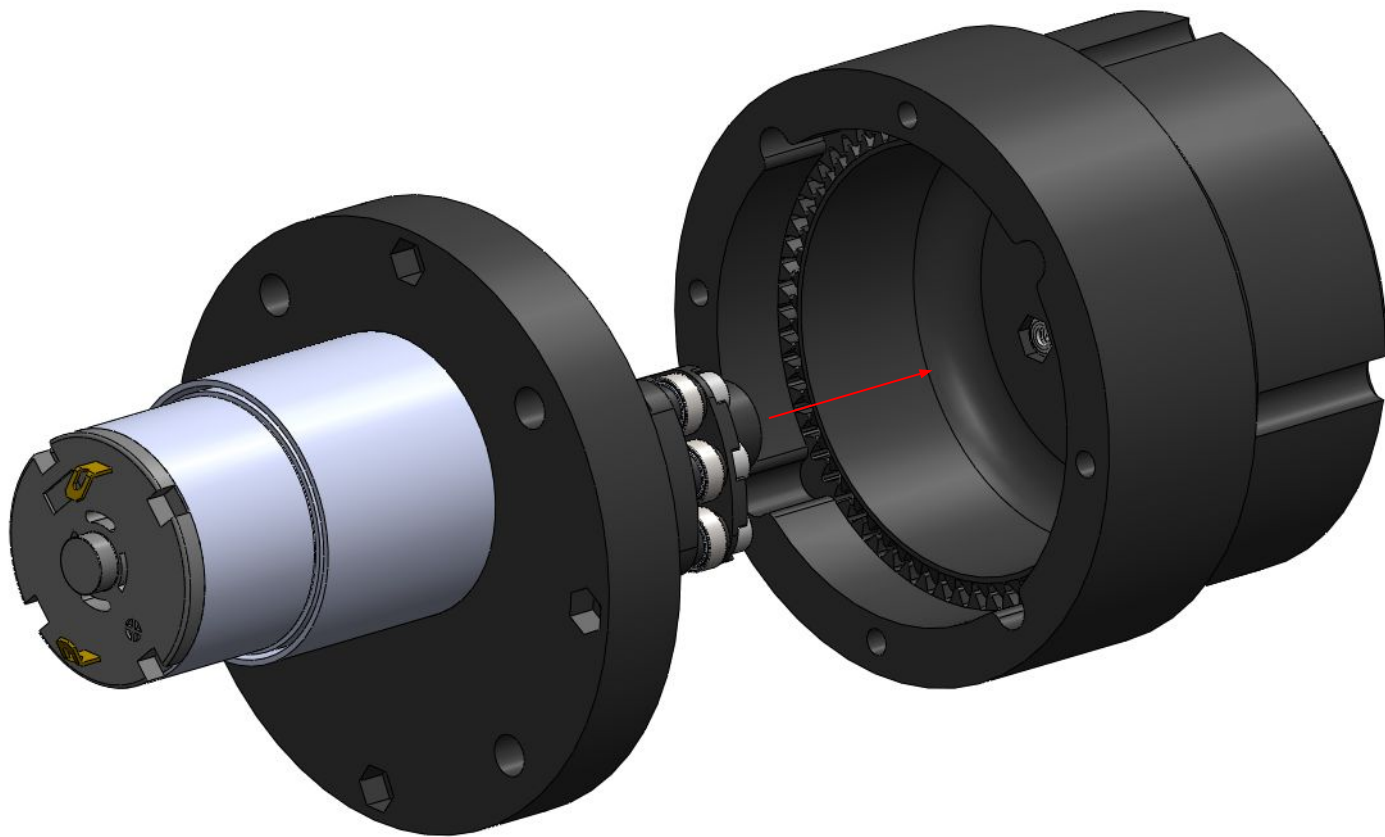

# 14.

Parts:

- 4 x M3 x 35mm Socket Head Cap Machine Screws (not shown)
- 4 x M3 Carbon Steel Self Locking Hex Nut

