




SPECIFICATIONS

- Input Voltage: 12VDC
- Current: 0.24A at full load
- Load Capacity: 5lbs
- Static load: 6.5lbs
- Stroke Length: 0.25" to 12"
- Mounting Holes: 0.16" diameter
- Screw: Acme Screw
- Duty Cycle: 10%
- Operational Temperature: -0°C~50°C (-32°F~122°F)
- Limit Switch: Built in, Non -Adjustable
- IP Grade: IP66
- Low Noise: db<45(A)
- Certification: CE and ROHS
- Housing: Plastic and Aluminum Alloy
- Gear: Plastic Gears
- Wire Length: 8"


DIMENSIONS IN INCHES

Dimensions in brackets for under 2" stroke

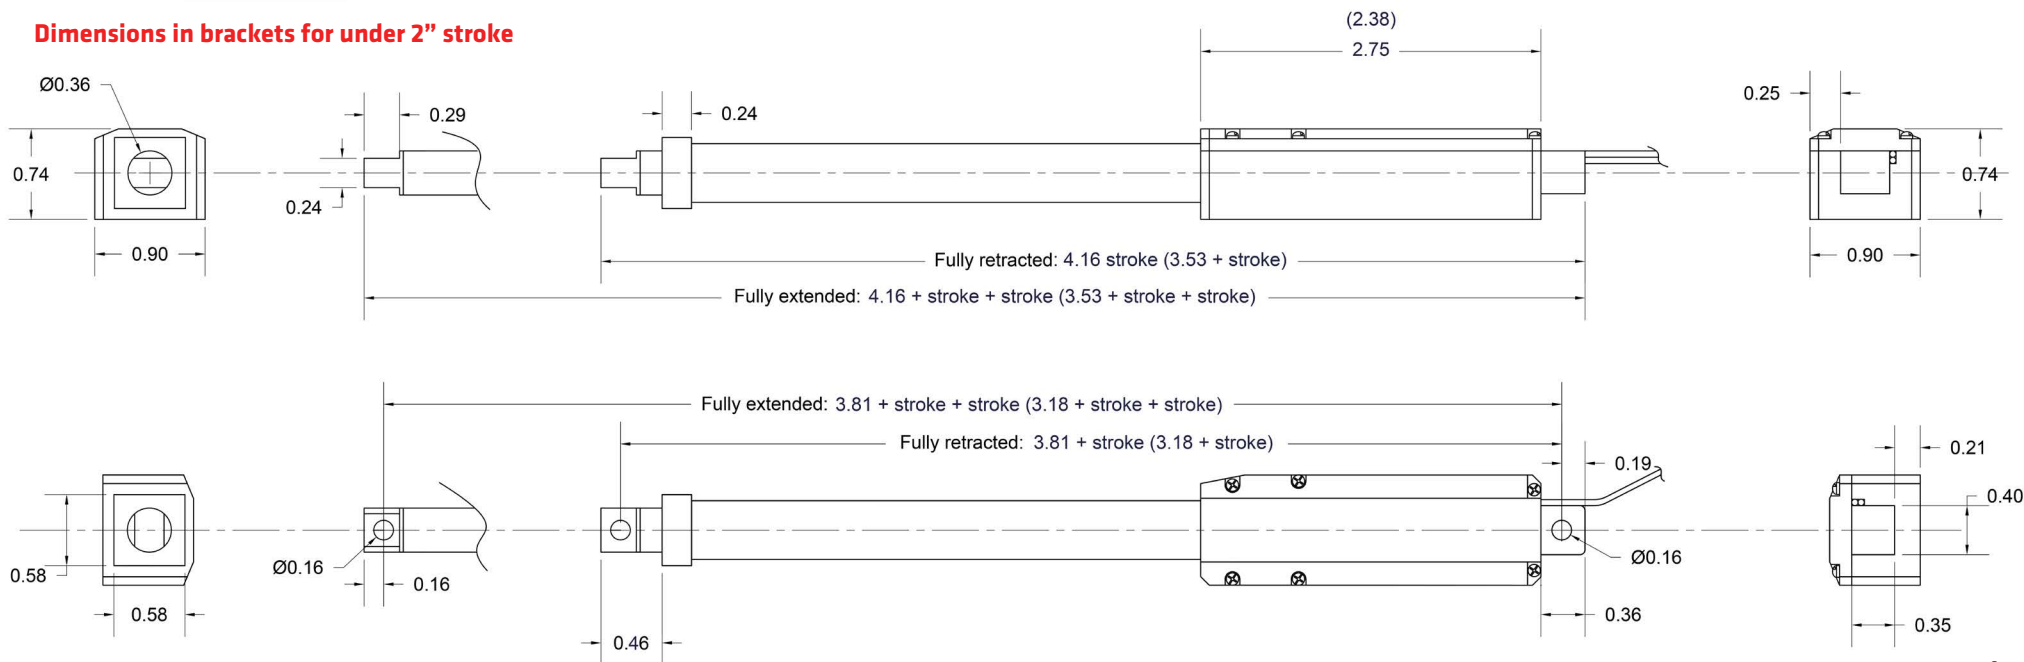




12 VDC CURRENT VS LOAD

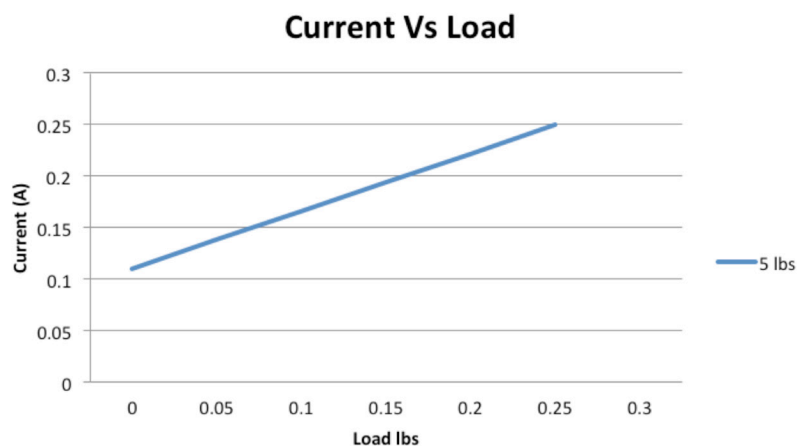

HOLE TO HOLE DIMENSIONS

Stroke Size (in inches)	Fully Retracted (in inches)	Fully Extended (in inches)
0.25	3.43	3.68
0.5	3.68	4.18
0.8	3.98	4.78
1	4.18	5.18
2	5.81	7.81
4	7.81	11.81
6	9.81	15.81
8	11.81	19.81
10	13.81	23.81
12	15.81	27.81

12 VDC SPEED VS LOAD

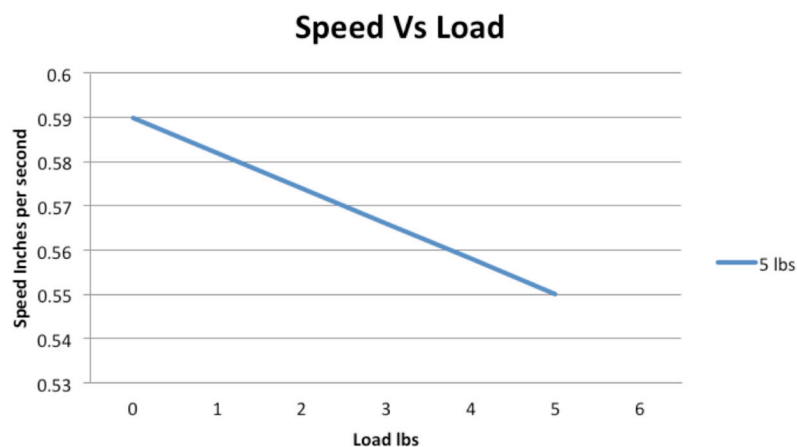


PRODUCT ACCESSORIES

- Will work with most of PA's AC & DC controls boxes
- Mounting Brackets: BRK-07 (for each end);
- Rocker Switches: any PA's Rocker Switches
- Longer Wires: AC-01
- Foot Controls: PDL-01 and PDL-03

SPEED IN INCHES PER SECOND

Forces (lbs)	No Load	Full Load
5	0.59	0.55

ACTUATOR INTERNALS

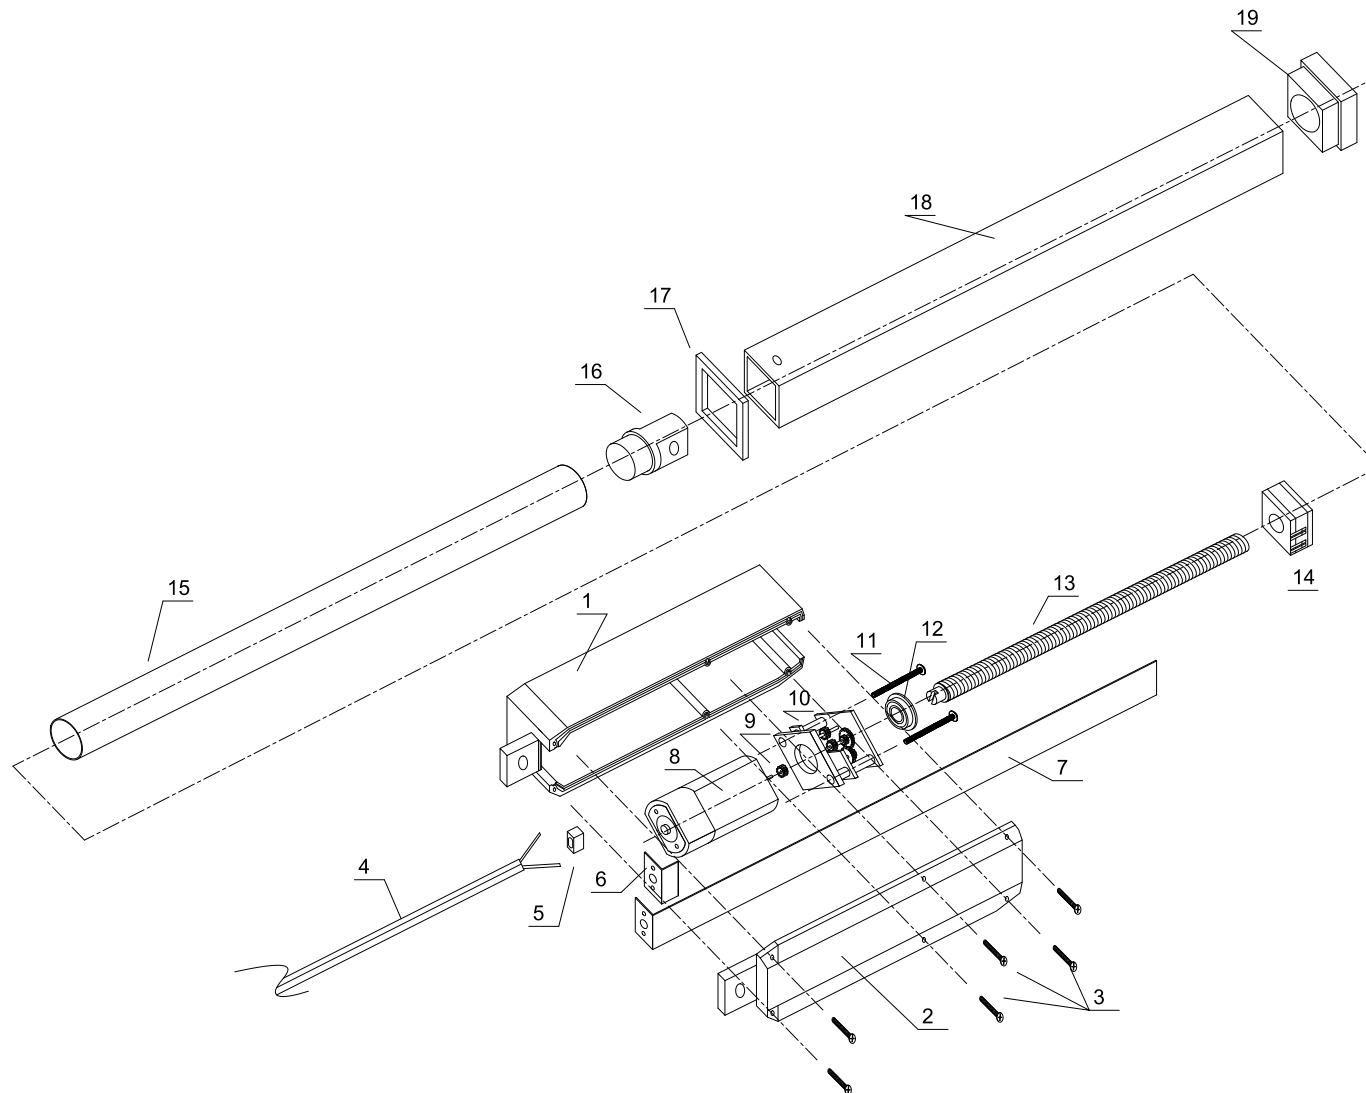



ACTUATOR ASSEMBLY EXPANDED VIEW PARTS DESCRIPTION

Item	Description	Qty
1	Actuator Bottom Case	1
2	Actuator Upper Case	1
3	Actuator Case Screw	6
4	Power Cable	1
5	Power Cable Grommet	1
6	Pudding	1
7	Limit Switch Bar with Diodes	1
8	Electric Motor	1
9	Drive Gear	1
10	Gear Box	1

Item	Description	Qty
11	Gear Box Screw	2
12	Shaft Bearing	1
13	Treaded Shaft Drive	1
14	Limit Contacts	1
15	Shaft	1
16	Shaft Cap with Mounting Hole	1
17	Shaft Case Gasket	1
18	Shaft Case	1
19	Shaft Case Top Cap	1



3D MODEL (CLICK TO ACTIVATE)

