



SPECIFICATION

Contact Resistance: 30Milliohms Max
Dielectric Withstanding Voltage: 500V AC At Sea Level
Insulation Resistance: 1000Megaohms Min
Mating Force: 3.57Kg Max
Unmating Force: 0.7Kg Min
RoHS Compliant



5	Housing	PBT	1	White,UL94V-0
4	Cover Shell	Steel	1	Plated Ni
3	Med Clip Slice	Brass	1	Plated Ni
2	Shell	Brass	1	Plated Ni
1	Terminal	Brass	8	Plated Gold In Mating Area Tin On Solder Tails
No	Parts	Material	Q'ty	Finishing

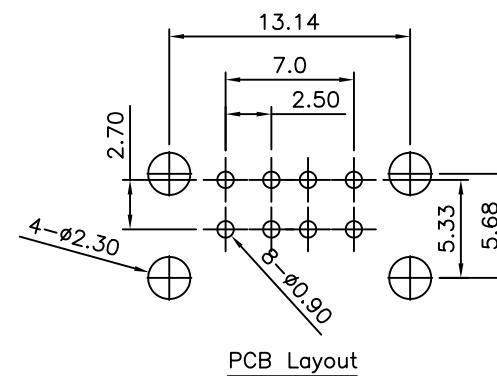

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.25 .XXX ±0.15 ANG: ±2.00°						
PART No. CCUSBA-32002-15		CHECKED BY								
DRAWING No. USB1X04SRB-H		DRAWING BY								
		JLT								
SCALE	NONE	REV.	A0	UNIT mm		A0	NEW RELEASE		HZF	06/16/2008
						NO REV.	REVISIONS		CHK	DATE