


DATE: 6/19/09

## BATTERY SPECIFICATION

P/N AA

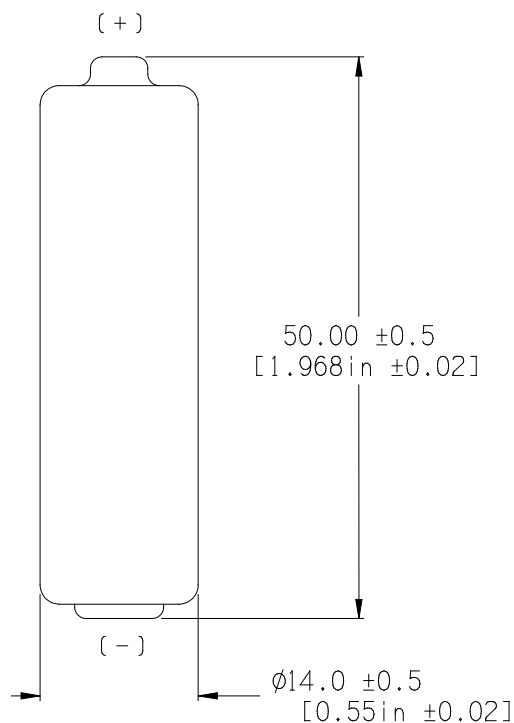

## TYPICAL SPECIFICATIONS

ELECTROCHEMICAL SYSTEM: ALKALINE MANGANESE DIOXIDE OR CARBON ZINC

NOMINAL VOLTAGE: 1.5

MAXIMUM OFF-LOAD VOLTAGE: 1.83

RATED CAPACITY: 2450mAh ON  $24\Omega$  TO 0.8V AT  $21^{\circ}\text{C}$  ( $70^{\circ}\text{F}$ )

AVERAGE WEIGHT: 0.80 oz (22.7 g)

OPERATING TEMP. RANGE:  $-20^{\circ}\text{C}$  TO  $54^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  TO  $130^{\circ}\text{F}$ )

ANSI DESIGNATION: 15A, 15AC, 15AP, 15CD, 15D

TYPICAL USE	LOAD (OHMS)	DAILY PERIOD	END POINT V	MINIMUM AVERAGE DURATION
ELECTRONIC GAMES COMPACT DISKS & MINI DISKS	250mA	1 hr/d	0.9	6 hr

TYPICAL MPD HOLDER NO. BHAA-3 OR BCAAPC

SEE MANUFACTURER'S SPECIFICATION SHEET FOR FURTHER INFORMATION.

AWI	DURACELL	EVEREADY	IEC	KODAK	MAXELL	NEDA	PANASONIC	RAYOVAC	SANYO	TOSHIBA	VARTA	OTHER
	MN1500	E91	LR6	KAA		15A	AM3	815		LR6N	4006	BA3058/U