

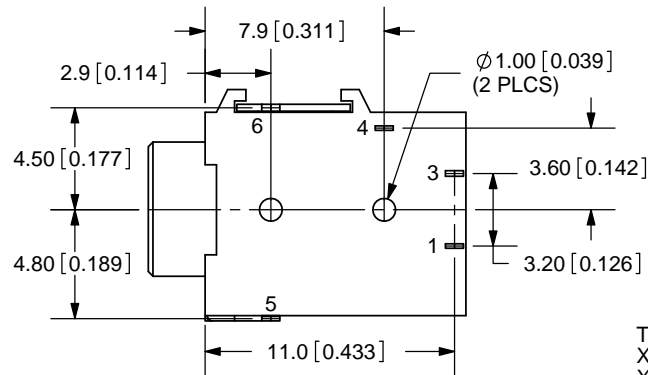


**SPECIFICATIONS:**  
**RATING: 16V DC @ 300mA**  
**CONTACT RESISTANCE: 100m OHMS MAX**  
**INSULATION RESISTANCE: 100M OHMS MIN: 500V DC**  
**VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE**  
**LIFE: 5,000 CYCLES**

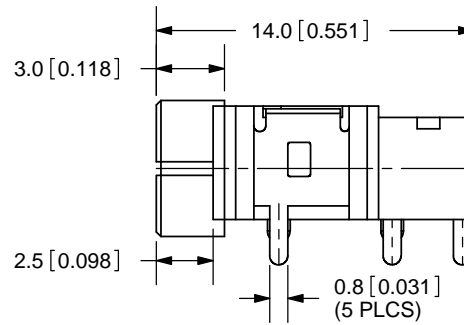

**CUI INC**

20050 SW 112th Ave.  
Tualatin, OR 97062  
Phone: 503-612-2300  
800-275-4899  
Fax: 503-612-2383  
Website: [www.cui.com](http://www.cui.com)

|            | MATERIAL        | PLATING |
|------------|-----------------|---------|
| TERMINAL 1 | Phosphor Bronze | Tin     |
| TERMINAL 3 | Brass           | Tin     |
| TERMINAL 4 | Copper Titanium | Tin     |
| TERMINAL 5 | Phosphor Bronze | Gold    |
| TERMINAL 6 | Phosphor Bronze | Tin     |
| BUSHING    | Brass           | Nickel  |
| HOUSING    | PA66 HF         |         |

|  |              |                    |
|--|--------------|--------------------|
| TITLE: AUDIO JACK W/4 CONDUCTORS 3.5mm |              | REV: B             |
| PART NO. SJ-43515TS                    |              | UNITS: MM [INCHES] |
| DRAWN BY: ZRJ                          | APPROVED BY: | SCALE: 3:1         |

PC FILE NAME:  
SJ-43515TS

COPYRIGHT 2011 BY CUI INC.