
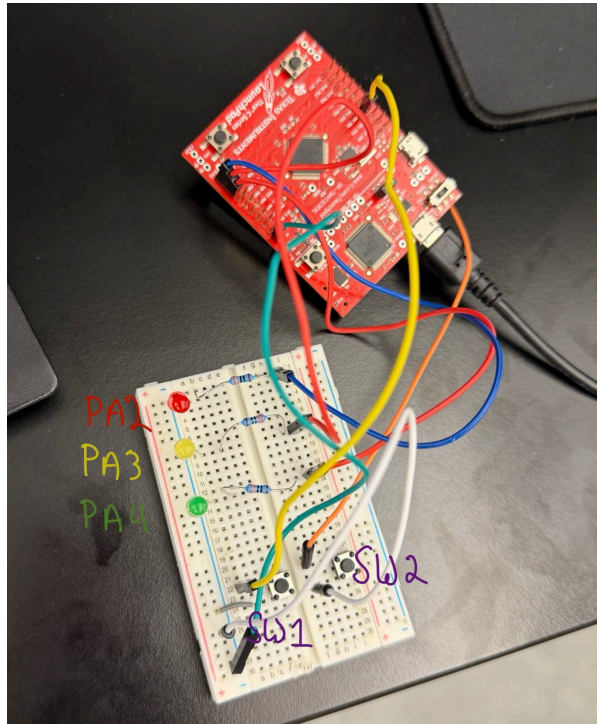


ECE-455 Lab 2

Name: Paul Blair, Benjamin Drumwright

NetID: VBQ669, BDRUMWRI

R1: External LED

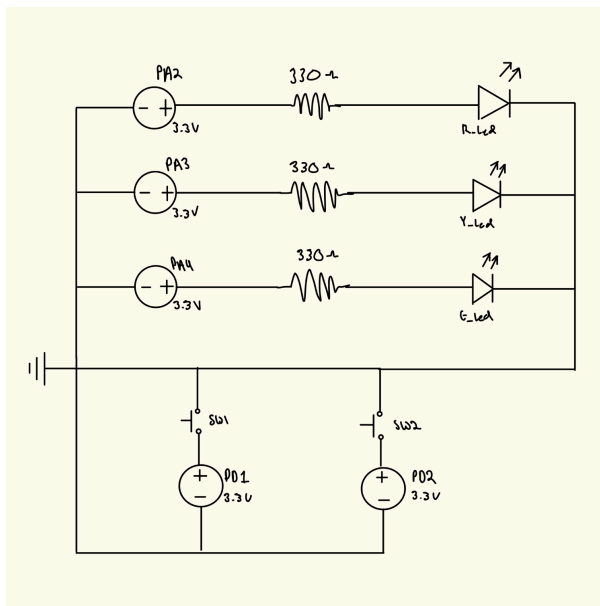


R2: Sequence Detector

Design choice for Sequence Detector:

For the implementation for this we choose to store each input in a `uint8_t` (0b0000_0000). By doing this we can shift each input in and then check if it matches the pattern (0b1011). Then on each input we are able to check the if the lower 4 bits of the `uint8_t` is equal to the pattern (`pattern & 0b1011`) == 0b1011.

State Graph Overlapping

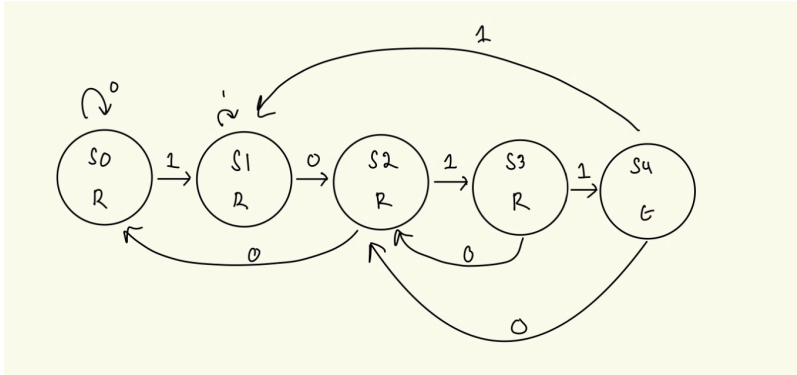

State Graph Without Overlapping

