



PRODUCT AND SYSTEM CATALOGUE

Your partner in chemical technology

ADHESIVES

BINDERS

FLOOR COATINGS &
PAINTS

PRIMERS & PUTTIES

WATERPROOFING
PRODUCTS

PRODUCT AND SYSTEM CATALOGUE

Contents

01 Products	06	00 Company	03
Product List	07	Leon Kimya	03
Adhesives	08	Why Leon Kimya	04
Parquet Adhesives	09	Standards and Conformity	05
PVC & Vinyl Flooring Adhesive	11		
Rubber & Synthetic Turf Adhesives	12		
Filter Adhesives	15		
Binders	17	02 Systems	41
Pour Binders	18	Sports Flooring Systems	42
Press Binders	20	Industrial Flooring Systems	48
Stone Binders	22	Waterproofing System	51
EPDM Granules	24		
EPDM Colour Chart	25	03 Application Areas	52
Floor Coatings & Paints	26	Application Areas	53
Polyurethane Floor Coatings	27		
Acrylic Floor Coatings	29	04 Export	60
Epoxy Floor Coatings	32	Container Dimensions	61
Primers & Putties	34	Incoterms 2020 — Delivery Terms	62
Primers	35		
Putties	37		
Waterproofing Products	39		
Waterproofing Products	40		

COMPANY

Leon Kimya

Leon Kimya applies advanced technology and employs qualified people across every branch of chemistry it works in. It has made it a principle to deliver products of standard-compliant quality without compromising on customer satisfaction, and to build a brand that responds to changing customer expectations.

With polyurethane, epoxy and acrylic based production processes, we deliver solutions in adhesives, rubber binders, industrial and sports floor coatings, waterproofing systems and joint sealants.

Our product development is driven by feedback from the field; we build system configurations that vary with the specification, the budget and the substrate.

Alongside production, we run product development (R&D) and customer-specific adaptation as separate disciplines, recommending formulations that match the sub-strate, the climate and the operating conditions. We prioritise solvent-free, user- and environment-friendly formulations, and together with our application partners we prepare project-specific system build-ups.



COMPANY

Why Leon Kimya

Six principles we apply at every step, from production to delivery.

01**Excellence in Service**

We work to raise efficiency across all our processes to a competitive level.

02**High Quality Technology**

We encourage innovative and creative approaches in order to raise technological quality.

03**Production Control**

We run our production processes under our own control, with batch-level quality tracking.

04**Customer-Focused Approach**

We take your expectations into account from the start and provide solutions across survey, production and after-sales.

05**Fast, Quality Delivery**

Thanks to professional production and dispatch planning, your products are prepared on time.

06**Customer Satisfaction**

In every project we have completed, are running or will take on, customer satisfaction comes first.



COMPANY

Standards and Conformity

Reference standards the products are designed to, the production facility's certificates and Leon Kimya declarations.

Product conformity standards

Products are designed and tested to the requirements of the following standards.

STANDARD	SCOPE	PRODUCT FAMILY
EN 14877	Synthetic surfaces for outdoor sports areas	Sports flooring systems
EN 1177	Playground surfacing, critical fall height	EPDM granule systems
EN 13813	Screed and floor covering materials	Industrial flooring systems
EN 1504-2	Concrete surface protection systems	Coatings, waterproofing
EN 13501-1	Reaction to fire classification	Floor coatings
EN 14041	Resilient floor coverings, essential characteristics	PU and epoxy coatings
REACH	Chemical registration and safety	Entire portfolio

Production facility certificates

Leon Kimya products are manufactured in an ISO 9001 and ISO 14001 certified facility. Copies of the certificates are provided on request.

System certificates

The international federation certificates below are issued in the name of the system stated alongside.

DOCUMENT	SYSTEM	SCOPE
World Athletics Product Certificate	Leon Sandwich Athletics System	Sandwich · 14 mm
ITF Court Pace Classification	Leon Acrylic Hard Court System	Category 4 · Medium-fast

Leon Kimya declarations

DOCUMENT	SCOPE
Declaration of Performance (DoP)	Issued in the name of Leon Kimya, per product
Safety Data Sheet (SDS)	For each product, with Leon Kimya name and contact details
Technical Data Sheet (TDS)	Issued separately for each product
Batch analysis certificate	Supplied with every shipment

Certificate copies, test reports and declarations of performance are provided on request.

01

Products

From adhesives to binders, from floor coatings to waterproofing: six product families and three system categories.

	Product List	07
01	Adhesives	08
02	Binders	17
03	Floor Coatings & Paints	26
04	Primers & Putties	34
05	Waterproofing Products	39

PRODUCTS

Product List

Adhesives

PARQUET ADHESIVES

LK-PU-101	Standard 2K Polyurethane Parquet Adhesive	10
LK-PU-102	Thixotropic 2K Polyurethane Parquet Adhesive	10
LK-PU-103	Flexible 2K Polyurethane Parquet Adhesive	10

PVC & VINYL FLOORING ADHESIVE

LK-AC-110	Water-Based Acrylic Floor-Covering Adhesive	11
-----------	---	----

RUBBER & SYNTHETIC TURF ADHESIVES

LK-PU-121	Flexible 2K PU Rubber Adhesive	13
LK-PU-122	Economical 2K PU Rubber Adhesive	13
LK-PU-123	2K PU Synthetic Turf Adhesive	13
LK-PU-124	Economical Synthetic Turf Adhesive	13
LK-AK-721	Seaming Tape	14
LK-AK-731	Rubber Tiles	14
LK-AK-741	SBR Rubber Roll	14

FILTER ADHESIVES

LK-PU-131	Fast-Curing Filter Adhesive	16
LK-PU-132	Automated-Dosing Filter Adhesive	16
LK-PU-133	Thixotropic / Gasket Grade	16

Binders

POUR BINDERS

LK-PP-201	EPDM Pour Binder	18
LK-PP-202	SBR Pour Binder	19
LK-PP-203	Aliphatic EPDM Binder (UV-Stable)	19

PRESS BINDERS

LK-PP-211	Standard Press Binder	21
LK-PP-212	Fast-Cycle Press Binder	21
LK-PP-213	Economical Press Binder	21
LK-PP-214	High-Strength Press Binder	21

STONE BINDERS

LK-PU-221	2K Aliphatic Stone Binder	23
LK-EP-222	2K Epoxy Stone Binder	23
LK-PU-223	1K Aliphatic Stone Binder	23

EPDM GRANULES

LK-GR-701 / 702	EPDM Granules — 24 Standard Colours	25
LK-GR-711 / 712	SBR Granules (Recycled)	25

Floor Coatings & Paints

POLYURETHANE FLOOR COATINGS

LK-PU-301	2K PU Floor Paint (UV)	28
LK-PU-302	2K PU Self-Levelling Coating (Rigid)	28
LK-PU-303	2K PU Self-Levelling Coating (Flexible)	28

ACRYLIC FLOOR COATINGS

LK-AC-311	Acrylic Finish / Sealer	29
LK-AC-312	Acrylic Cushion (Thick)	29
LK-AC-313	Acrylic Cushion (Thin)	29
LK-AC-314	Premium Acrylic Resurfacer	30
LK-AC-315	Acrylic Resurfacer	30
LK-AC-316	Acrylic Filled Top Coat	30
LK-AC-317	Premium Acrylic Concentrated Paint	30
LK-AC-318	Acrylic Concentrated Paint	30
LK-PU-402	1K PU Primer	30
LK-AC-407	Acrylic Primer	31
LK-AC-319	Acrylic Line Paint	31

EPOXY FLOOR COATINGS

LK-EP-321	Epoxy Textured Coating (Orange Peel)	33
LK-EP-322	Epoxy Floor Paint	33
LK-EP-323	Epoxy Self-Levelling Coating	33

Primers & Putties

PRIMERS

LK-PU-401	Solvent-Free PU Primer	36
LK-PU-402	1K PU Primer	36
LK-PU-403	1K PU Clear Primer	36
LK-EP-404	2K Epoxy Moisture Barrier	36
LK-EP-405	2K Epoxy Primer	36
LK-EP-406	2K Epoxy Primer (Economical)	36

PUTTIES

LK-PU-501	PU Sealer	37
LK-PU-502	Elastic PU Putty	37
LK-PU-503	Low-Viscosity PU Putty	38
LK-PU-504	High-Viscosity PU Putty	38

Waterproofing Products

WATERPROOFING PRODUCTS

LK-WP-601	Liquid Membrane Product Family	40
-----------	--------------------------------	----

PRODUCTS

Adhesives

01	Parquet Adhesives	09
02	PVC & Vinyl Flooring Adhesive	11
03	Rubber & Synthetic Turf Adhesives	12
04	Filter Adhesives	15

ADHESIVES

Parquet Adhesives

A predominantly polyurethane based adhesive family that bonds solid, laminate and engineered parquet permanently to screed and concrete substrates.

The portfolio is built on solvent-free two-component (2K) polyurethane adhesives suitable for every parquet type. The right choice depends on the dimensional movement of the wood, the absorbency of the screed and the working time required.

The thixotropic body prevents vertical slump, while the elastic bond stops creaking and gradual separation of the boards. The products are compatible with underfloor heating. Before application, substrate moisture must be measured, the correct notched trowel selected and the open time never exceeded.

USE AND RESISTANCE

- ✓ Solvent-free, two-component polyurethane based
- ✓ Suitable for solid, laminated and engineered parquet
- ✓ Compatible with underfloor heating systems
- ✓ Cleans off the parquet surface without staining within 48 hours of application
- ✓ Consumption stays under control with the correct notched trowel

APPLICATION AREAS

- Solid and laminate parquet
- Engineered wood flooring
- Underfloor-heated substrates
- Homes and offices
- Hotels and retail spaces
- Sports hall timber floors

PARQUET ADHESIVES

Product Family

01

01 **LK-PU-101**

Standard 2K Polyurethane Parquet Adhesive

Solvent-free two-component polyurethane for every parquet type; high final strength with a balanced working time.

Base	Two-component (2K) · Polyurethane · Solvent-free	Mixing ratio	10/1 (by weight)
Pot life	30 – 60 min	Consumption	1.75 – 2 kg/m²
Packaging	10 kg (A+B) kit	Shelf life	12 months

02 **LK-PU-102**

Thixotropic 2K Polyurethane Parquet Adhesive

Its high-body consistency holds the trowel ridges and does not run on slopes; controlled, clean spreading for wide-format parquet.

Base	Two-component (2K) · Polyurethane · Solvent-free	Mixing ratio	9/1 (by weight)
Pot life	30 – 60 min	Consumption	1.75 – 2 kg/m²
Packaging	10 kg (A+B) kit	Shelf life	12 months

03 **LK-PU-103**

Flexible 2K Polyurethane Parquet Adhesive

A permanently elastic bond that follows the dimensional movement of wood; first choice for solid, wide-plank and underfloor-heated floors.

Base	Two-component (2K) · Polyurethane · Solvent-free	Mixing ratio	6/1 (by weight)
Pot life	45 – 90 min	Consumption	1 – 1.25 kg/m²
Packaging	7 kg (A+B) kit · 10 kg (A+B) kit	Shelf life	12 months

ADHESIVES

PVC & Vinyl Flooring Adhesive

A water-based acrylic adhesive that fixes flexible PVC, vinyl, linoleum, marley and backed carpet floorings onto absorbent substrates.

The one-component, solvent-free formulation is odourless, allowing safe work in enclosed spaces such as hospitals, schools and homes. High initial tack and a long working window leave room for adjustment on large areas.

The adhesive is spread evenly with a notched trowel, the covering is laid within minutes and pressed with a roller for full surface contact. On underfloor-heated screeds the system is switched off before application and restarted gradually after installation. Floor-covering adhesive must never be confused with rigid PVC pipe cement.

APPLICATION AREAS

- Hospitals and laboratories
- Schools and nurseries
- Residential buildings
- Malls and shops
- Offices
- Homogeneous and heterogeneous PVC floors

PVC & VINYL FLOORING ADHESIVE

Product Family



01 LK-AC-110

Water-Based Acrylic Floor-Covering Adhesive

One-component, acrylic based and solvent-free. Easy to apply, with high initial and final adhesion over a long working window. Used to bond PVC, PU and latex floorings, marley, marmoleum, linoleum and backed carpets to concrete and screed.

ADHESIVES

Rubber & Synthetic Turf Adhesives

Two-component polyurethane adhesives that bond rubber tiles and rolls to the substrate, and synthetic turf strips to each other and to the seaming tape.

The solvent-free 2K polyurethane build keeps its bond strength for years, unaffected by daylight, water or outdoor exposure. Rubber tiles and rolls are bonded to concrete, MDF, chipboard and metal — and where needed to ceramic, granite and marble.

In synthetic turf the critical zone is not the open field but the seams and edge returns: the adhesive is spread evenly on the seaming tape, the strips are centred and the joint is protected throughout curing. A green colour option keeps the seams invisible.

USE AND RESISTANCE

- ✓ Solvent-free, two-component polyurethane based
- ✓ Used to bond rubber tiles and rolls to the substrate
- ✓ Used at synthetic turf seams and for line marking installation
- ✓ Resistant to moisture, water and most chemicals
- ✓ High abrasion resistance and tear strength
- ✓ Applies over concrete, MDF, chipboard and metal surfaces

APPLICATION AREAS

- Artificial turf and football pitches
- Rubber tile and roll floors
- Sports halls
- Children's playgrounds
- Landscape and decorative turf
- Pool surrounds

RUBBER & SYNTHETIC TURF ADHESIVES

Product Family



01 LK-PU-121

Flexible 2K PU Rubber Adhesive

A solvent-free, flexible two-component system bonding rubber tiles and rolls to concrete, wood and metal.

Base Two-component (2K) · Polyurethane · Solvent-free

Mixing ratio 9/1 (by weight)

Consumption 1 kg/m²

Packaging 10 kg (A+B) kit · 24 kg (A+B) kit

Shelf life 12 months



02 LK-PU-122

Economical 2K PU Rubber Adhesive

A balanced-grip two-component variant offering cost advantage on large areas.

Base Two-component (2K) · Polyurethane · Solvent-free

Mixing ratio 7/1 (by weight)

Consumption 1 kg/m²

Colour Cream

Packaging 24 kg (A+B) kit

Shelf life 12 months



03 LK-PU-123

2K PU Synthetic Turf Adhesive

A green adhesive bonding turf strips to the seaming tape; resistant to water and outdoor exposure.

Base Two-component (2K) · Polyurethane · Solvent-free

Mixing ratio 7/1 (by weight)

Colour Green

Packaging 11.50 kg pail · 13 kg pail · 24 kg pail · 36 kg pail

Shelf life 12 months



04 LK-PU-124

Economical Synthetic Turf Adhesive

An economical two-component solution for pitches and landscaping.

Base Two-component (2K) · Polyurethane · Solvent-free

Mixing ratio 5.25/1 (by weight)

Colour Green

Packaging 25 kg pail

Shelf life 12 months

RUBBER & SYNTHETIC TURF ADHESIVES

Product Family

KEY FEATURES


- ✓ Two-component, solvent-free polyurethane
- ✓ UV, water and outdoor resistance
- ✓ Fully compatible with seaming tape
- ✓ Thixotropic — no run on sloped surfaces
- ✓ Flexible and economical variants


05 **LK-AK-721**

Seaming Tape

The woven tape that joins synthetic turf strips from below; used together with the adhesive.


Dimensions **1 roll: 140 × 500 m · 5**
 roll: 28 × 100 m


06 **LK-AK-731**

Rubber Tiles

Flexible, wear-resistant ready floor tiles in various sizes and thicknesses.

Dimensions **40 × 40 × 2 cm · 40 × 40**
 × 3 cm · 50 × 50 × 2 cm
 · 50 × 50 × 3 cm


07 **LK-AK-741**

SBR Rubber Roll

The shock-absorbing base layer of sports floors; also used under screed and for acoustics.

Coating **4 – 10 mm**
thickness

ADHESIVES

Filter Adhesives

Industrial polyurethane systems that hold filter media, frame and end caps together — and form gaskets in place where required.

Two distinct jobs are covered by two distinct product families: media potting aims for a strong, repeatable bond, while gasket products deliver controlled filling, shape stability and sealing. Fast-curing and non-sag (thixotropic) grades suit automated dosing lines.

Dosing method, viscosity, working time, service temperature and the fluid in contact drive product selection. Whenever the media, frame or raw-material batch changes, a small-scale trial is recommended before series production.

USE AND RESISTANCE

- ✓ Solvent-free, two-component polyurethane based
- ✓ Bonds filter media to metal or plastic separators
- ✓ Resistant to water, moisture, abrasion, impact, acids-alkalis and sea water
- ✓ Liquid-tight and antibacterial
- ✓ No volumetric shrinkage after curing
- ✓ Also used as a potting and moulding compound

APPLICATION AREAS

- Air filters
- Automotive filters
- Industrial filter cartridges
- Filter gaskets
- Automated dosing lines

FILTER ADHESIVES

Product Family

01

01 **LK-PU-131**

Fast-Curing Filter Adhesive

A polyurethane system developed for short cycle times on automated dosing lines.



Base **Two-component (2K) · Polyurethane · Solvent-free**

Mixing ratio **5/1 (by weight)**

Pot life **5 – 10 min**

Packaging **36 kg pail · 300 kg drum (A) · 250 kg drum (B)**

Shelf life **12 months**

02 **LK-PU-132**

Automated-Dosing Filter Adhesive

A grade delivering repeatable dosing stability on production lines.



Base **Two-component (2K) · Polyurethane · Solvent-free**

Packaging **30 kg pail · 360 kg drum**

Shelf life **12 months**

03 **LK-PU-133**

Thixotropic / Gasket Grade

A non-sag filling grade forming gaskets in place with high shape stability.



Base **Two-component (2K) · Polyurethane · Solvent-free**

Mixing ratio **5/1 (by weight)**

Pot life **5 – 10 min**

Packaging **36 kg pail · 300 kg drum (A) · 250 kg drum (B)**

Shelf life **12 months**

 PRODUCTS

Binders

01	Pour Binders	18
02	Press Binders	20
03	Stone Binders	22
04	EPDM Granules	24
	EPDM Colour Chart	25

BINDERS

Pour Binders

Moisture-curing, one-component polyurethane prepolymers that turn SBR and EPDM granules into a monolithic, flexible floor on site.

Mixed with granules and spread on the surface, the binder cures into a water-permeable, shock-absorbing, seamless layer. Large areas are laid with a paver (finisher); small areas by hand. Aromatic grades are the economical choice for black SBR and dark systems; non-yellowing aliphatic / UV-stable grades are recommended for coloured EPDM.

Too little binder weakens the bond; too much hardens the surface. Mixing ratio and granule cleanliness decide the outcome, and a small trial is advised with every new granule batch.

USE AND RESISTANCE

- ✓ One-component, moisture-curing polyurethane binder
- ✓ Used for in-situ cast EPDM and SBR granule systems
- ✓ The aliphatic grade does not yellow under UV
- ✓ Produces a permeable, open-pored surface
- ✓ Applied by finisher machine or by hand

APPLICATION AREAS

- Children's playgrounds
- Jogging and walking paths
- Sports floors
- Schoolyards
- Parks and landscaping
- Decorative floors

POUR BINDERS

Product Family



01 LK-PP-201

EPDM Pour Binder

A pigmented binder preserving colour consistency in coloured EPDM granule systems.

Base **One-component · Polyurethane · Aromatic**

Colour **Clear**

POUR BINDERS

Product Family

01


02 **LK-PP-202**

SBR Pour Binder

The standard wet-pour binder for black SBR and dark systems.

Base **One-component · Polyurethane · Aromatic**

Colour **Brown – yellow**

Packaging **200 kg drum · 220 kg drum**

Shelf life **9 months**


03 **LK-PP-203**

Aliphatic EPDM Binder (UV-Stable)

A premium non-yellowing grade for coloured EPDM surfaces.

Base **One-component · Polyurethane · Aliphatic**

Colour **Clear**

Packaging **220 kg drum**

Shelf life **9 months**

— BINDERS

Press Binders

Binder resins developed for moulding rubber tiles, kerbs and technical parts under pressure and heat.

The granule-binder mix is pressed in the mould into dense, shape-retaining products. Mould temperature, cycle time and granule structure determine the result; keeping these parameters constant guarantees part integrity in series production.

Pour and press binders must not be substituted for each other: working time, surface quality and strength are engineered differently for the two processes. Granule quality defines elasticity; granule size defines consumption.

USE AND RESISTANCE

- ✓ One-component, moisture-curing polyurethane binder
- ✓ Used in press/mould production of rubber tiles and sheets
- ✓ Available in different reactivities to match mould cycle time
- ✓ The cured bond stays elastic and does not become brittle
- ✓ Compatible with SBR and EPDM granules

APPLICATION AREAS

- Rubber tile production
- Rubber kerbs and ramps
- Stable and paddock mats
- Technical rubber parts
- In-plant series production

PRESS BINDERS

Product Family


01 **LK-PP-211**

Standard Press Binder

A mould binder with balanced cycle times for rubber tile and kerb production.

Base **One-component · Polyurethane · Aromatic**

Colour **Brown – yellow**

Packaging **220 kg drum**

Shelf life **9 months**


02 **LK-PP-212**

Fast-Cycle Press Binder

Shortened press times for high-capacity production lines.

Base **One-component · Polyurethane · Aromatic**

Colour **Brown – yellow**

Packaging **220 kg drum**

Shelf life **9 months**


03 **LK-PP-213**

Economical Press Binder


A cost-advantage grade for standard parts.

Base **One-component · Polyurethane · Aromatic**

Colour **Light brown – yellow**

Packaging **220 kg drum**

Shelf life **9 months**


04 **LK-PP-214**

High-Strength Press Binder

A reinforced formulation for heavy-traffic technical parts.

Base **One-component · Polyurethane · Aromatic**

Colour **Light brown – yellow**

Packaging **220 kg drum**

Shelf life **9 months**

KEY FEATURES

- ✓ Formulated specifically for the moulding process
- ✓ High bond strength at low consumption
- ✓ Repeatability with constant cycle parameters
- ✓ Dense, shape-retaining product structure
- ✓ Compatible with SBR and EPDM granules

— BINDERS

Stone Binders

Resins that bind natural and coloured stone granules with a clear film, creating the decorative, water-permeable surfaces known as stone carpet.

Three variants are offered: one-component aliphatic, two-component aliphatic and two-component epoxy. Aliphatic grades do not yellow under UV and are the first choice outdoors; the epoxy grade is the economical alternative for interiors and UV-free areas.

The cured surface is slip-resistant, unaffected by wind, resistant to water and most chemicals, and serves light traffic for many years without special maintenance.

USE AND RESISTANCE

- ✓ Binds natural and coloured stone granules with a clear film
- ✓ Applied over asphalt or concrete
- ✓ Produces a non-slip surface
- ✓ Aliphatic grades do not yellow and are UV resistant
- ✓ Unaffected by wind, requires no special maintenance
- ✓ Resistant to moisture, water and most chemicals

APPLICATION AREAS

- Walkways and passages
- Parks, gardens and botanical areas
- Pool and pond surrounds
- Balconies and terraces
- Hotel and gallery floors
- Decorative interiors

STONE BINDERS

Product Family

01 **LK-PU-221****2K Aliphatic Stone Binder**

A non-yellowing clear two-component system — first choice for outdoor stone carpet.

Base	Two-component (2K) · Polyurethane · Aliphatic	Colour	Clear
Packaging	18 kg (A+B) kit	Shelf life	12 months

02 **LK-EP-222****2K Epoxy Stone Binder**

An economical, high-strength grade for interiors and UV-free areas.

Base	Two-component (2K) · Epoxy	Colour	Clear
Packaging	16 kg (A+B) kit · 352 kg drum	Shelf life	12 months

03 **LK-PU-223****1K Aliphatic Stone Binder**

Practical one-component application for balconies, terraces and walkways.

Base	One-component · Polyurethane · Aliphatic	Colour	Clear
Packaging	7 kg pail · 50 kg pail · 220 kg drum	Shelf life	9 months

KEY FEATURES

- ✓ Clear film that reveals the stone texture
- ✓ Non-yellowing aliphatic grades
- ✓ Water-permeable, slip-resistant surface
- ✓ 1K and 2K application options
- ✓ Maintenance-free durability

— BINDERS

EPDM Granules

UV-stable, vividly coloured granules produced from synthetic EPDM rubber — the raw material of flexible, safe floors with polyurethane binders.

A homogeneous grain structure and a wide colour palette allow free design, from patterned playgrounds to multicoloured sports fields. Adjusting granule size and layer thickness produces different fall-protection levels; on playgrounds the thickness follows the EN 1177 critical fall height approach.

Recycled SBR granules work alongside EPDM as the economical elastic base layer of these systems.

APPLICATION AREAS

- Children's playgrounds
- Running tracks and tartan surfaces
- Schoolyards
- Sports fields
- Pool surrounds
- Gymnastics and exercise areas

EPDM GRANULES

Product Family



01 LK-GR-701 / 702

EPDM Granules — 24 Standard Colours

UV-stable, homogeneous coloured granules; browse the full palette in the gallery.

Dimensions 0.5 – 1.5 mm · 1 – 3.5 mm



02 LK-GR-711 / 712

SBR Granules (Recycled)

The economical, shock-absorbing black base-layer granule of the systems.

Dimensions 1 – 3.5 mm · 2.5 – 3.5 mm

EPDM GRANULES

EPDM Colour Chart

24 standard granule colours. Printing and screen conditions may shift the actual colour; request a physical sample before making a binding decision.



Colour 01



Colour 02



Colour 03



Colour 04



Colour 05



Colour 06



Colour 07



Colour 08



Colour 09



Colour 10



Colour 11



Colour 12



Colour 13



Colour 14



Colour 15



Colour 16



Colour 17



Colour 18



Colour 19



Colour 20



Colour 21



Colour 22



Colour 23



Colour 24

PRODUCTS

Floor Coatings & Paints

01	Polyurethane Floor Coatings	27
02	Acrylic Floor Coatings	29
03	Epoxy Floor Coatings	32

FLOOR COATINGS & PAINTS

Polyurethane Floor Coatings

Polyurethane based coating and paint systems for floors where elasticity, impact absorption and UV resistance are decisive.

Rigid self-levelling grades create smooth, hygienic surfaces in factories, warehouses and cold stores; flexible grades absorb im-pact in sports halls, shooting ranges and nurseries, reducing in-jury risk. The system is completed with putty, an EPDM top layer and a UV-resistant finish coat.

Compared with the rigid nature of epoxy, polyurethane offers ac-commodation of thermal movement, vibration damping and re-duced footfall noise — with higher resistance to UV and outdoor weathering.

USE AND RESISTANCE

- ✓ Can be applied at any thickness between 0.2 mm and 20 mm
- ✓ Creates a seamless, dust-free and easy-to-clean surface
- ✓ Produced in all RAL colours
- ✓ Provides high mechanical and chemical resistance
- ✓ Available in fully or semi-conductive (ESD) grades on request
- ✓ Logos, wayfinding and lines can be applied to the floor

APPLICATION AREAS

- Factories and warehouses
- Cold stores
- Sports halls and shooting ranges
- Car parks and outdoor areas
- Offices, shops and showrooms
- Wet areas

POLYURETHANE FLOOR COATINGS

Product Family


01 **LK-PU-301**

2K PU Floor Paint (UV)

The colour and protection layer of the systems; a non-yellowing finish.

Base	Two-component (2K) · Polyurethane
------	--

Consumption	0.15 – 0.30 kg/m²
-------------	-------------------------------------

Colour	All RAL colours
--------	------------------------


02 **LK-PU-302**

2K PU Self-Levelling Coating (Rigid)

A smooth, high-resistance coating for factories and warehouses.

Base	Two-component (2K) · Polyurethane
------	--

Consumption	2 – 3.50 kg/m²
-------------	----------------------------------

Colour	All RAL colours
--------	------------------------


03 **LK-PU-303**

2K PU Self-Levelling Coating (Flexible)

A shock-absorbing grade for sports halls and comfort areas.

Base	Two-component (2K) · Polyurethane
------	--

Consumption	2 – 2.50 kg/m²
-------------	----------------------------------

Colour	All RAL colours
--------	------------------------

KEY FEATURES

- ✓ Rigid or flexible system build-up
- ✓ UV-resistant, non-yellowing finish coats
- ✓ Accommodation of thermal stress
- ✓ Reduced footfall noise
- ✓ Antibacterial and flame-retardant options



FLOOR COATINGS & PAINTS

Acrylic Floor Coatings

Water-based, solvent-free acrylic sports coatings applied in successive layers over concrete and asphalt, with outstanding UV resistance.

The system consists of a resurfacer, shock-absorbing cushion layers, a filled top coat and line paint. By adjusting sand content and the number of layers, the court's coefficient of friction — its pace — is customised.


Freeze-thaw resistance and high colour retention give long out-door life; indoors the system serves every level from amateur to professional.

APPLICATION AREAS

- Tennis courts
- Basketball and volleyball courts
- Multi-purpose courts
- Running and cycling tracks
- School and municipal facilities

ACRYLIC FLOOR COATINGS

Product Family



01 **LK-AC-311**

Acrylic Finish / Sealer

A final coat adding gloss and protection to acrylic surfaces.



02 **LK-AC-312**

Acrylic Cushion (Thick)

The thick shock-absorbing cushion layer of courts.



03 **LK-AC-313**

Acrylic Cushion (Thin)

A thin cushion layer for fine pace tuning.

ACRYLIC FLOOR COATINGS

Product Family



04

LK-AC-314

Premium Acrylic Resurfacer

A premium leveller filling surface defects and preparing the base.



05

LK-AC-315

Acrylic Resurfacer

The standard surface-correction layer over concrete and asphalt.



06

LK-AC-316

Acrylic Filled Top Coat

The coloured, sand-filled coat that sets the friction coefficient.

KEY FEATURES

- ✓ Water-based, environmentally friendly system
- ✓ Strong adhesion to concrete and asphalt
- ✓ Adjustable court pace (friction)
- ✓ Low maintenance cost, wide colour range
- ✓ UV and freeze-thaw resistance



07

LK-AC-317

Premium Acrylic Concentrated Paint

A high-pigment, long-life colour layer.



08

LK-AC-318

Acrylic Concentrated Paint

An economical concentrate for court colouring.



09

LK-PU-402

1K PU Primer

The concrete primer applied before acrylic systems.

ACRYLIC FLOOR COATINGS

Product Family



10

LK-AC-407

Acrylic Primer

A water-based primer securing adhesion of acrylic layers.



11

LK-AC-319

Acrylic Line Paint

A high-opacity paint for court markings.

FLOOR COATINGS & PAINTS

Epoxy Floor Coatings

From thin-film paint to self-levelling coatings and epoxy mortar: seamless floor systems focused on hygiene and mechanical strength.

Self-levelling grades create smooth, glossy floors; textured (orange-peel) grades create slip-resistant, economical ones. The dust-free, monolithic structure leaves no room for bacteria, supporting hygiene in hospitals, food plants and laboratories. Conductive (ESD) versions can be produced on request.

New concrete needs roughly three weeks of curing, priming and a moisture check before application. Because epoxy has limited UV resistance, sun-exposed areas are protected with a UV-stable finish coat, and heavy-load areas are reinforced with epoxy mortar.

USE AND RESISTANCE

- ✓ Withstands heavy loads and intensive traffic
- ✓ An orange-peel texture can be added for slip resistance
- ✓ Creates a glossy, seamless and hygienic floor
- ✓ Unaffected by chemicals, easy to clean
- ✓ Produced in all RAL colours
- ✓ Colour renewal is done economically with a fresh top coat

APPLICATION AREAS

- Factories and production plants
- Warehouses and bonded stores
- Hospitals and laboratories
- Food and pharmaceutical plants
- Indoor car parks
- Industrial kitchens

EPOXY FLOOR COATINGS

Product Family


01 **LK-EP-321**


Epoxy Textured Coating (Orange Peel)

An anti-slip, economical and decorative textured finish.

Base **Two-component (2K) · Epoxy**

Consumption

0.50 – 0.70 kg/m²

Colour **All RAL colours**

02 **LK-EP-322**

Epoxy Floor Paint

A thin-film protective paint for light and medium traffic.

Base **Two-component (2K) · Epoxy**

Consumption

0.40 – 0.50 kg/m²

Colour **All RAL colours**

03 **LK-EP-323**

Epoxy Self-Levelling Coating

A smooth, glossy, high-resistance self-levelling coat.

Base **Two-component (2K) · Epoxy**

Consumption

2 – 3.50 kg/m²

Colour **All RAL colours**

KEY FEATURES

- ✓ Self-levelling, paint and textured options
- ✓ High mechanical and chemical resistance
- ✓ Hygienic, dust-free seamless surface
- ✓ Conductive (ESD) versions available
- ✓ Application in all RAL colours

PRODUCTS

Primers & Putties

01	Primers	35
02	Putties	37

PRIMERS & PUTTIES

Primers

The first layer: a bonding bridge between coating and concrete that balances absorbency, stops dusting and forms a moisture barrier where needed.

Epoxy primers suit floors demanding high adhesion and chemical resistance; polyurethane primers pair with flexible top layers, acrylic primers with acrylic sports systems. Filled primers level out surface defects, preparing a smooth base.

Substrate moisture is the first check: up to about 3% a standard primer suffices, between 3–7% a moisture-barrier epoxy primer is mandatory, and above that no application is made. Skipping the primer leads to early peeling and blistering.

USE AND RESISTANCE

- ✓ Separate grades for absorbent and non-absorbent substrates
- ✓ Determines the adhesion between substrate and coating
- ✓ The epoxy moisture barrier prevents blistering on damp screeds
- ✓ Substrate moisture must be measured before application
- ✓ The next coat is not applied before drying is complete

APPLICATION AREAS

- Concrete and screed surfaces
- Metal surfaces
- Damp substrates (barrier grade)
- Sports system bases
- All floors before coating

PRIMERS

Product Family


01 **LK-PU-401**

Solvent-Free PU Primer

An odourless polyurethane primer safe for enclosed spaces.

Base	One-component · Polyurethane · Solvent-free
------	--

Consumption	0.15 – 0.30 kg/m²
-------------	--------------------------


02 **LK-PU-402**

1K PU Primer

A practical moisture-curing primer compatible with flexible top layers.

Base	One-component · Polyurethane
------	-------------------------------------

Consumption	0.15 – 0.25 kg/m²
-------------	--------------------------


03 **LK-PU-403**

1K PU Clear Primer

A clear, deep-penetrating grade for absorbent substrates.

Base	One-component · Polyurethane
------	-------------------------------------

Consumption	0.15 – 0.25 kg/m²
-------------	--------------------------

Colour	Clear
--------	--------------


04 **LK-EP-404**

2K Epoxy Moisture Barrier

A barrier primer protecting the coating on damp substrates.

Base	Two-component (2K) · Epoxy
------	-----------------------------------

Consumption	0.30 – 0.40 kg/m²
-------------	--------------------------


05 **LK-EP-405**

2K Epoxy Primer

The standard for floors demanding high adhesion and chemical resistance.

Base	Two-component (2K) · Epoxy
------	-----------------------------------

Consumption	0.30 – 0.40 kg/m²
-------------	--------------------------


06 **LK-EP-406**

2K Epoxy Primer (Economical)

An economical solution for general concrete priming.

Base	Two-component (2K) · Epoxy
------	-----------------------------------

Consumption	0.30 – 0.40 kg/m²
-------------	--------------------------

KEY FEATURES

- ✓ Epoxy, polyurethane and acrylic families
- ✓ Moisture-barrier options
- ✓ Surface correction with filled primer
- ✓ Special grades for non-absorbent surfaces
- ✓ The critical layer that defines system life

PRIMERS & PUTTIES

Putties

Polyurethane filling products that close joints, cracks and pores, creating a sealed, smooth transition between layers.

High- and low-viscosity grades and elastic variants follow the movement of the floor, preventing the filling from cracking. In sports floor systems the putty acts as the intermediate layer that seals the pores of the granule core.

The right putty lowers the consumption of the self-levelling layer above it and directly improves the quality of the finished surface.

USE AND RESISTANCE

- ✓ Seals the pores over the elastic core layer
- ✓ Lets the coating spread evenly at a uniform thickness
- ✓ Viscosity options to suit every system build-up
- ✓ Consumption varies with granule size and surface texture
- ✓ Fully compatible with polyurethane systems

APPLICATION AREAS

- Joint and crack filling
- Sports floor intermediate layers
- Rubber and SBR surface pores
- Concrete repairs
- Pre-coating corrections

PUTTIES

Product Family

01

LK-PU-501

PU Sealer

The sealing layer that closes granule pores in sports systems.

Base	Two-component (2K) · Polyurethane
Consumption	0.80 – 1 kg/m ²

02

LK-PU-502

Elastic PU Putty

An elastic filler that works without cracking on moving floors.

Base	Two-component (2K) · Polyurethane
Consumption	1.50 – 2.50 kg/m ²

PUTTIES

Product Family

03

LK-PU-503

Low-Viscosity PU Putty

A fluid grade penetrating fine pores and capillaries.

Base	Two-component (2K) · Polyurethane
------	-----------------------------------

Consumption	0.80 – 1 kg/m²
-------------	----------------

04

LK-PU-504

High-Viscosity PU Putty

A dense grade holding its shape in joints and wide gaps.

Base	Two-component (2K) · Polyurethane
------	-----------------------------------

Consumption	2 – 2.50 kg/m²
-------------	----------------

KEY FEATURES

- ✓ High/low-viscosity and elastic variants
- ✓ Accommodation of floor movement
- ✓ Pore sealing and watertightness
- ✓ Reduces top-coat consumption
- ✓ Full compatibility with PU systems

 PRODUCTS

Waterproofing Products

— WATERPROOFING PRODUCTS

Waterproofing Products

A complete waterproofing portfolio of liquid membranes and matching primers for every detail from roof to foundation.

Aliphatic grades serve UV-exposed finish coats and economical grades go under tiling; non-sag (thixotropic) types handle vertical surfaces and bitumen-polyurethane hybrids extend the range. Separate primers for absorbent and non-absorbent substrates complete the system.

APPLICATION AREAS

- Roofs and terraces
- Bathrooms, balconies and wet areas
- Foundations and retaining walls
- Water tanks and pools
- Concealed gutter details

— WATERPROOFING PRODUCTS

Product Family



01 LK-WP-601

Liquid Membrane Product Family

A complete waterproofing set of 1K/2K PU liquid membranes, primers and aliphatic finish coats.



02

Systems

Systems configured to the specification, budget and substrate.

01	Sports Flooring Systems	42
02	Industrial Flooring Systems	48
03	Waterproofing System	51

SYSTEMS

Sports Flooring Systems

Layered sports floor build-ups — primer, elastic core, putty and finish — scaling from amateur halls to professional athletics tracks.

Indoors, a polyurethane self-levelling coat and UV-resistant finish are applied over an SBR roll or cast-in-place SBR core; total thickness follows the intensity of use. For athletics, the sandwich system (cast SBR core + elastomer + broadcast EPDM surface) and the full-pour system are complemented by the water-permeable combined build-up and the economical spray coating.

On hard courts, acrylic systems allow the pace of play to be tuned through resurfacer, cushion layers and a filled top coat. Court markings are always the final layer; renewal takes nothing more than a fresh finish coat.

APPLICATION AREAS

- Tennis courts
- Basketball and volleyball
- Indoor sports halls
- Athletics tracks
- Padel courts
- Jogging and walking paths
- Children's playgrounds
- Fitness gyms
- Shooting ranges

SYSTEM FEATURES

- ✓ Primer → elastic core → putty → finish build-up
- ✓ Sandwich, full-pour, combined and spray variants
- ✓ Shock-absorbing SBR/EPDM core
- ✓ Non-yellowing aliphatic top coats
- ✓ Economical colour and marking renewal
- ✓ Indoor and outdoor application

On padel courts the playing surface is built on a 20 × 10 m area over a reinforced concrete or porous asphalt base: artificial turf with a 10–15 mm pile, filled with 0.2–0.5 mm silica sand. Turf strips are joined with seaming tape and a two-component polyurethane turf adhesive; a 0.5–1% fall in the base plus perimeter drainage keeps water off the surface and protects the bonded layer.


SPORTS FLOORING SYSTEMS

System Build-Ups and Consumption

Amateur Hall System — with roll pad

Coating thickness: ~6 mm


Fitness and training halls, indoor tennis courts, nursery floors

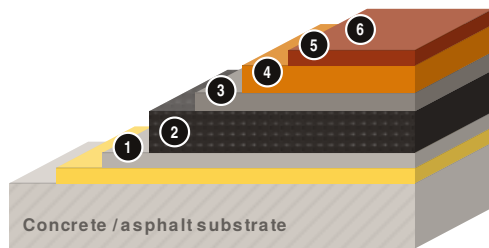

#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.15 – 0.25 kg/m ²
02	Rubber adhesive LK-PU-121	1 kg/m ²
03	Rubber roll pad 4 mm LK-AK-741	1 m ² /m ²
04	Elastic filler putty LK-PU-502	0.80 – 1 kg/m ²
05	Self-levelling PU coating LK-PU-303	2 – 2.50 kg/m ²
06	UV-resistant PU paint LK-PU-301	0.15 – 0.30 kg/m ²

Amateur Hall System — cast in situ

Coating thickness: ~6 mm

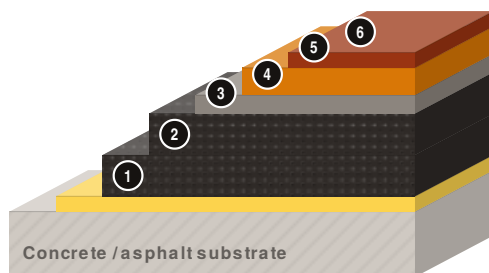

#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.15 – 0.25 kg/m ²
02	SBR rubber granules 1 – 3.5 mm LK-GR-711	2.60 – 2.86 kg/m ²
03	Rubber binder LK-PP-202	0.52 – 0.57 kg/m ²
04	Elastic filler putty LK-PU-502	2 – 2.50 kg/m ²
05	Self-levelling PU coating LK-PU-303	2 – 2.50 kg/m ²
06	UV-resistant PU paint LK-PU-301	0.15 – 0.30 kg/m ²


SPORTS FLOORING SYSTEMS

System Build-Ups and Consumption

Professional Hall System

Basketball, volleyball, handball and all indoor court sports

Coating thickness: ~10 mm

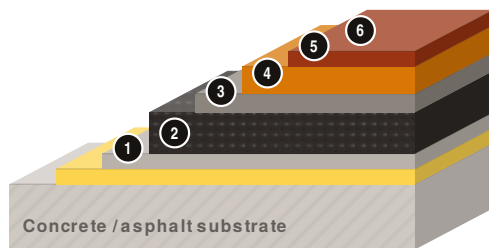


#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.15 – 0.25 kg/m ²
02	Rubber adhesive LK-PU-121	1 kg/m ²
03	Rubber roll pad 8 mm LK-AK-741	1 m ² /m ²
04	Elastic filler putty LK-PU-502	0.80 – 1 kg/m ²
05	Self-levelling PU coating LK-PU-303	2 – 2.50 kg/m ²
06	UV-resistant PU paint LK-PU-301	0.15 – 0.30 kg/m ²

Jogging and Walking Track System

Walking paths, amateur sports and play areas

Coating thickness: ~18 mm

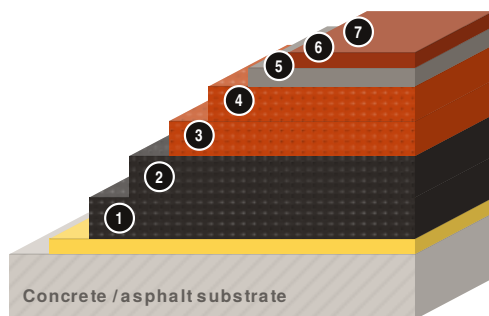

#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.20 – 0.30 kg/m ²
02	SBR rubber granules 2.5 – 3.5 mm LK-GR-712	7.80 – 8.50 kg/m ²
03	Rubber binder LK-PP-202	1.40 – 1.53 kg/m ²
04	EPDM granules 0.5 – 1.5 mm LK-GR-701	5 – 5.50 kg/m ²
05	EPDM binder LK-PP-201	1 – 1.10 kg/m ²
06	Elastic filler putty LK-PU-502	1.50 – 2 kg/m ²
07	UV-resistant PU paint LK-PU-301	0.25 – 0.35 kg/m ²


SPORTS FLOORING SYSTEMS

System Build-Ups and Consumption

Water-Permeable Combined System

Amateur athletics tracks, tennis courts, playgrounds

Coating thickness: ~8+7 mm

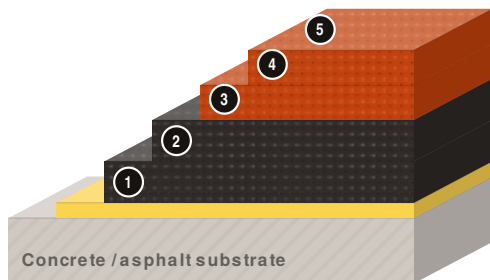


#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.20 – 0.30 kg/m ²
02	SBR rubber granules 1 – 3.5 mm LK-GR-711	5.20 – 5.72 kg/m ²
03	Rubber binder LK-PP-202	1.04 – 1.14 kg/m ²
04	EPDM granules 1 – 3.5 mm LK-GR-702	7 – 7.70 kg/m ²
05	EPDM binder LK-PP-201	1.40 – 1.54 kg/m ²

Economical Spray Coating System

Amateur athletics tracks and walking paths

Coating thickness: ~13 mm

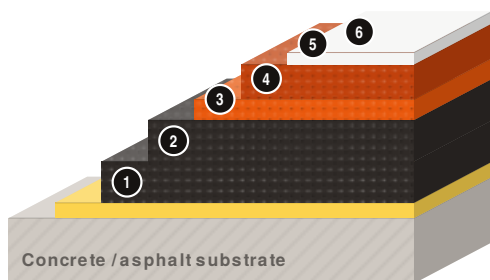

#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.20 – 0.30 kg/m ²
02	Rubber binder LK-PP-202	1.60 – 1.75 kg/m ²
03	SBR rubber granules 1 – 3.5 mm LK-GR-711	8 – 8.80 kg/m ²
04	Polyurethane spray coating LK-PU-304	1.20 – 1.32 kg/m ²
05	EPDM granules 0.5 – 1.5 mm LK-GR-701	0.80 – 0.88 kg/m ²
06	Line paint LK-AC-319	0.25 – 0.30 kg/m ²


SPORTS FLOORING SYSTEMS

System Build-Ups and Consumption

Sandwich Athletics System

Professional athletics tracks and field areas

Coating thickness: ~14 mm

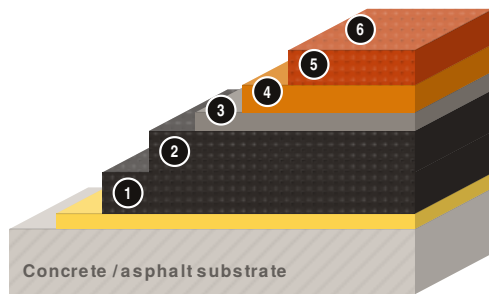


#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.20 – 0.30 kg/m ²
02	Rubber binder LK-PP-202	1.30 – 1.45 kg/m ²
03	SBR rubber granules 1 – 3.5 mm LK-GR-711	6.50 – 7.20 kg/m ²
04	Elastic filler putty LK-PU-502	1.50 – 2.50 kg/m ²
05	Self-levelling PU coating LK-PU-303	2.20 – 2.45 kg/m ²
06	EPDM granules 1 – 3.5 mm LK-GR-702	4 – 4.40 kg/m ²

Full-Pour Athletics System

Professional athletics tracks and field areas

Coating thickness: ~15 mm

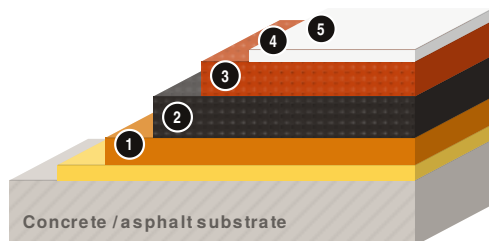

#	LAYER	CONSUMPTION
01	Primer LK-PU-402	0.20 – 0.30 kg/m ²
02	Self-levelling PU coating LK-PU-302	8 – 9 kg/m ²
03	SBR rubber granules 1 – 3.5 mm LK-GR-711	7.30 – 8.30 kg/m ²
04	EPDM granules 1 – 3.5 mm LK-GR-702	4 – 5 kg/m ²
05	Line paint LK-AC-319	0.20 – 0.30 kg/m


SPORTS FLOORING SYSTEMS

System Build-Ups and Consumption

Shooting Range System

Indoor shooting range floors

Coating thickness: ~10 mm

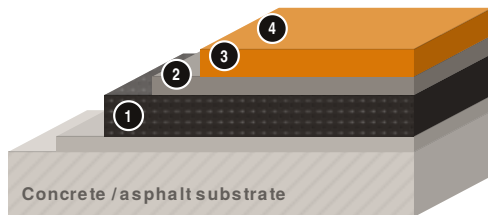


#	LAYER	CONSUMPTION
01	Rubber adhesive LK-PU-121	—
02	Rubber floor covering LK-AK-731	—
03	Elastic filler putty LK-PU-502	0.80 – 1 kg/m ²
04	Self-levelling PU coating LK-PU-303	2 – 2.50 kg/m ²

Acrylic Hard-Court System

Tennis, basketball, volleyball, running and cycling tracks

Coating thickness: ~2-3 mm

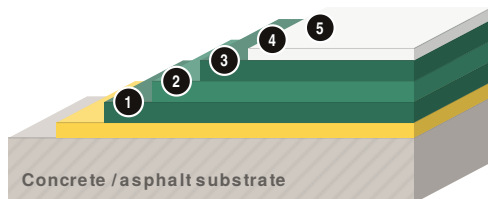

#	LAYER	CONSUMPTION
01	Primer LK-PU-402	—
02	Acrylic resurfacer LK-AC-315	—
03	Acrylic cushion LK-AC-312	—
04	Acrylic top coat LK-AC-316	—
05	Acrylic line paint LK-AC-319	—

Figures assume a substrate of ideal quality and flatness; they change on damaged or uneven surfaces. Request the current technical data sheet (TDS) for binding values. Numbers follow the application order; thicknesses are illustrative.

SYSTEMS

Industrial Flooring Systems

Industrial floor systems configured by traffic load, hygiene requirement and budget — from thin-film paint to epoxy mortar.

Economical epoxy paint for light traffic; primer, body coat and self-levelling systems for medium and heavy duty; and screed-like epoxy mortar reinforcement for heavy loads and damaged substrates. Where slip resistance matters, the finish is textured into an orange-peel skin.

Semi-flexible polyurethane systems reduce footfall noise on mezzanines, hotels and offices; decorative projects use flakes, coloured quartz and printed interlayers for one-off surfaces. Hospital-grade areas call for the antibacterial and conductive (ESD) options.

APPLICATION AREAS

- Factory floors
- Warehouses and bonded stores
- Laboratories and cold storage
- Food and pharmaceutical plants
- Indoor car parks
- Aircraft hangars
- Vehicle service and car wash
- Restaurants, cafés and bars
- Hotel rooms and common areas
- Shops, offices and exhibition halls
- Nurseries and kindergartens

SYSTEM FEATURES

- ✓ Paint, self-levelling, texture and mortar tiers
- ✓ Slip-resistant orange-peel option
- ✓ Semi-flexible build-up that dampens footfall
- ✓ Decorative flakes and coloured quartz
- ✓ Antibacterial and ESD alternatives
- ✓ Application in all RAL colours


INDUSTRIAL FLOORING SYSTEMS

System Build-Ups and Consumption

Semi-Flexible System

Coating thickness: ~2-3 mm

Mezzanines, hotels, offices, shops, restaurants, laboratories, canteens

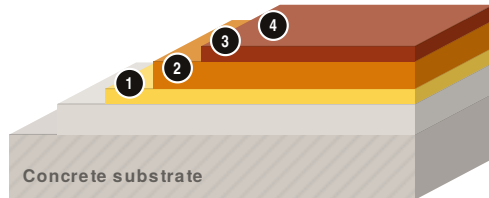


#	LAYER	CONSUMPTION
01	Self-levelling screed	optional
02	Primer LK-PU-402	0.15 – 0.25 kg/m ²
03	Self-levelling PU coating LK-PU-302	2.20 – 3.50 kg/m ²
04	UV-resistant PU paint LK-PU-301	0.20 – 0.30 kg/m ²

Decorative Design System

Coating thickness: ~2-3 mm

Shops, cafés, restaurants, sales offices, fairs, TV studios

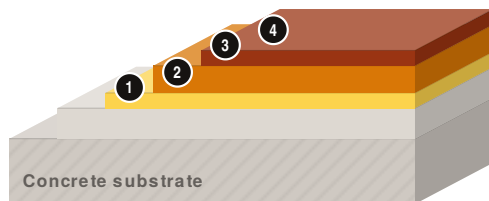


#	LAYER	CONSUMPTION
01	Self-levelling screed	optional
02	Primer LK-PU-402	0.15 – 0.25 kg/m ²
03	Self-levelling PU coating LK-PU-302	2.20 – 3.50 kg/m ²
04	UV-resistant PU paint LK-PU-301	0.20 – 0.30 kg/m ²

Anti-Slip Texture System

Coating thickness: ~2 mm

Indoor car parks, kitchens, food production areas, light-duty warehouses

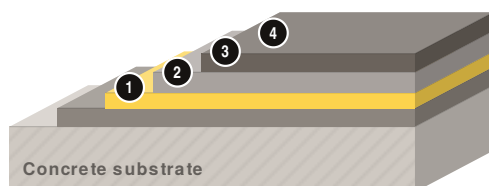

#	LAYER	CONSUMPTION
01	Filler putty	—
02	Epoxy primer LK-EP-405	0.30 – 0.40 kg/m ²
03	Epoxy intermediate coat LK-EP-323	0.40 – 0.50 kg/m ²
04	Epoxy texture paint LK-EP-321	0.50 – 0.70 kg/m ²


INDUSTRIAL FLOORING SYSTEMS

System Build-Ups and Consumption

Medium-Duty Self-Levelling System

Coating thickness: ~2.5–3 mm


Factory floors, kitchens, shops, food production areas, warehouses, cold stores

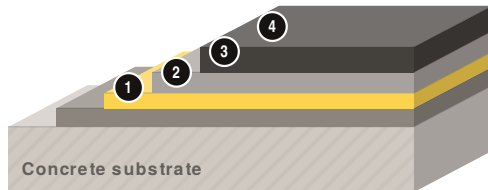

#	LAYER	CONSUMPTION
01	■ Filler putty	—
02	■ Epoxy primer LK-EP-405	0.30 – 0.40 kg/m ²
03	■ Epoxy intermediate coat LK-EP-323	0.50 – 0.70 kg/m ²
04	■ Epoxy self-levelling coating LK-EP-323	2 – 2.50 kg/m ²

Medium-Duty Polyurethane System

Coating thickness: ~2.5–3 mm

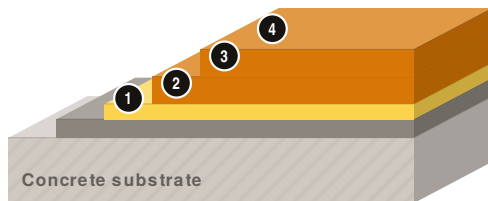


#	LAYER	CONSUMPTION
01	■ Filler putty	—
02	■ Epoxy primer LK-EP-405	0.30 – 0.40 kg/m ²
03	■ Polyurethane intermediate coat LK-PU-302	0.50 – 0.70 kg/m ²
04	■ Self-levelling PU coating LK-PU-302	2 – 2.50 kg/m ²

Heavy-Duty Epoxy Mortar System

Coating thickness: ~13 mm

Loading bays, heavy production areas, badly damaged substrates

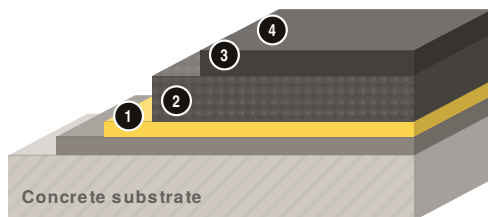

#	LAYER	CONSUMPTION
01	■ Filler putty	—
02	■ Epoxy primer LK-EP-405	0.30 – 0.40 kg/m ²
03	■ Epoxy mortar 10 mm LK-EP-324	23 – 33 kg/m ²
04	■ Epoxy self-levelling coating LK-EP-323	2.50 – 3.50 kg/m ²

Figures assume a substrate of ideal quality and flatness; they change on damaged or uneven surfaces. Request the current technical data sheet (TDS) for binding values. Numbers follow the application order; thicknesses are illustrative.

SYSTEMS

Waterproofing System

A monolithic waterproofing system built from primer, detail reinforcement, layered liquid membrane and a UV-protected finish coat.

In wet areas, corner and drain details are taped with reinforcement band and at least two coats of liquid membrane are applied; after verification with a water test, tiling follows. On roofs and terraces a UV-resistant membrane or aliphatic finish is used, and on large flat areas sheet membrane can be combined with liquid detailing.

Water-reactive injection resins handle pressurised leaks and negative-side waterproofing. Waterproofing should be planned while the building is still under construction; later intervention is harder and costlier.

APPLICATION AREAS

- Roofs and terraces
- Balconies
- Bathrooms and wet areas
- Foundations and retaining walls
- Water tanks and pools
- Car park decks

SYSTEM FEATURES

- ✓ Detail taping and reinforcement mesh
- ✓ Controlled film thickness in layers
- ✓ Verification by water test
- ✓ Aliphatic finish on UV-exposed surfaces
- ✓ Combined solution with sheet membrane
- ✓ Negative-side waterproofing by injection

03

Application Areas

From polyurethane sports flooring to decorative stone, from athletics tracks to industrial epoxy.

APPLICATION AREAS

Application Areas



01

Polyurethane Sports Flooring

Shock-absorbing, seamless polyurethane sports floors from indoor halls to fitness areas.

The system is built with an SBR core, putty and self-levelling polyurethane over a primer; court lines and colour complete it with the finish coat. Thickness follows the intensity of use.



02

Parquet Flooring Application

Seamless, silent installation of solid and laminate parquet with elastic polyurethane adhesives.

After moisture testing and selecting the right primer and notched trowel, the parquet is laid onto elastic adhesive; creaking and separation are prevented, and underfloor heating is safe.



03

Acrylic Sports Floors

Acrylic coating applications with adjustable pace, from tennis courts to multi-purpose fields.

Resurfacer, cushion layers and the filled top coat are applied in sequence; sand content sets the court pace and line paint completes the job. Freeze-thaw resistance gives long outdoor life.



04

Rubber Application

Installation of rubber tiles and rolls in sports halls, nurseries and industrial areas.

After surface preparation the two-component polyurethane adhesive is combed on, tiles are laid staggered and pressed with a roller; the bond cures in about eight hours.



05

Athletics Track

Professional running track applications with sandwich and full-pour systems.

An elastomer and EPDM surface is applied over a paver-laid SBR-binder core; the result is a drainage-compatible track surface with grip in all weather.



06

Turf Adhesive Applications

Professional seam-focused bonding for pitches and landscape turf.

Strips are centred on the seaming tape, adhesive is spread evenly across the tape and the joint is protected throughout curing; seams stay invisible and the field is not opened early.



07

Decorative Stone Application

Water-permeable, decorative stone-carpet surfaces from natural granules and clear binder.

Granules and binder are mixed homogeneously and laid by trowel; once cured, the surface is slip-resistant, maintenance-free and rain-permeable. The choice for pool surrounds and walkways.



08

Elastomer Sandwich System

A two-layer sports floor build-up of elastic core, elastomer and coloured EPDM surface.

EPDM granules are broadcast while the elastomer layer is still wet; energy return and deformation values are tuned to professional standards.



09

Sandwich Sports Flooring

Sandwich system applications for stadium and university tracks.

Correct application and regular maintenance give a long service life; worn areas are renewed with local repairs and colour schemes follow the project.



10

Padel Court Application

Laying, seaming and sand-filling the artificial turf surface of a 20 × 10 m padel court.

The court is a fully enclosed volume: 4 m tempered glass back walls and 3 m of glass on the sides continuing into mesh; the net stands 0.88 m high at the centre and 0.92 m at the posts, and the service lines are set 6.95 m from the net. The surface is built over reinforced concrete or porous asphalt, with a 0.5–1% fall and perimeter drainage.



11

EPDM Granule Application

Safe, patterned floors for playgrounds and sports fields with coloured EPDM granules.

The EPDM-binder mix is spread and levelled over an SBR base; layer thickness follows fall height, and 24 colours allow free pattern design.




12

Waterproof Coating

Seamless liquid-membrane waterproofing applications from roofs to wet areas.

Corner and drain details are taped, the membrane is applied in layers and verified with a water test; UV-exposed surfaces are protected with an aliphatic finish.

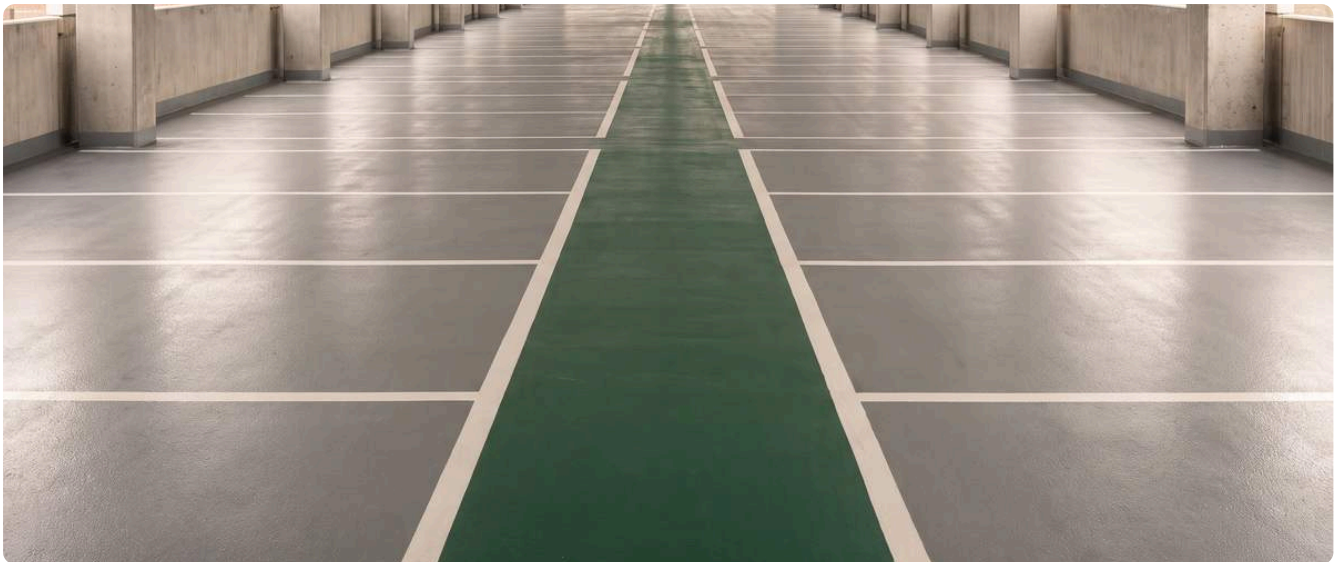


13

Industrial Polyurethane and Epoxy Floors

Hygienic, load-bearing seamless floor applications in factories, warehouses and car parks.

After blasting and priming, a self-levelling or textured coating is applied; the result is a monolithic surface resistant to forklift traffic, chemicals and intensive cleaning.

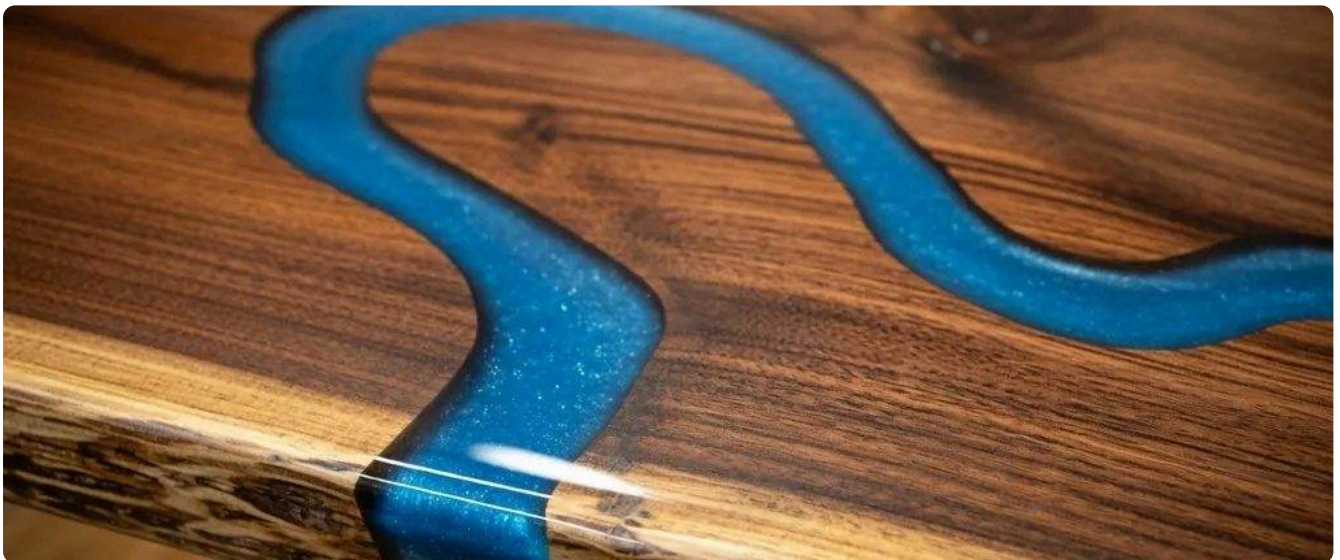

14

Epoxy Casting Applications

Tables, objects and decorative surface castings with clear epoxy resin.

The pour is worked from the centre outwards and air bubbles release on their own; depth is built in layers after gelling, and sanding plus polishing bring crystal gloss.

04

Export

Reference data you need for load planning and for choosing the right delivery term.

01	Container Dimensions	61
02	Incoterms 2020 — Delivery Terms	62

EXPORT

Container Dimensions

Internal dimensions and loading capacities of standard ISO dry cargo containers.

CONTAINER	INTERNAL (L × W × H)	DOOR OPENING (W × H)	CAPACITY	TARE WEIGHT	MAX PAYLOAD	LOADING CAPACITY
20' DV — Standard	5.9 × 2.35 × 2.39 m	2.34 × 2.28 m	33.2 m ³	2,250 kg	28,200 kg	10 × IBC (1000 L) 80 × drums (200 L)
40' DV — Standard	12.03 × 2.35 × 2.39 m	2.34 × 2.28 m	67.7 m ³	3,750 kg	26,730 kg	20 × IBC (1000 L) 160 × drums (200 L)
40' HC — High Cube	12.03 × 2.35 × 2.7 m	2.34 × 2.58 m	76.4 m ³	3,900 kg	26,580 kg	20 × IBC (1000 L) 160 × drums (200 L)
45' HC — High Cube	13.56 × 2.35 × 2.7 m	2.34 × 2.58 m	86 m ³	4,800 kg	27,700 kg	25 × IBC (1000 L) 180 × drums (200 L)

Figures are indicative and may vary by a few centimetres and a few hundred kilograms depending on the container manufacturer and the carrier. Confirm exact dimensions and maximum payload with your carrier before shipment.



EXPORT

Incoterms 2020 — Delivery Terms

The international rules that define where cost and risk pass between seller and buyer.

CODE	DESCRIPTION	TRANSPORT MODE	FREIGHT	INSURANCE	RISK TRANSFERS
EXW	Ex Works	All modes	Buyer	Not required	At the seller's premises, once goods are placed at the buyer's disposal
FCA	Free Carrier	All modes	Buyer	Not required	On delivery to the carrier at the named place
FAS	Free Alongside Ship	Sea / inland waterway	Buyer	Not required	When placed alongside the vessel at the port of shipment
FOB	Free On Board	Sea / inland waterway	Buyer	Not required	When the goods are on board the vessel at the port of shipment
CFR	Cost and Freight	Sea / inland waterway	Seller	Not required	When the goods are on board the vessel at the port of shipment
CIF	Cost, Insurance and Freight	Sea / inland waterway	Seller	Seller — minimum cover (ICC C)	When the goods are on board the vessel at the port of shipment
CPT	Carriage Paid To	All modes	Seller	Not required	On delivery to the first carrier
CIP	Carriage and Insurance Paid To	All modes	Seller	Seller — extensive cover (ICC A)	On delivery to the first carrier
DAP	Delivered At Place	All modes	Seller	Not required	At the named destination, ready for unloading on the vehicle
DPU	Delivered at Place Unloaded	All modes	Seller	Not required	At the named destination, once unloading is complete
DDP	Delivered Duty Paid	All modes	Seller	Not required	At the named destination, ready for unloading on the vehicle

Incoterms® is a registered trademark of the International Chamber of Commerce (ICC). This table is a summary; always state the named place next to the rule in the contract (e.g. "FOB Istanbul, Incoterms 2020").



Your solution partner in adhesives, binders, floor coatings and waterproofing.

ADDRESS

Maslak Mah. Eski Büyükdere Cad. Giz 2000
Plaza No: 7/24, Sarıyer / İstanbul

PHONE

+90 212 912 52 32

MOBILE

+90 530 360 61 43

E-MAIL

info@leonkimya.com



leonkimya.com

PRODUCT AND SYSTEM CATALOGUE · Edition 2026

The information in this catalogue is for general presentation and does not replace a technical specification. Request the current technical data sheet (TDS) and safety data sheet (SDS) before application. Product properties may change without notice.

Leon Kimya © 2026