User Manual Audio Box

Overview

This audio box is designed to route and process stereo audio signals through two separate input paths:

- **Carrier Input** — standard left and right audio input
- **Modulation Input** — left and right audio input used for envelope/modulation processing
- **Power Specifications** — Hook up 12V 3A power via USBC

The unit combines these signal paths and provides a stereo output.

Input and Output Connections

Inputs

The audio box has **four input connections**:

1. **Carrier Left (L)**
2. **Carrier Right (R)**
3. **Modulation Left (L)**
4. **Modulation Right (R)**

Outputs

The audio box has **two output connections**:

1. **Output Left (L)**
2. **Output Right (R)**

These outputs provide the final processed stereo signal from the pass-through and modulation path.

Connection Instructions

Step 1:

Connect the Carrier Audio Source

Connect the left and right channels of the main audio source to:

- **Pass-Through Left (L)**
- **Pass-Through Right (R)**

This is the main audio signal that will be heard at the output.

Connection as shown Below:

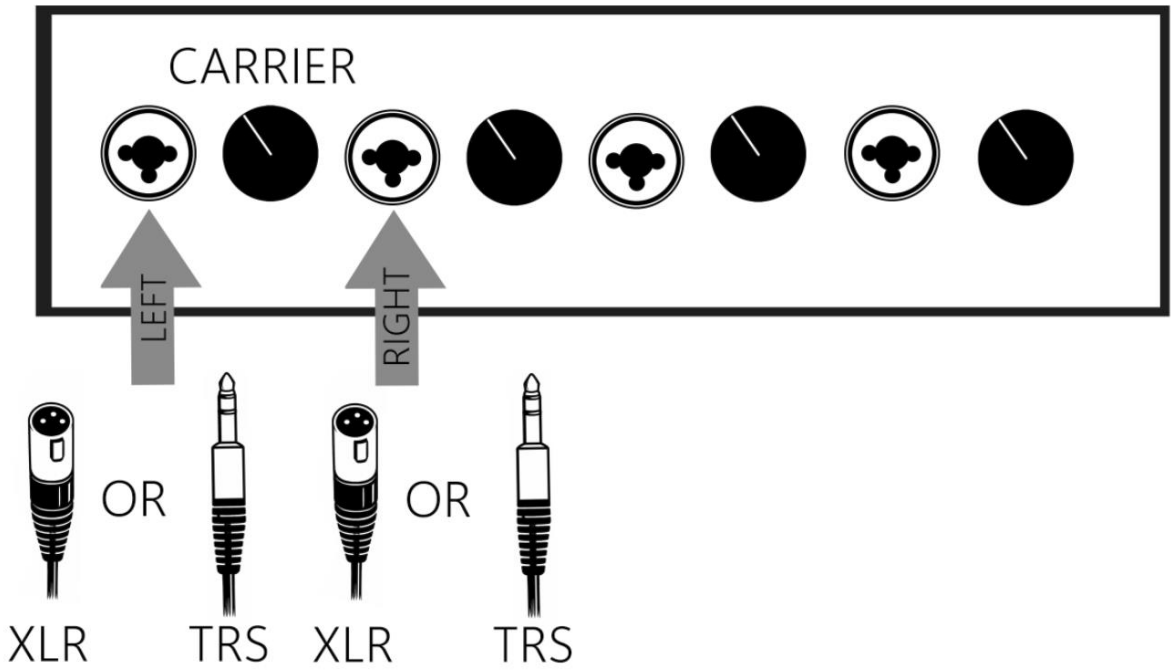

2. Connect the Modulation Audio Source

Connect the left and right channels of the modulation source to:

- **Modulation Left (L)**
- **Modulation Right (R)**

This signal is used to control or affect the modulation/envelope processing of the main audio path.

Connection Shown Below:

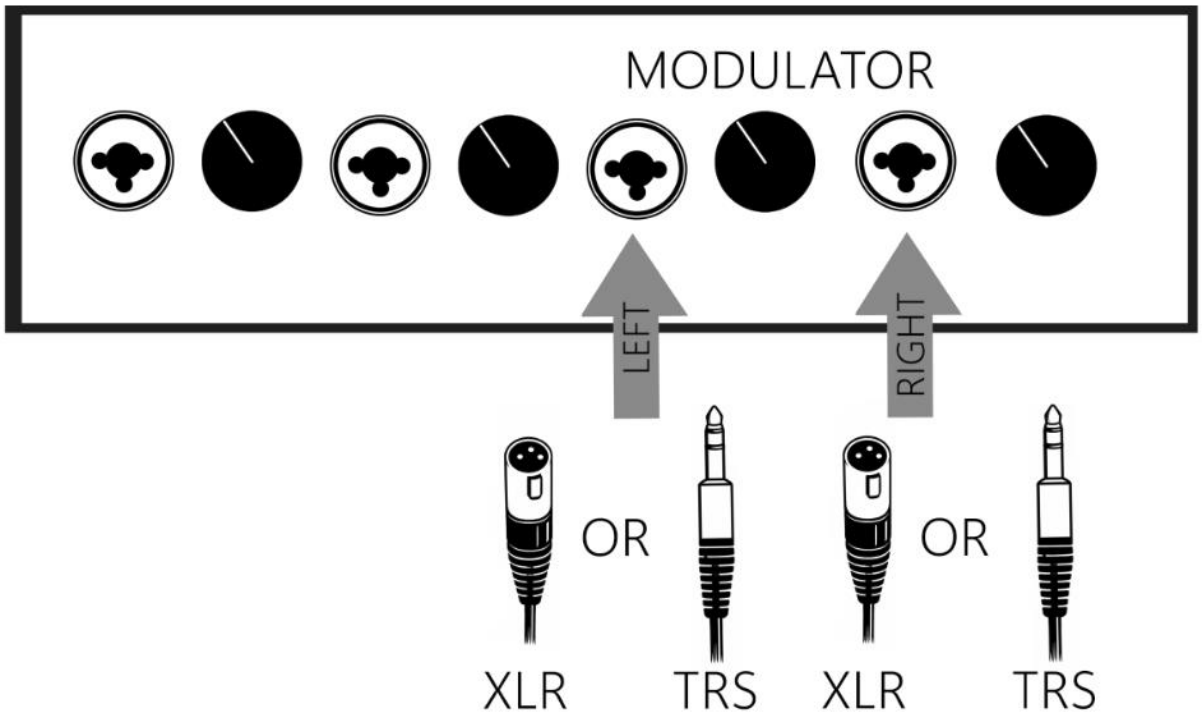

3. Connect the Outputs

Connect the final stereo outputs to your destination device, such as speakers, headphones, an amplifier, or recording equipment:

- **Output Left (L)**
- **Output Right (R)**

Sample Connection Shown Below:

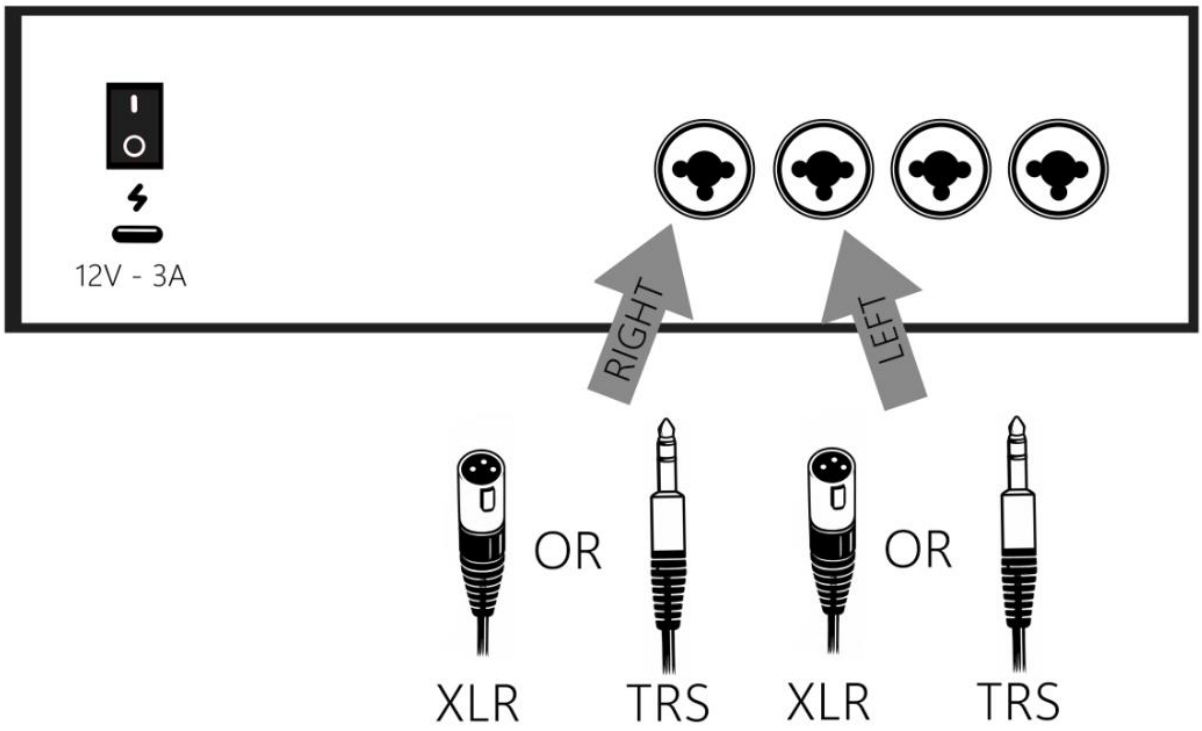

Basic Operation

Once all input and output connections are made:

1. Power on the system.
2. Start the pass-through audio source.
3. Start the modulation audio source, if used.
4. Monitor the stereo output from the left and right output connections.

The box will process the incoming signals and send the resulting stereo audio to the outputs.

Channel Reference

Pass-Through Input

Left side of board:

- Left channel → **Pass-Through L**
- Right channel → **Pass-Through R**

Modulation Input

Right side of board:

- Left channel → **Modulation L**
- Right channel → **Modulation R**

Output

- Left channel → **Output L**
- Right channel → **Output R**

Important Notes

- Always match **left to left** and **right to right** when making connections.
- Make sure all cables are securely inserted before powering the system.
- Use compatible audio cables and signal levels as required by your setup.

- If no modulation source is connected, only the pass-through path will be active, depending on system configuration.

Quick Setup Guide

Step 1: Connect main audio source to **Carrier L/R**
Step 2: Connect modulation source to **Modulation L/R**
Step 3: Connect destination device to **Output L/R**
Step 4: Power on the unit and begin operation

Simple User Version

How to Use the Audio Box

1. Plug your main stereo audio source into the **Carrier Left** and **Carrier Right** inputs.
2. Plug your modulation stereo source into the **Modulation Left** and **Modulation Right** inputs.
3. Plug your output device into the **Left Output** and **Right Output**.
4. Turn on the system and play audio.