

ASSIMILATING EMADDC MODE-S AIRCRAFT OBSERVATIONS IN THE NAVY'S NUMERICAL WEATHER MODELS

Brian K. Blaylock, Daniel P. Tyndall, and Patricia M. Pauley

Naval Research Laboratory Marine Meteorology Division

Contact: Brian Blaylock
brian.blaylock@nrlmry.navy.mil

OBJECTIVE

Aircraft provide some of the most impactful observations used in numerical weather prediction. (James and Benjamin 2017)

Aircraft data providers and data transmission standards continue to evolve.


The European Meteorological Aircraft Derived Data Center, **EMADDC**, processes air traffic reports from Mode-S Enhanced Surveillance (EHS) to derive atmospheric information from aircraft flying over Europe.

Atmospheric information derived from Mode-S provides an unprecedented volume of meteorological information.

Mode-S will eventually become the primary source of meteorological aircraft observations in Europe. To prepare for this transition, we developed the capability to assimilate these observations into the Navy's NWP models and evaluated their impact on forecasts.

COAMPS EXPERIMENT

COAMPS® is the Navy's regional model. We ran a COAMPS simulation for a 22-day period starting on January 1, 2022 and assimilated using all operationally available datasets in addition to the sample of superrobbed Mode-S reports.

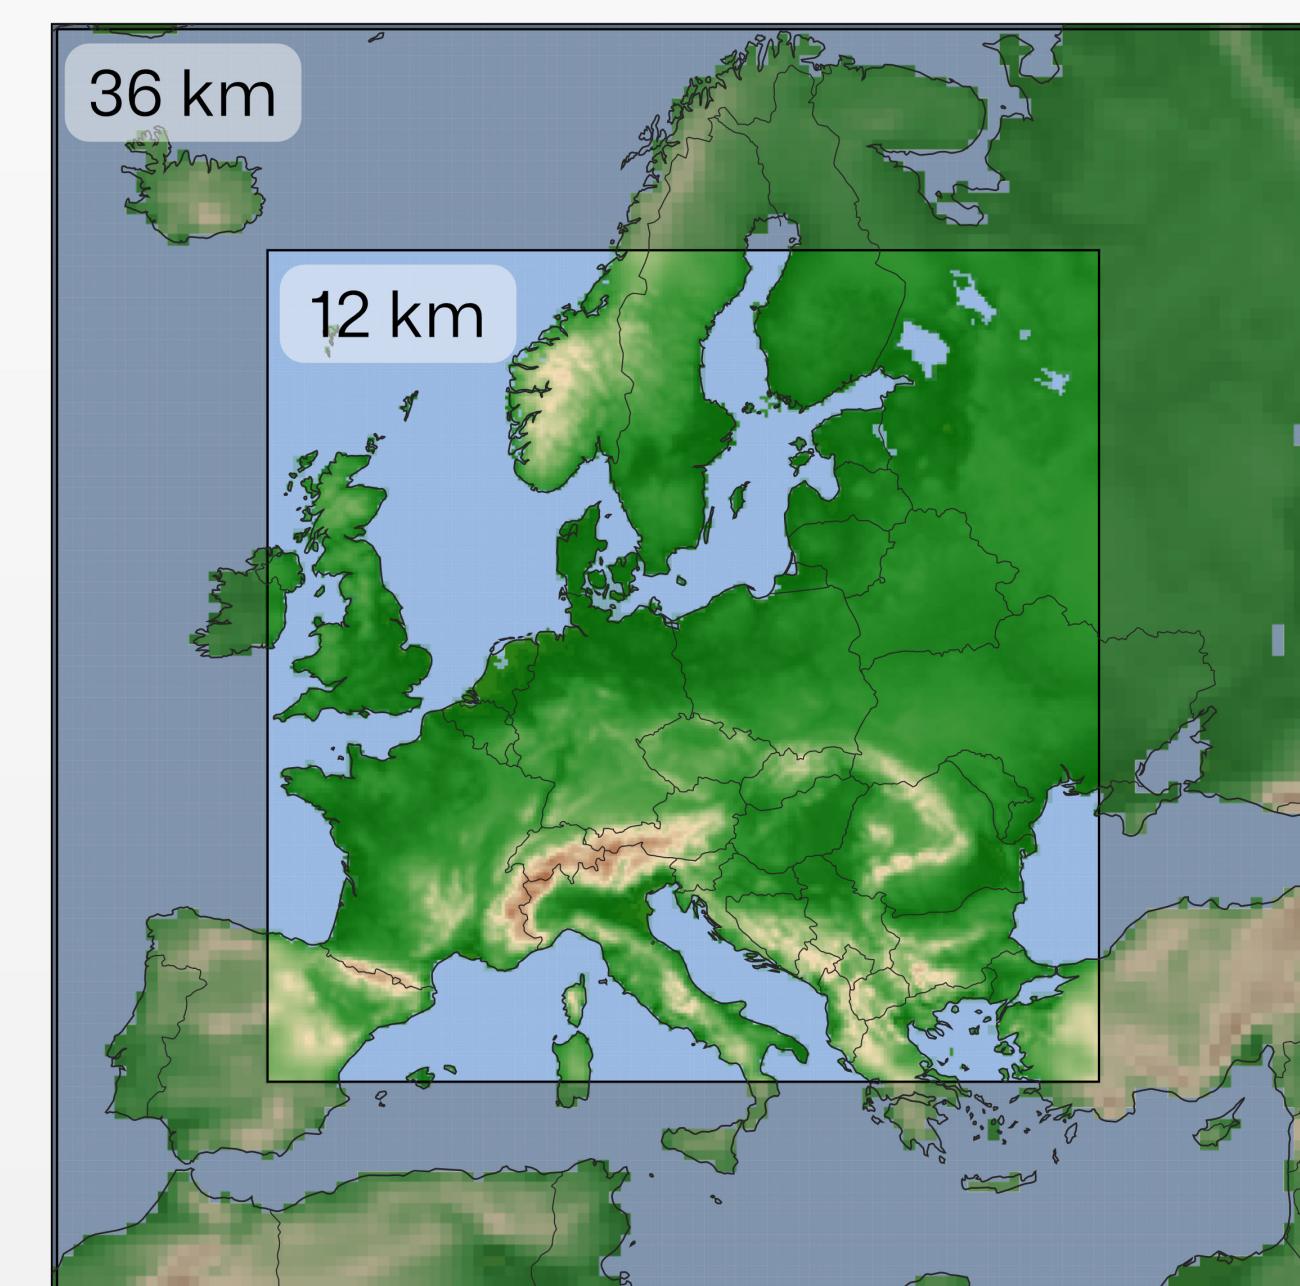

▲ COAMPS domain.
Specifications: NAVGEM boundary conditions • 60 vertical levels
COMAMPS-AR 4D-Var data assimilation • Cycled every 6 hours.
FSOI evaluated for the area in the innermost domain.


MODE-S AIRCRAFT DATA

Mode-S EHS reports are collected from aircraft by air traffic control receivers as often as every 4-20 seconds. **EMADDC** collects that data and derives calibrated and quality-controlled observations of wind and temperature. They then disseminate that data every 15 minutes with 15-30 min latency.


- **Wind speed and direction** are derived from ground speed, track angle, air speed, and magnetic heading with aircraft-specific corrections.
- **Air temperature** is derived from Mach number and true air speed with aircraft-specific corrections.

The data quality is comparable to AMDAR.

Wind speed bias is ~0.5 m/s and temperature bias is ~0.1 K when compared to models and radiosonde. ([WMO Newsletter Volume 24](#))


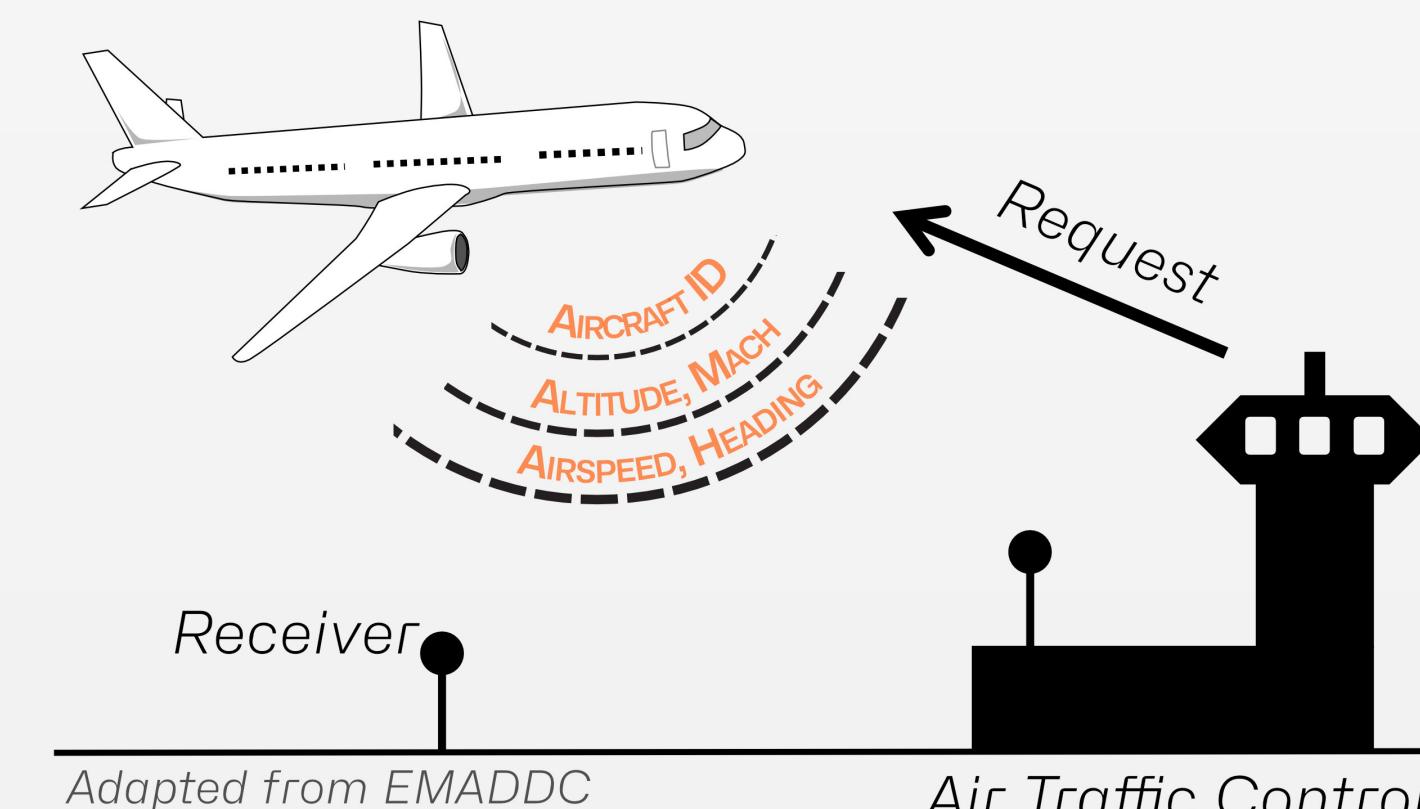


For a full description, visit <https://emaddc.com/>

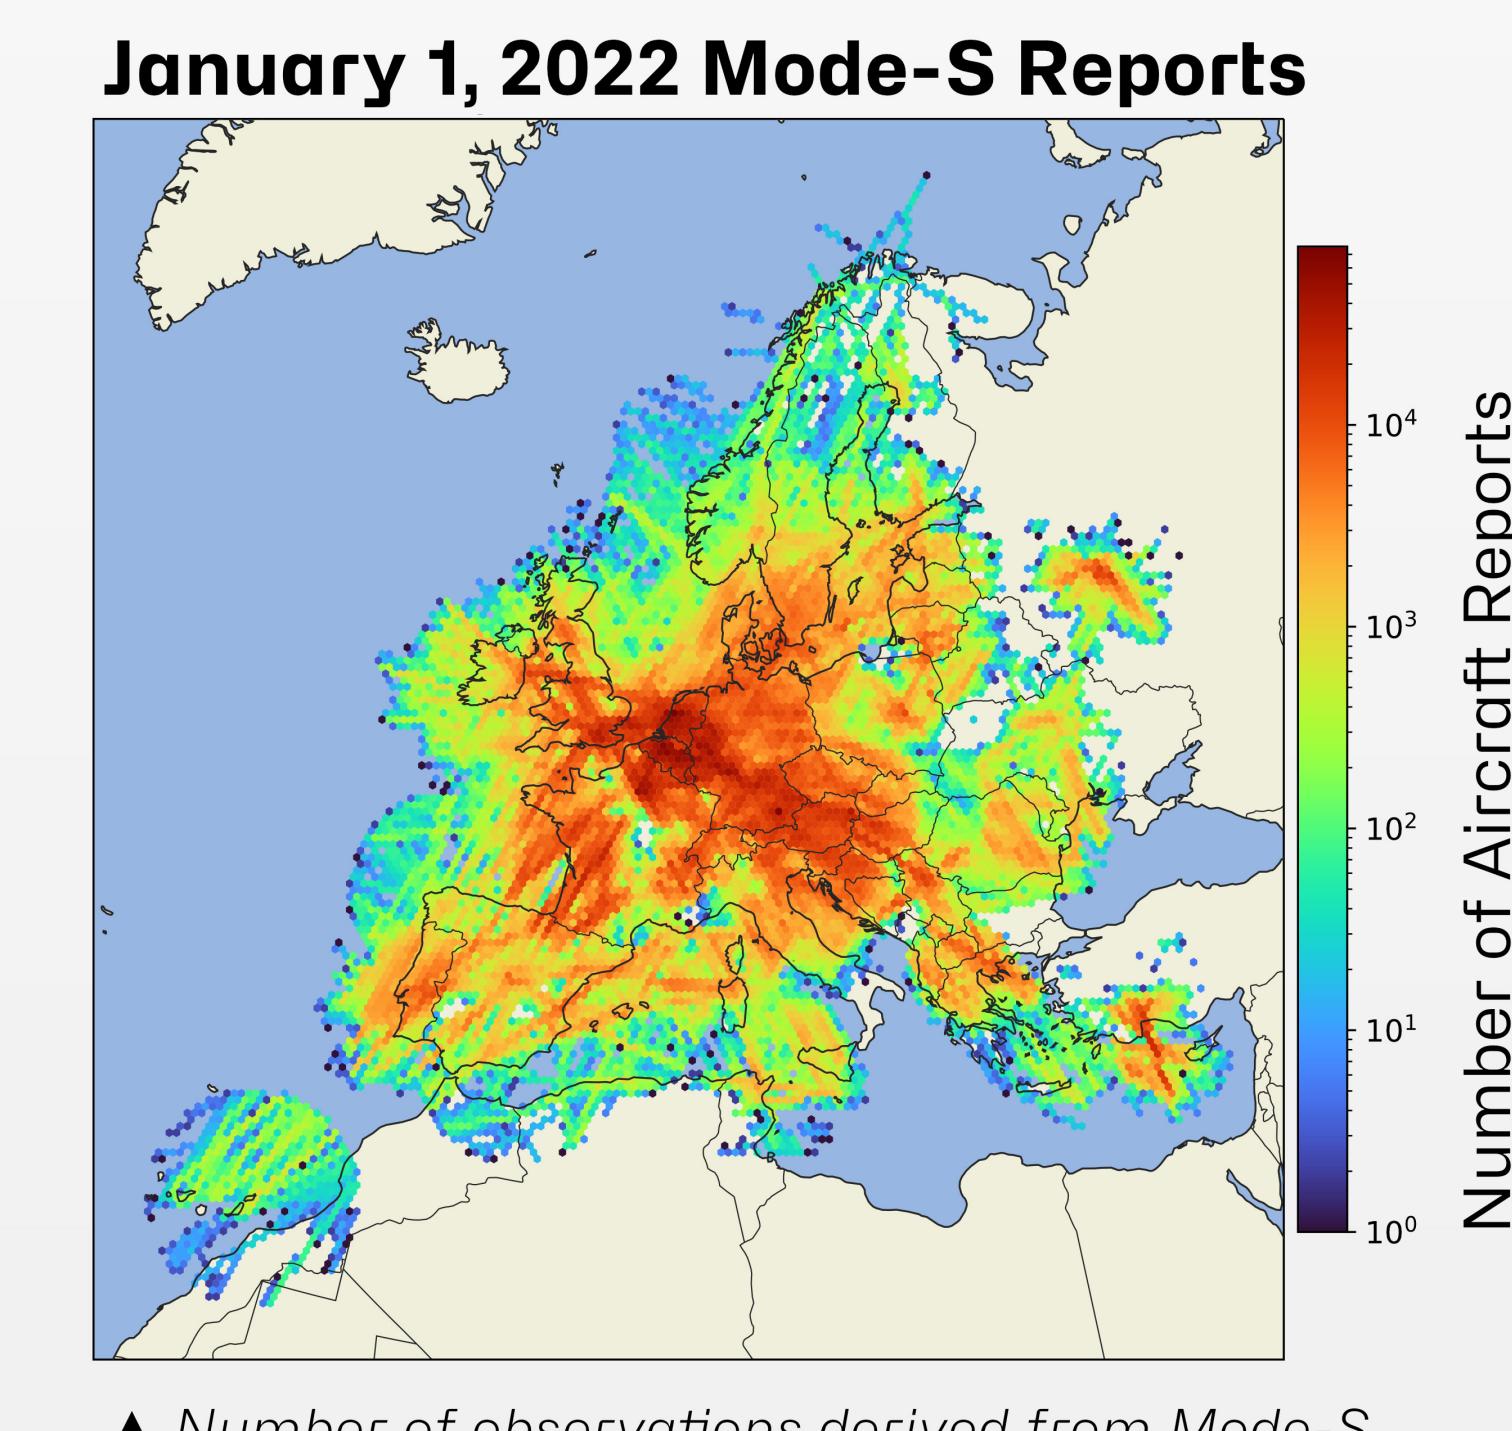

TEMPERATURE QUALITY


Aircraft temperatures measured at flight level have historically been excluded from data assimilation in the Navy models due to a known temperature bias (other NWP centers apply bias correction techniques). Mode-S derived measurements are not subject to the same temperature bias. The major gain in using Mode-S is the ability to assimilate good quality temperature data at upper levels without the need for bias correction.

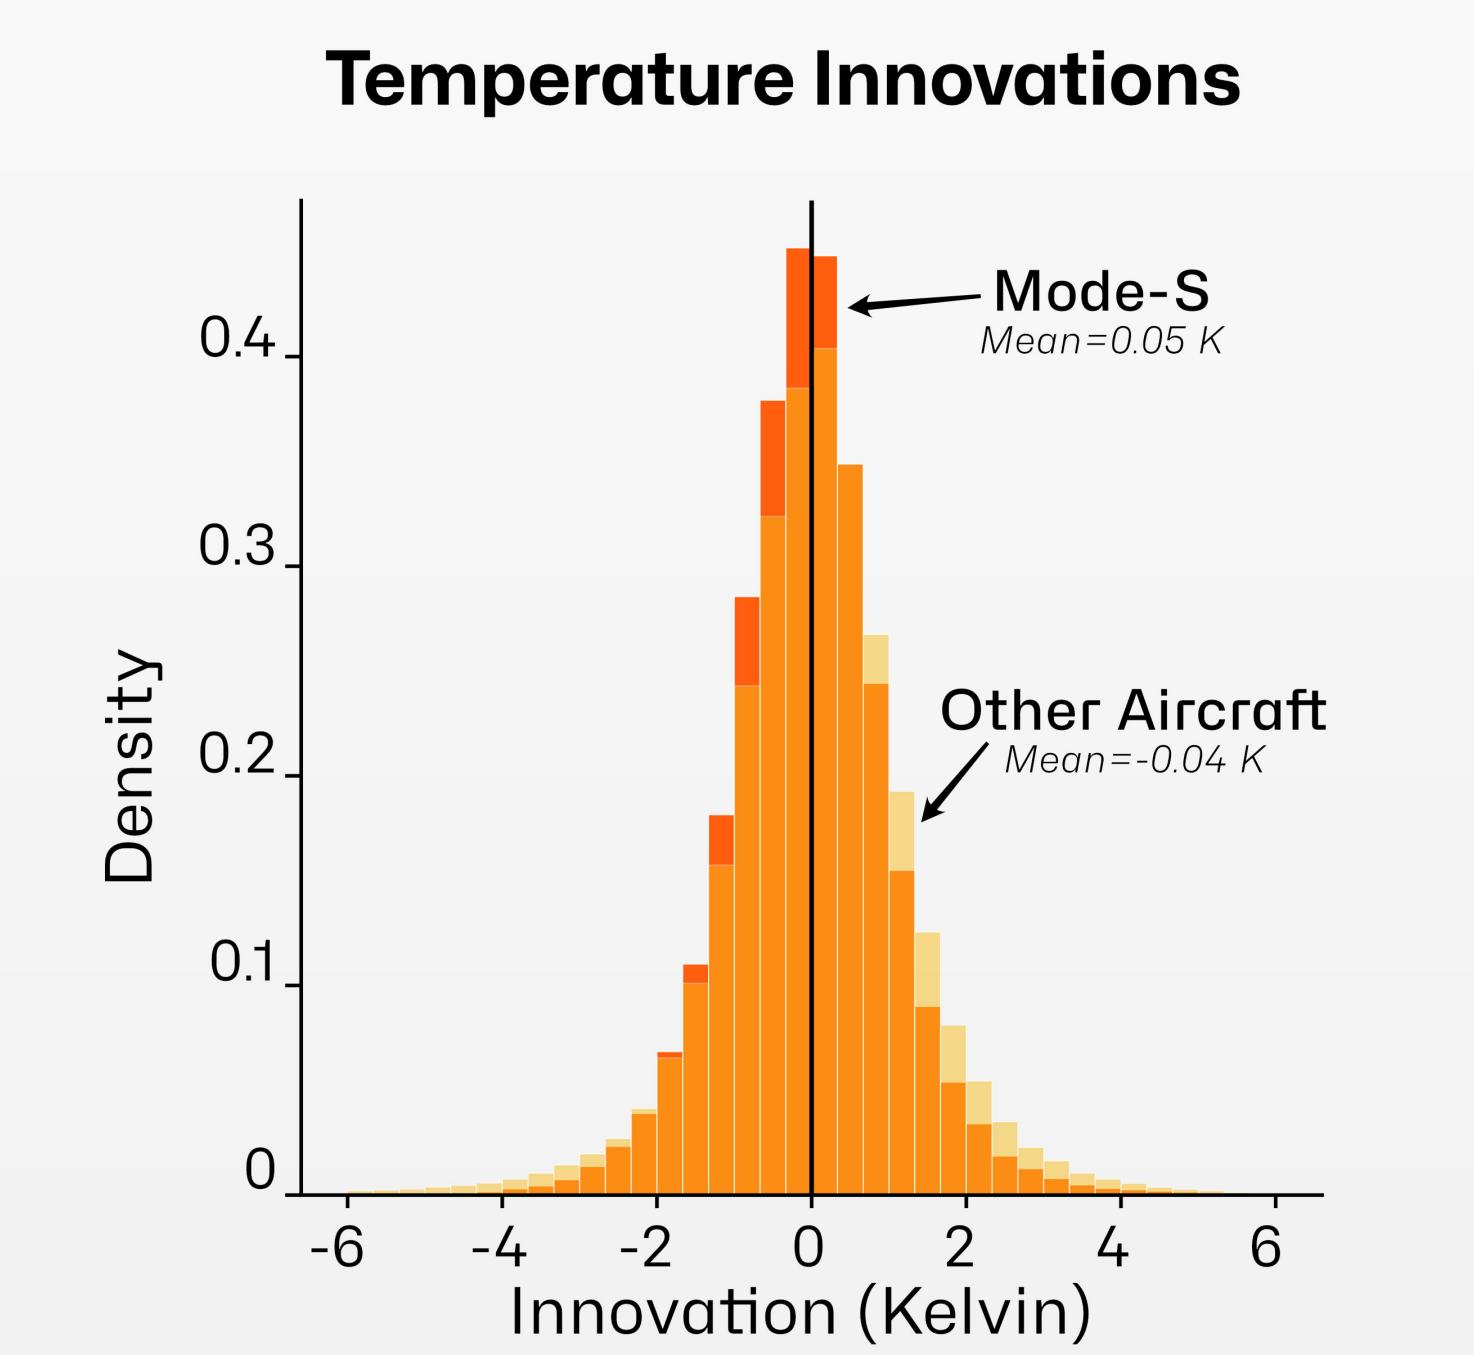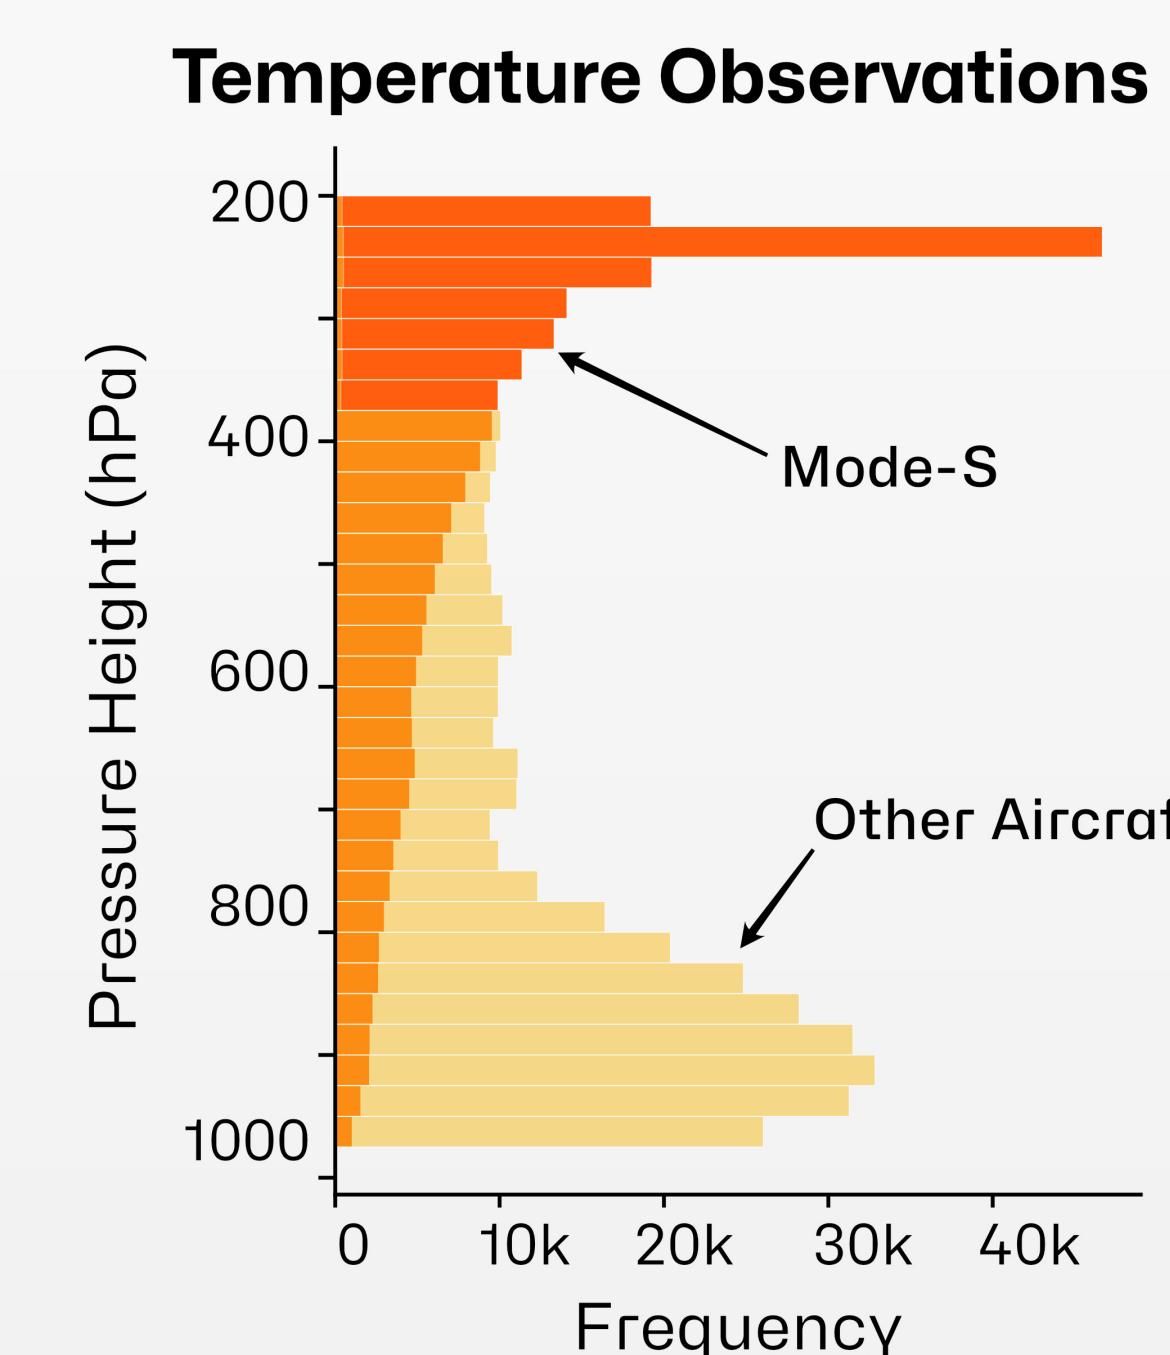

DATA PREPARATION

Preparing Mode-S observations for assimilation required substantial data reduction due to the exceptional volume of data.


We reduced the amount of data using the superobservation technique; observations close in time and space are averaged together to form a "superobservation."

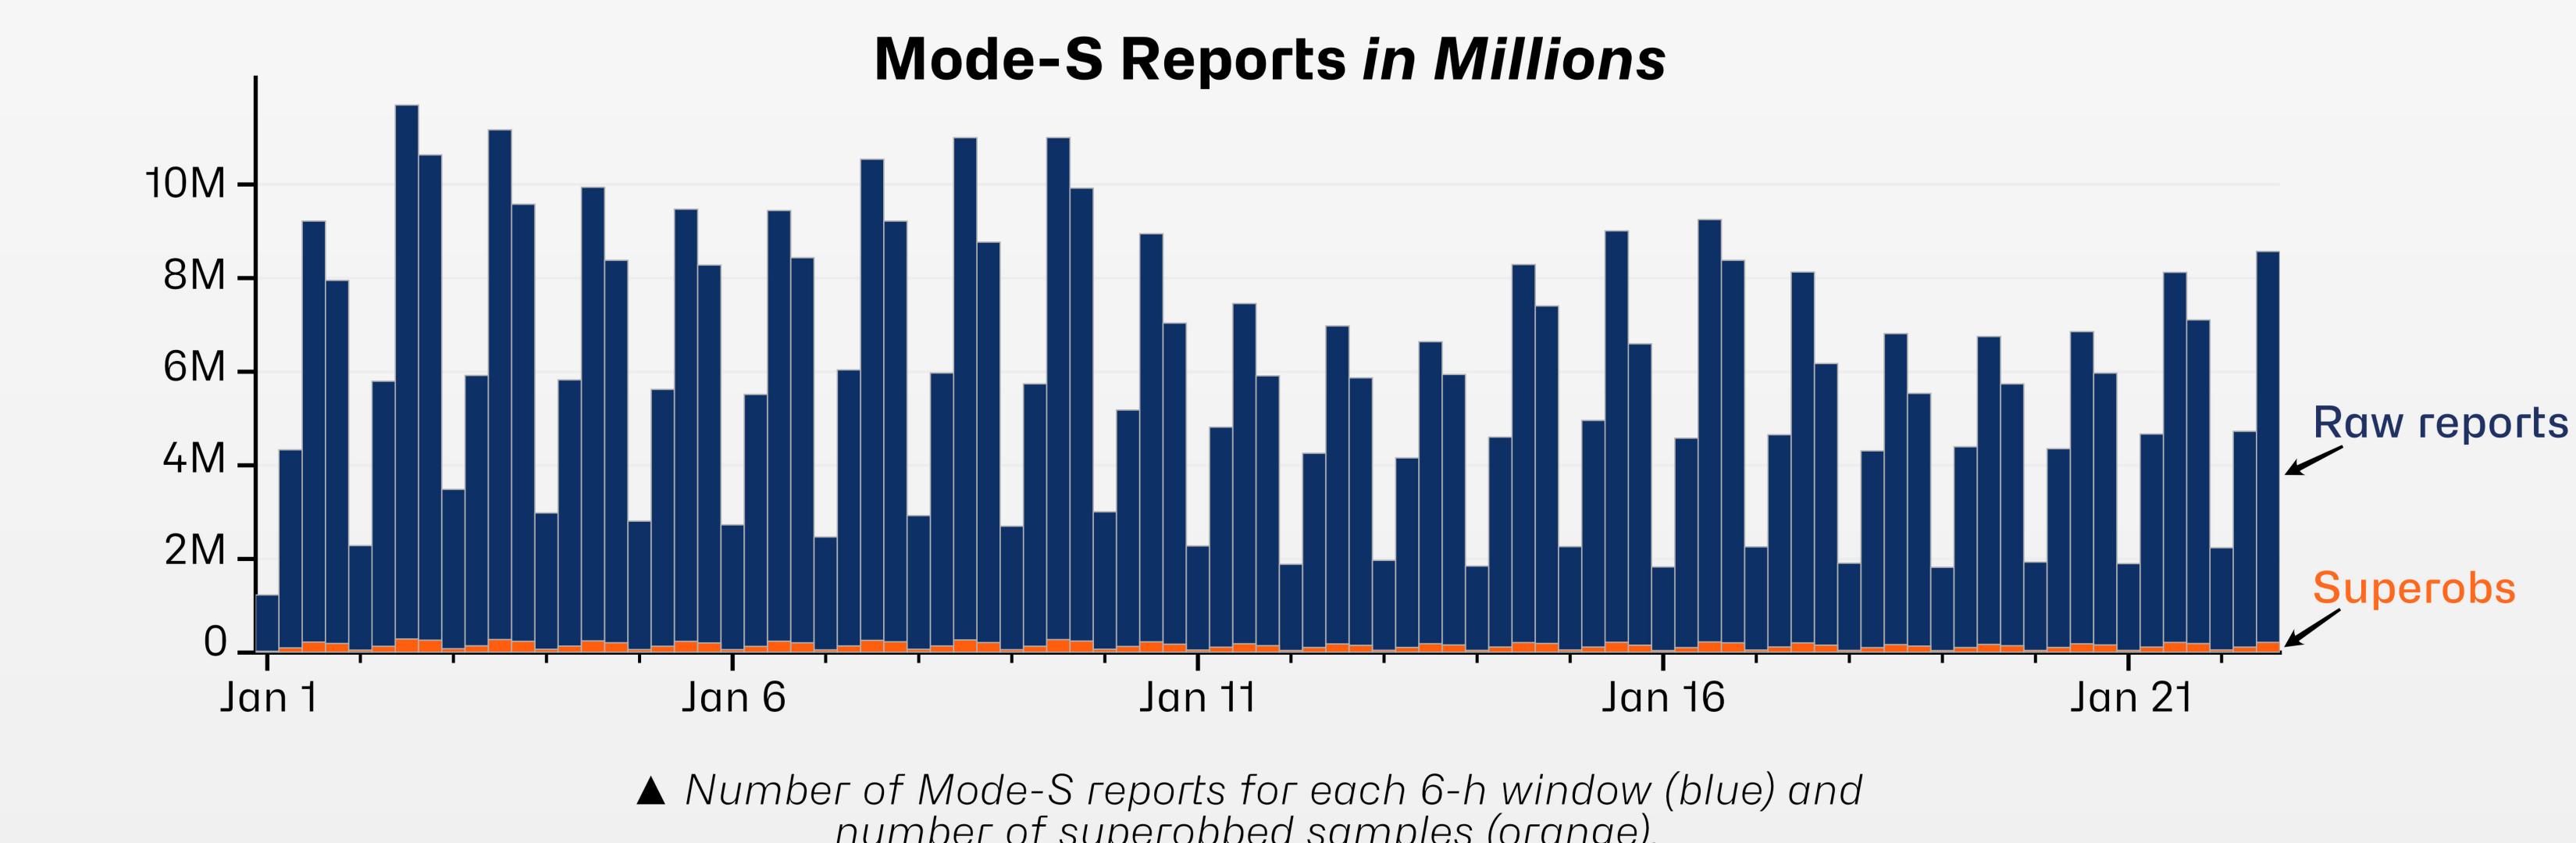

IMPACT ON FORECAST

The impact of each observation on the forecasts was measured by Forecast Sensitivity Observation Impact (FSOI).

In this experiment, FSOI measured how each observation reduced the 12-h forecast dry energy norm for the area of the inner-nest and for lowest 48 model levels.

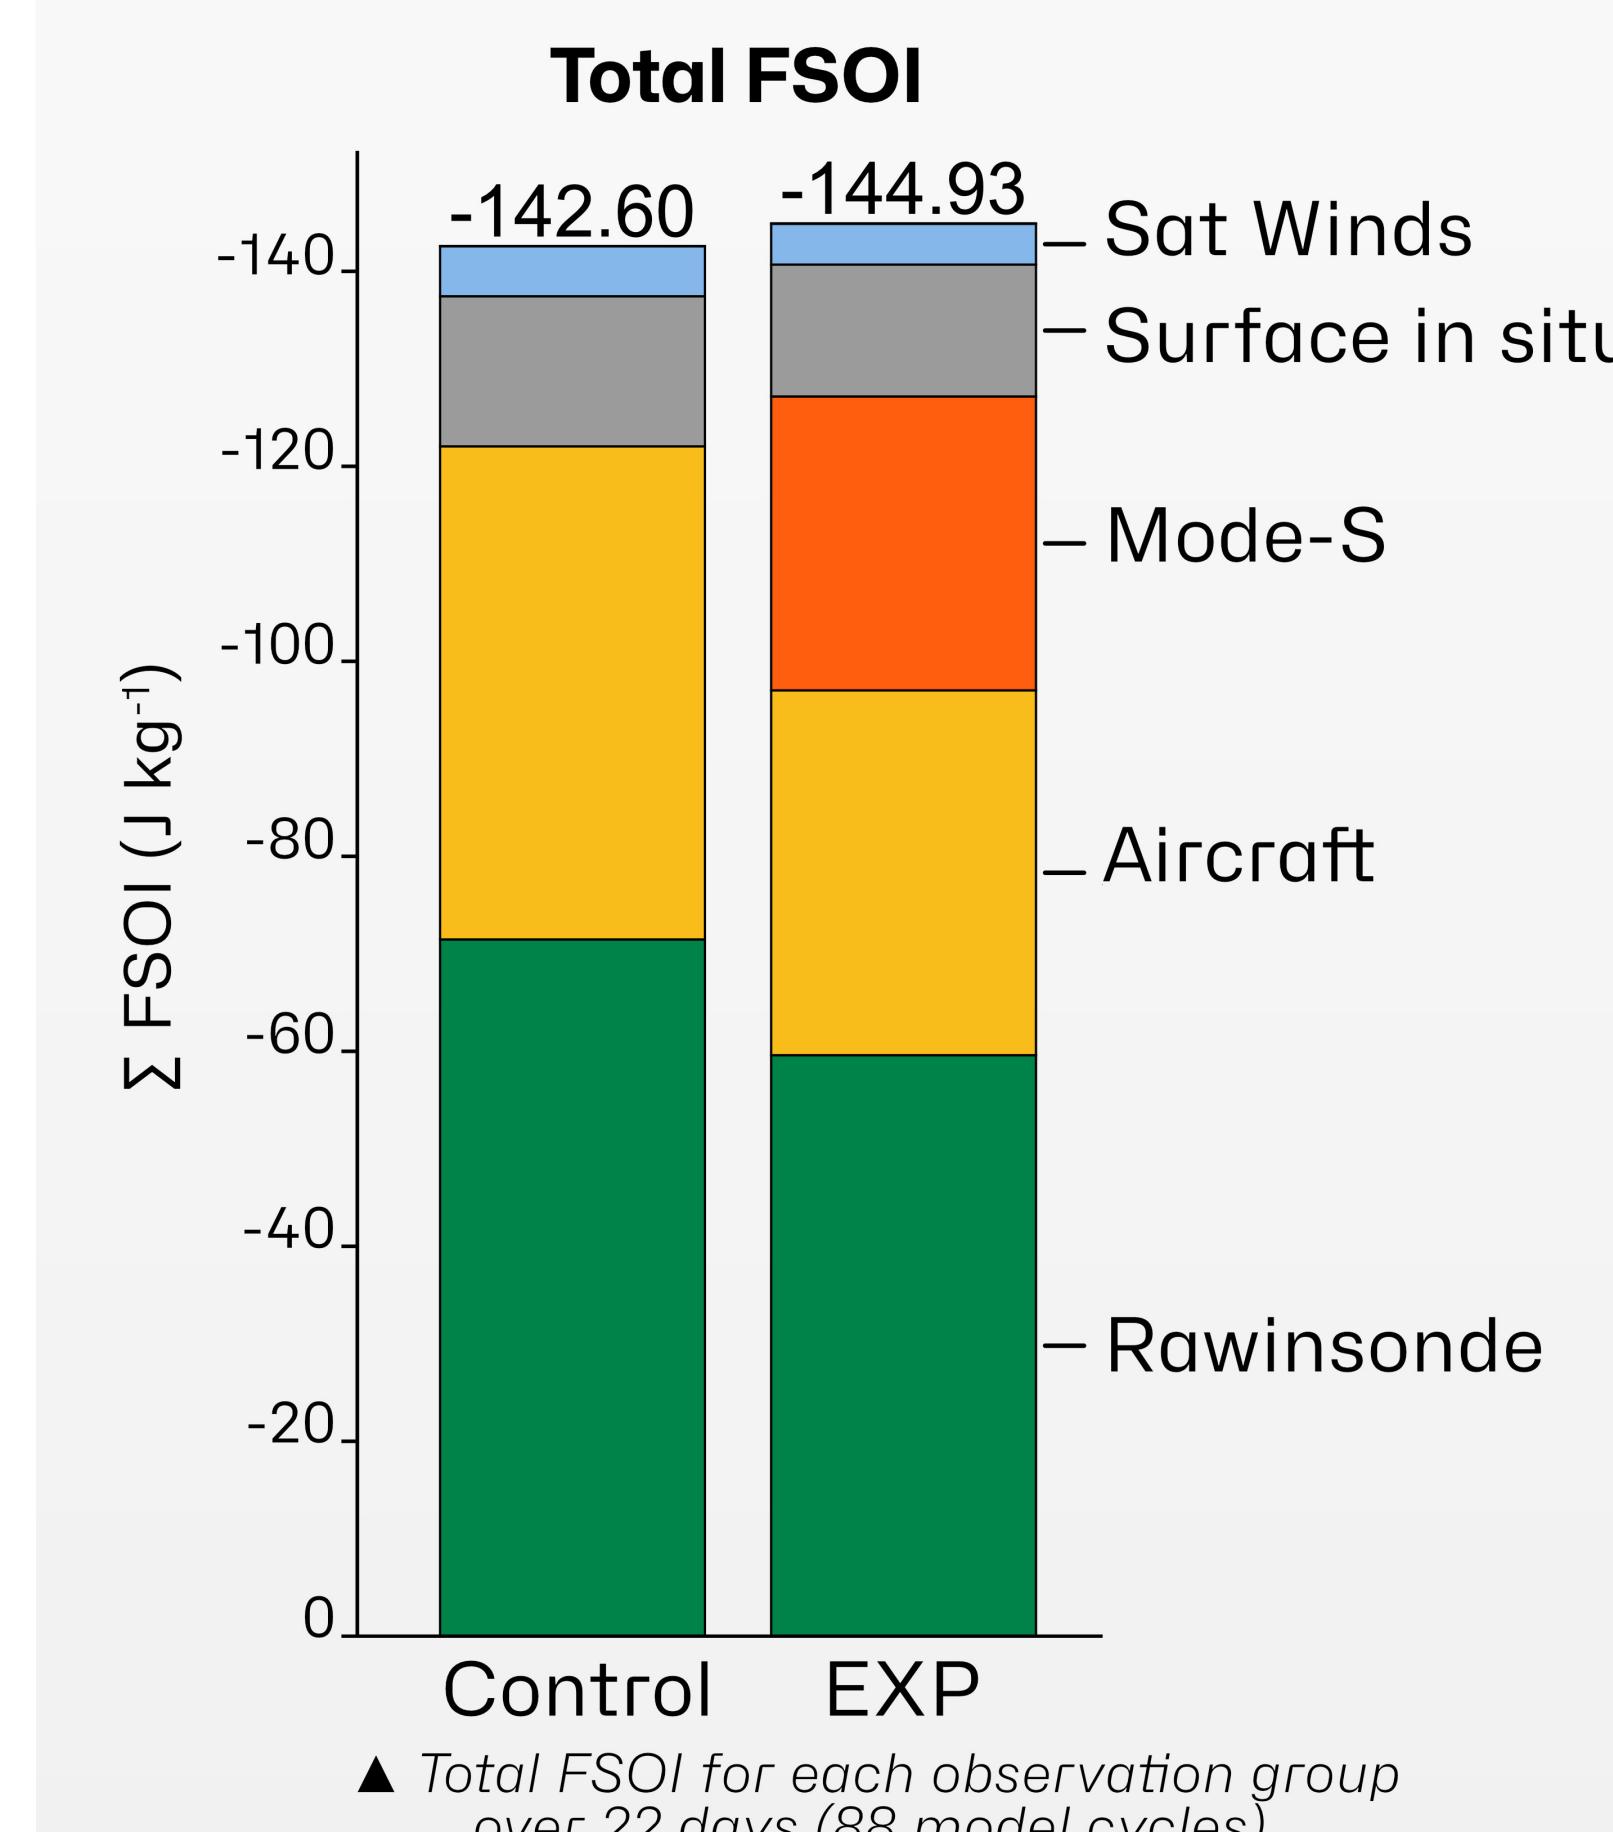

Compared to a control experiment that did not assimilate Mode-S observations, the Mode-S observations seem to "steal" impact from other observation types, but the overall total impact is slightly larger with the additional data.

After applying the superobservation technique, the data volume was ~2.5% the original data volume.

- Superob bin size**
- Horizontal: 56 km (~0.5°)
 - Vertical: 100 m
 - Time: 30 minute

Due to a constraint in the current COAMPS assimilation system that limits the number of data that can be assimilated, we only assimilated 8,000 randomly sampled Mode-S superobs each cycle.

