


Wall EW-2

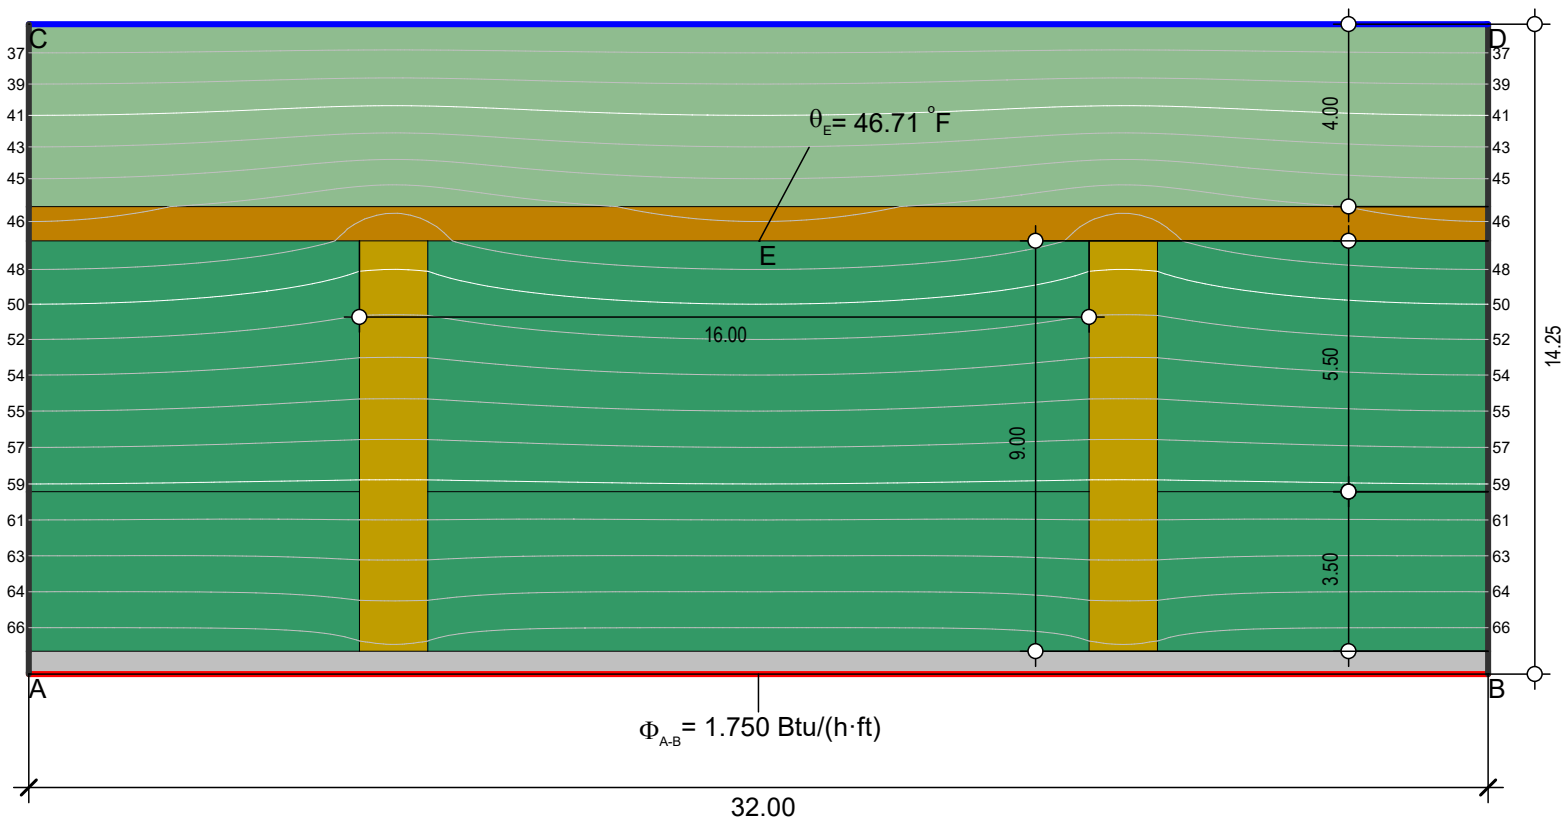

$$U_{eq \text{ A-B}} = \frac{1.75}{32.4 \cdot 2.667} = 0.0203 \text{ Btu}/(\text{h}\cdot\text{ft}^2 \cdot \text{F}) = R-49.2611$$

Boundary Condition	$\theta [^{\circ}\text{F}]$	$h [\text{Btu}/(\text{h}\cdot\text{ft}^2 \cdot \text{F})]$
Exterior, Westerly 90d Avg	35.600	4.403
Interior, normal, horizontal	68.000	1.355
Symmetry/Model section		

Material	$\lambda [\text{Btu}/(\text{h}\cdot\text{ft}\cdot\text{F})]$	ε
GWB (Typ) [R-0.85/in]	0.098	0.900
Plywood (Typ) [R-1.2/in] (1)	0.069	0.900
Roxul Comfortboard 80 [R-4.2/in]	0.020	0.900
Roxul Comfortbatt 3.5in [R-4.29/in]	0.019	0.900
Roxul Comfortbatt 5.5in [R-4.18/in]	0.020	0.900
Wood, Coniferous (Softwood) [R-1.03/in]	0.081	0.900