


Floor FC-2

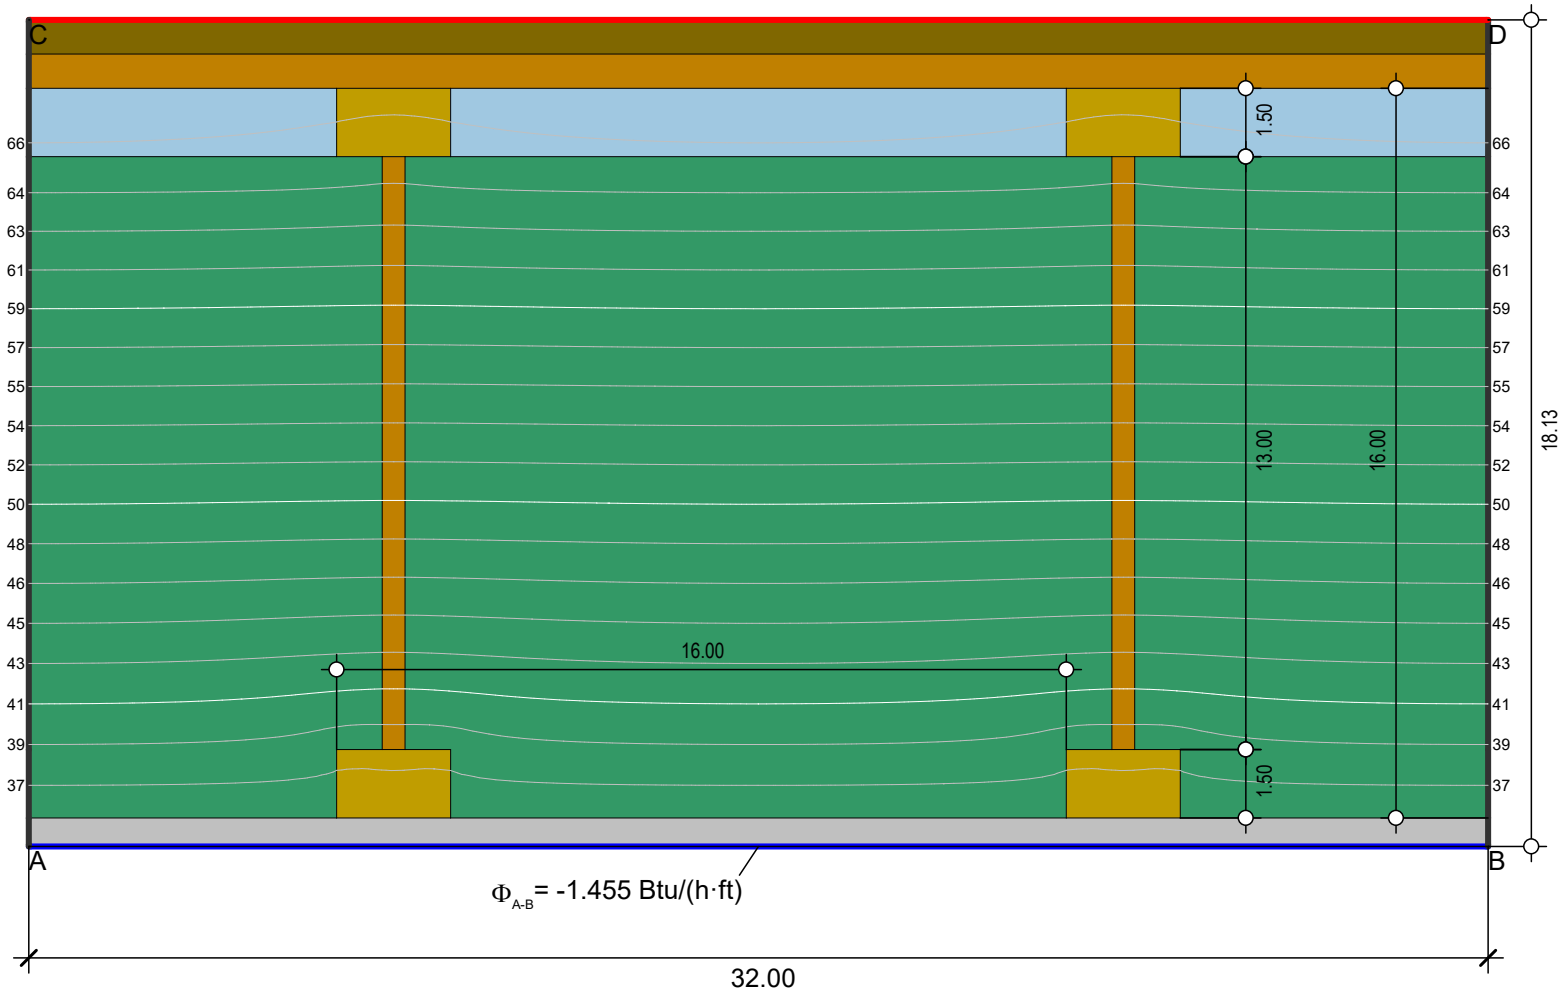

$$U_{eq A-B} = \frac{1.455}{32.4 \cdot 2.667} = 0.0168 \text{ Btu}/(\text{h}\cdot\text{ft}^2\cdot\text{F}) = R-49.2611$$

Boundary Condition	$\theta [^{\circ}\text{F}]$	$h [\text{Btu}/(\text{h}\cdot\text{ft}^2\cdot\text{F})]$
Exterior, Westerly 90d Avg	35.600	4.403
Interior, heat flux, downwards	68.000	1.036
Symmetry/Model section		

Material	$\lambda [\text{Btu}/(\text{h}\cdot\text{ft}\cdot\text{F})]$	ε
Air layer, unventilated, downwards, thickness: 40 mm	0.114	0.900
GWB (Typ) [R-0.85/in]	0.098	0.900
Plywood (Typ) [R-1.2/in]	0.069	0.900
Plywood (Typ) [R-1.2/in] (1)	0.069	0.900
Roxul Comfortbatt 7.25in [R-4.14/in]	0.020	0.900
Wood, Coniferous (Softwood) [R-1.03/in]	0.081	0.900
Wood, Deciduous (Hardwood) [R-0.91/in]	0.092	0.900