


Exterior Wall

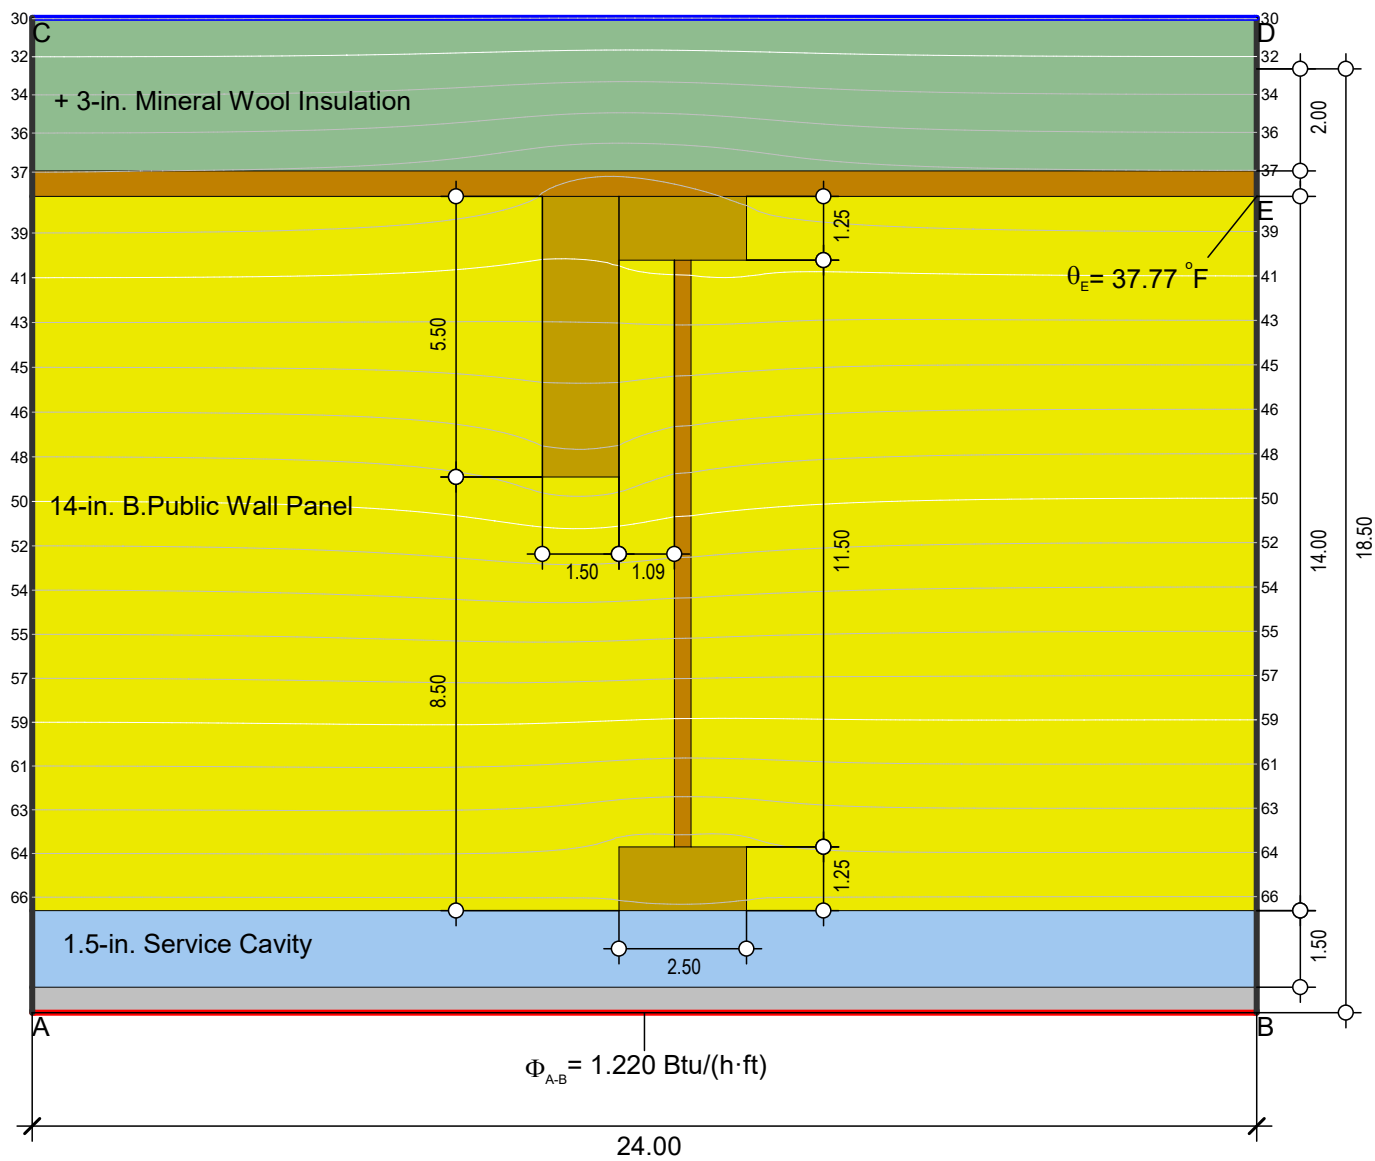

$$U_{eq\ A-B} = \frac{1.22}{37.97 \cdot 2.0} = 0.0161 \text{ Btu}/(\text{h}\cdot\text{ft}^2\cdot\text{F}) = R-62.1118$$

Boundary Condition	$\theta [^\circ\text{F}]$	$h [\text{Btu}/(\text{h}\cdot\text{ft}^2\cdot\text{F})]$
Exterior, Santa Fe 90d Avg	30.030	4.403
Interior, normal, horizontal	68.000	1.355
Symmetry/Model section		

Material	$\lambda [\text{Btu}/(\text{h}\cdot\text{ft}\cdot\text{F})]$	ε
Air layer, unventilated, horizontal, thickness: 40 mm	0.128	0.900
Cellulose (Denspack) [R-3.7/in]	0.023	0.900
GWB (Typ) [R-0.85/in]	0.098	0.900
Plywood (Typ) [R-1.2/in]	0.069	0.900
Plywood (Typ) [R-1.2/in] (1)	0.069	0.900
Roxul Comforboard 80 [R-4.2/in]	0.020	0.900
Wood, Coniferous (Softwood) [R-1.03/in]	0.081	0.900