


Wall AG

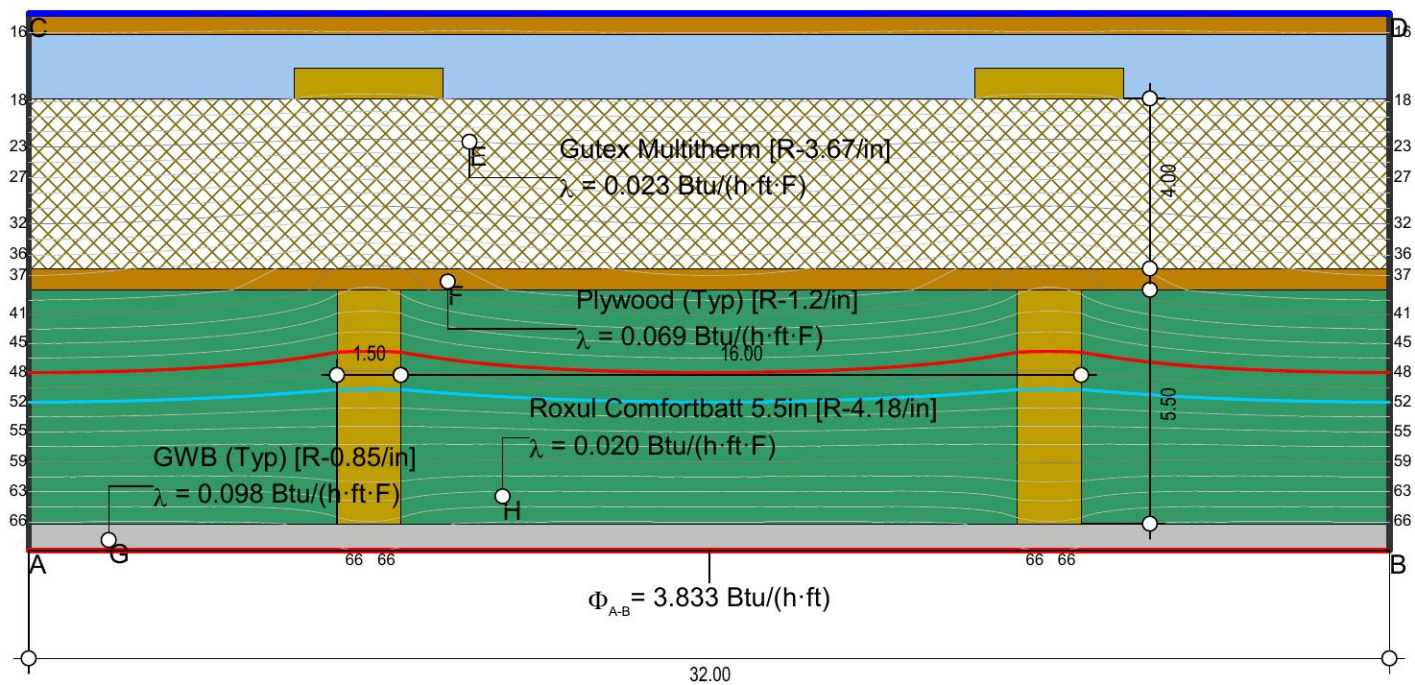

$$U_{eq \text{ A-B}} = \frac{3.833}{54.0 \cdot 2.667} = 0.0266 \text{ Btu}/(\text{h}\cdot\text{ft}^2\cdot\text{F}) = R-37.6$$

Boundary Condition					Material	$\lambda[\text{Btu}/(\text{h}\cdot\text{ft}\cdot\text{F})]$
q[Btu/(h·ft ²)]	$\theta[^\circ\text{F}]$	h[Btu/(h·ft ² ·F)]	ε			
Exterior, ventilated	14.000	1.355			Air layer, unventilated, horizontal, thickness: 40 mm	0.128
Interior, normal, horizontal	68.000	1.355			GWB (Typ) [R-0.85/in]	0.098
Symmetry/Model section	0.000				Gutex Multitherm [R-3.67/in]	0.023
					Plywood (Typ) [R-1.2/in]	0.069
					Roxul Comfortbatt 5.5in [R-4.18/in]	0.020
					Wood, Coniferous (Softwood) [R-1.03/in]	0.081