

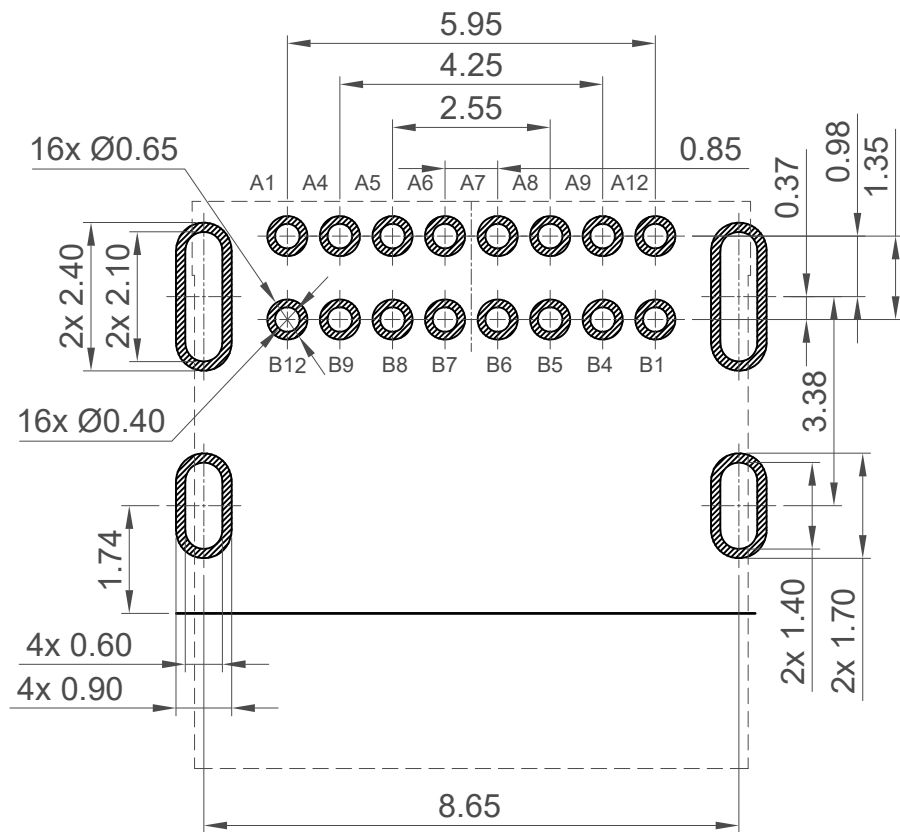


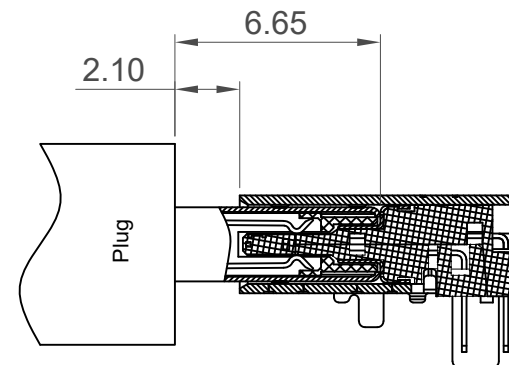

Recommended PCB Layout

As viewed from component side Tolerance: $\pm 0.05\text{mm}$





Solder Area Component Outline

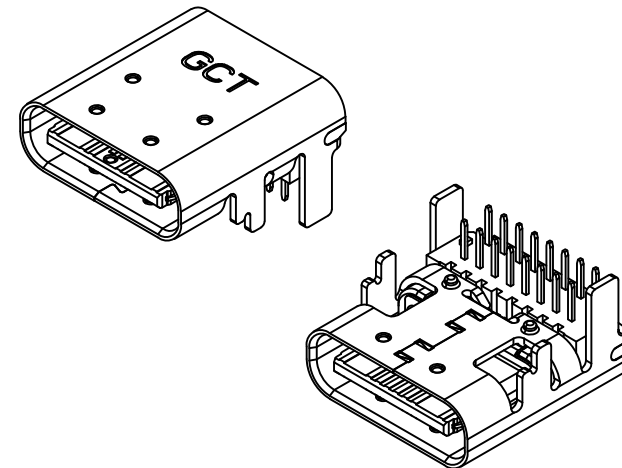

Plug and Receptacle Mating View

Part Number		Product Description	
USB4085		USB 2.0 Type C Receptacle	
Drawing Date		Dip Type, PCB Top Mount	
9th April 2018			
By	CC	Tolerances (Except as Noted)	Units:
Detail	USB4085 B PCN	Length X. ± 0.50 X.X ± 0.30 X.XX ± 0.20 X.XXX ± 0.10	Metric (mm)
Revision	B	Angle $\pm 2^\circ$	
Date	28/02/23		
		This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	
		Not to Scale	Drawn By CC
			Sheet No. 2/3

GCT
www.gct.co

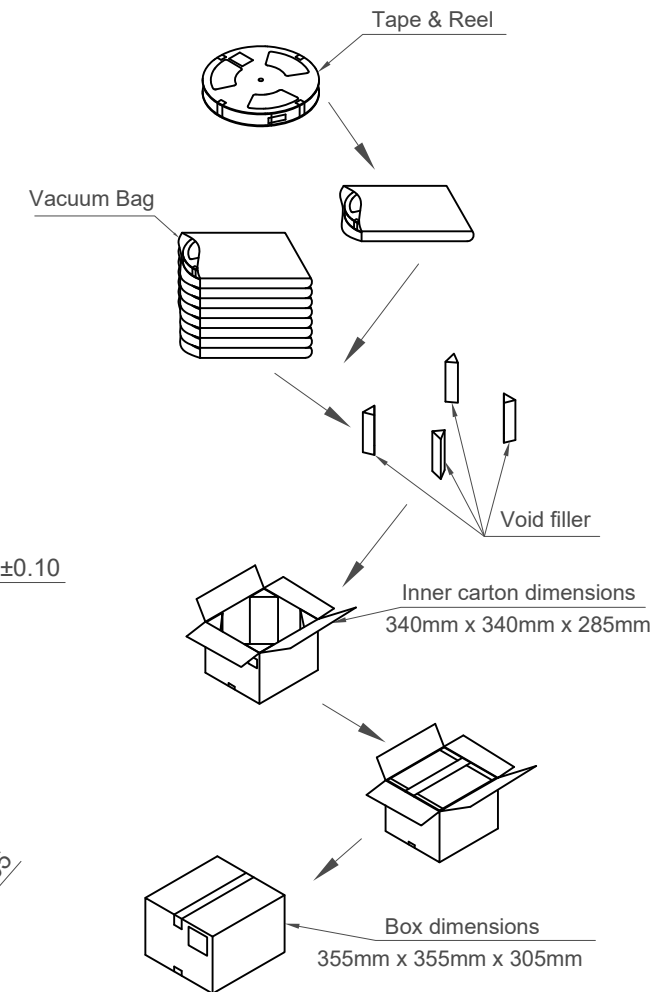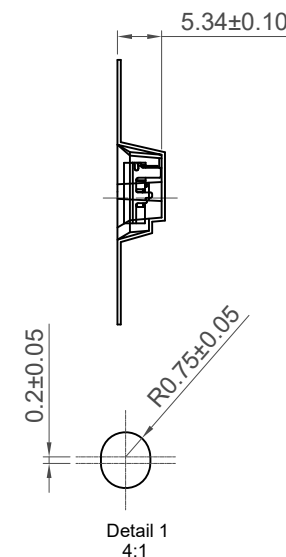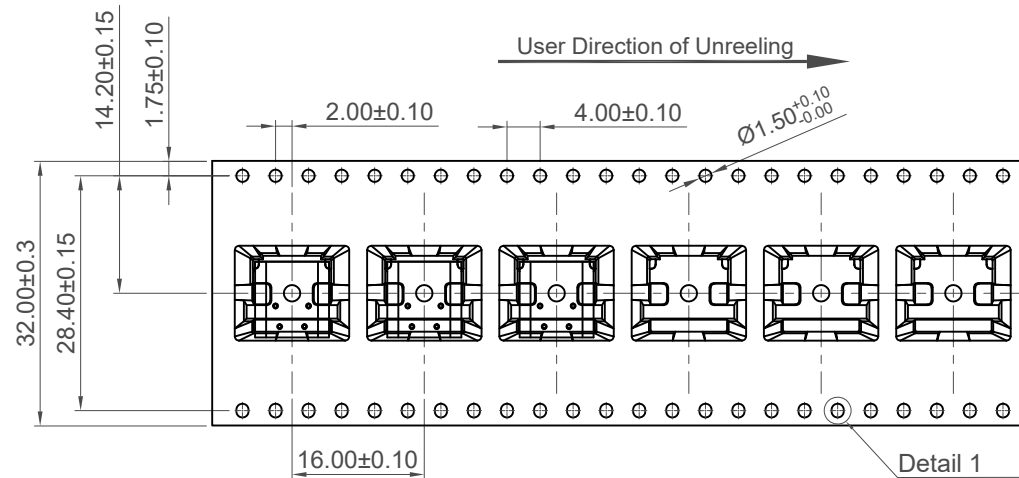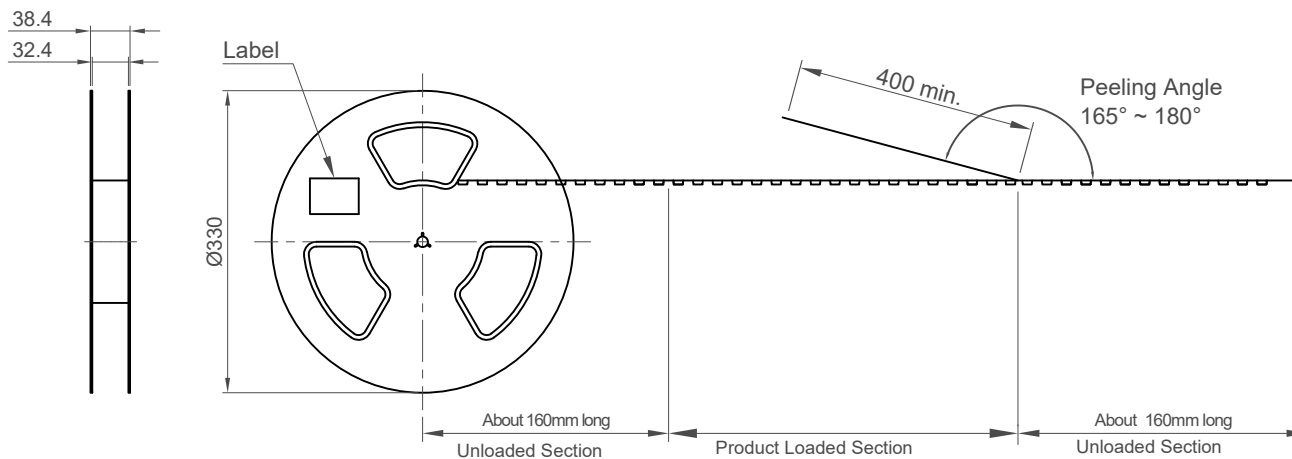

Notes:

Peeling off force of top tape: 0.1-1.3N (Peeling direction as shown)

Materials:

Carrier Tape: Polystyrene (PS)

Top Tape: PE

Reel Tape: Polystyrene (PS)

Bag: PE

Pcs / Reel	Reels / Carton	Total Quality
700	7	4,900 pcs

Part Number		Product Description				 www.gct.co		
USB4085		USB 2.0 Type C Receptacle Dip Type, PCB Top Mount						
Drawing Date								
9th April 2018								
By	CC	Tolerances (Except as Noted)	Units:		 This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	Not to Scale	Drawn By CC	Sheet No. 3/3
Detail	USB4085 B PCN	Length	Metric (mm)					
Revision	B	Angle	 3rd Angle Projection					
Date	28/02/2013	$\pm 2^\circ$						
		X. ± 0.50						
		X.X ± 0.30						
		X.XX ± 0.20						
		X.XXX ± 0.10						