



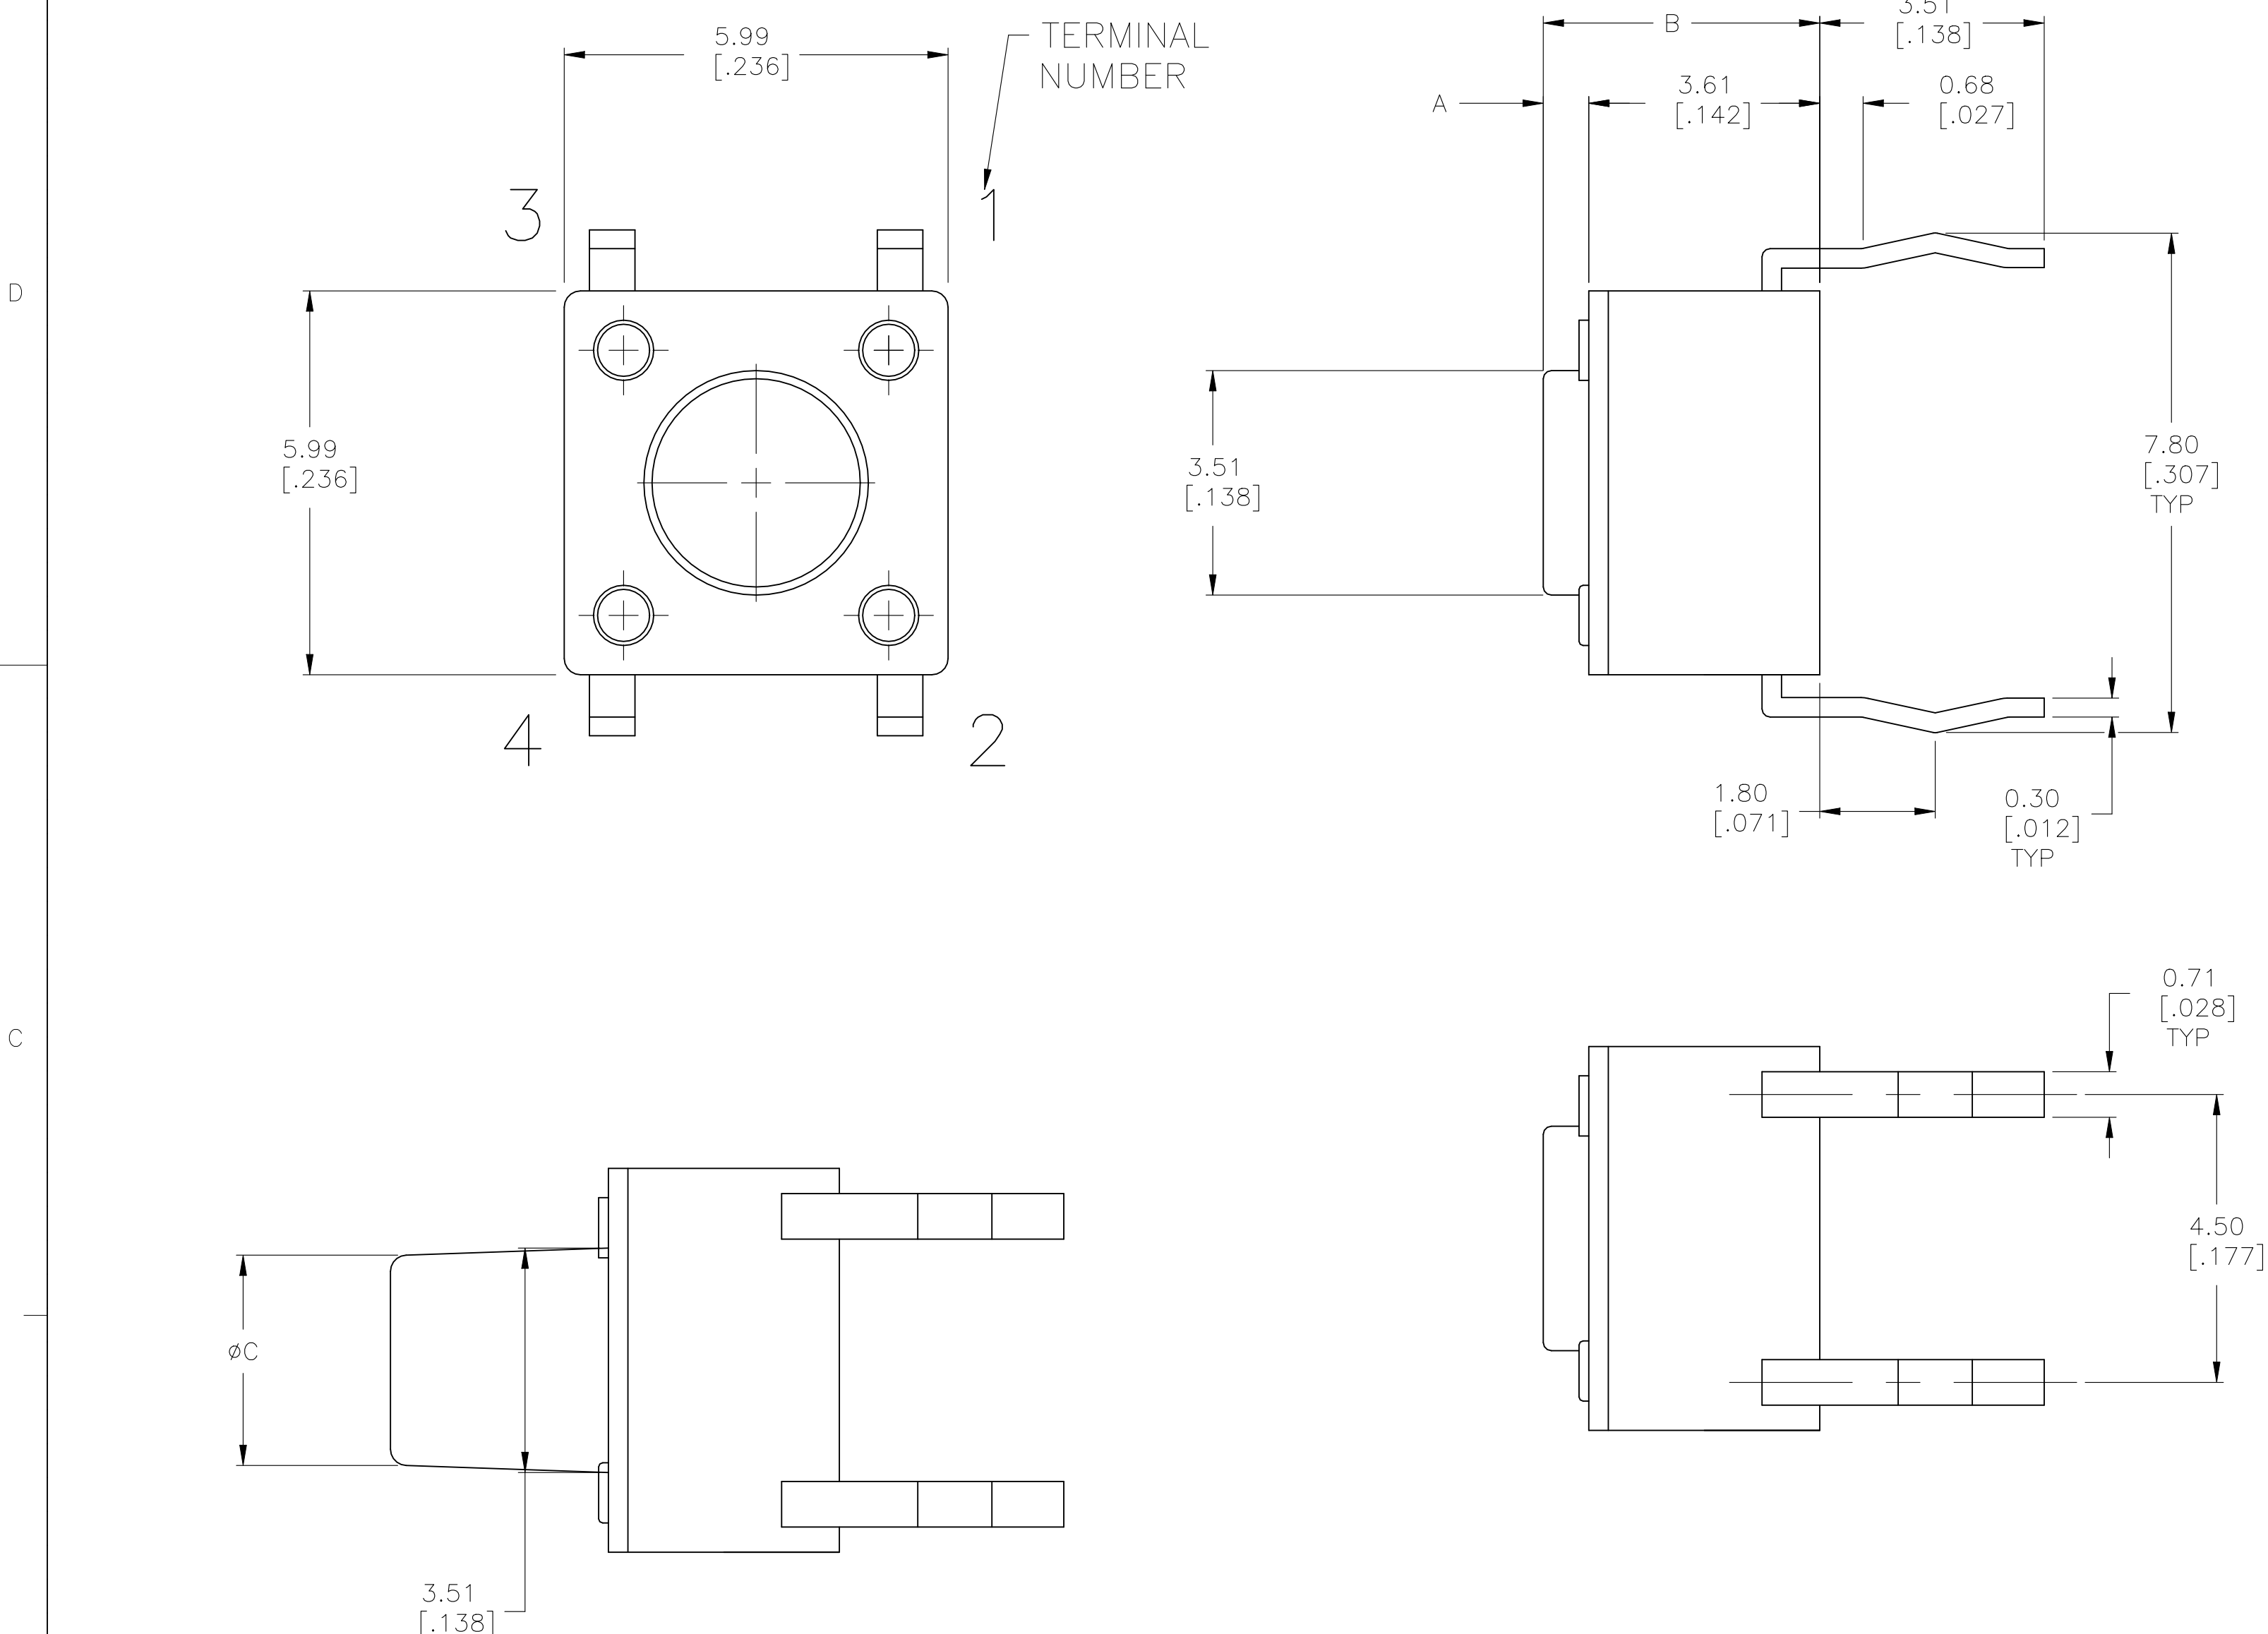

VIEW A-A
FSM6J THRU FSM18J

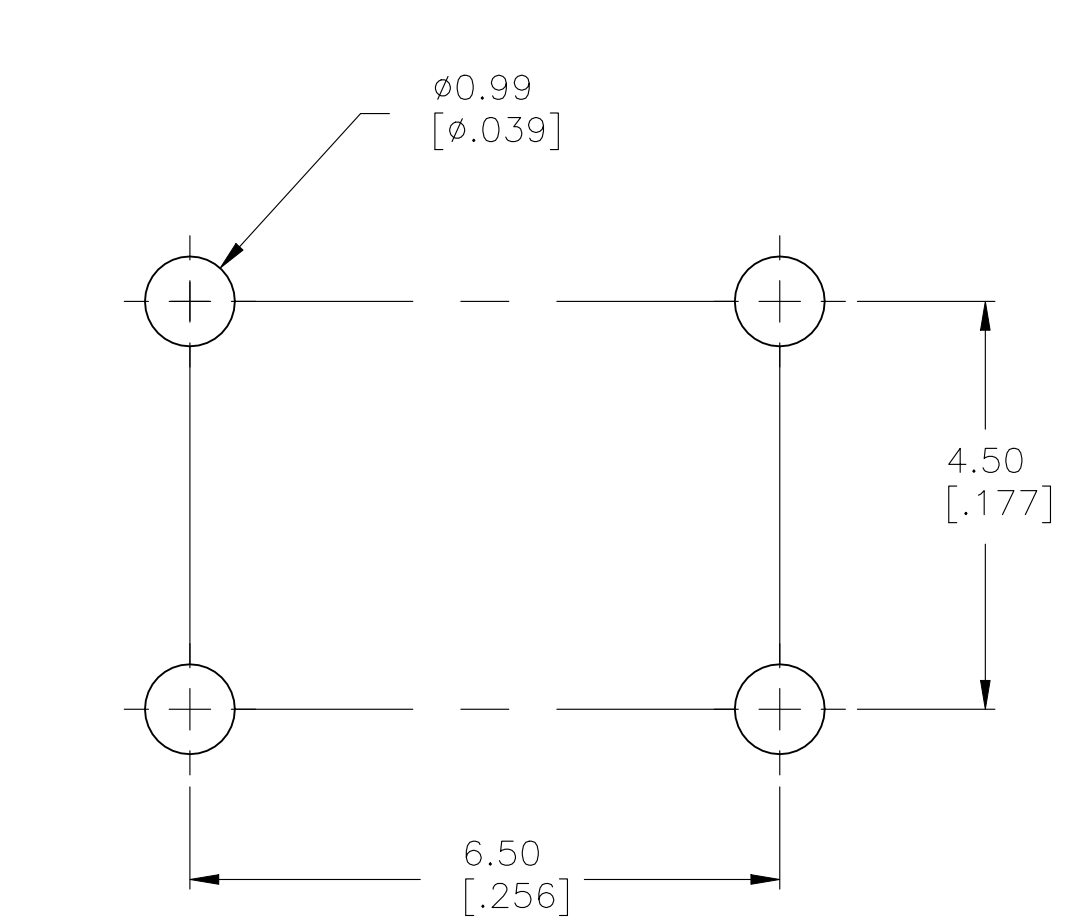

()—INDICATES MOMENTARY POSITION		
CIRCUIT CHARACTERISTICS		
CONTACT	POSITION	CIRCUIT DIAGRAM
		
OFF	(ON) 1—3 2—4	

RECOMMENDED HOLE LAYOUT
TOLERANCE $\pm 0.05[.002]$ UNLESS
OTHERWISE NOTED

SPECIFICATIONS:

MATERIALS:
CASE: PA66 UL94HB
ACTUATOR: PA66 UL94HB, SEE P/N TABLE
COVER: PET.
MOVING CONTACT: STAINLESS STEELAg clad
FIXED CONTACT/TERMINAL: BRASS Ag Plating

ELECTRICAL:
MAX CONTACT RATING: 50 MILLIAMPS@24V DC (FSM14JHS/FSM16JLHS: 50 MILLUAMPS@12V DC).
MIN CONTACT RATING: 10 MICROAMPS@1V DC (FSM14JHS/FSM16JLHS: 10 MILLIAMPS@5V DC).
INITIAL CONTACT RESISTANCE: 100 MILLIOHM MAX. (FSM14JHS/FSM16JLHS: 50 MILLIOHM MAX.)
INSULATION RESISTANCE: 100 MEGAOHM MIN. @100V DC.
DIELECTRIC STRENGTH: 500V AC FOR 1 MINUTE (FSM14JHS/FSM16JLHS:250V AC).
LIFE EXPECTANCY: 100,000 CYCLES MIN. (2CYCLES PER SECOND THE 150% ACTUATION FORCE).
EXCEPT FOR THE 520GF MODEL WHICH WOULD BE 50,000 CYCLES MIN.

MECHANICAL:
ACTUATION FORCE: SEE TABLE
ACTUATION TRAVEL: $0.010^{+0.008}_{-0.004}$ (FSM14JHS/FSM16JLHS: 0.25 ± 0.1 mm)

ENVIRONMENTAL:
 OPERATING TEMPERATURE: -40°C TO +105°C (FSM14JHS/FSM16JLHS: -20 TO +70°C)
 STORAGE TEMPERATURE: -40°C TO +105°C (FSM14JHS/FSM16JLHS: -30 TO +80°C)
 THERMAL SHOCK: PER EIA-364-32C, -35 TO +85°C (FSM14JHS/FSM16JLHS: -10 TO +65°C)
 RESISTANCE TO SOLDER HEAT: PER 109-202, CONDITION B (FSM14JHS/FSM16JLHS: 260°C, 10 sec max)
 SOLDERABILITY: PER EIA-364-52, CLASS2, CATEGORY 1, CATEGORY 2, 95% MINIMUM COVERAGE
 (SOLDERABILITY ONLY FOR FSM14JHS/FSM16JLHS):
 automatic:- Preheat: 150°C-175°C, 40-80sec
 Peak temp: 260°C max,
 Soldering area temp: 260°C, 1-4sec, 2 times max
 Manual-Soldering temp: less than 350°C, within 3 sec


NOTES:

1. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
2. A REINFORCE COLLAR IS RECOMENDED FOR APPLICATIONS WITH INCREASED AXIAL LOAD. PLEASE REFERENCE FIGURE

	PA66	BLACK	160 +/-50 GF	See page #2	13.5 (0.531)	6 (0.236)	FSM16JLHS	4-1825910-2
	PA66	BLACK	160 +/-50 GF	See page #2	9.5 (0.374)	2 (0.079)	FSM14JHS	4-1825910-1
	NYLON 6/6	BROWN	100 +/-50 GF	3.30 (.130)	7.00 (.276)	3.40 (.134)	FSM6JLHTB	3-1825910-9
OBSOLETE	PBT	BROWN	100 +/-50 GF	N/A	5.00 (.196)	1.40 (.055)	FSM4JLHTB	3-1825910-8
OBSOLETE	NYLON 6/6	YELLOW	520 +/-100 GF	3.09 (.122)	8.50 (.335)	4.90 (.193)	FSM18JAAH	3-1825910-7
OBSOLETE	NYLON 6/6	RED	260 +/-50 GF	3.09 (.122)	8.50 (.335)	4.90 (.193)	FSM18JAH	3-1825910-6
	NYLON 6/6	BLACK	160 +/-50 GF	3.09 (.122)	8.50 (.335)	4.90 (.193)	FSM18JHJ	3-1825910-5
OBSOLETE	NYLON 6/6	BROWN	100 +/-50 GF	3.09 (.122)	8.50 (.335)	4.90 (.193)	FSM18JLH	3-1825910-4
	NYLON 6/6	YELLOW	520 +/-100 GF	2.80 (.110)	17.00 (.669)	13.40 (.527)	FSM16JAAH	3-1825910-3
	NYLON 6/6	RED	260 +/-50 GF	2.80 (.110)	17.00 (.669)	13.40 (.527)	FSM16JAH	3-1825910-2
	NYLON 6/6	BLACK	160 +/-50 GF	2.80 (.110)	17.00 (.669)	13.40 (.527)	FSM16JHJ	3-1825910-1
	NYLON 6/6	BROWN	100 +/-50 GF	2.80 (.110)	17.00 (.669)	13.40 (.527)	FSM16JLH	3-1825910-0
	NYLON 6/6	YELLOW	520 +/-100 GF	2.87 (.113)	13.00 (.512)	9.40 (.370)	FSM14JAAH	2-1825910-9
	NYLON 6/6	RED	260 +/-50 GF	2.87 (.113)	13.00 (.512)	9.40 (.370)	FSM14JAH	2-1825910-8
	NYLON 6/6	BLACK	160 +/-50 GF	2.87 (.113)	13.00 (.512)	9.40 (.370)	FSM14JHJ	2-1825910-7
	NYLON 6/6	BROWN	100 +/-50 GF	2.87 (.113)	13.00 (.512)	9.40 (.370)	FSM14JLH	2-1825910-6
OBSOLETE	NYLON 6/6	YELLOW	520 +/-100 GF	3.20 (.126)	8.00 (.315)	4.40 (.173)	FSM12JAAH	2-1825910-5
OBSOLETE	NYLON 6/6	BLACK	260 +/-50 GF	3.20 (.126)	8.00 (.315)	4.40 (.173)	FSM12JABH	2-1825910-4
OBSOLETE	NYLON 6/6	RED	260 +/-50 GF	3.20 (.126)	8.00 (.315)	4.40 (.173)	FSM12JAH	2-1825910-3
	NYLON 6/6	WHITE	160 +/-50 GF	3.20 (.126)	8.00 (.315)	4.40 (.173)	FSM12JHJ	2-1825910-2
OBSOLETE	NYLON 6/6	BROWN	100 +/-50 GF	3.20 (.126)	8.00 (.315)	4.40 (.173)	FSM12JLH	2-1825910-1
OBSOLETE	NYLON 6/6	YELLOW	520 +/-100 GF	3.25 (.128)	7.30 (.287)	3.70 (.146)	FSM10JAAH	2-1825910-0
	NYLON 6/6	RED	260 +/-50 GF	3.25 (.128)	7.30 (.287)	3.70 (.146)	FSM10JAH	1-1825910-9
	NYLON 6/6	IVORY	160 +/-50 GF	3.25 (.128)	7.30 (.287)	3.70 (.146)	FSM10JHJ	1-1825910-8
OBSOLETE	NYLON 6/6	BROWN	100 +/-50 GF	3.25 (.128)	7.30 (.287)	3.70 (.146)	FSM10JLH	1-1825910-7
OBSOLETE	PBT	YELLOW	520 +/-100 GF	3.10 (.122)	9.50 (.374)	5.90 (.232)	FSM8JAAH	1-1825910-6
	PBT	RED	260 +/-50 GF	3.10 (.122)	9.50 (.374)	5.90 (.232)	FSM8JAH	1-1825910-5
	PBT	BLACK	160 +/-50 GF	3.10 (.122)	9.50 (.374)	5.90 (.232)	FSM8JHJ	1-1825910-4
	PBT	BROWN	100 +/-50 GF	3.10 (.122)	9.50 (.374)	5.90 (.232)	FSM8JLH	1-1825910-3
	NYLON 6/6	YELLOW	520 +/-100 GF	3.30 (.130)	7.00 (.276)	3.40 (.134)	FSM6JAAH	1-1825910-2
	NYLON %	RED	260 +/-50 GF	3.30 (.130)	7.00 (.276)	3.40 (.134)	FSM6JAH	1-1825910-1
	NYLON 6/6	BLUE	160 +/-50 GF	3.30 (.130)	7.00 (.276)	3.40 (.134)	FSM6JHJ	1-1825910-0
	NYLON 6/6	BROWN	100 +/-50 GF	3.30 (.130)	7.00 (.276)	3.40 (.134)	FSM6JLH	1825910-9
	PBT	YELLOW	520 +/-100 GF	N/A	5.00 (.196)	1.40 (.055)	FSM4JAAH	1825910-8
	PBT	RED	260 +/-50 GF	N/A	5.00 (.196)	1.40 (.055)	FSM4JAH	1825910-7
	PBT	BLACK	160 +/-50 GF	N/A	5.00 (.196)	1.40 (.055)	FSM4JHJ	1825910-6
	PBT	BROWN	100 +/-50 GF	N/A	5.00 (.196)	1.40 (.055)	FSM4JLH	1825910-5
OBSOLETE	PBT	YELLOW	520 +/-100 GF	N/A	4.30 (.169)	0.70 (.028)	FSM2JAAH	1825910-4
	PBT	RED	260 +/-50 GF	N/A	4.30 (.169)	0.70 (.028)	FSM2JAH	1825910-3
	PBT	NATURAL	160 +/-50 GF	N/A	4.30 (.169)	0.70 (.028)	FSM2JHJ	1825910-2
	PBT	BROWN	100 +/-50 GF	N/A	4.30 (.169)	0.70 (.028)	FSM2JLH	1825910-1

ACTUATOR MAT'L	ACTUATOR COLOR	ACTUATION FORCE	DIM C	DIM B	DIM A	ALCO P/N	P/N				
THIS DRAWING IS A CONTROLLED DOCUMENT.			DIN M_BINNER	07NOV06	 TE Connectivity 6MM TACT SWITCH, THRU-HOLE HIGH TEMP						
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	CWK M_SARVER	07NOV06				NAME			
		0 PLC ± — 1 PLC ± — 2 PLC ± 0.30 [.012] 3 PLC ± — 4 PLC ± — ANGLES ± —	APVD M_SARVER	07NOV06				PRODUCT SPEC			
MATERIAL SEE SPECIFICATIONS		FINISH —	APPLICATION SPEC	—				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			WEIGHT	A1	00779	C=1825910		—			
CUSTOMER DRAWING						SCALE	12:1	SHEET	1 OF 2	REV	D

FIGURE 2. HIGHER PERFORMANCE SWITCH WITH COLLAR
FOR APPLICATIONS WITH GREATER AXIAL FORCE (4-1825910-1 & 4-1825910-2)

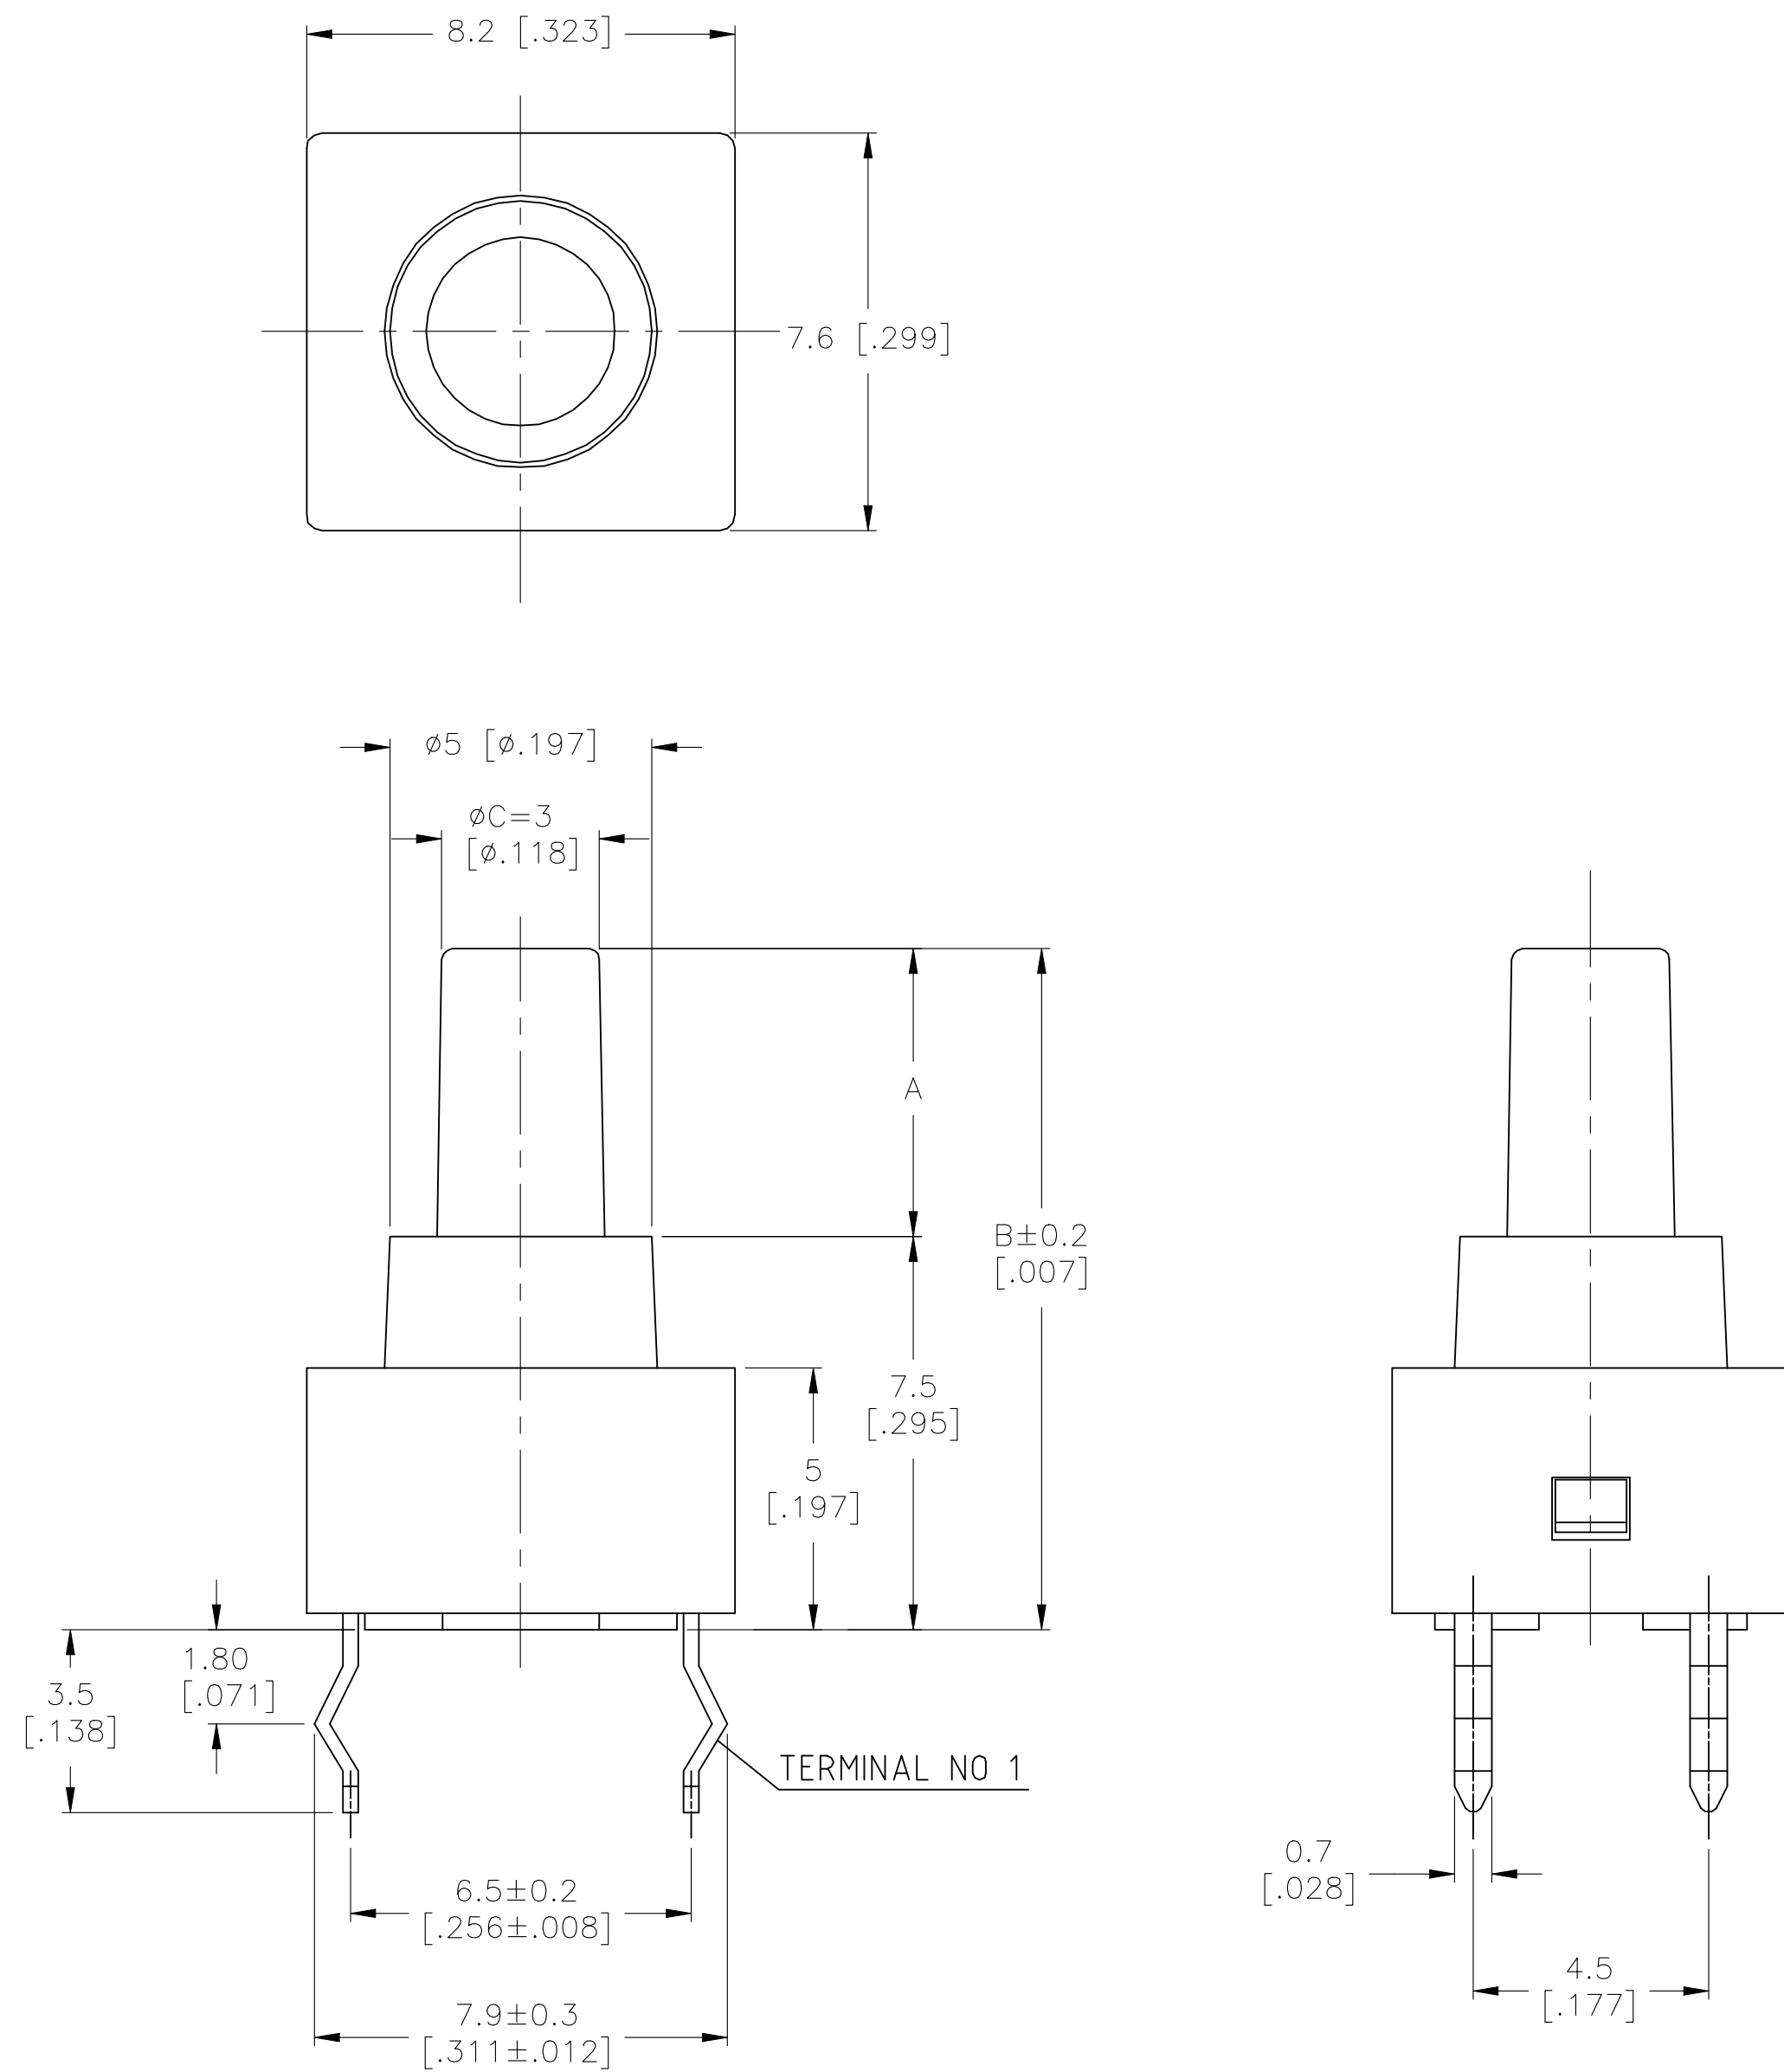

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER 07NOV06	TE Connectivity		
		CHK M. SARVER 07NOV06			
DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. SARVER 07NOV06	NAME		
		PRODUCT SPEC	6MM TACT SWITCH, THRU-HOLE HIGH TEMP		
	0. PLC ± -	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO		
	1. PLC ± -	—	A1 00779 C=1825910		
MATERIAL SEE SPECIFICATIONS	2. PLC ± 0.30 [.012]	—	RESTRICTED TO		
	3. PLC ± -	—	—		
	4. PLC ± -	—	WEIGHT		
	ANGLES ± -	—	CUSTOMER DRAWING		
		FINISH -	SCALE 8:1 SHEET 2 OF 2 REV D		