



**NTNU – Trondheim**  
Norwegian University of  
Science and Technology

# Village Telco

**Esther Bloemendaal & Ida Malene Hassel Øveråsen**

Submission date: March 2014  
Responsible professor: Norvald Stol, ITEM  
Supervisor: Sjur Eivind Usken, Lyse Smart AS

Norwegian University of Science and Technology  
Department of Telematics



## Abstract



## Preface



# Contents

<b>List of Figures</b>	<b>ix</b>
<b>List of Tables</b>	<b>xi</b>
<b>List of Algorithms</b>	<b>xiii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Motivation . . . . .	1
1.2 Problem Description . . . . .	1
1.3 Methodology . . . . .	1
1.4 Limitations . . . . .	1
<b>2 Background</b>	<b>3</b>
2.1 Village Telco . . . . .	3
2.2 Mesh Potato . . . . .	3
2.2.1 Ad Hoc Networks and Mesh Networks . . . . .	5
2.2.2 OpenWrt . . . . .	9
2.3 The Cost Structure and Revenue Model(s) of Village Telco Today . .	9
2.4 Comparison of Village Telco and Other Telcos . . . . .	9
2.5 Refugee Camps . . . . .	9
2.5.1 The Existing Communication Methods . . . . .	9
<b>References</b>	<b>11</b>
<b>Appendices</b>	





# List of Figures

2.1	The Mesh Potato . . . . .	4
2.2	Cellular network vs. MANET . . . . .	5
2.3	Example of a Wireless Mesh Network . . . . .	6
2.4	Ad Hoc Routing Protocols . . . . .	7
2.5	Originator Message in B.A.T.M.A.N . . . . .	8



# List of Tables



# List of Algorithms













# Chapter 1

## Introduction

- 1.1 Motivation
- 1.2 Problem Description
- 1.3 Methodology
- 1.4 Limitations



# Chapter 2

## Background

### 2.1 Village Telco

### 2.2 Mesh Potato

The whole concept around the Mesh Potato was developed in June 2008 during a workshop at the Shuttleworth Foundation. The main goal was to figure out how to develop an inexpensive system to provide rural and under-served areas with affordable telephone communication [3]. The workshop included, among others, participants like open hardware pioneer Dawid Rowe and Elektra, the developer of the B.A.T.M.A.N. mesh networking protocol [4]. The aim of the workshop was to develop a business model as well as a prototype for a Village Telco. Initially the idea was to use low cost VoIP headsets. At that time it was the most viable and convenient way to deliver telephone services to the customers. With a VoIP telephone services the nodes can not be more than 100 meters away from each other, requiring more nodes in order to cover the desirable area. Which again would drastically increase the start-up costs for a village. In order to keep the cost down, it was also important to keep the number of access points down. A mesh network have a larger range, and one suggestion was to use a small mesh device like an Open Mesh AP and connect a SIP phone to it. This solution would solve a lot of the problems regarding range, antenna and number of access points, but the idea was still an expensive option. The challenge was to create something that would be simple enough to be implemented and scaled by local entrepreneurs with limited technical skills. As well as keeping the cost down. The two key cost factors that emerged in the scale-up of a Village Telco were the cost of the customer's phone and the power supply. It was clear that the the power supply was the most important factor, and that they had to look at other, and cheaper options regardig the customers phones [4]. During the debating, Rael Lissoos took a Analogue Telephone Adapter (ATA) and an Open Mesh AP, held them together and said that we need these two devices in one. These small OpenMesh devices are able to run an adapted version of the B.A.T.M.A.N. protocol,

called RO.B.IN (Routing Batman Inside). This point was the birth of the Mesh Potato, fully based on customized open hardware and open software design. The name comes from combining the words mesh, POTS (Plain Old Telephone) and ATA. "Patata" is the Spanish word for potato, and hence the name Mesh Potato. A mesh enabled WiFi device with the possibility to connect any inexpensive regular phone and IP device. [5]



**Figure 2.1: The fist generation Mesh Potato, MP01**

The First generation of the Mesh Potato is shown in Figure 2.1. This device is designed to be used in rural areas. It can be deployed and run anywhere in the world relying only on a low, but stable, power supply. The Ethernet port, Foreign eXchange Station (FXS) ports and power are robust and designed in order to handle all weather conditions, poor power conditions, lightening and static electricity. In addition the Mesh Potato comes in a waterproof box for outdoor mounting [6].

The Mesh Potato combines the features of a 802.11bg WiFi router with an Analog telephone Adaptor (ATA) [7]. The ATA converts the signal from a standard telephone, into the digital signal needed to connect to the internet and use the SIP protocol [3]. Each Mesh Potato provides a single fixed telephone line to the end user. The MPs are connected together via a mesh WiFi network, and configure themselves automatically to form a peer-to-peer network, greatly extending the range of the network over regular WiFi. Enabling phone calls to be made independent of landlines and telephone towers. Creating the basis for the "plug-and-play" solution.

As mentioned the Mesh Potato is open, based on open hardware as well as open software design. Everything is kept open in order for any third party to test, set standards, and come with feedback. Some of the key goals while developing was to minimize the binary blobs, propriety software and make the hardware open.

The device is based on the Atheros chipset that is used, among others, by OpenMesh, and would run OpenWRT and B.A.T.M.A.N.

The Mesh network can be connected via a backbone link to the rest of the world by using VoIP gateways. No cell phone towers, no land lines, and no big telcos required. A Village Telco is a community owned telephony, allowing a local entrepreneur to roll out the Village Telco system only needing a server and the wanted amount of Mesh Potatoes. The mesh network is self healing and self organizing, meaning if one node goes down, B.A.T.M.A.N. routes the calls through other available nodes in the network [8]. In order to provide internet access a super node have to be placed in connection with an internet connection. The internet signal enters the server in the Village Telco, this could for example be an existing internet café, with a broadband, link or satellite connection. The signal is transmitted to the super node. The super node consists of three external access points, and is placed high over ground, giving a 360 degree coverage, with approximately 1 km range. The Internet signal is then carried through the network from one MP to another.


MP02

Difference between MP01 and MP02?

Hvordan er et netverk bygd opp

legge inn bilde av net netverk, kanskje et vi har tegnet selv


### 2.2.1 Ad Hoc Networks and Mesh Networks

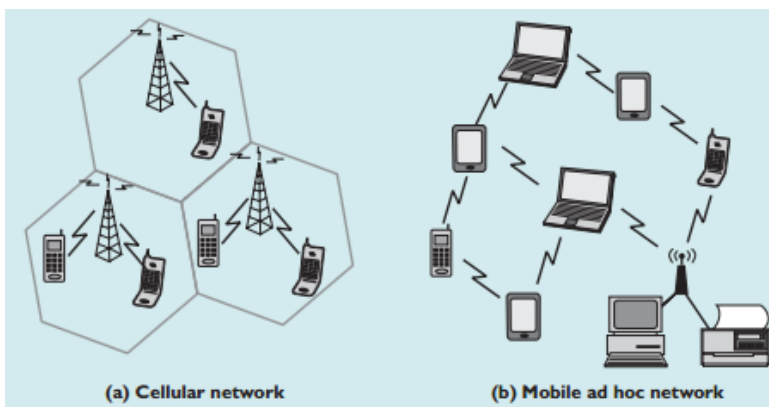

**Figure 2.2: Cellular network vs. MANET.** This figure illustrates the difference between a regular cellular network and a mobile ad hoc network [9].

### MANETs

Mobile ad hoc networks (MANETs) are networks that does not rely on an underlying and fixed infrastructure (access points and routers), in other words infrastructureless. MANETs acts in a shared wireless media [1]. The structure of these networks change dynamically, and key factors for MANETs is self-configuration, self-organization, self-discovery, and self-healing [10]. The members of the network are mobile and are free to join or leave the network [9], and therefore these factors are important. MANETs are based on multi-hop forwarding. This means that each node acts not only as a host, but also as a router. The nodes themselves establishes and maintain routes, and forward packets to other nodes if necessary. This enables communication between nodes that are originally not within each other's send range [9]. Because of these characteristics MANETs is suited for use in situations where there are no fixed underlying infrastructure. MANETs can operate as a stand-alone solution, but it can also be attached to the Internet. This makes room for numerous of services.

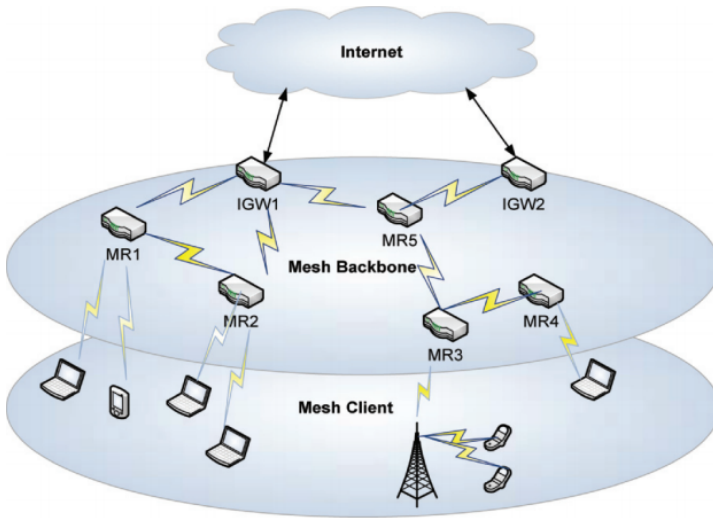

**Figure 2.3: Example of a Wireless Mesh Network.** This figure illustrates the architecture of a typical WMN [10].

### Wireless Mesh Networks


A wireless mesh network (WMN) is a type of MANET [10]. A WMN has as objective to serve a larger number of users with high bandwidth access. As mentioned before, MANETs are infrastructureless and they are self-configuring, self-organizing, self-healing and self-discovering. WMNs share all these characteristics, except from the infrastructure part. WMNs, on the contrary to MANETs, are often a collection of



routers called mesh routers (MRs). These MRs are usually stationary. The MRs can be employed for different use. One MR could for example be connected via cable to Internet, and then become a Internet gateway. Then this MR can provide Internet connectivity to the other MRs in the mesh network. A wireless mesh network consists of two parts [10]; the backbone of the mesh (the MRs) and the clients of the mesh. An example of a WMN architecture is shown in Figure 2.3.

## Routing Protocols

There exists many challenges when it comes to routing protocols in ad hoc networks and mesh networks. The routing protocols must be able to adapt quickly due to the topology changes. Figure 2.4 shows the different groups of the ad hoc protocols that exist. The routing protocols must not cause excessive overhead. Under the category flat routing, there are two types of routing protocols; proactive and reactive. *Proactive routing protocols* (e.g. OLSR) are table driven [11]. This means that every network node has a routing table for the forwarding of data. To obtain stability, each node broadcasts and modifies the routing table periodically. Proactive routing protocols are suitable when there are few nodes in the network. Because of the routing table that is periodically updated, the overhead exceeds the desired value when there are a high number of nodes in the network. In contrary to the proactive routing protocols, *reactive routing protocols* (e.g. AODV) are on demand. Since they are on demand, the overhead is significantly lower. These protocols utilizes flooding. The network is flooded with the route request (RREQ) in order to set up the route. The reactive routing protocols does not have a up-to-date routing table like proactive routing protocols [11]. Routes are only set up to nodes they communicate with, and these routes are only kept alive while they are needed [9]. As shown in Figure 2.4, there are several different protocols under proactive and reactive.

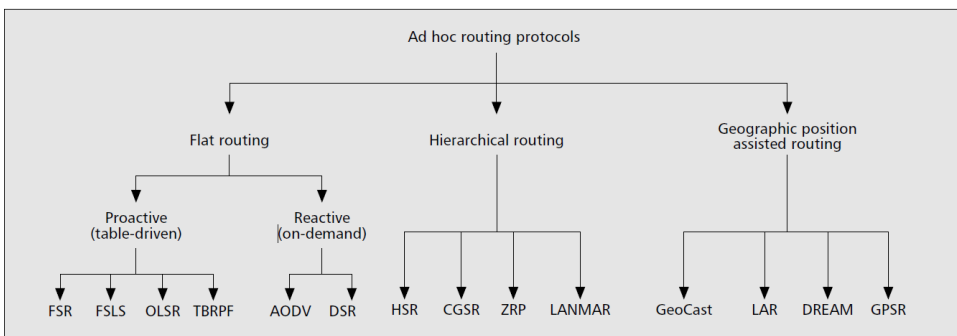


**Figure 2.4:** Different groups of ad hoc routing protocols [1].

**B.A.T.M.A.N** Better Approach To Mobile Adhoc Networking (B.A.T.M.A.N) is the routing protocol utilized in the networks formed by the Mesh Potatoes. B.A.T.M.A.N is a proactive routing protocol for wireless ad hoc networks. This includes MANETs [12]. This protocol was developed as an alternative to OLSR (Optimized Link State Routing) [2]. Like mentioned before, routing protocols must be able to adapt quickly to topology changes. B.A.T.M.A.N was made to be a more efficient routing protocol in this area, since it employs a new method for discovering routes. The nodes in the network broadcasts a OGM periodically, like shown in Figure 2.5. A OGM is a Originator Message which contains:

- The address of the node
- Sequence number
- TTL (Time to live)

The address and the sequence number enables identification of a packet and duplicate detection.

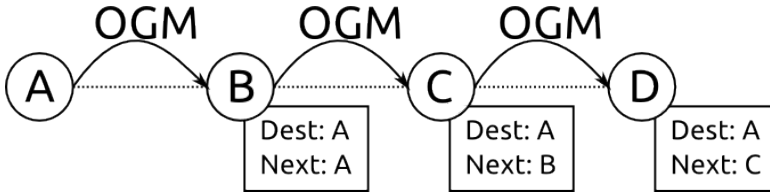

**Figure 2.5:** Originator Message used in B.A.T.M.A.N [2].

Information about the nodes that are accessible via single-hop or multi-hop are maintained and updated [12]. Every node updates it's routing table each time it receives and OGM. The routing table includes information about [2]:

#### Originator Address

This is the source address of the node that sent the OGM.

#### Current Sequence Number

The sequence number of the last OGM. This is used to discover if there are any duplicates or any information that is outdated.

#### Sliding Window

A list of sequence numbers that is stored for each originator and each previous hop, i.e., for the neighbour node that forwarded or originated the OGM. This is used to decide which next hop is best for each destination.

When a node receives an OGM it will decrease the TTL, and then forward it to the neighbour nodes. The same OGM can arrive to a node, but from a different paths. In this case, only the first copy is preserved.

## **RO.B.IN**

RO.B.IN (Routing Batman Inside) uses the B.A.T.M.A.N routing algorithm. It is a project based on open source, and is intended for wireless mesh networks. It runs on Atheros AP51 routers running OpenWrt. RO.B.IN has the ability to spread wired internet (e.g. DSL) throughout a specific area, for example a village or a school [13].

### **Simple Unified Dashboard for mesh networks**

Simple Unified Dashboard (SPUD) for mesh networks is a tool for visualization made for B.A.T.M.A.N mesh networks, and for the users of the networks [14]. The Simple Unified Dashboard is, like the name insinuates, a dashboard based on PHP which is designed to be simple. It communicates with the B.A.T.M.A.N visualization server. The dashboard makes it possible to monitor the link status of the networks, by displaying real time wireless link status. Other features are client management and customization. The software is written in CakePHP and for visualization SPUD uses Google Maps API 1.3 [14].

### **2.2.2 OpenWrt**

OpenWrt is an embedded open-source operating system for routers distributed by Linux [15]. It is extensible and can easily be modified to suit any application, since it offers a file system with a package manager. OpenWrt provides (1) Free and open-source, (2) Easy and free access, and are (3) Community Driven [15]. This means that the source code is free and available to everyone, and that everyone has the opportunity to contribute to it.

## **2.3 The Cost Structure and Revenue Model(s) of Village Telco Today**

### **2.4 Comparison of Village Telco and Other Telcos**

### **2.5 Refugee Camps**

#### **2.5.1 The Existing Communication Methods**



# References

- [1] X. Hong, K. Xu, and M. Gerla, “Scalable routing protocols for mobile ad hoc networks,” *IEEE*, 2002.
- [2] Freie Universität Berlin, “Better approach to mobile ad hoc networking (b.a.t.m.a.n.).” <http://www.des-testbed.net/content/better-approach-mobile-ad-hoc-networking-batman>, accessed 24.02.2014.
- [3] J. Dempsey, “The mesh potato network,” 2008. <http://ictupdate.cta.int/en/Feature-Articles/The-mesh-potato-network>, accessed 26.02.2014.
- [4] Village Telco, “Village telco workshop,” 2008. <http://villagetelco.org/2008/07/village-telco-workshop/>, last accessed 24.02.2014.
- [5] Village Telco, “The origin of the mesh potato,” Last edited: 2013. <http://villagetelco.org/2008/06/the-origin-of-the-mesh-potato/>, accessed 21.02.2014.
- [6] Village Telco, “Background village telco,” Last edited: 2013. <http://wiki.villagetelco.org/Background>, accessed 20.02.2014.
- [7] Village Telco, “Mesh potato,” 2013. <http://store.villagetelco.com/mesh-potatoes/mesh-potato.html>, last accessed 20.02.2014.
- [8] D. Rowe, “The mesh potato part 1,” 2008. <http://www.rowetel.com/blog/?p=70>, accessed 26.02.2014.
- [9] J. Hoebeke, I. Moerman, B. Dhoedt, and P. Demeester, “An overview of mobile ad hoc networks: Applications and challenges,” 2004.
- [10] J. Wang, B. Xie, and D. P. Agrawal, *Journey from Mobile Ad Hoc Networks to Wireless Mesh Networks*, pp. 1–30. Springer London, 2009.
- [11] B. D. Shivahare, C. Wahi, and S. Shivhare, “Comparison of proactive and reactive routing protocols in mobile adhoc network using routing protocol property,” *International Journal of Emerging Technology and Advanced Engineering*, 2012.
- [12] A. Neumann, C. Aichele, M. Lindner, and S. Wunderlich, “Better approach to mobile ad-hoc networking (b.a.t.m.a.n.),” 2008. <http://tools.ietf.org/html/draft-wunderlich-openmesh-manet-routing-00>, accessed 21.02.2014.

## 12 REFERENCES

- [13] P2P foundation, “Robin.” <http://p2pfoundation.net/ROBIN>, accessed 05.03.2014.
- [14] Village Telco, “Spud – simple unified dashboard for mesh networks.” <http://villagetelco.org/2011/06/spud-simple-unified-dashboard-for-mesh-networks/>, accessed 26.02.2014.
- [15] OpenWrt Wiki, “About openwrt.” <http://wiki.openwrt.org/about/start>, accessed 03.03.2014.