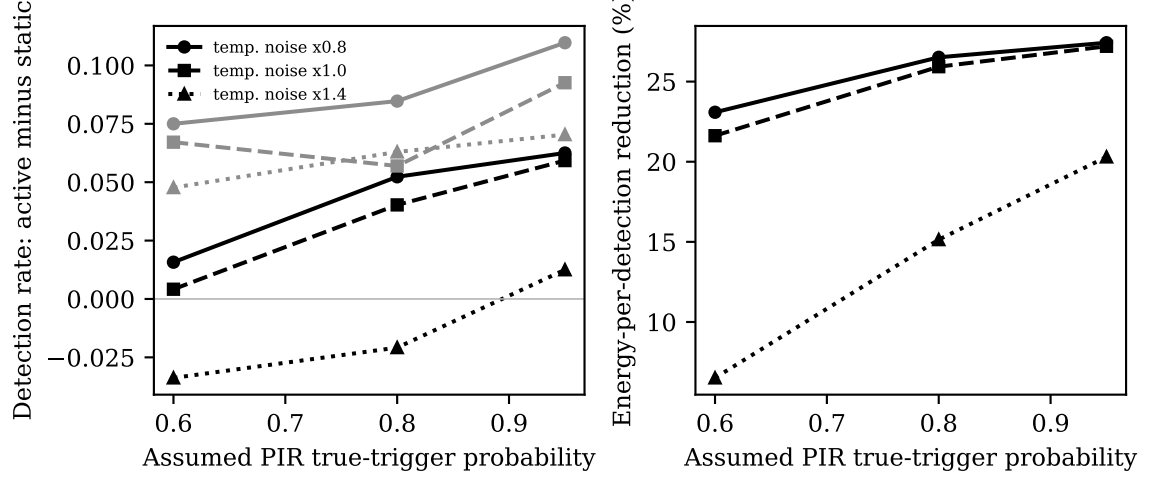
temp. noise x0.8
temp. noise x1.0
temp. noise x1.4
Detection rate: active minus static
0.100
0.075
0.050
0.025
0.000
−0.025
0.6
0.7
0.8
0.9
Assumed PIR true-trigger probability
Energy-per-detection reduction (%)
25
20
15
10
0.6
0.7
0.8
0.9
Assumed PIR true-trigger probability