


# Itty Bitty Blakely's Infinity Pump Caddy - Manual

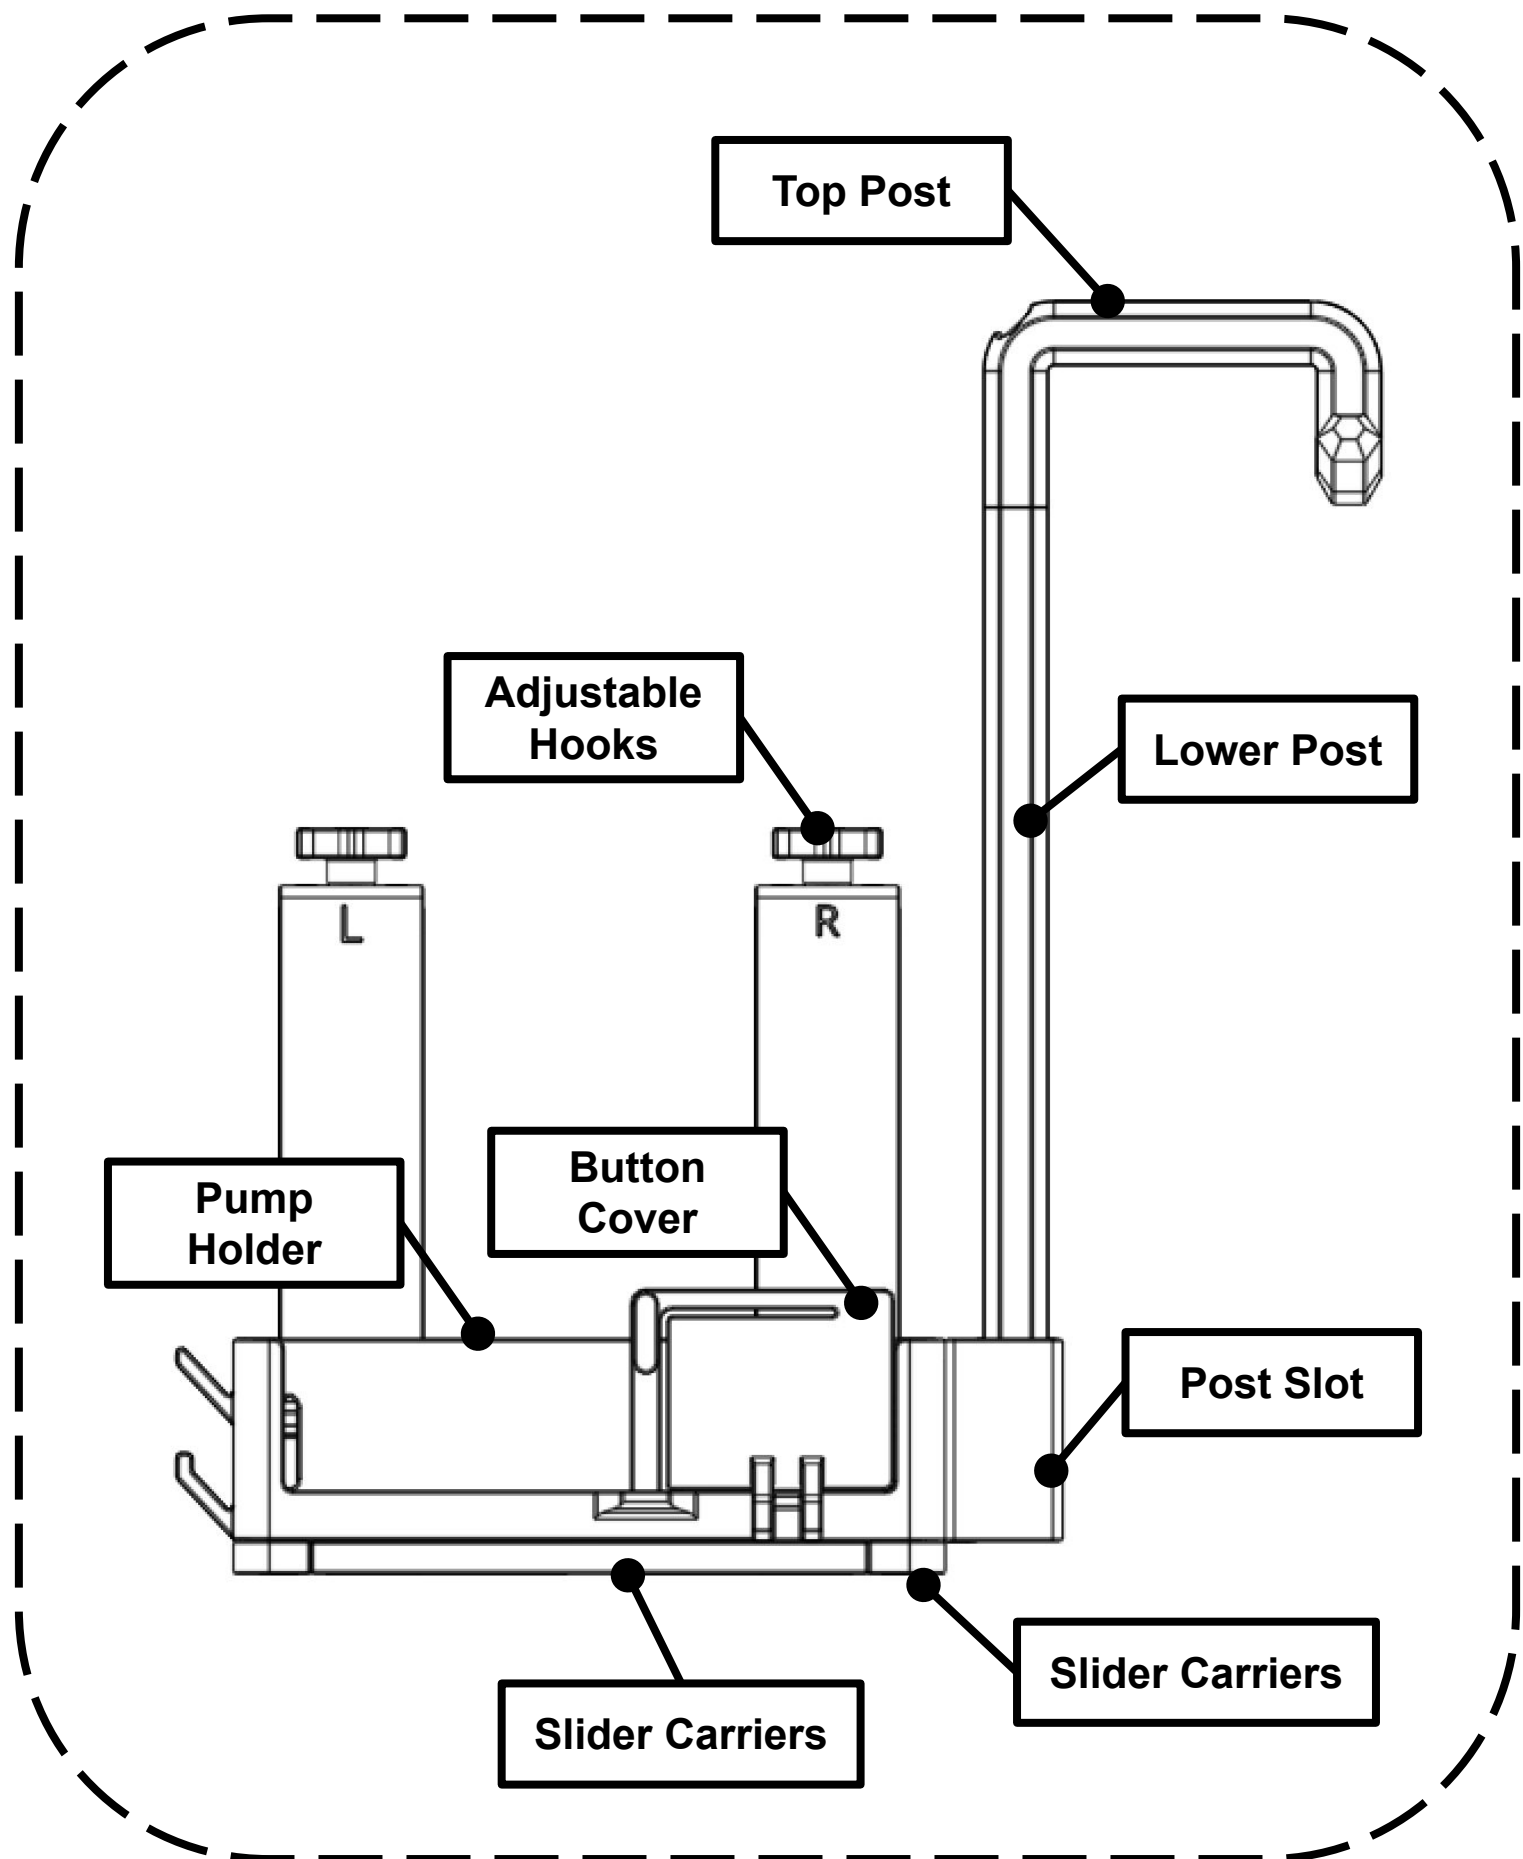


# Table of Contents

Hardware Kit	
Qty.	Description
2	M3 x 12mm Bolt (1 - Spare)
1	Allen Wrench

Component List		
a	Pump Holder	-
b	Left Side - Carrier	Installed
c	Right Side - Carrier	Installed
d	Balance Slider	Installed
e	Post Slot	-
f	Lower Post	-
g	Top Post	-
h	Button Cover	-
i	Left Side - Adjustable Hook	Pre-Assembled
j	Right Side - Adjustable Hook	Pre-Assembled


# 1. Assembling The Post Slot

FIRMLY PUSH  
OVER THE RAIL  
UNTIL FULLY  
SEATED

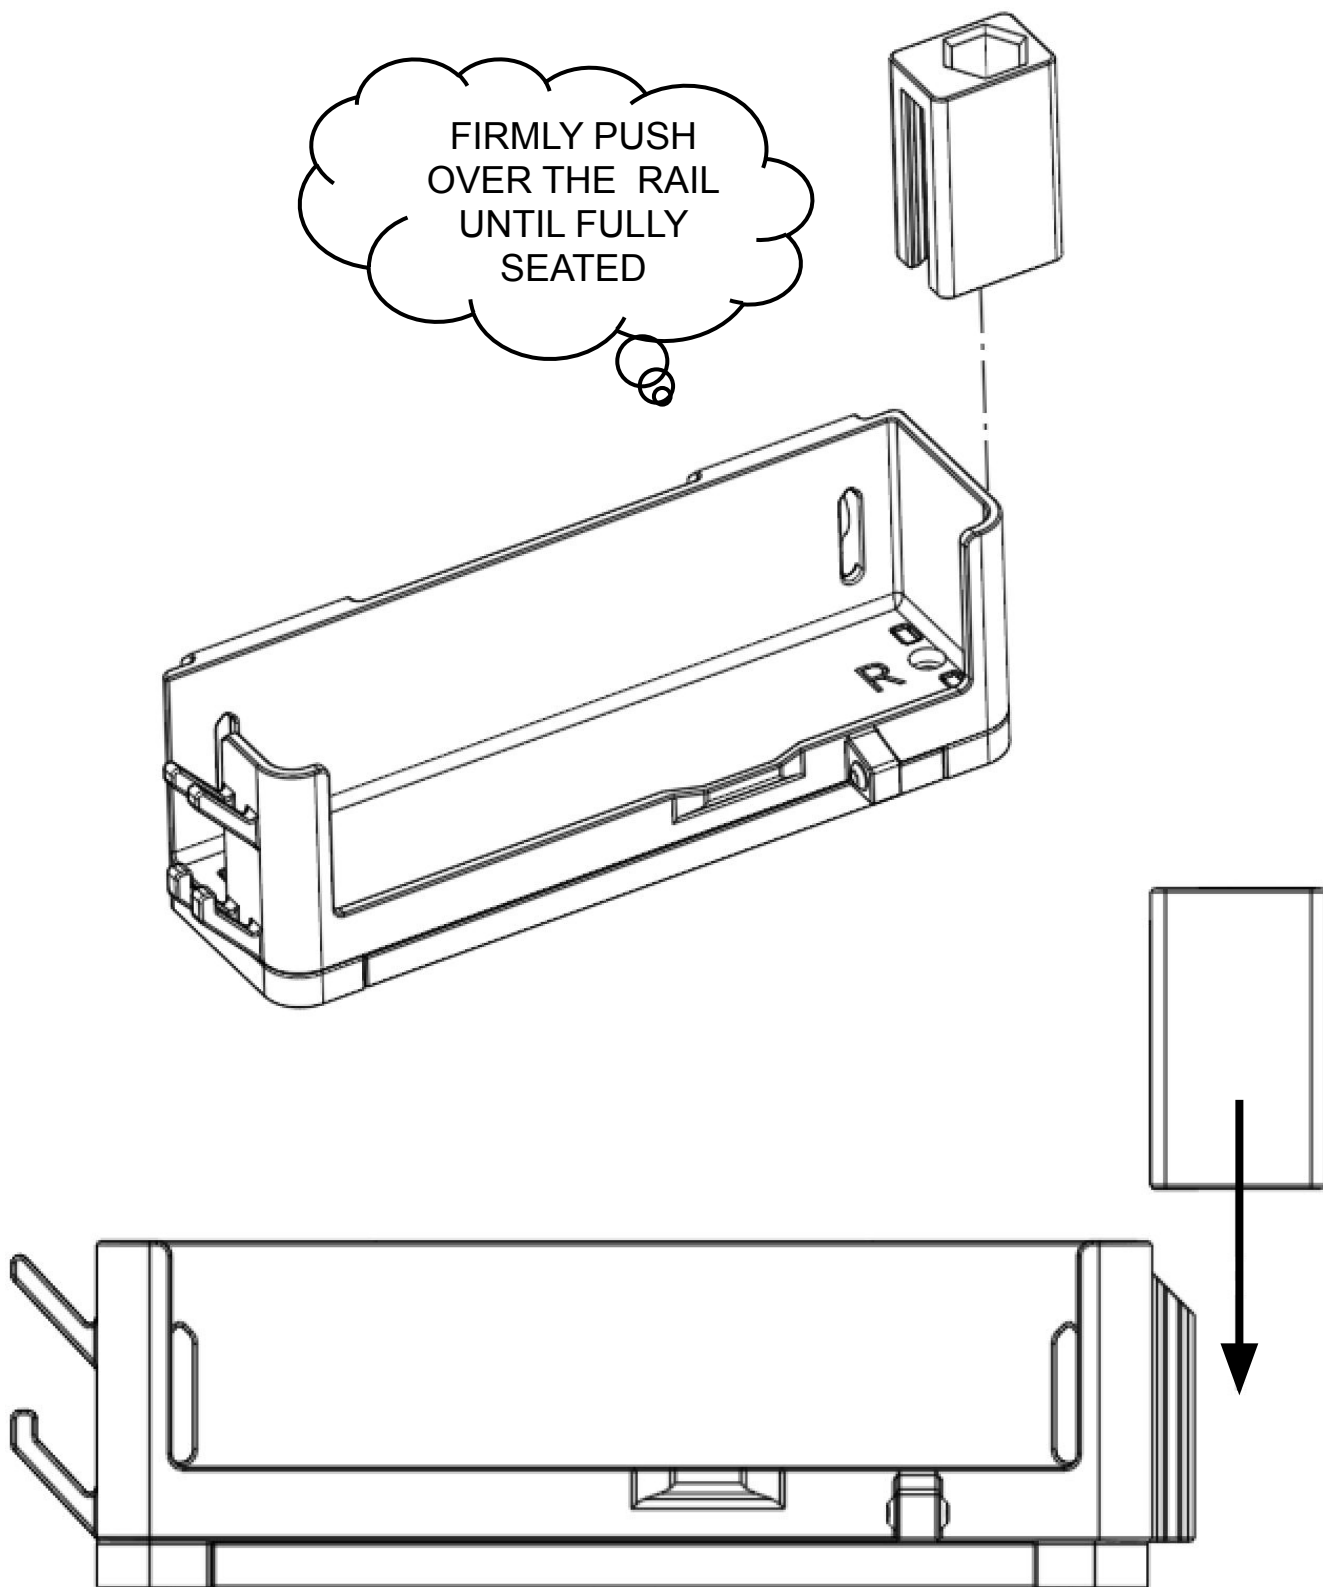



Note: Post slot should sit flush with the pump holder.

## 2. Assembly Formula Bag Post

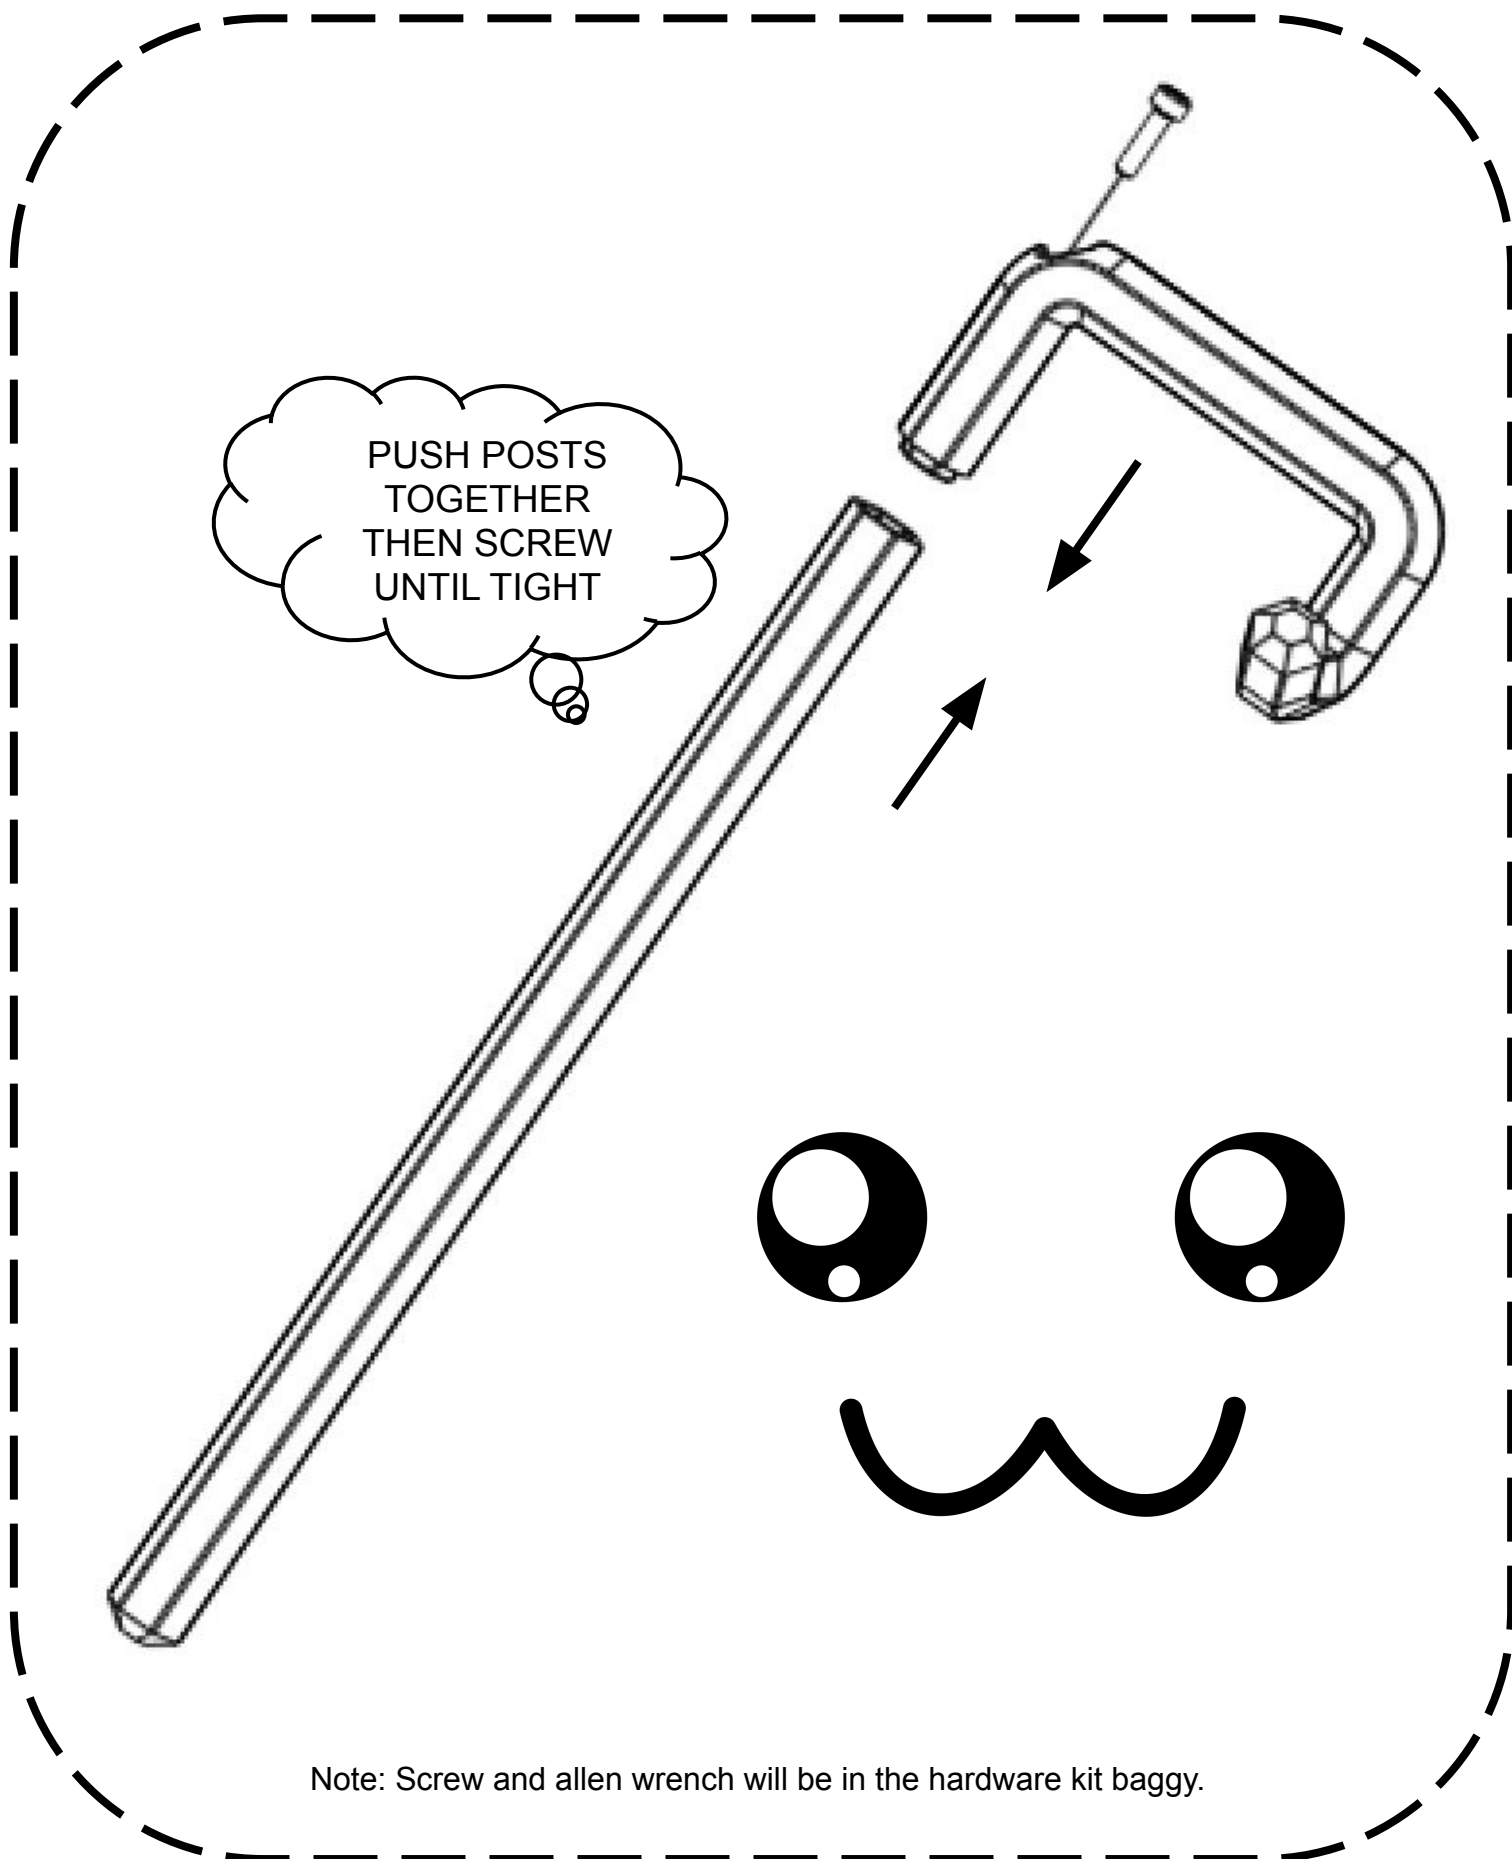


### 3. Button Cover Installation

PUSH BUTTON  
COVER OVER  
PIVOT PINS,  
GENTLY, BUT FIRM

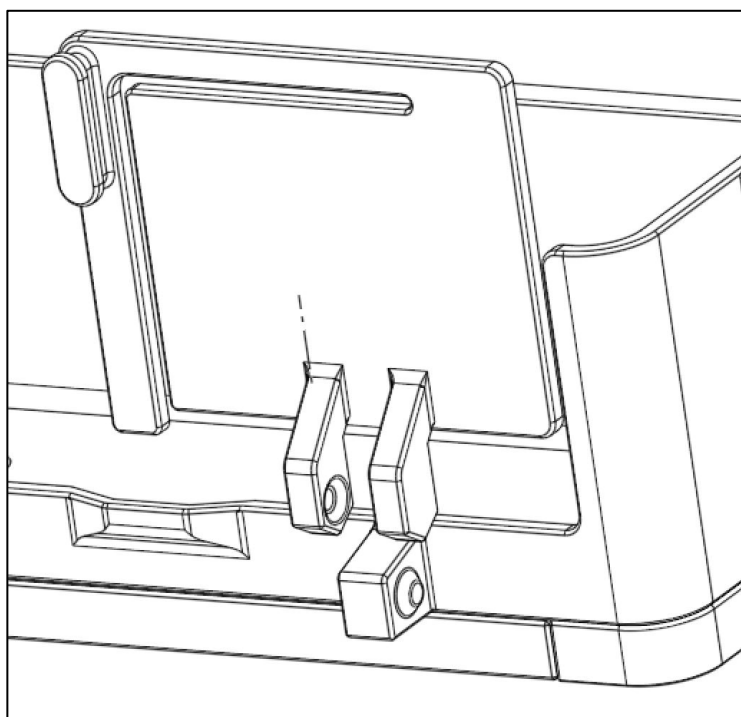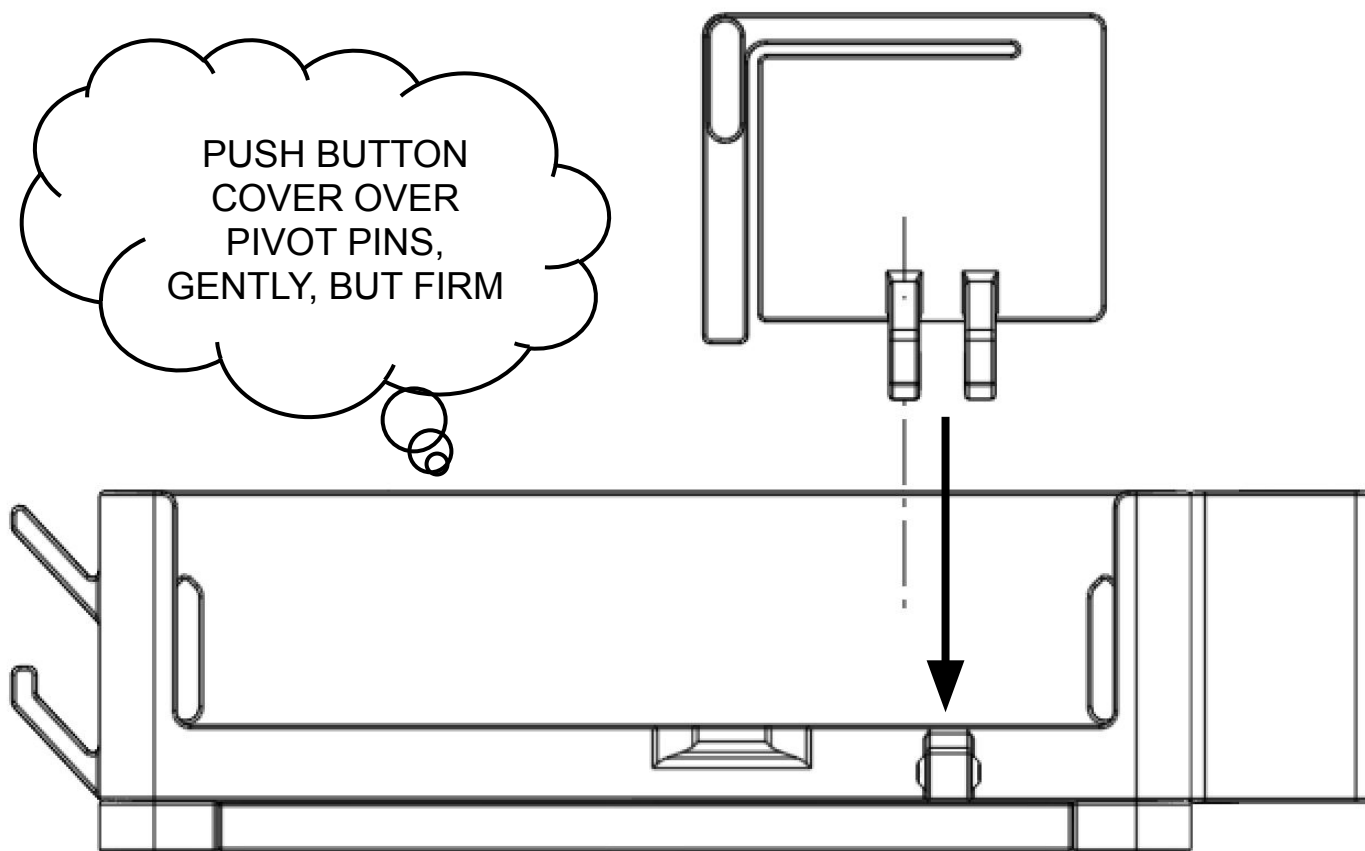


## 4. Installing Adjustable Hooks

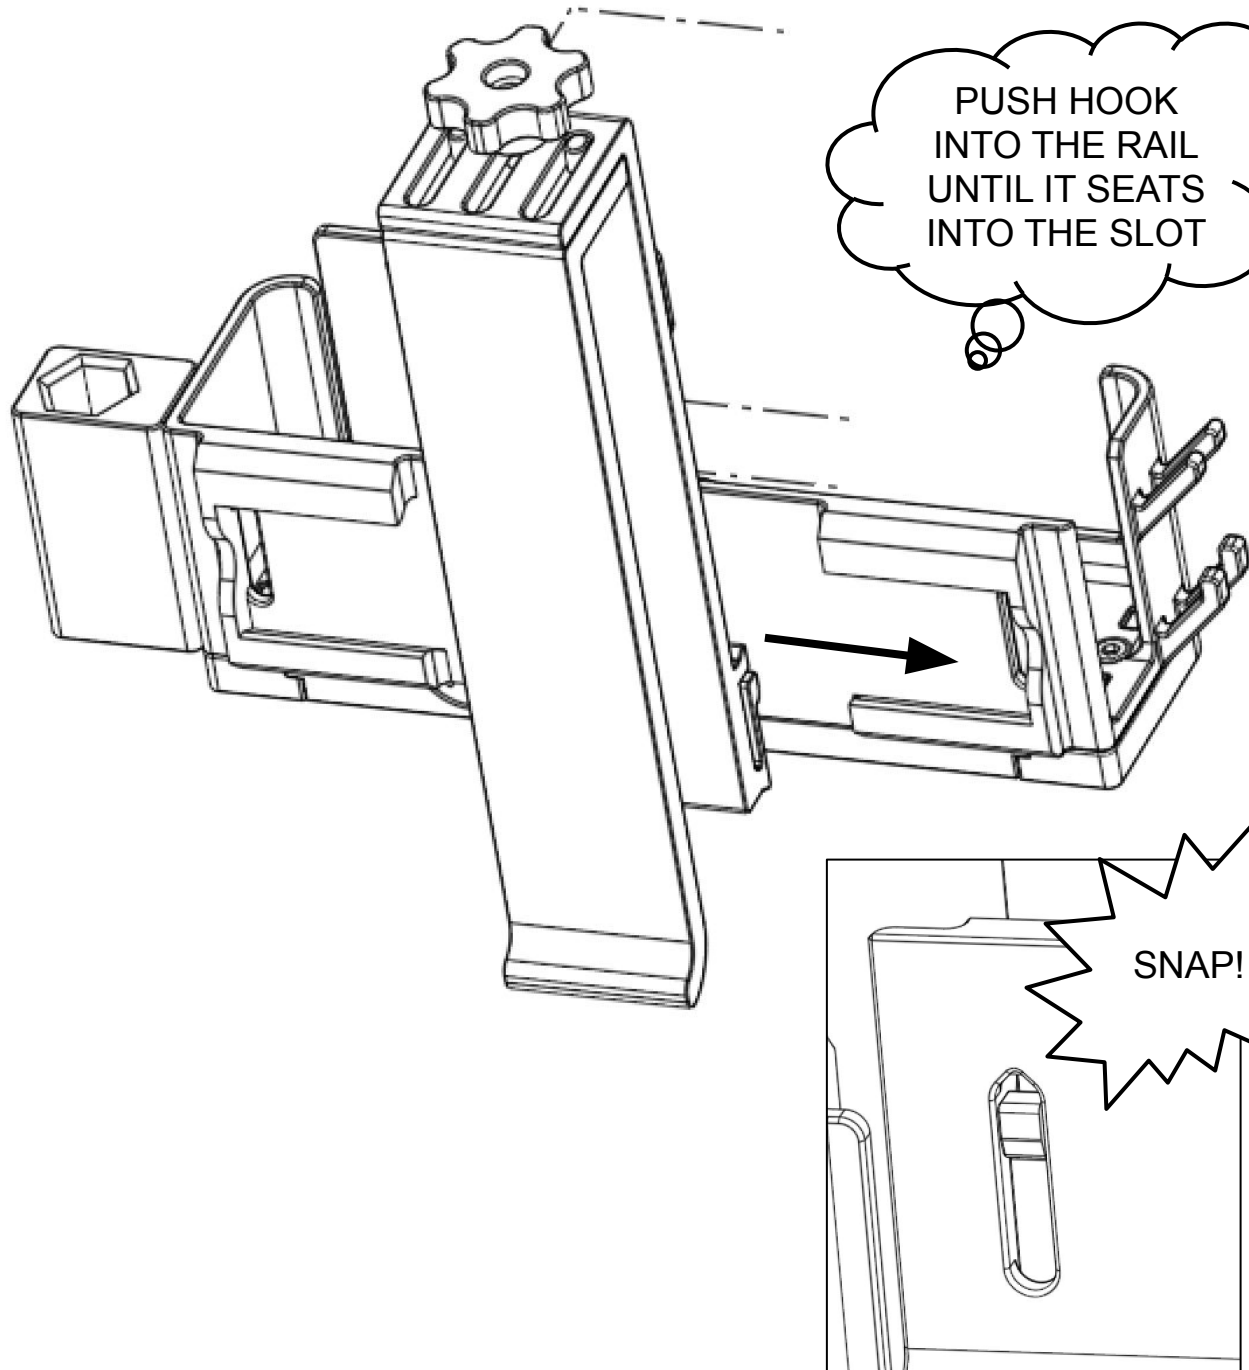


Note: Match corresponding sides to the Caddy Holder. A soft snap sound should be heard when the hook is properly seated, or looks like the picture of the snap installed. Repeat for other side.

5. Install Post

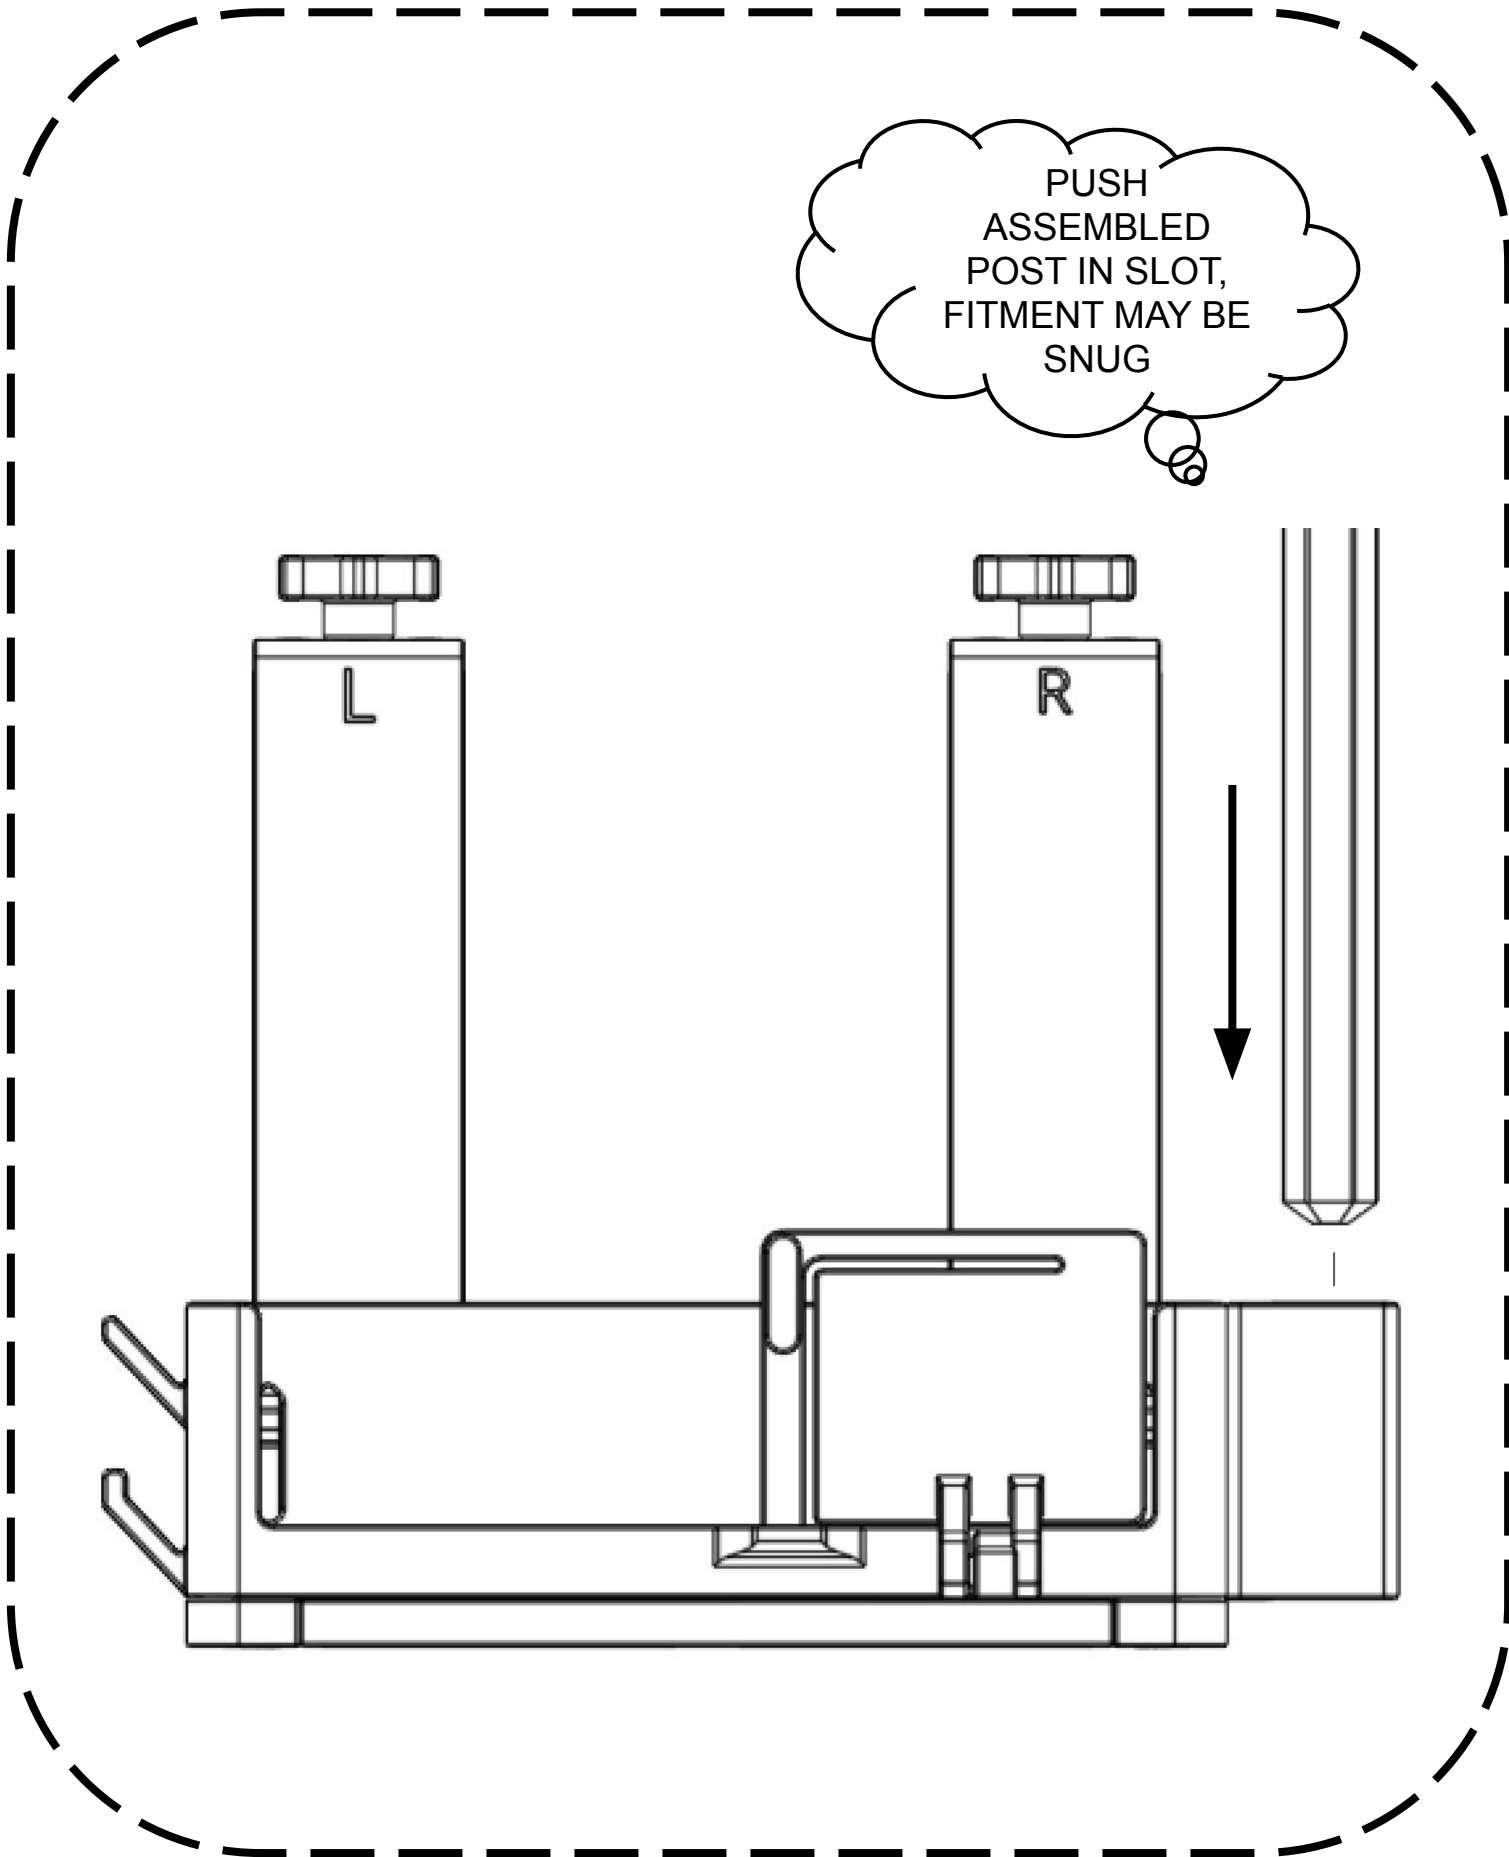

## 6. COMPLETED!



CONGRATULATE  
YOURSELF  
BECAUSE LIFE  
IS ABOUT THE  
SMALL WINS  
SOMETIMES!

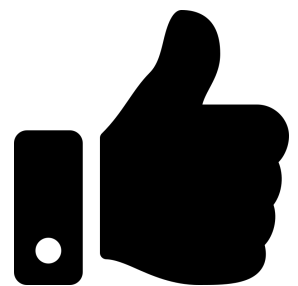




# Caddy Features - Part I

ADJUSTABLE  
HOOKS FROM  
 $\frac{3}{4}$ " (20mm) TO 1-  
 $\frac{3}{8}$ " (35mm)

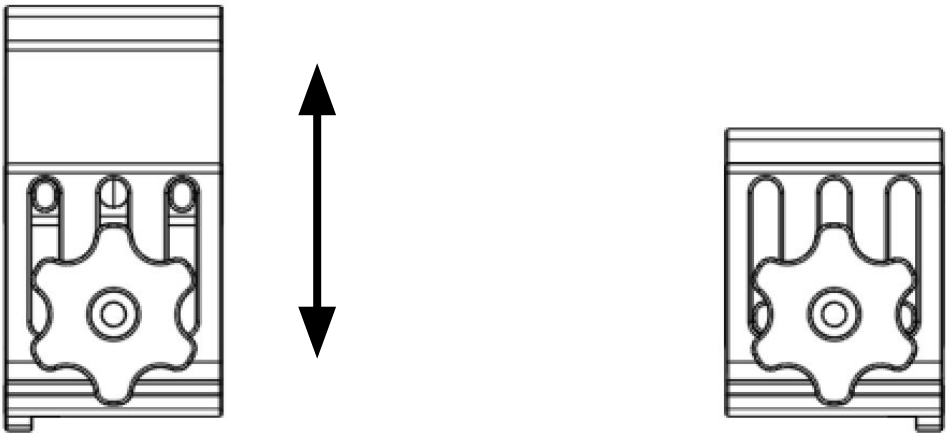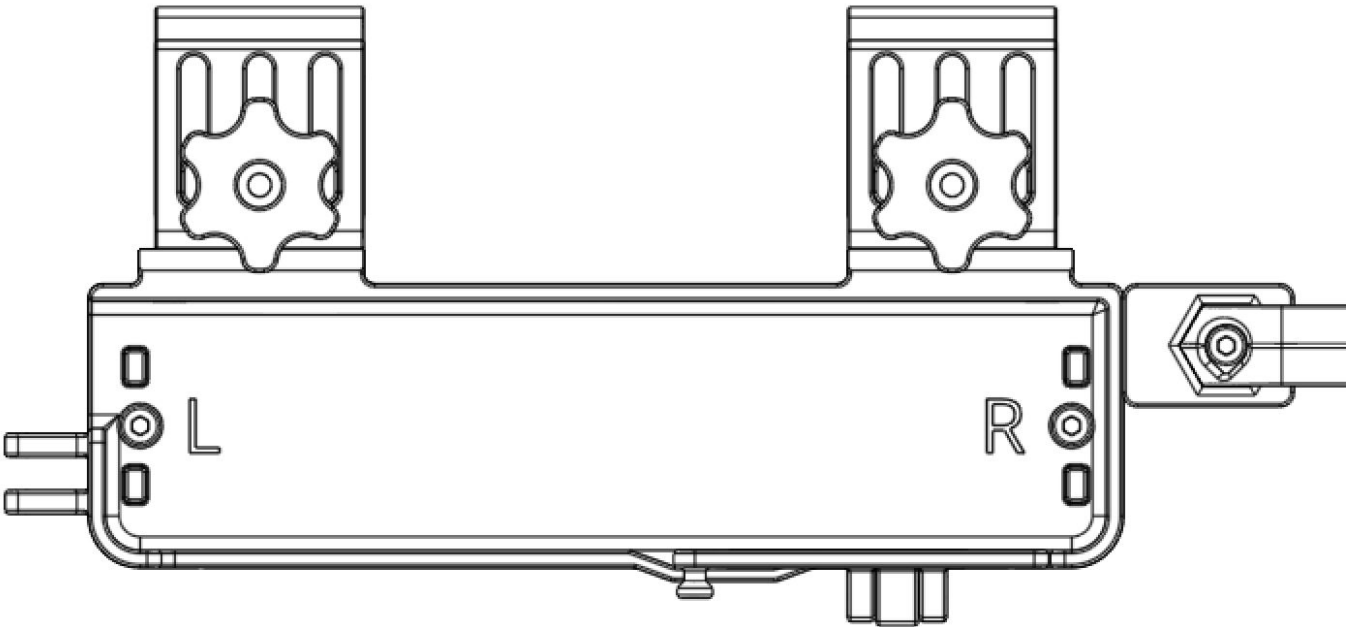


Note: To adjust the hooks, loosen the knobs by 1-2 rotations, then slip over edge, push each side together to get snug fit, then tighten knob securely.

# Caddy Features - Part II

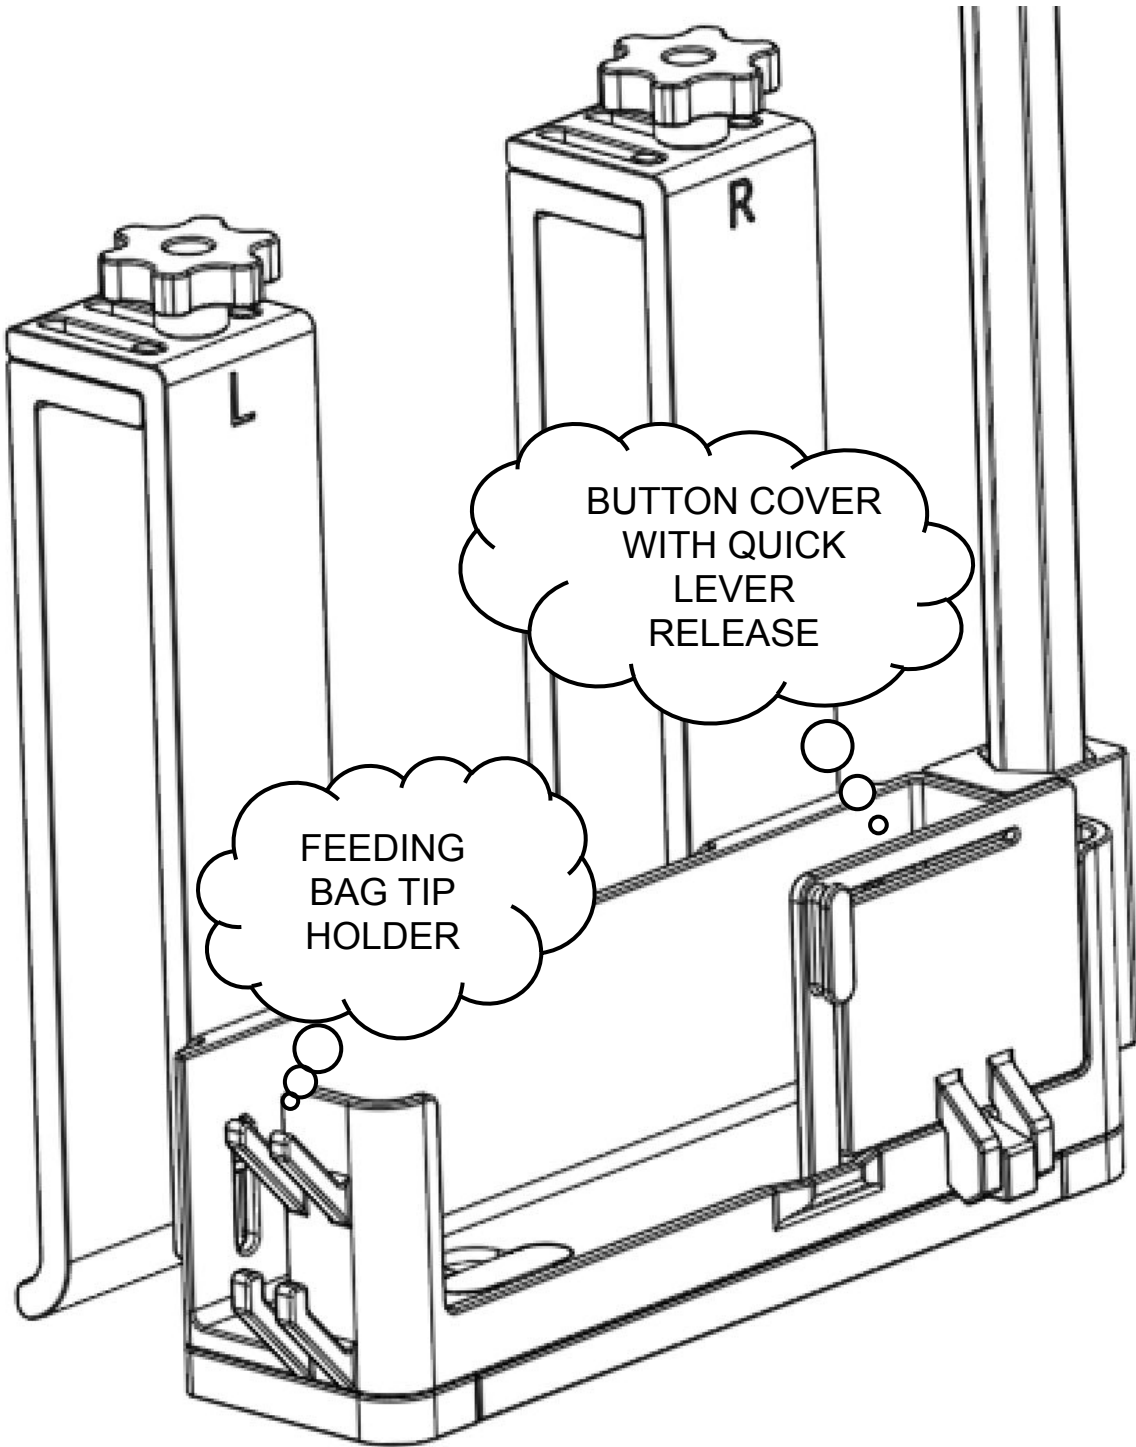

Note: To release the button cover, pull up on the handle slightly until the tab clears the caddy

# Caddy Features - Part III

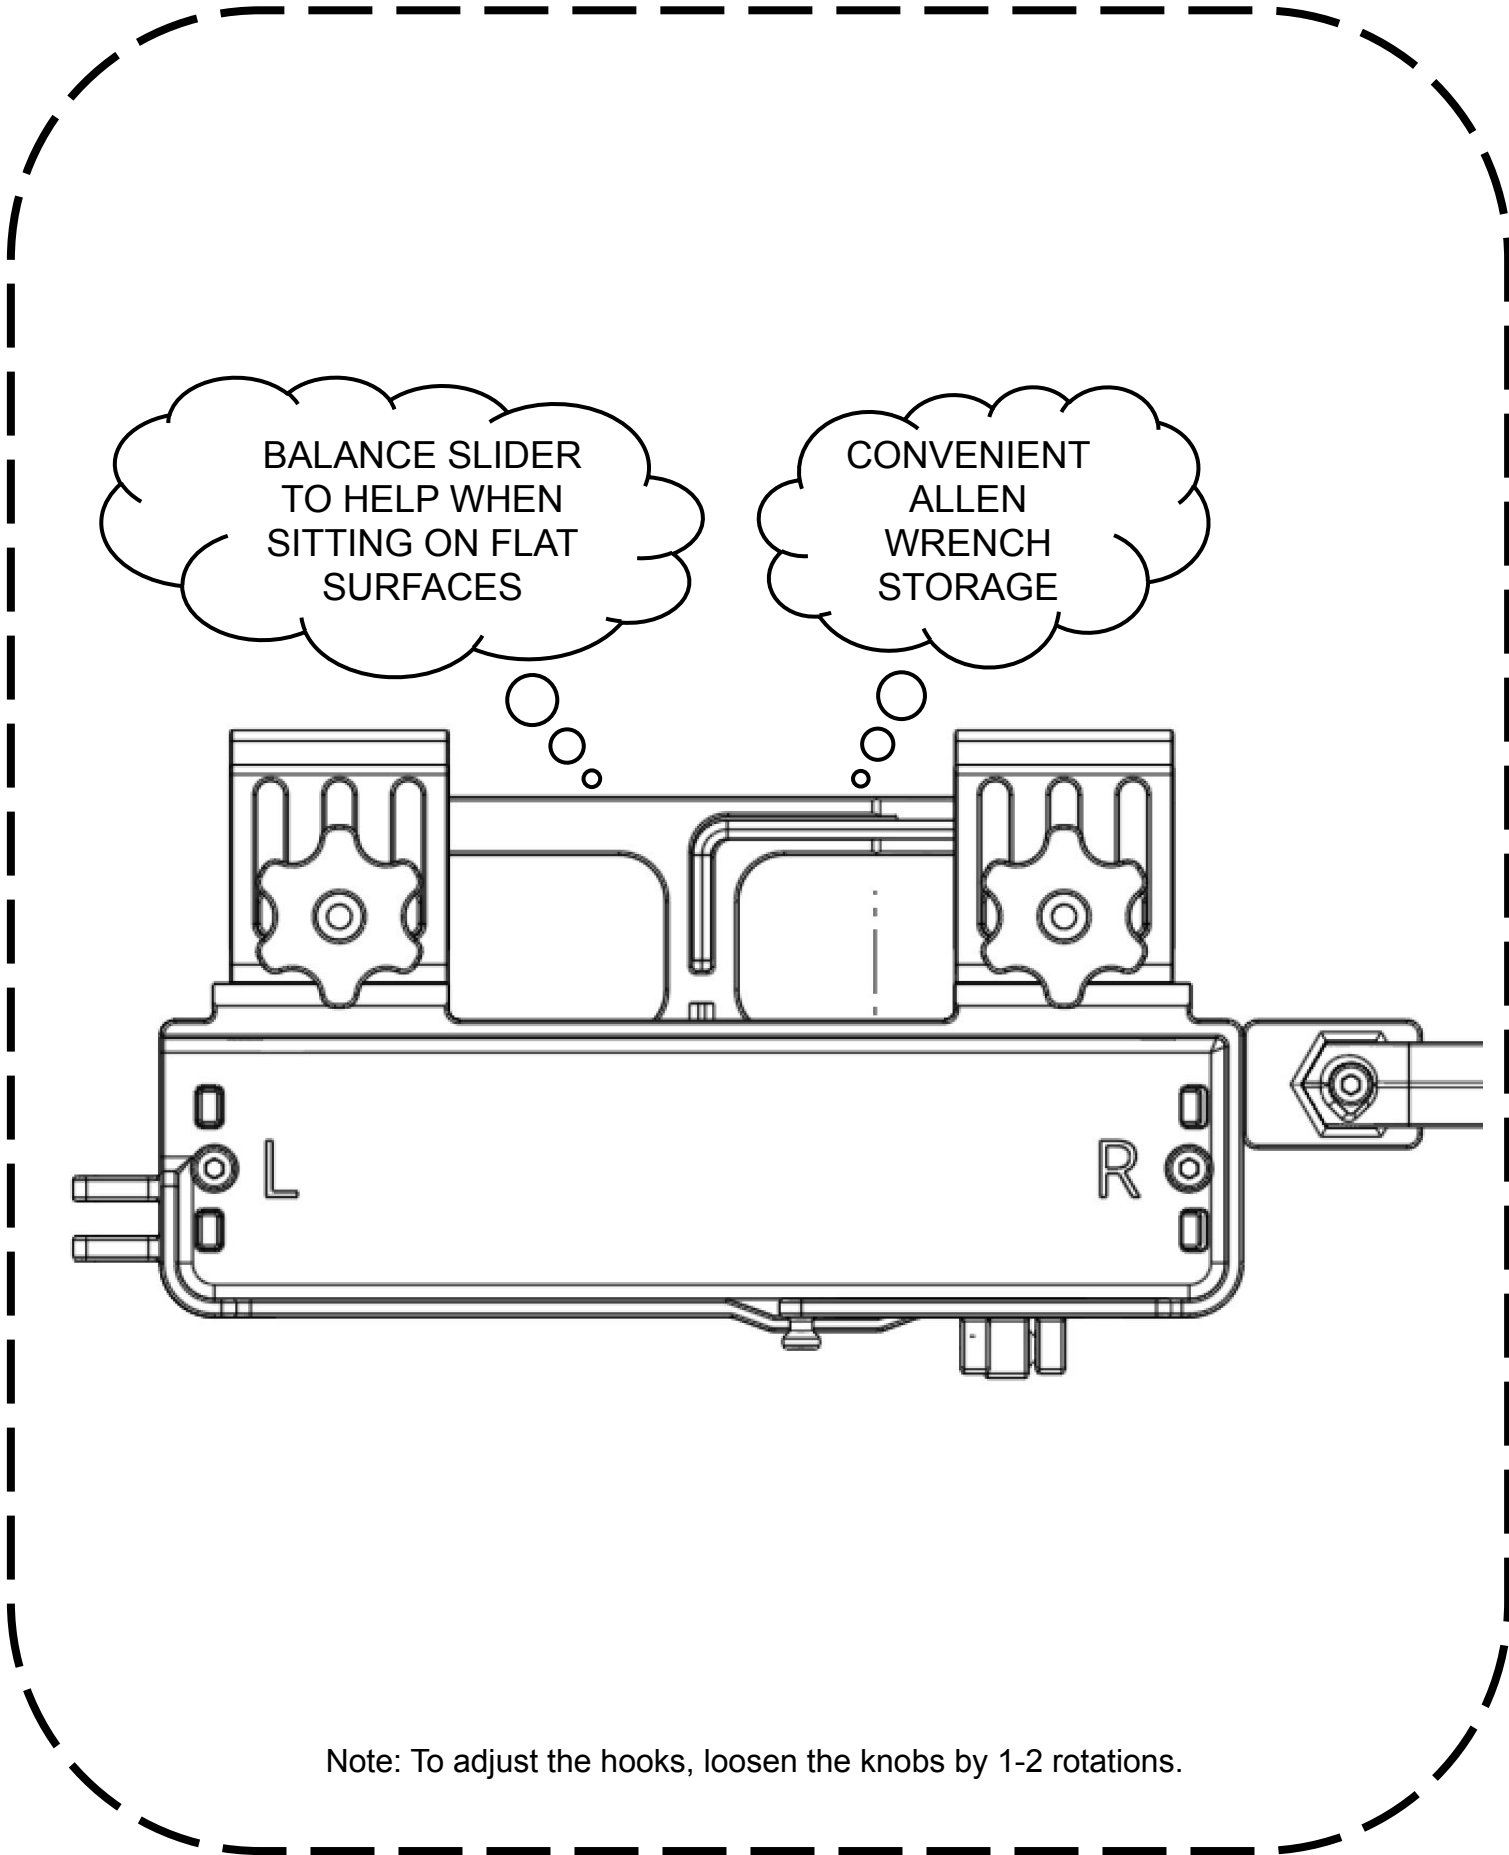

Note: To adjust the hooks, loosen the knobs by 1-2 rotations.

## Troubleshooting

- If the adjustable hooks disassemble, align both pins in the outer slots and then screw in the knob
- Tightening the slider carrier bolts may be required if the slider is used frequently.
- Use a small flat tool or the allen wrench provided to remove the hooks. To remove the hooks align the tool with the slot and pushing until bottoms out on the caddy (gentle pressure is only required), simultaneously push the hook out of the rail.

Note: This section will continuously be updated based on customer experience.

QR Code

*SCAN ME*

