


# Itty Bitty Blakely's Infinity Pump Caddy - Manual

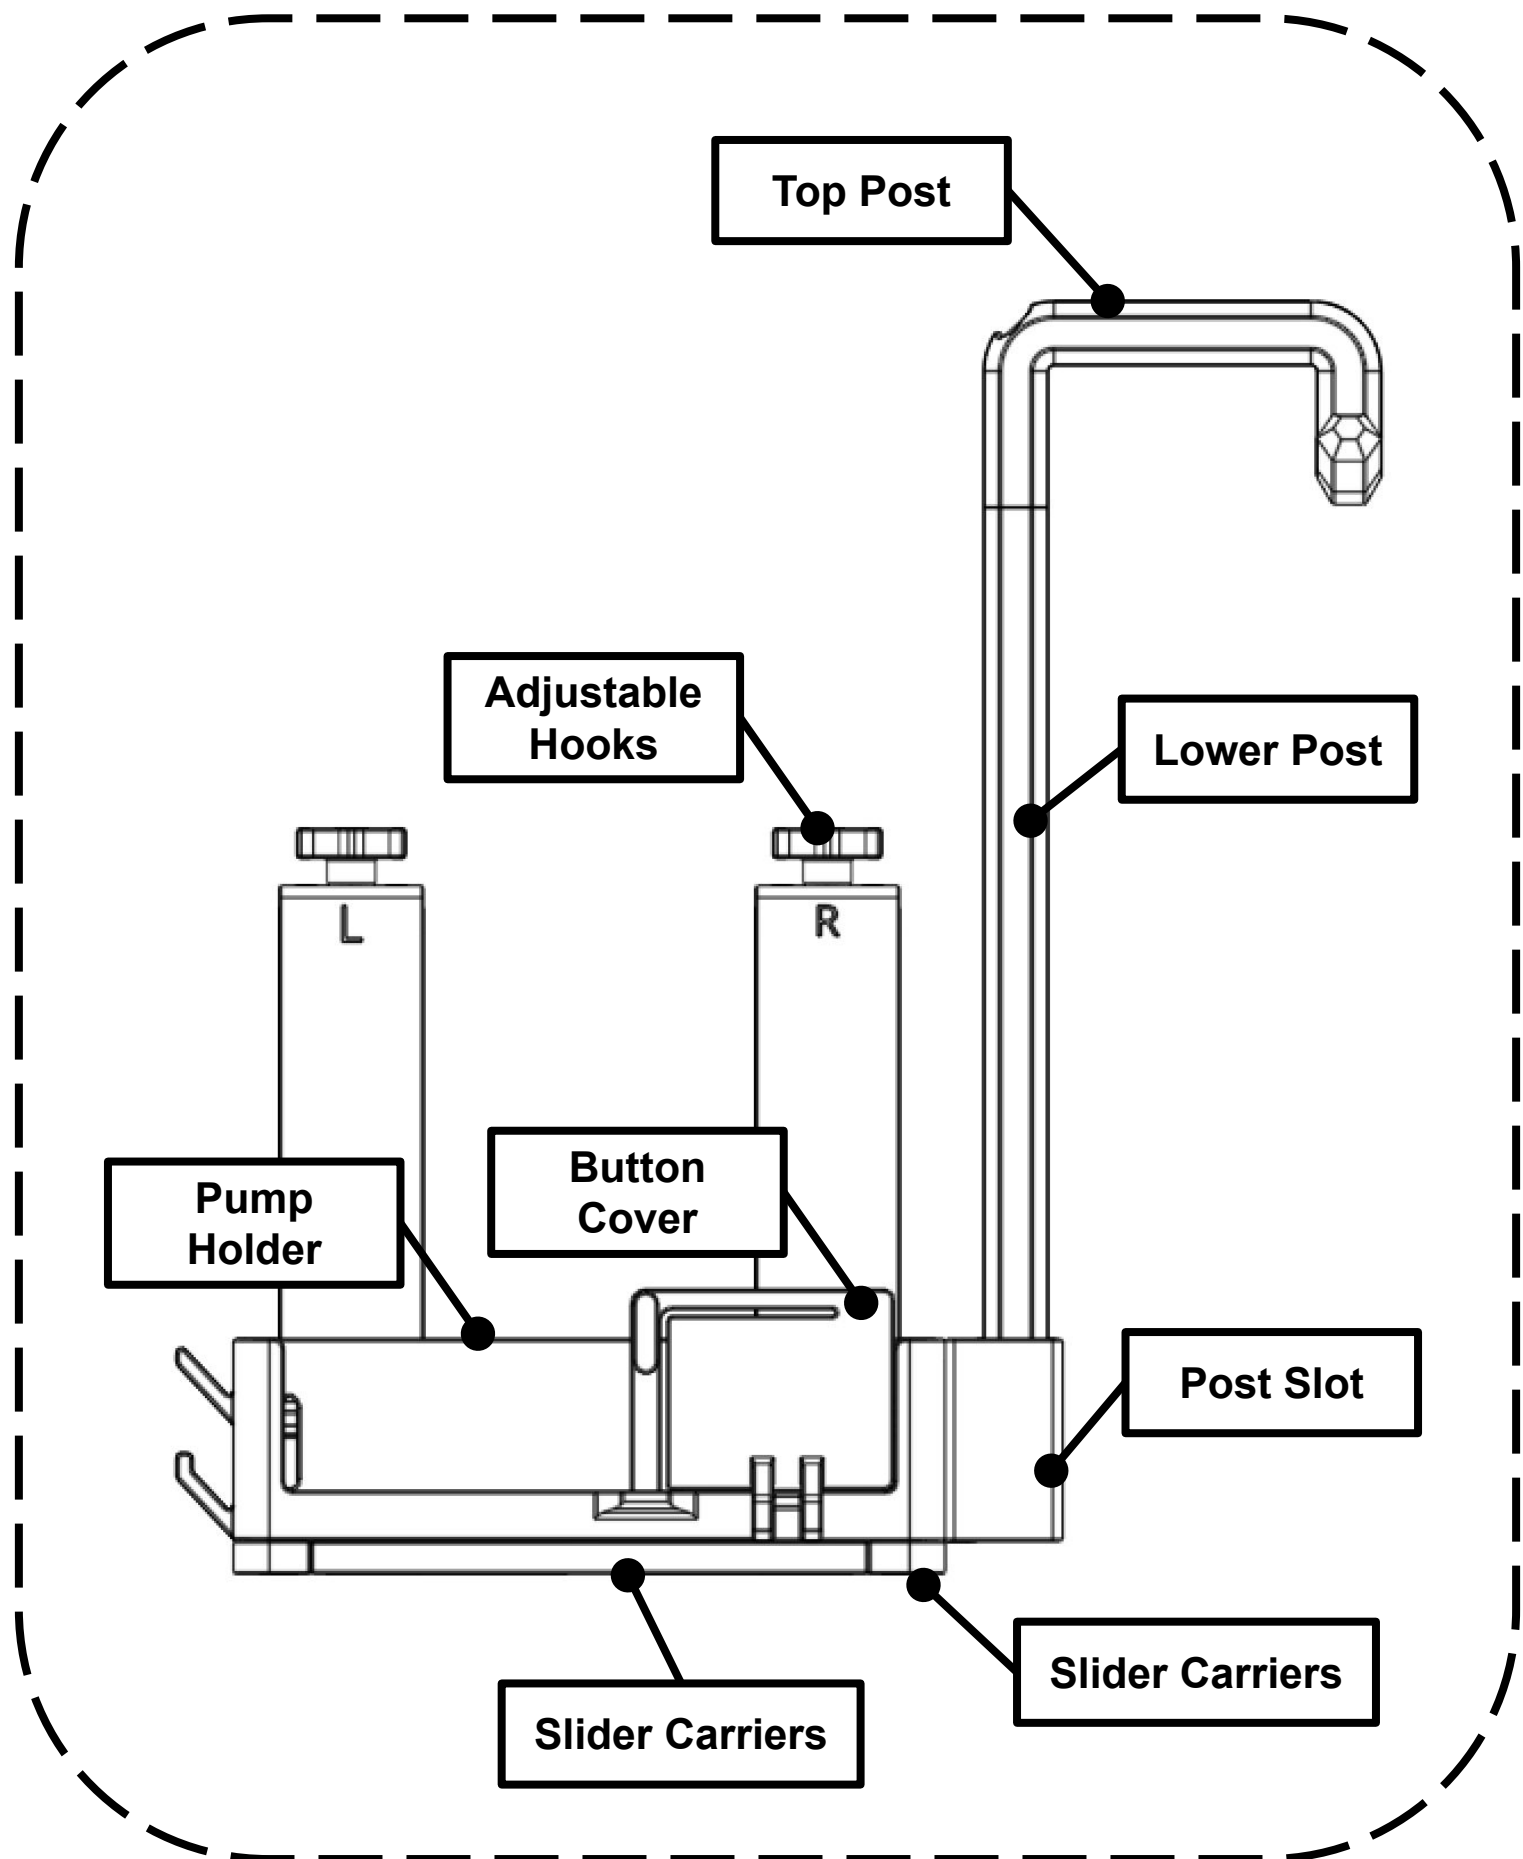





# Table of Contents

Hardware Kit	
Qty.	Description
2	M3 x 12mm Bolt (1 - Spare)
1	Allen Wrench

Component List		
a	Pump Holder	-
b	Left Side - Carrier	Installed
c	Right Side - Carrier	Installed
d	Balance Slider	Installed
e	Post Slot	-
f	Lower Post	-
g	Top Post	-
h	Button Cover	-
i	Left Side - Adjustable Hook	Pre-Assembled
j	Right Side - Adjustable Hook	Pre-Assembled
k	Hook Removal Tool	Installed


# 1. Assembling The Post Slot

FIRMLY PUSH  
OVER THE RAIL  
UNTIL FULLY  
SEATED

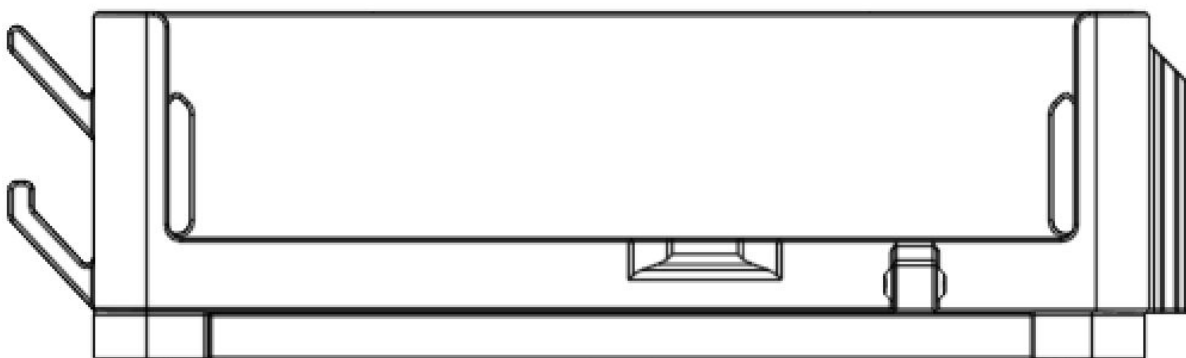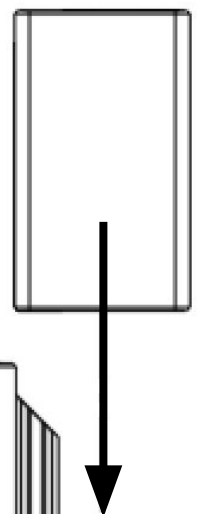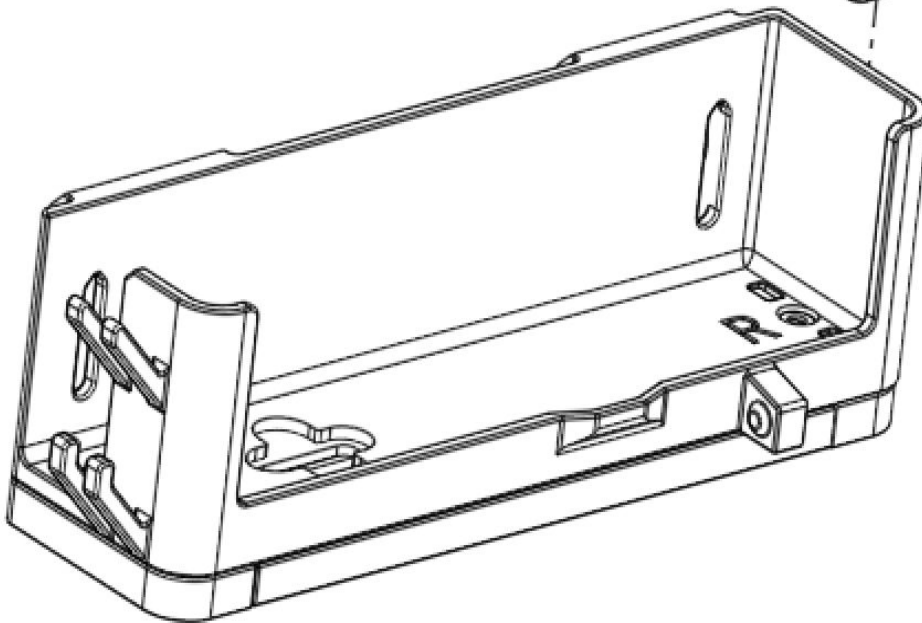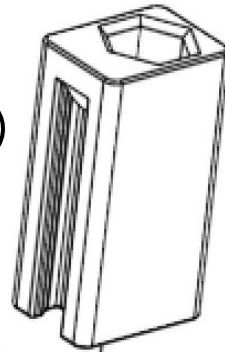



Note: Post slot should sit flush with the pump holder.

## 2. Assembly Formula Bag Post

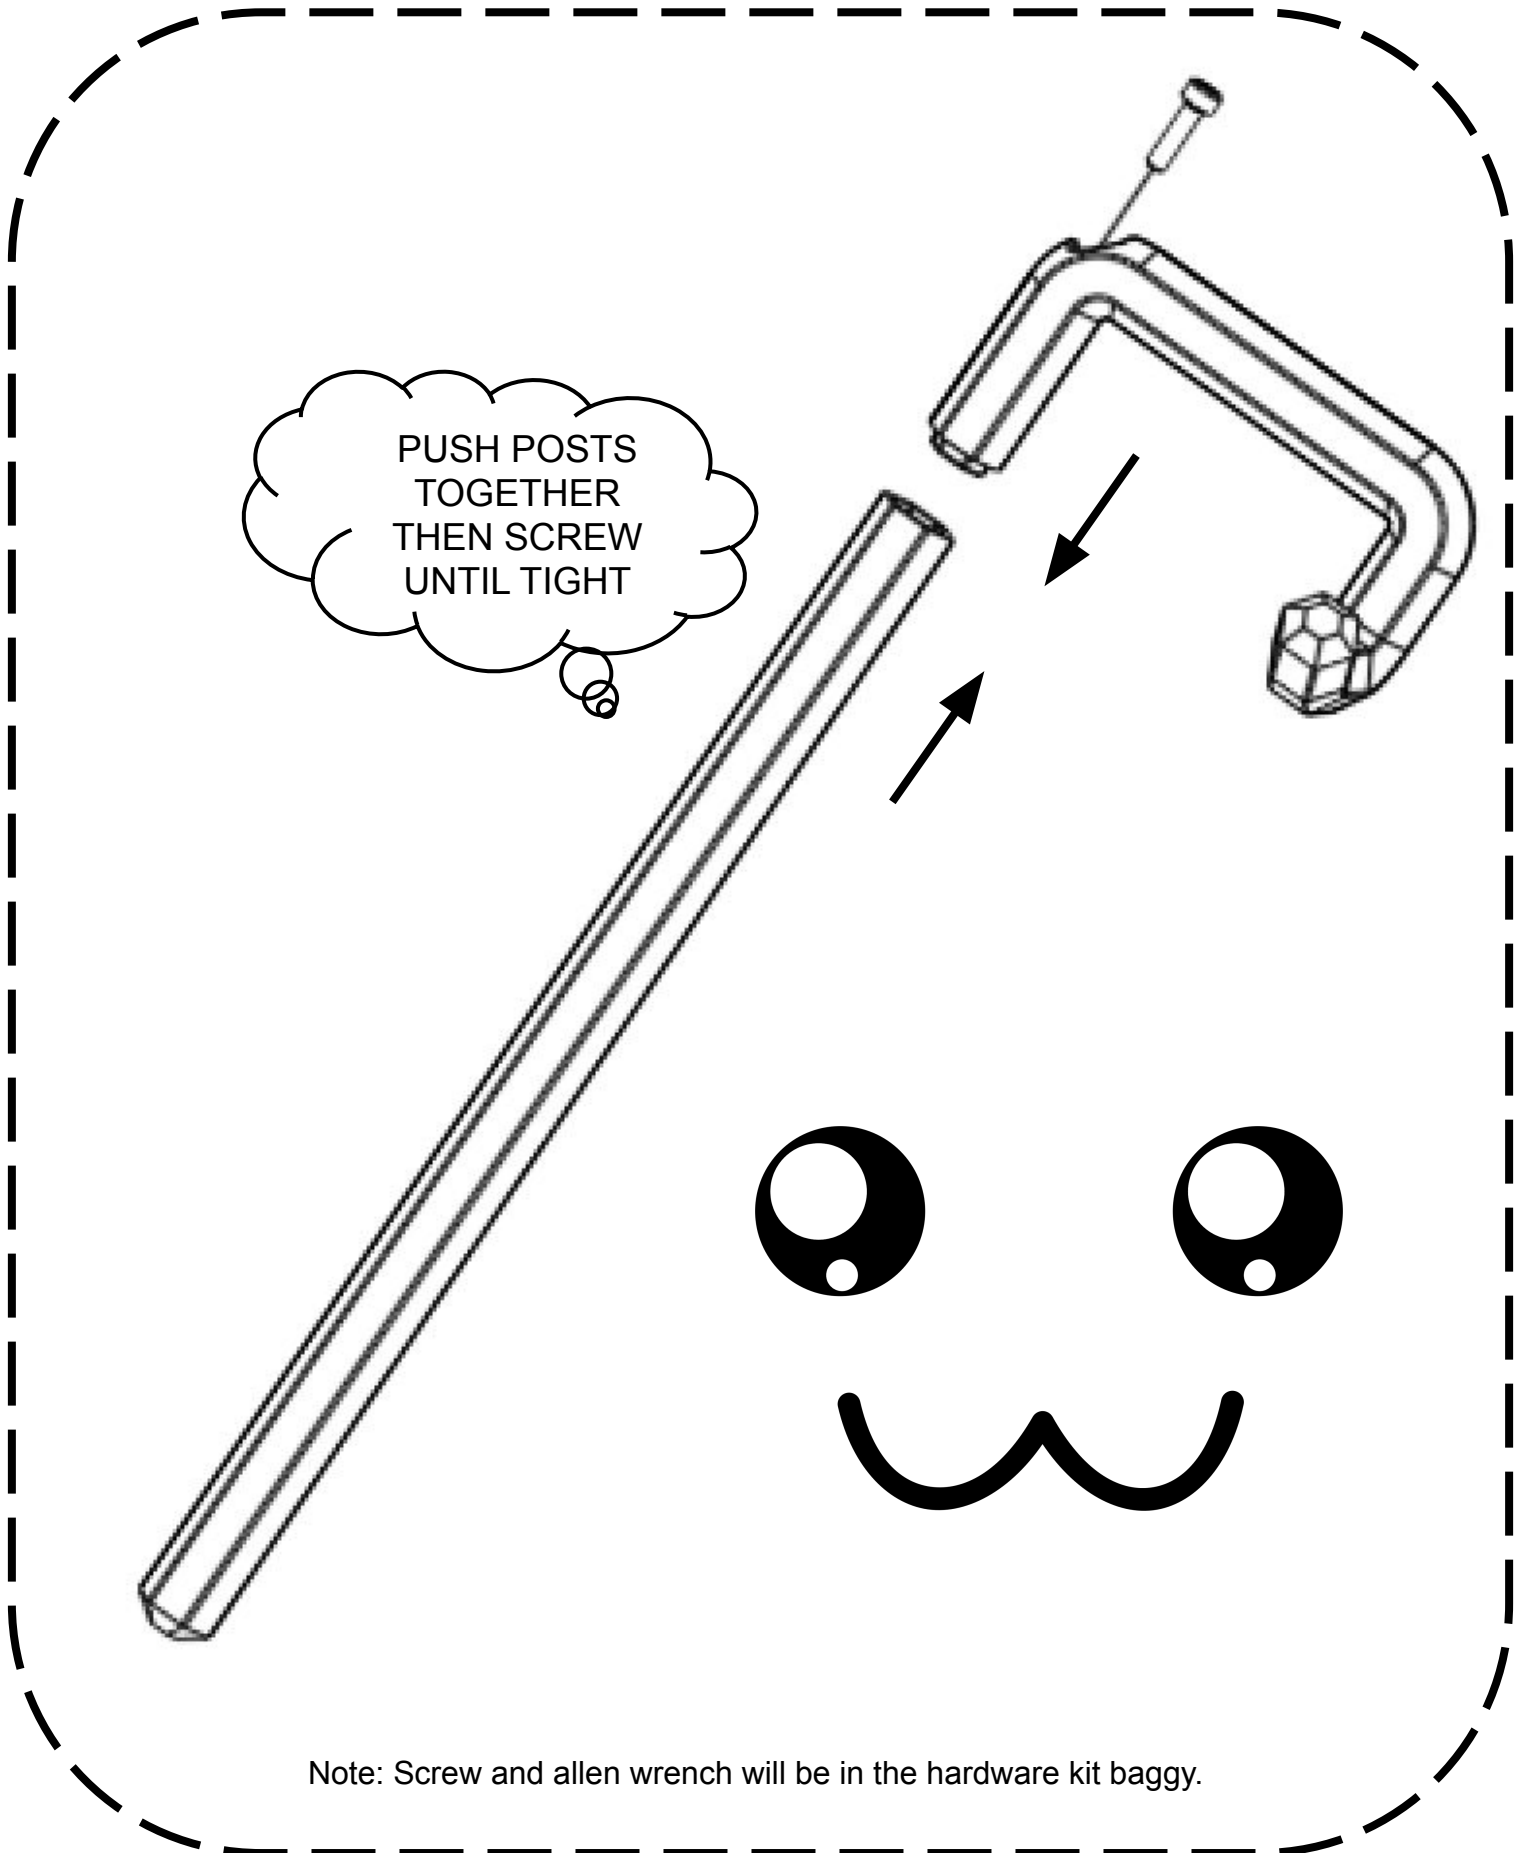


### 3. Button Cover Installation

PUSH BUTTON  
COVER OVER  
PIVOT PINS,  
GENTLY, BUT FIRM

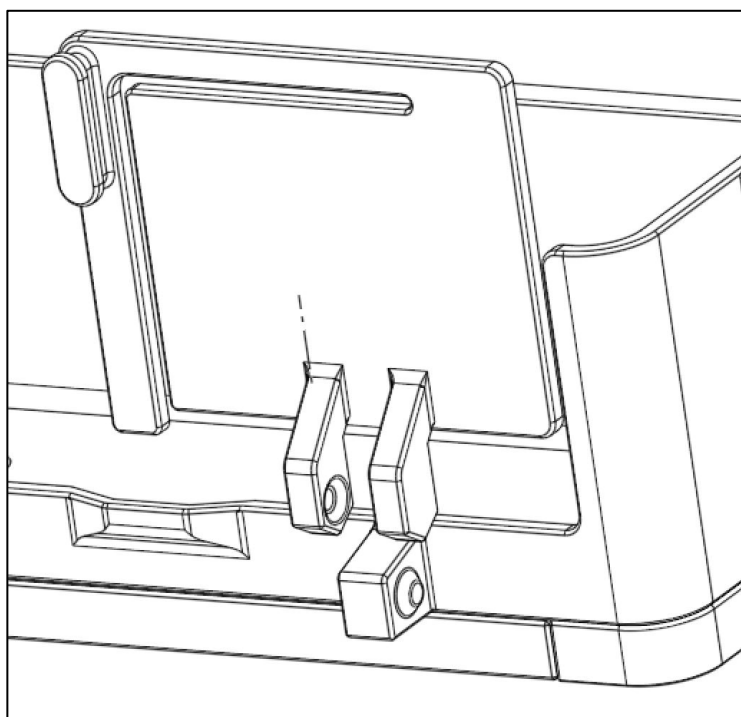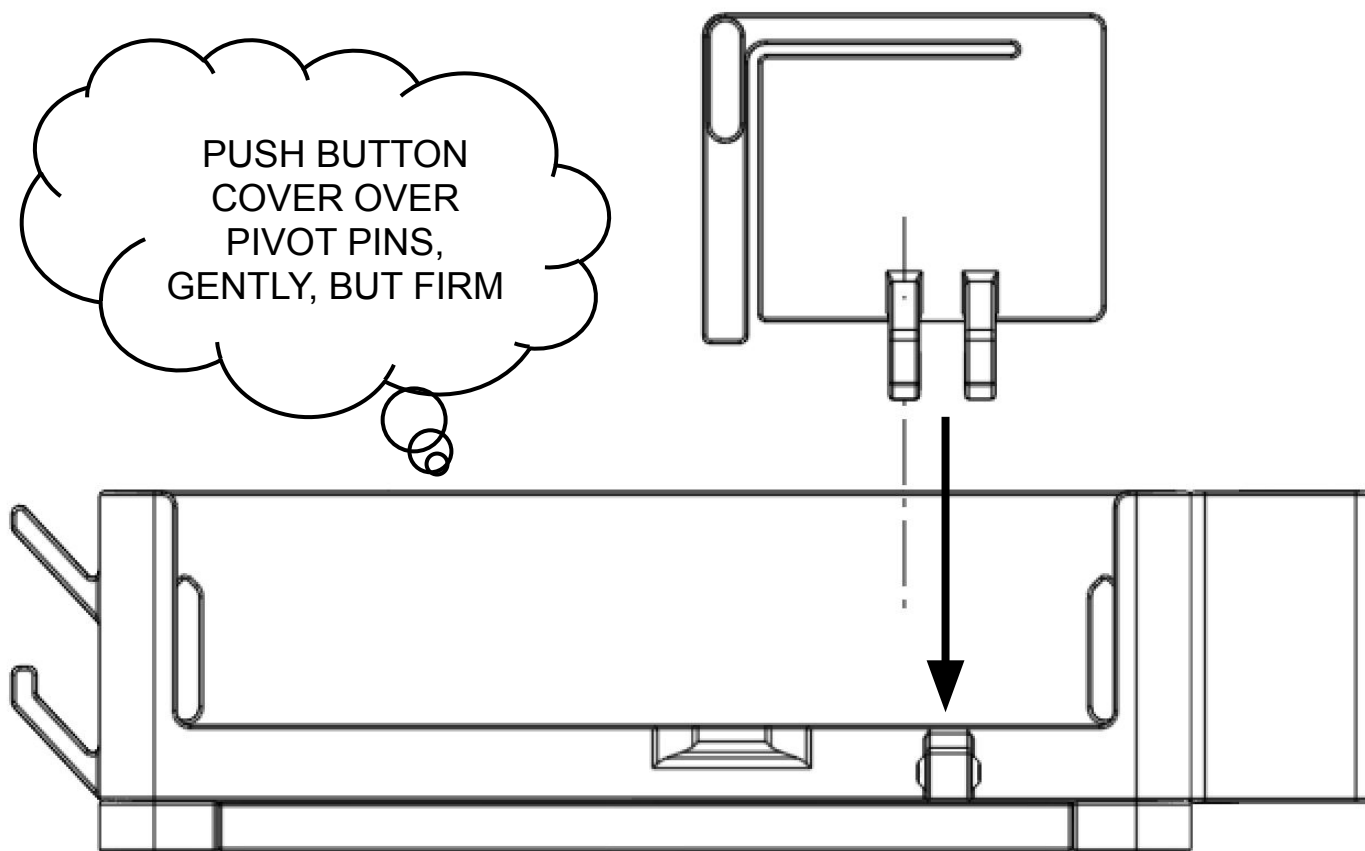


## 4. Installing Adjustable Hooks

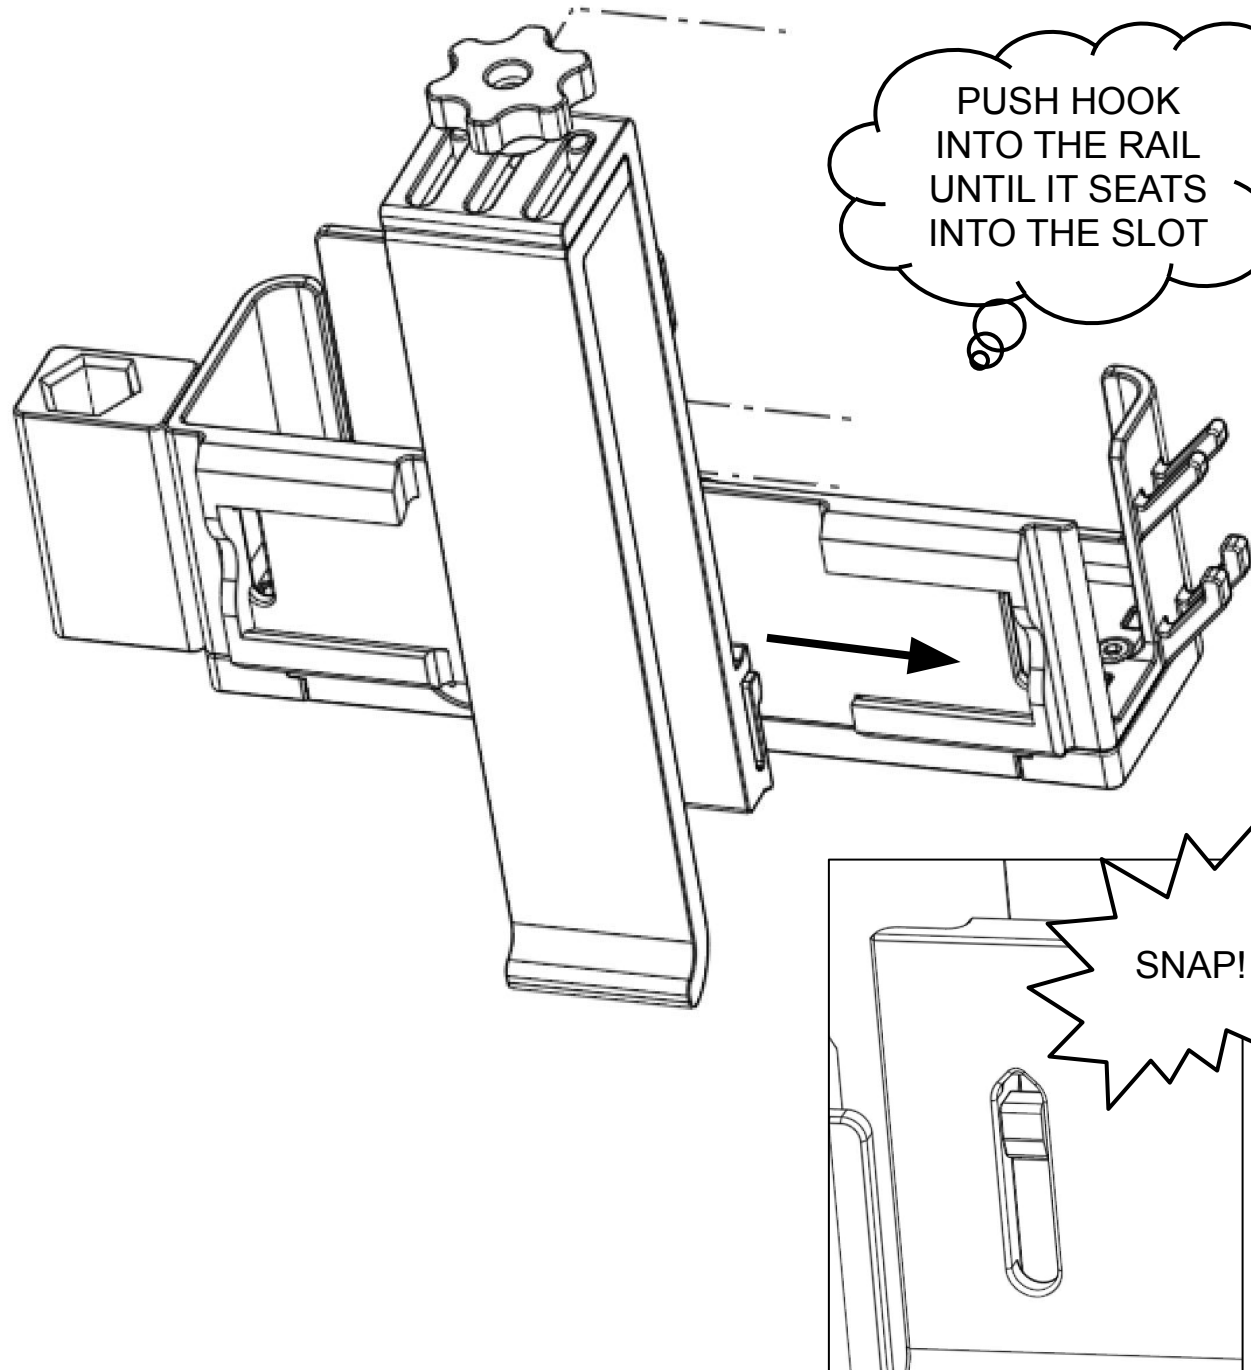


Note: Match corresponding sides to the Caddy Holder. A soft snap sound should be heard when the hook is properly seated, or looks like the picture of the snap installed. Repeat for other side.

5. Install Post

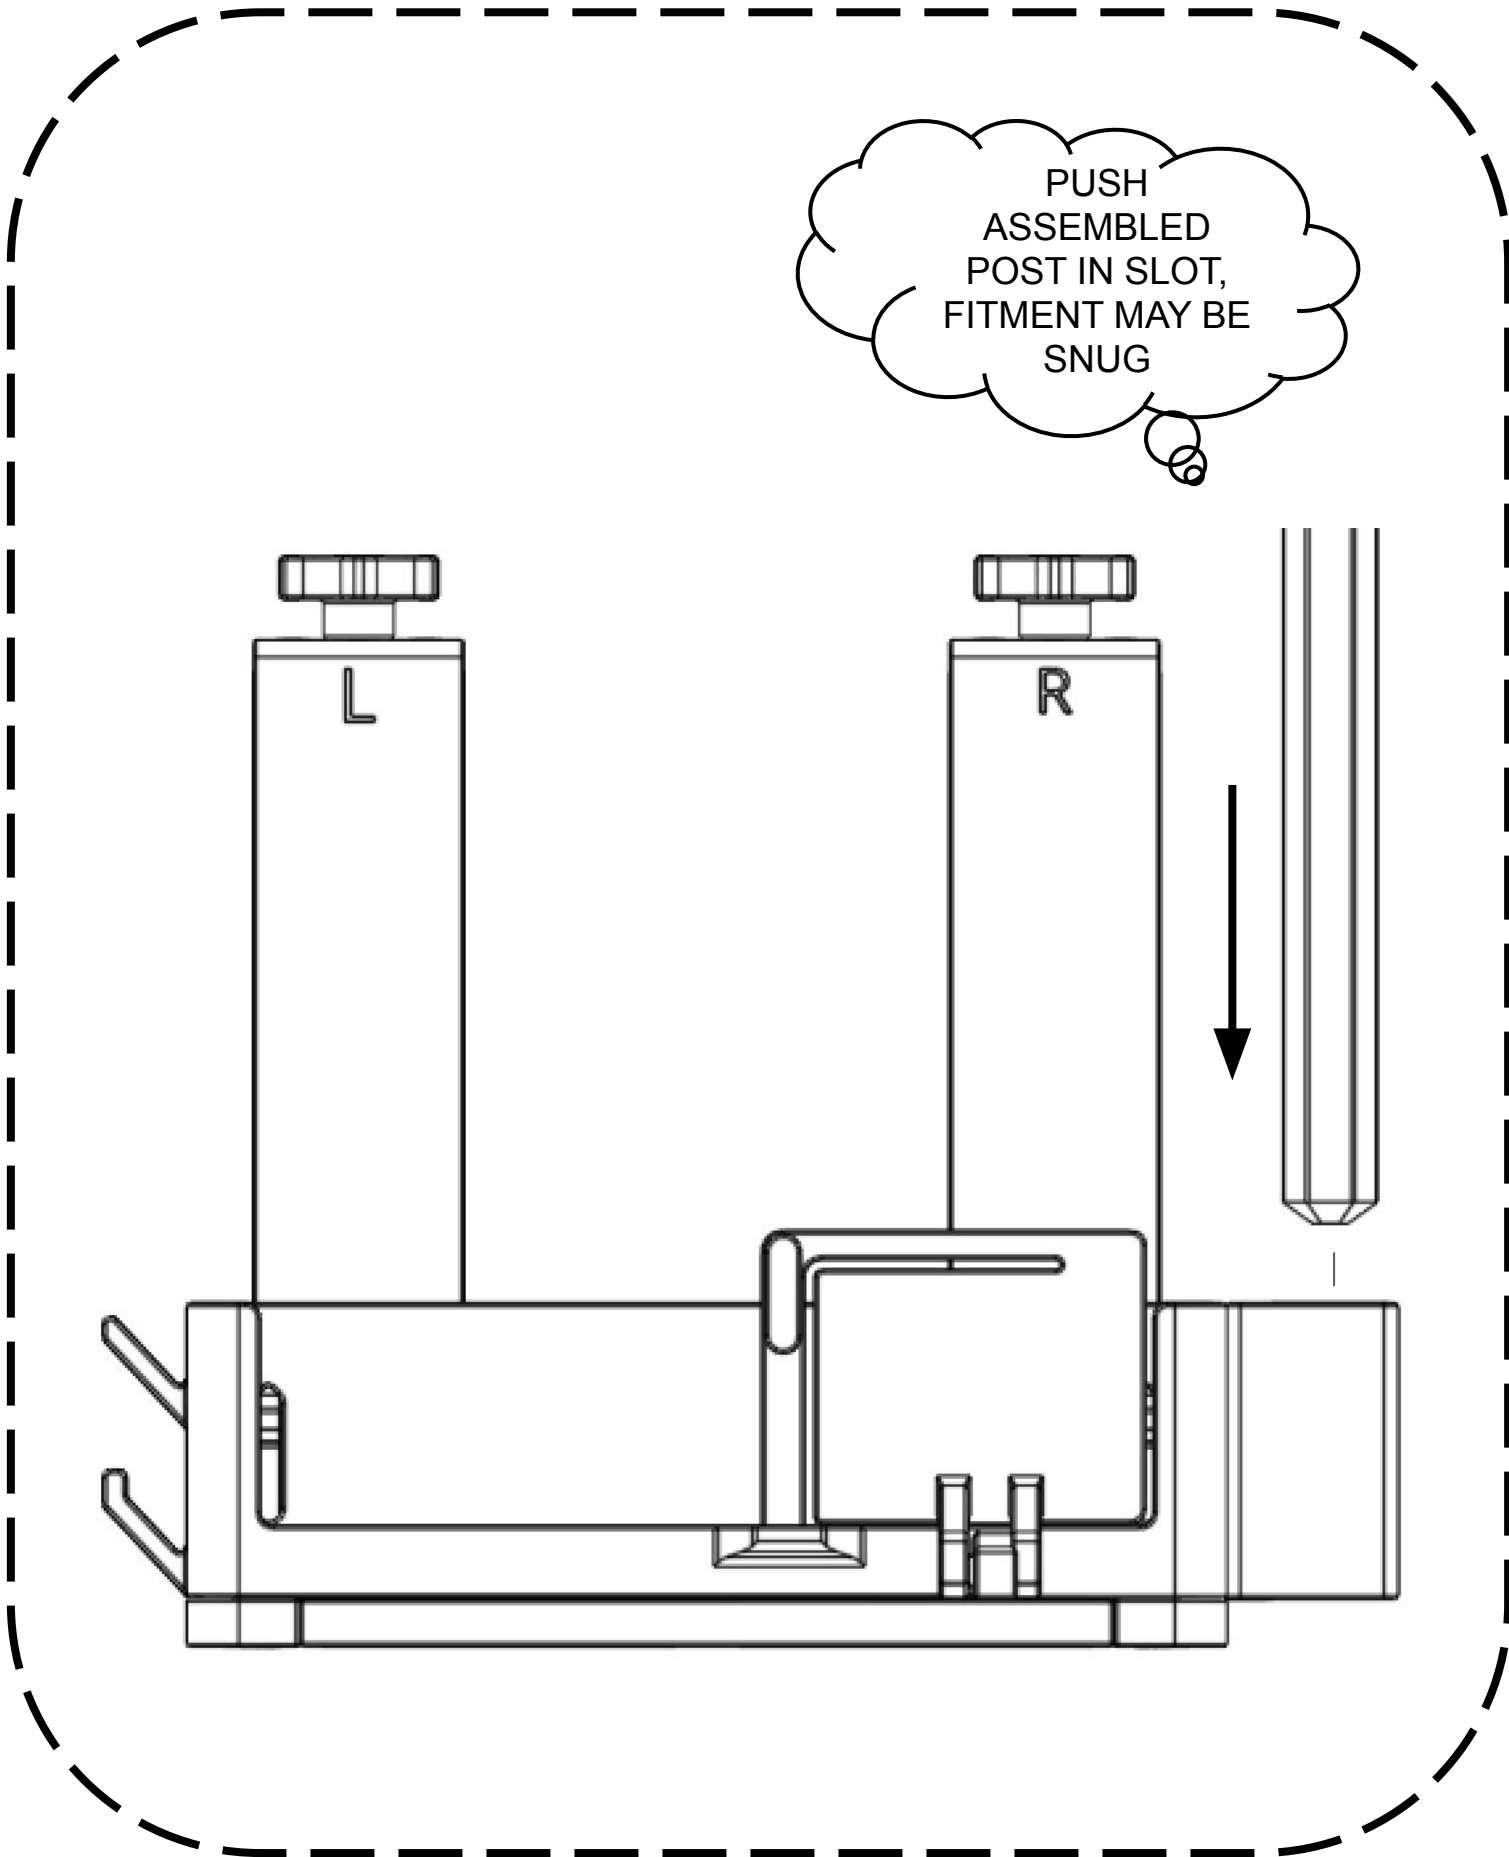


## 6. COMPLETED!

CONGRATULATE  
YOURSELF  
BECAUSE LIFE  
IS ABOUT THE  
SMALL WINS  
SOMETIMES!

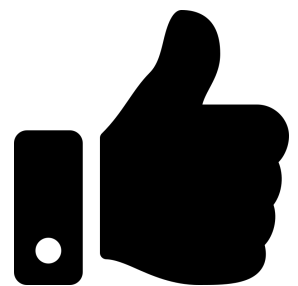




# Caddy Features - Part I

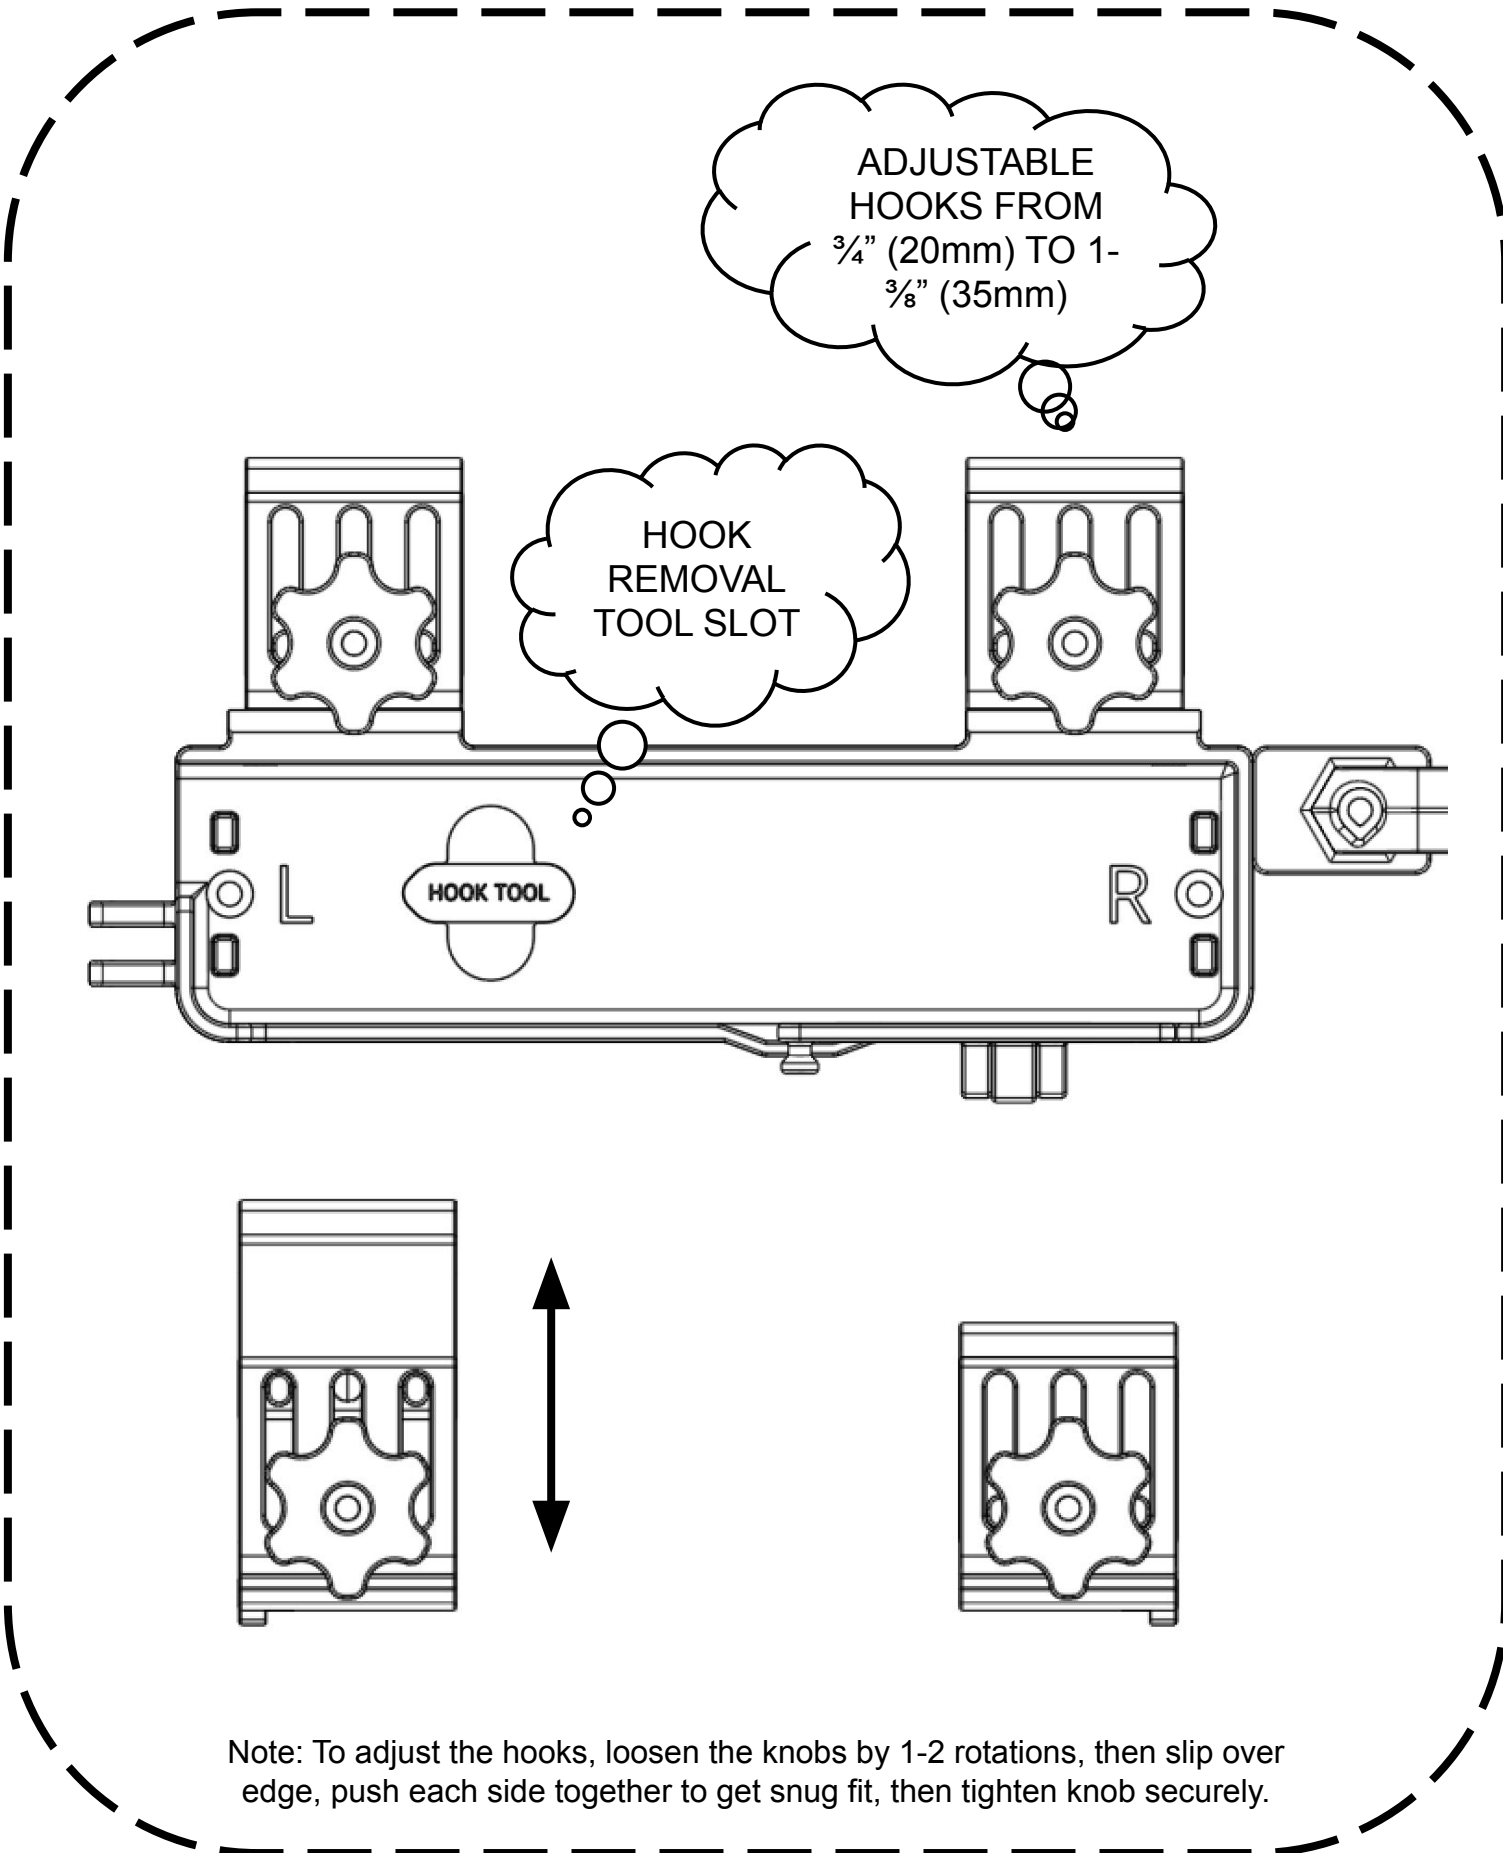


# Caddy Features - Part II

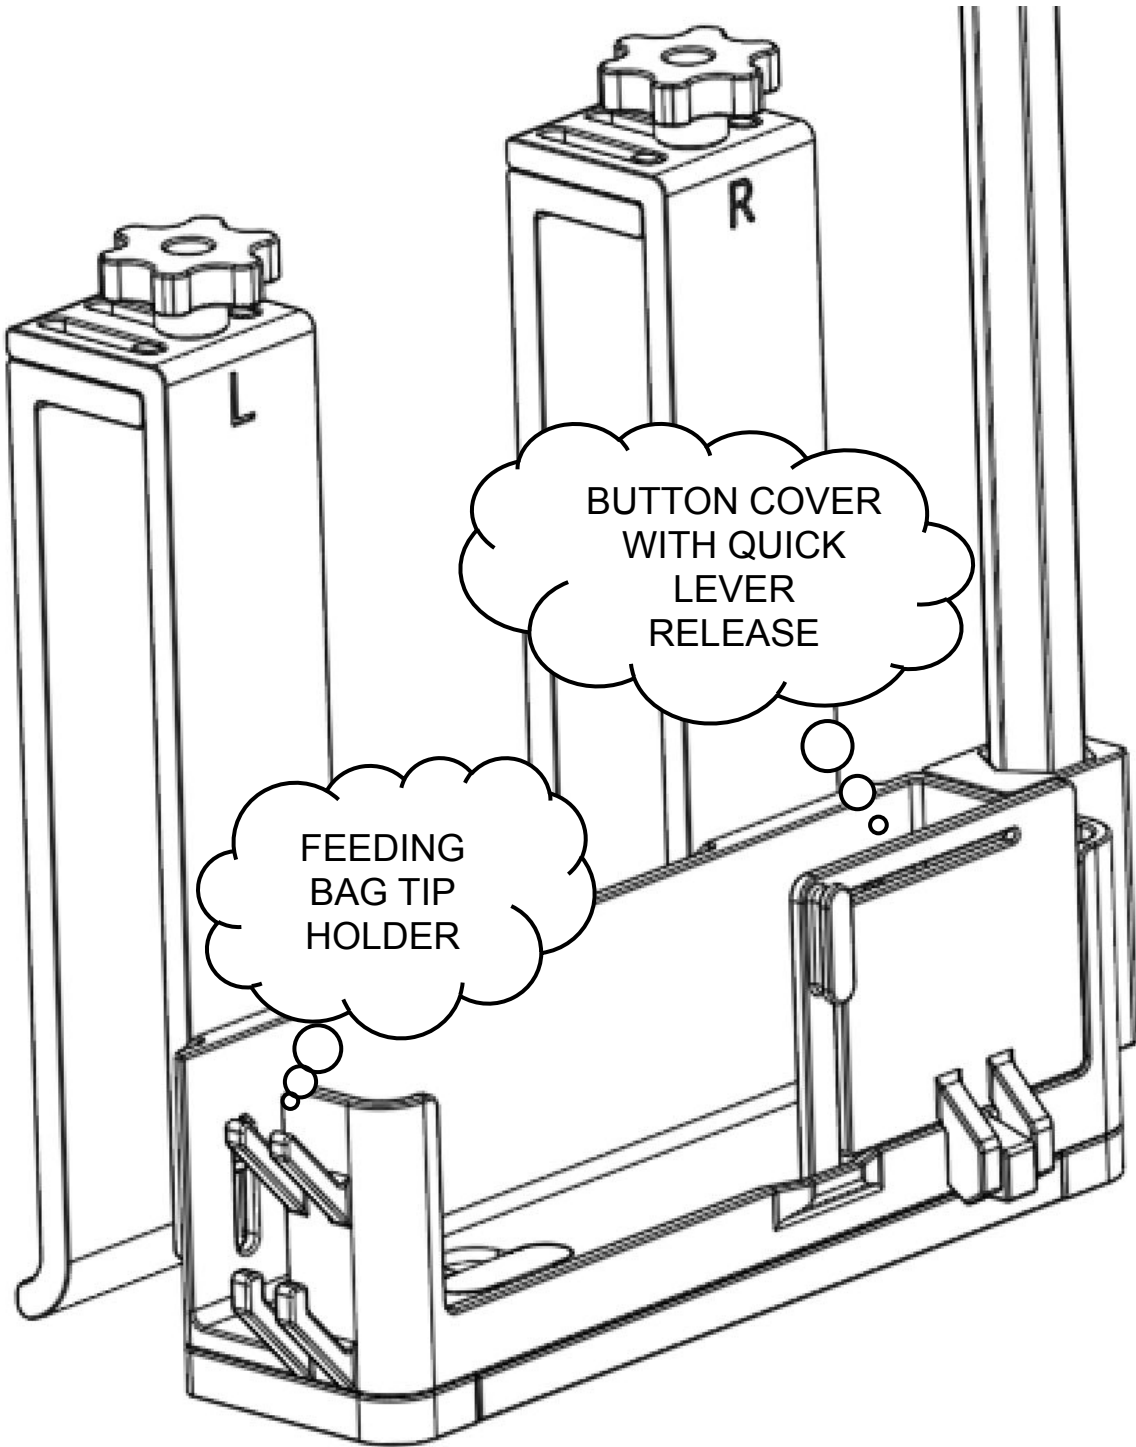

Note: To release the button cover, pull up on the handle slightly until the tab clears the caddy

# Caddy Features - Part III

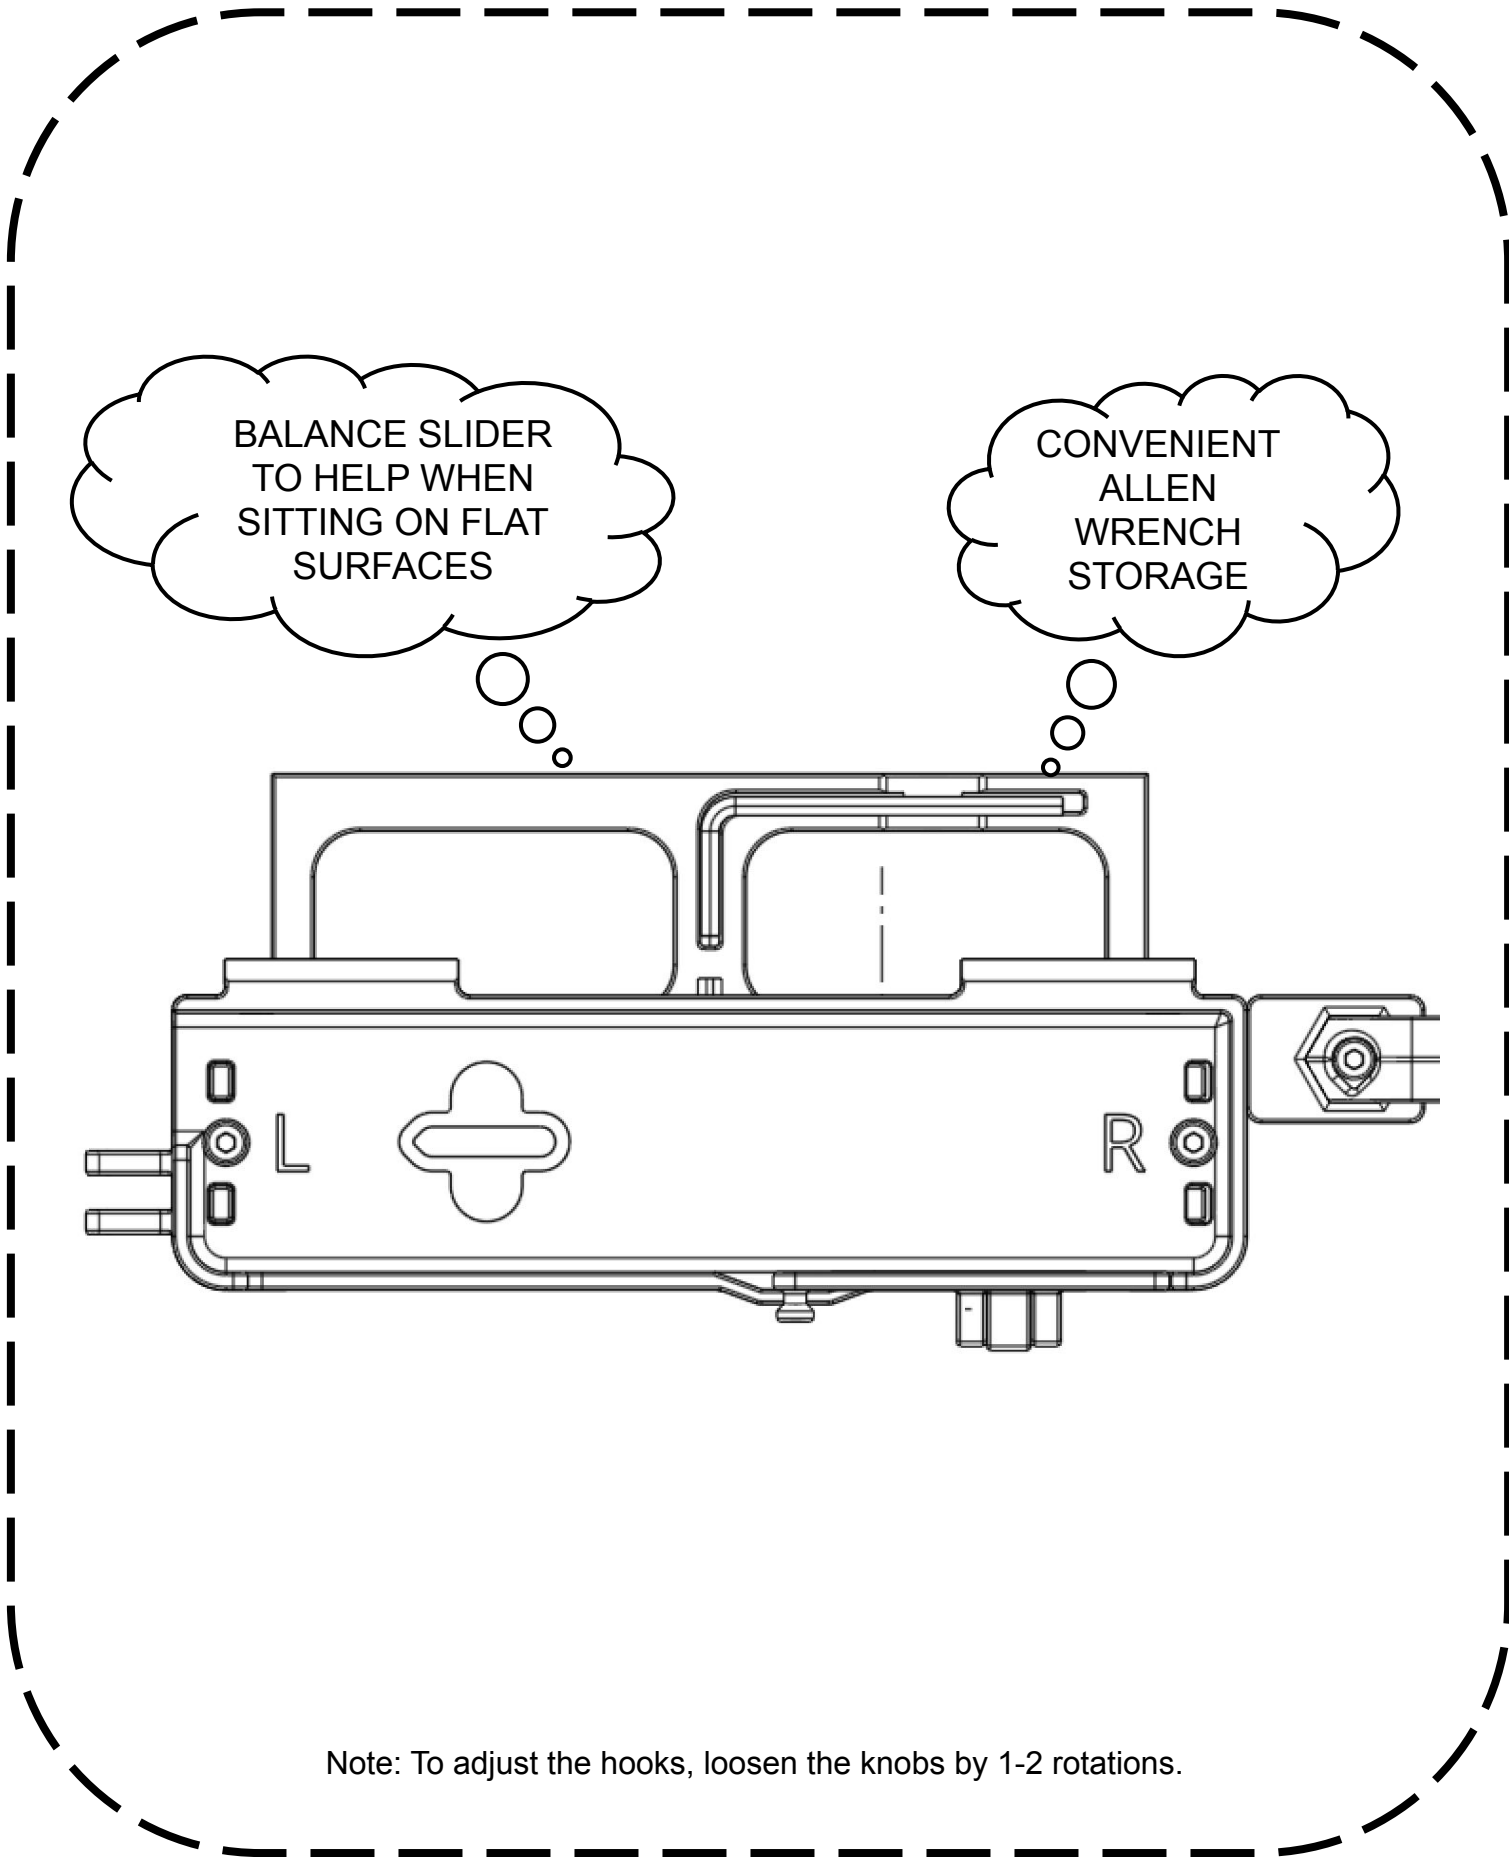

BALANCE SLIDER  
TO HELP WHEN  
SITTING ON FLAT  
SURFACES

CONVENIENT  
ALLEN  
WRENCH  
STORAGE

Note: To adjust the hooks, loosen the knobs by 1-2 rotations.

## Troubleshooting

- If the adjustable hooks disassemble, align both pins in the outer slots and then screw in the knob
- Tightening the slider carrier bolts may be required if the slider is used frequently.
- Use hook removal tool by aligning with the slot and pushing until bottoms out on the caddy, simultaneously push the hook out of the rail.

Note: This section will continuously be updated based on customer experience.