
Stainless steel fitting, with 3 screws rotating ring, deep drawn body and machined thread, for medium corrosive environments.

Minimum Size	Maximum Size	Material	Туре	Model
1" ½	2" ½	Stainless steel		66RJ (304L) 66RU (316L)



Because of permanent improvement of our products, drawings, descriptions, features used on these data sheets are for guidance only and can be modified without prior advice



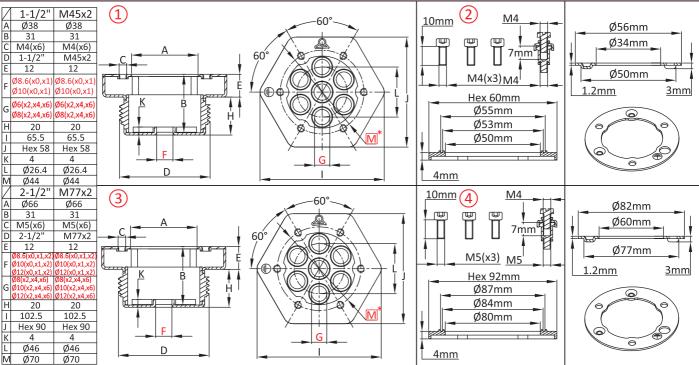

Wain references					
Dimensions	Composition	Reference in AISI 304L	Reference in AISI 316L		
1½"	1	66RJA3T****0000	66RUA3T****0000		
1½"	1+2	66RJA3T*****0005	66RUA3T****0005		
M45×2	1	66RJMDT****0000	66RUMDT****0000		
M45×2	1+2	66RJMDT****0005	66RUMDT****0005		
2½"	3	66RJA7T****0000	66RUA7T****0000		
2½"	3+4	66RJA7T*****0005	66RUA7T****0005		
M77×2	3	66RJMGT****0000	66RUMGT****0000		
M77×2	(3)+(4)	66RIMGT****0005	66RUMGT****0005		

Specify dimensions and quantity of holes F and G. Red dimensions inside rectangular frames are used for assembly on enclosures or on fittings



Links