
## Stainless steel fitting with 3 screws stamped rotation ring, with deep drawn body and massive machined thread, for medium corrosive environments. Non-welded thread

Minimum Size	Size Maximum Size Material Type		Model	
1" ½	2" ½	Stainless steel	Rotation ring and non-welded massive thread	66RQ (304L) 66RR (316L)





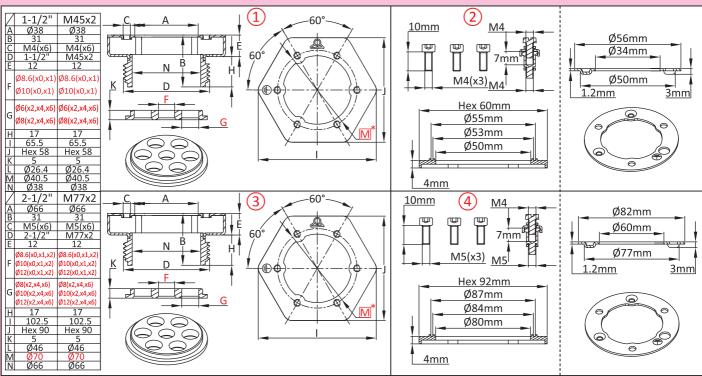

## Main references

Dimensions	Composition	Reference in AISI 304L	Reference in AISI 316L		
1½"	1	66RQA3T****0000	66RRA3T****0000		
1½"	1+2	66RQA3T****0005	66RRA3T****0005		
M45×2	1	66RQMDT****0000	66RRMDT****0000		
M45×2	1+2	66RQMDT****0005	66RRMDT****0005		
2½"	3	66RQA7T****0000	66RRA7T****0000		
2½"	3+4	66RQA7T*****0005	66RRA7T****0005		
M77×2	3	66RQMGT****0000	66RRMGT****0000		
M77×2	3+4	66RQMGT****0005	66RRMGT****0005		

Specify dimensions and quantity of holes F and G.
Red dimensions inside rectangular frames are used for assembly on enclosures or on fittings.





Page (.pdf)



回知而注回 安全之际 Drawing 2D (.dwg)



Drawing 3D (.stp)