
Brass fittings, double thread, with side grounding terminal

| Minimum Size | Maximum Size | Material | Туре | Model |
|--------------|--------------|----------|----------------------------|-------|
| 1½" | M77×2 | Brass | Double thread, side ground | 66RC |

| Compatible accessories | | | | | |
|------------------------|---------------|---------------|--|--|--|
| ⊠ 66JP | X 6 | 66NL | | | |
| ⊠ 66JF | ▼ 66XN | | | | |
| Compatible enclosures | | | | | |
| X Y303 | X Y3P5 | X Y3N2 | | | |
| X Y304 | X Y3P6 | X Y3N3 | | | |
| X Y305 | X Y3H1 | X Y3N4 | | | |
| X Y306 | X Y3H2 | XY3L1 | | | |
| X Y307 | X Y3H3 | X Y3L3 | | | |
| X Y309 | X Y3J1 | X Y3S3 | | | |
| X Y310 | X Y3J2 | ¥ Y3S5 | | | |
| X Y3P1 | X Y3G1 | XY3SA | | | |
| X Y3P3 | X Y3G2 | ¥ Y3S7 | | | |
| X Y3P4 | X Y3N1 | | | | |



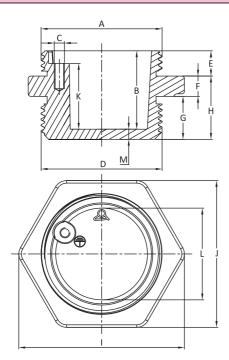

| | 1-1/2" | M45x2 | 2" | 2-1/2" | M77x2 |
|---|--------|--------|--------|--------|--------|
| Α | 1-1/2" | M45x2 | 2" | 2-1/2" | M77x2 |
| В | 31 | 31 | 34 | 34 | 34 |
| С | M4 | M4 | M5 | M5 | M5 |
| D | 1-1/2" | M45x2 | 2" | 2-1/2" | M77x2 |
| Е | 10 | 10 | 10 | 10 | 10 |
| F | 8 | 8 | 8 | 8 | 8 |
| G | 17 | 17 | 20 | 20 | 20 |
| Н | 25 | 25 | 28 | 28 | 28 |
| 1 | 65.5 | 65.5 | 79.5 | 102.5 | 102.5 |
| J | Hex 58 | Hex 58 | Hex 70 | Hex 90 | Hex 90 |
| K | 26 | 26 | 28 | 28 | 28 |
| L | Ø36 | Ø36 | Ø50 | Ø66 | Ø66 |
| M | 4 | 4 | 4 | 4 | 4 |

Main references

| Dimension | References | Dimension | References |
|-----------|------------------|-----------|------------------|
| 1-1/2" | 66RCA3T000000000 | 2-1/2" | 66RCA70000000000 |
| M45×2 | 66RCMD0000000000 | M77×2 | 66RCMG0000000000 |
| 2" | 66RCA50000000000 | | |

Links



Page (.pdf)



Drawing 2D (.dwg)



Drawing 3D (.stp)

Red dimensions inside rectangular frames are used for assembly on enclosures or on fitting

