



	1	2	3	4	5	6
A	IO Connection File: Notecarrier-X_IO-Connection.kicad_sch					A
B	Notecard Connection File: Notecarrier-X_Notecard-Connection.kicad_sch					B
C	Power File: Notecarrier-X_Power.kicad_sch					C
D	Blues Inc Copyright (c) 2023 Blues Inc Title: Notecarrier-X Drawn By: Ported from Altium Designer Sources (100%) File: Notecarrier-X.kicad_sch Rev: v1.2Date: 2026-07-31  Empirical Engineering Sheet: 1/4					D
	1	2	3	4	5	6


I/O Pin Headers

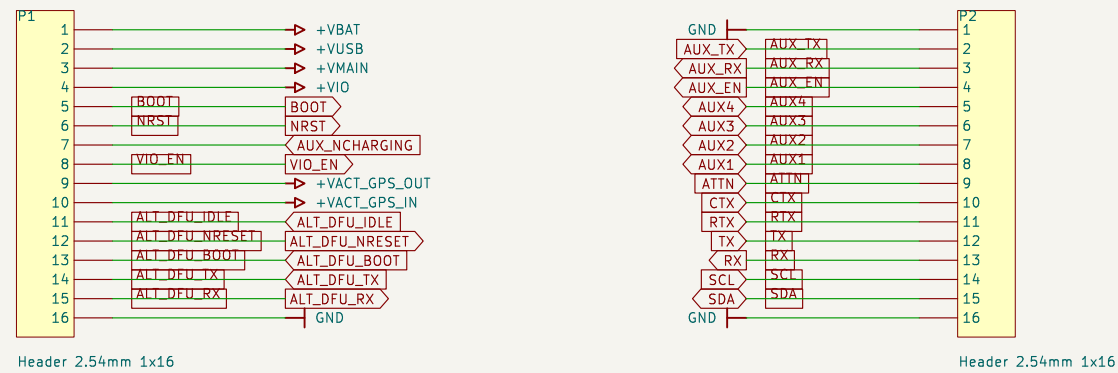


ESLOV Connector




USB C Connector



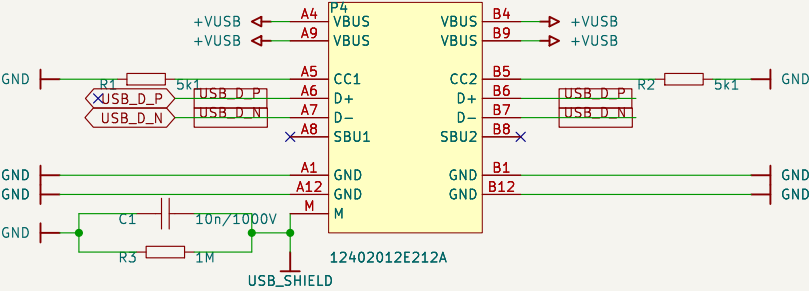


QWIIIC Connector



Battery Connector



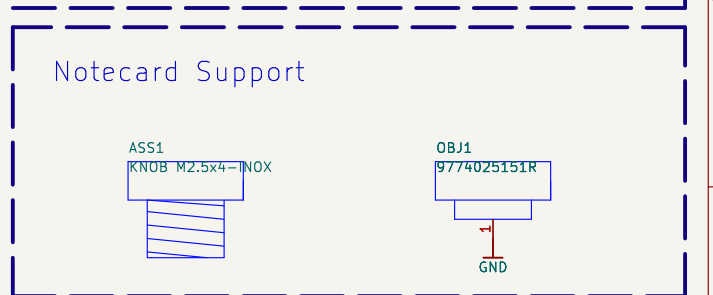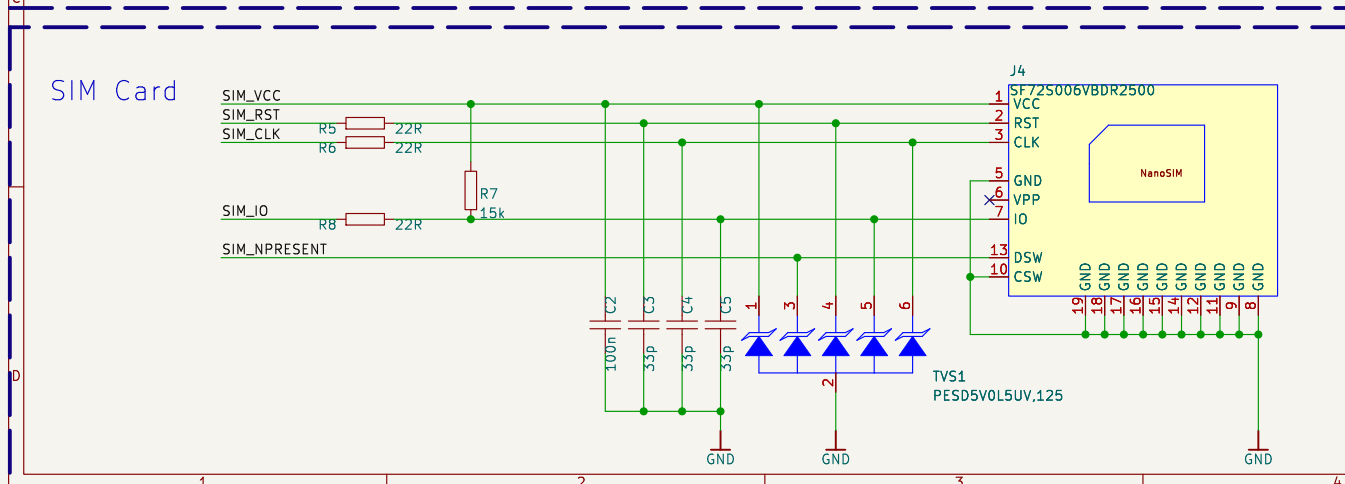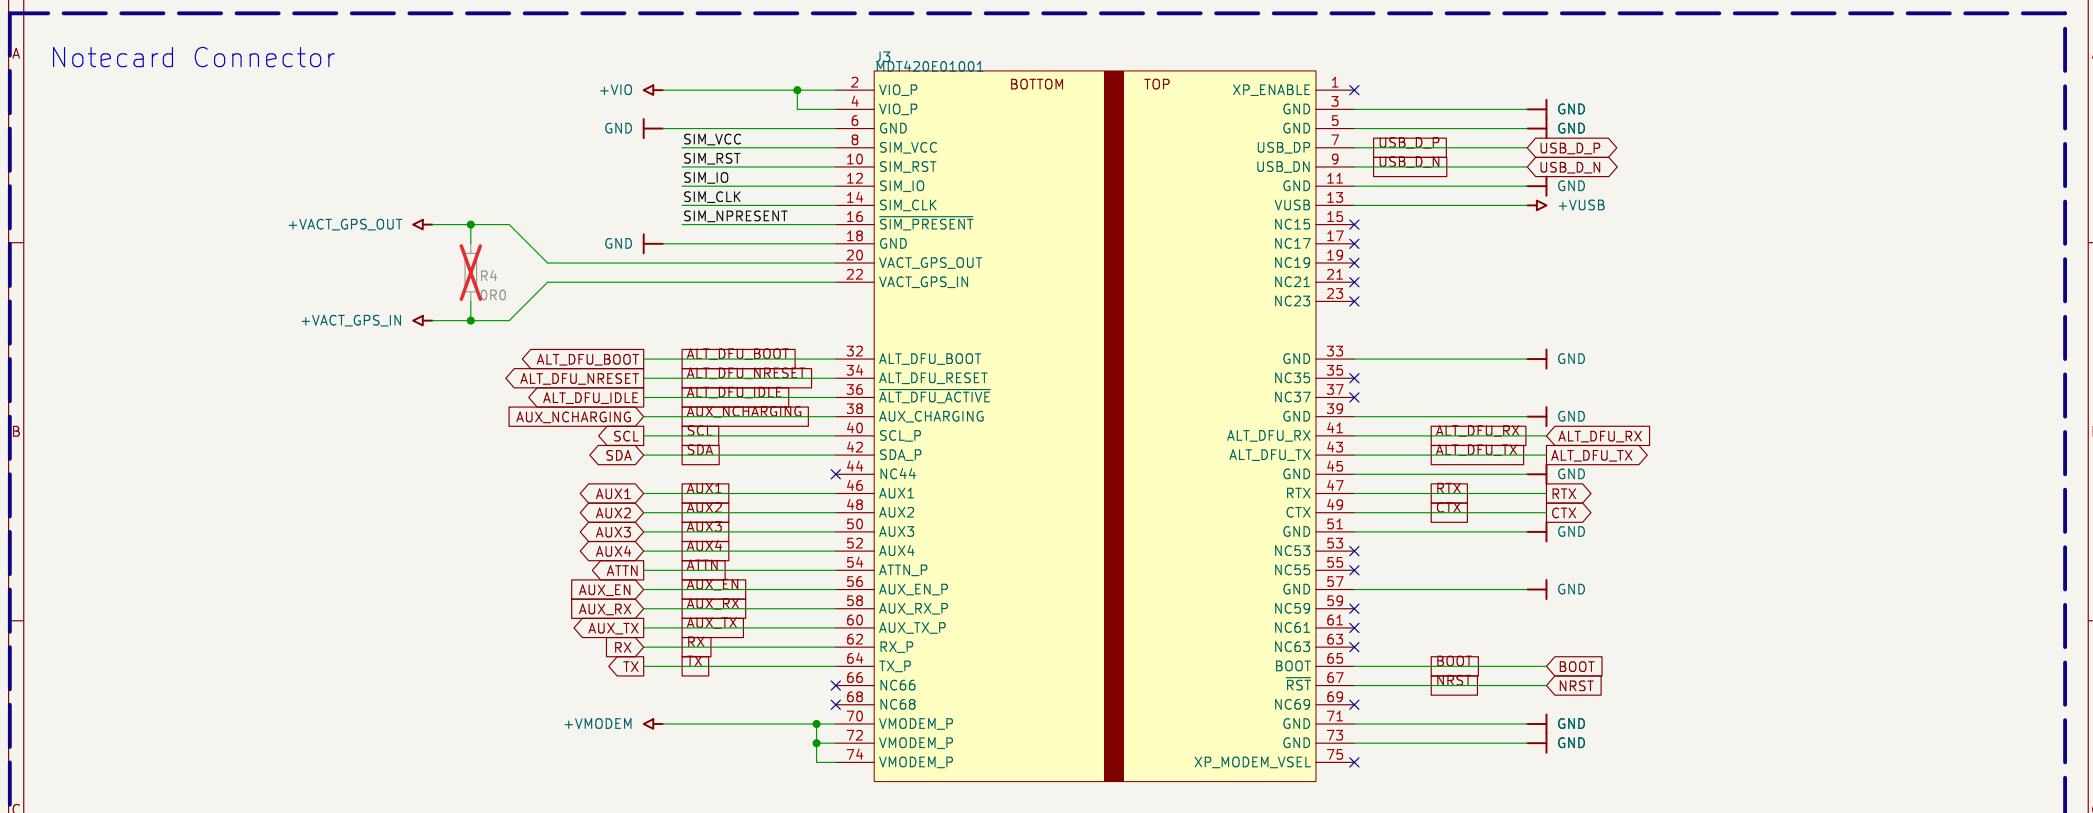

Title: Notecarrier-X.kicad_sch		Title:		 EmpiricalEE contact@empirical.ee	
Project: Notecarrier-X		Drawn By:		D	
Company: Medarska 69/1, 10000 Zagreb, Croatia		Byte Lab Grupa d.o.o. www.byte-lab.com		Notecard-Connection.kicad_sch	
Copyright (c) 2023 Blues Inc		Author: M. Maric		Sheet: 3/4	
		Acceptor: J. Medvedy		5	
Sheet 3 of 4		Rev: HW_E_Doc		Rev: A4	

Battery Charger w/ Power Path


DESIGN NOTE:

Charger:
- Default charging voltage: 4.2V
- Default charging current: 320mA
- Default termination current: 20mA
- Default pre-charge current: 20mA
- No battery thermal protection

DESIGN NOTE:

Power Path:
- Input current limit: 3.5A
- 26mOhm reverse blocking transistor
- 15mOhm battery transistor


Buck Regulator:
- 1.5MHz frequency
- Input Voltage: 5V
- Output Voltage: 3.3-4.2V
- Peak current: 2.5A

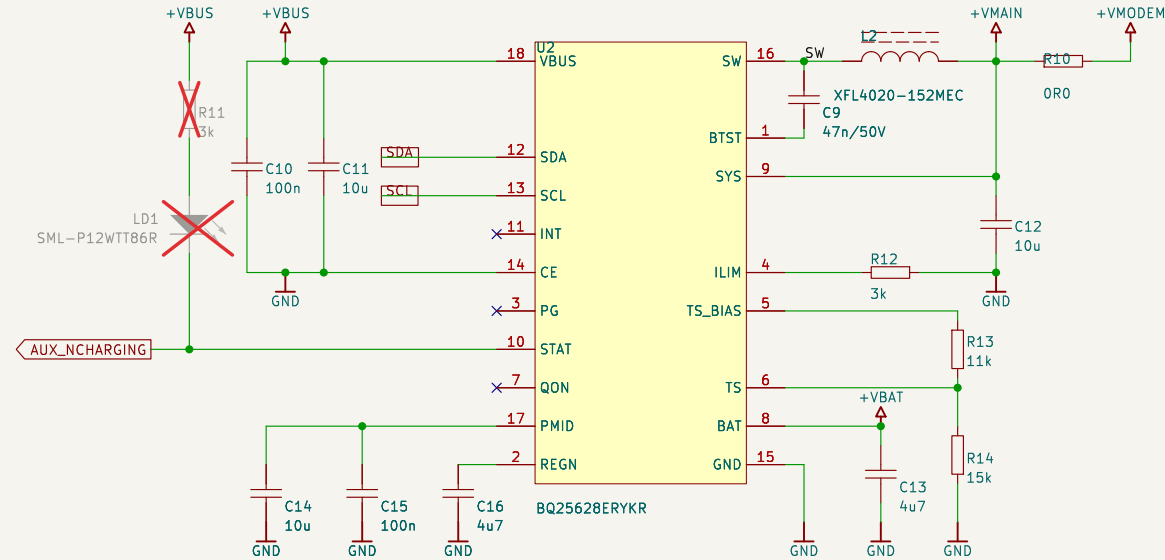

3V3 Buck/Boost Regulator

DESIGN NOTE:
Input Voltage: 1.8V - 5.5V
Output Voltage: 3.3V

Peak Output Current:
500mA
Average Current: 100mA

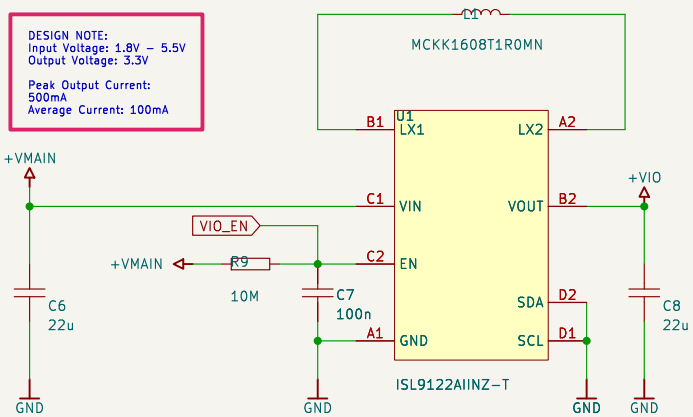

VBUS ORing

