



	1	2	3	4	5	6
A	IO Connection File: Notecarrier-XS_IO-Connection.kicad_sch					A
B	Notecard Connection File: Notecarrier-XS_Notecard-Connection.kicad_sch Power File: Notecarrier-XS_Power.kicad_sch Starnote Connection File: Notecarrier-XS_Starnote-Connection.kicad_sch					B
C						C
D	Blues Inc Copyright (c) 2023 Blues Inc Title: Notecarrier-XS Drawn By: Ported from Altium Designer File: Notecarrier-XS.kicad_sch Rev: v1.2Date: 2026-07-31  Empirical Engineering Sheet: 1/5					D
	1	2	3	4	5	6


I/O Pin Headers & Castellations

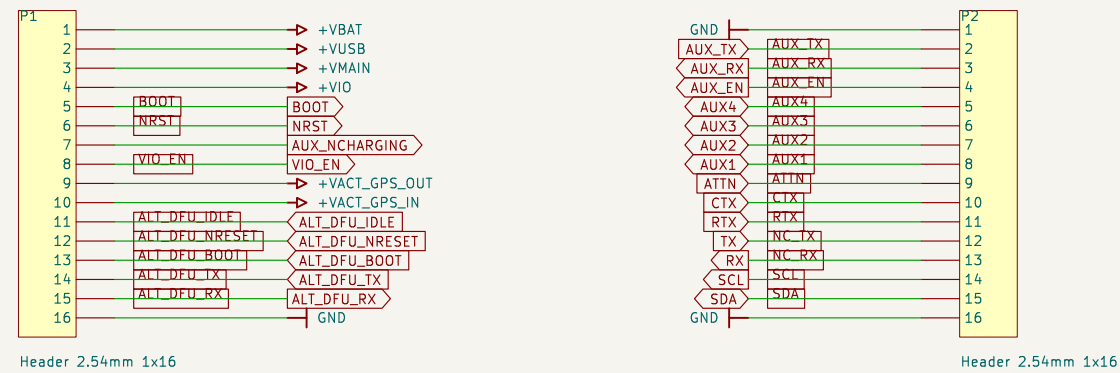


ESLOV Connector




Mech Support Connector




USB C Connector



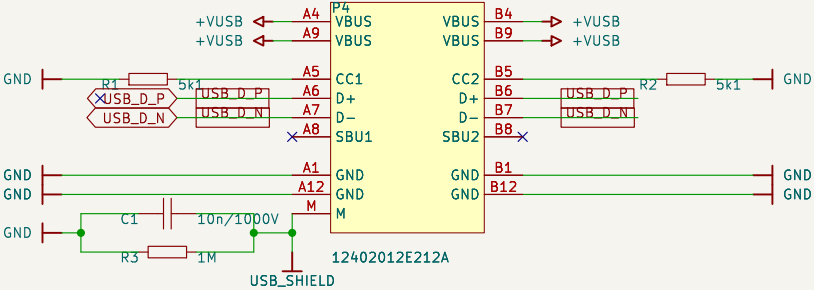


QWIIIC Connector



Battery Connector



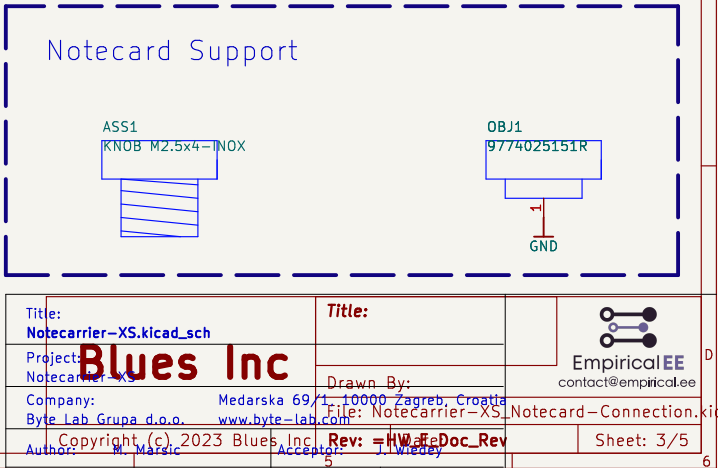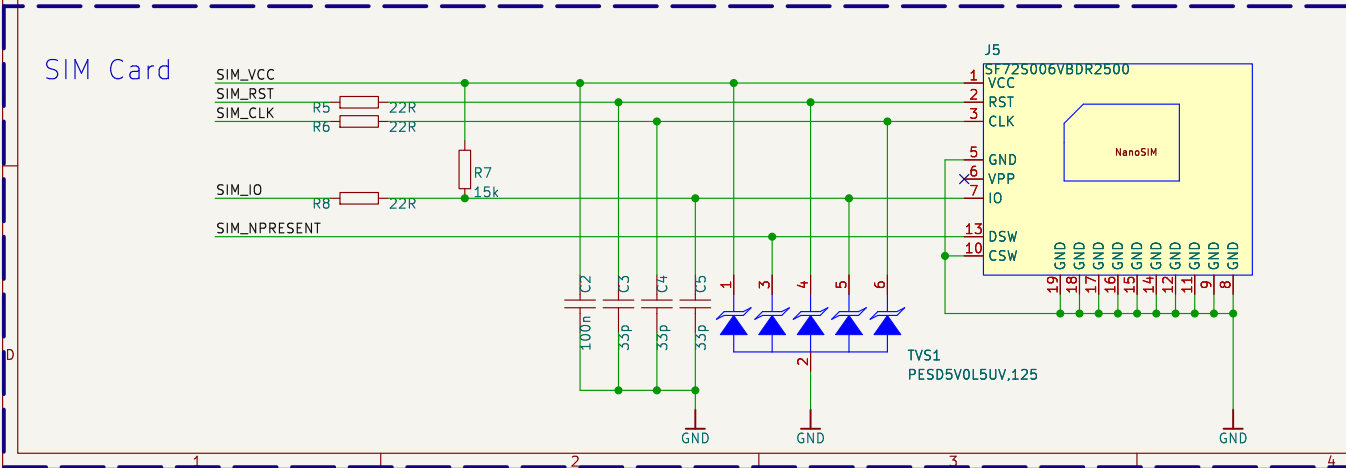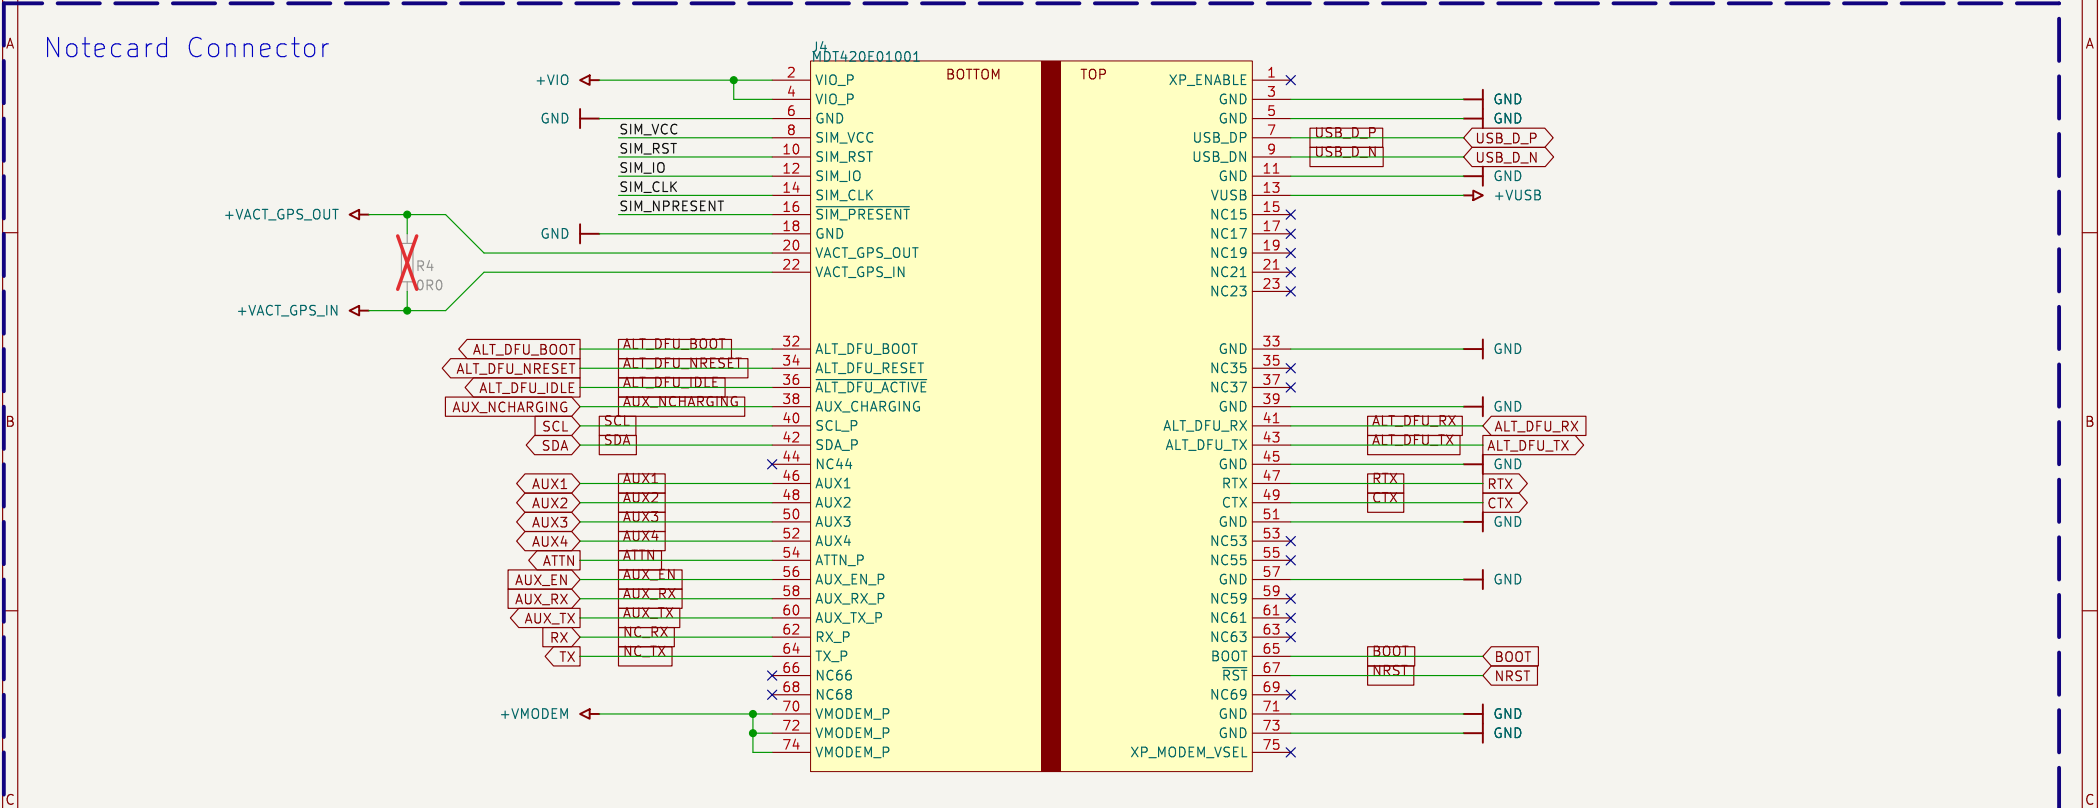


Battery Charger w/ Power Path

DESIGN NOTE:

Charger:
 - Default charging voltage: 4.2V
 - Default charging current: 320mA
 - Default termination current: 20mA
 - Default pre-charge current: 20mA
 - No battery thermal protection


DESIGN NOTE:

Power Path:
 - Input current limit: 3.5A
 - 26mOhm reverse blocking transistor
 - 15mOhm battery transistor
 Buck Regulator:
 - 1.5MHz frequency
 - Input Voltage: 5V
 - Output Voltage: 3.3-4.2V
 - Peak current: 2.5A

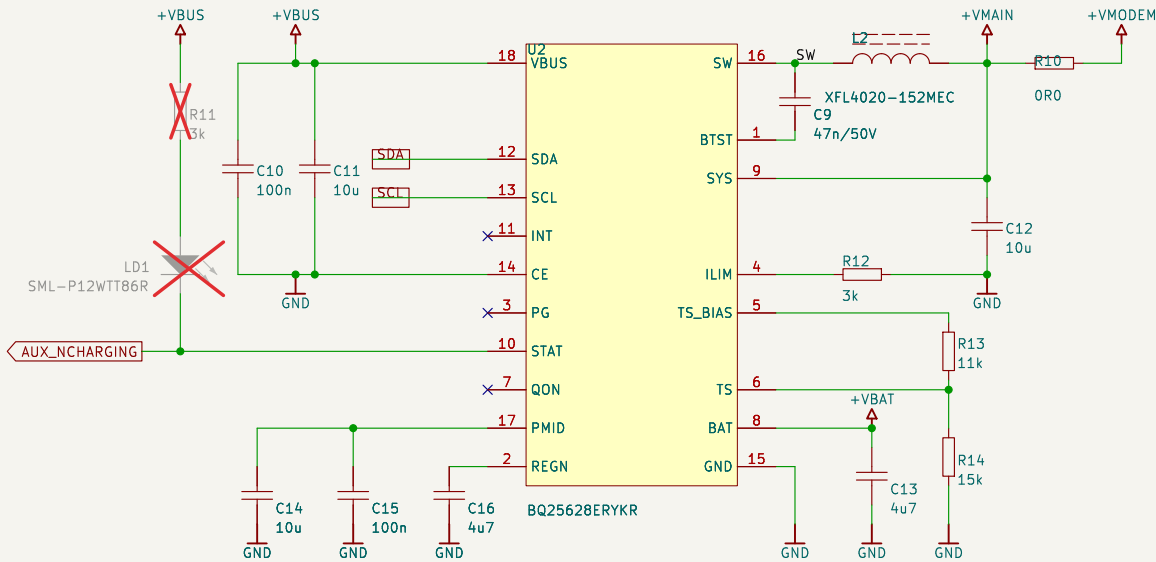


3V3 Buck/Boost Regulator


DESIGN NOTE:
 Input Voltage: 1.8V - 5.5V
 Output Voltage: 3.3V
 Peak Output Current:
 500mA
 Average Current: 100mA

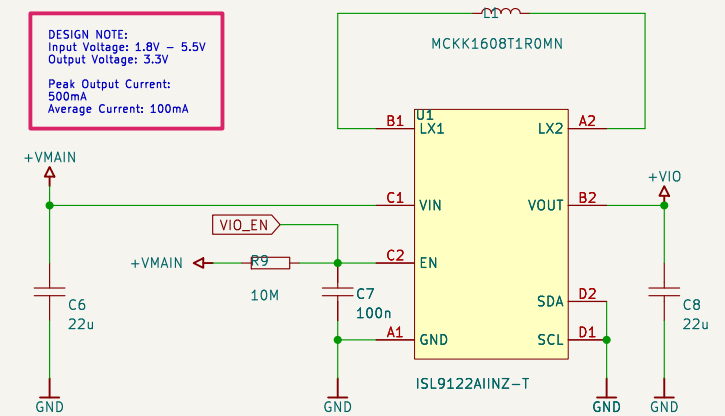

VBUS ORing

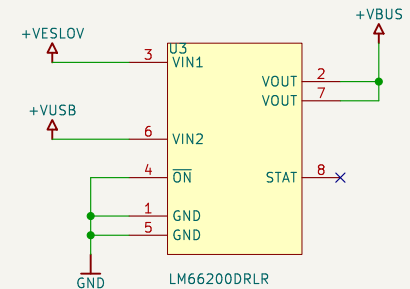

Starnote Connector

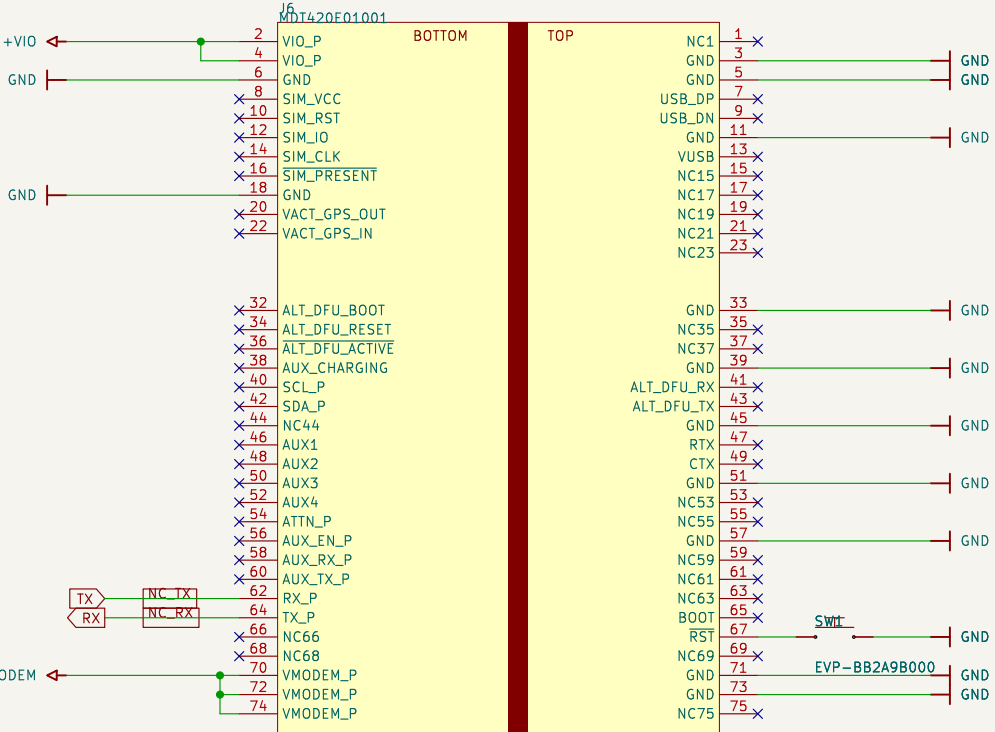

Starnote Support

