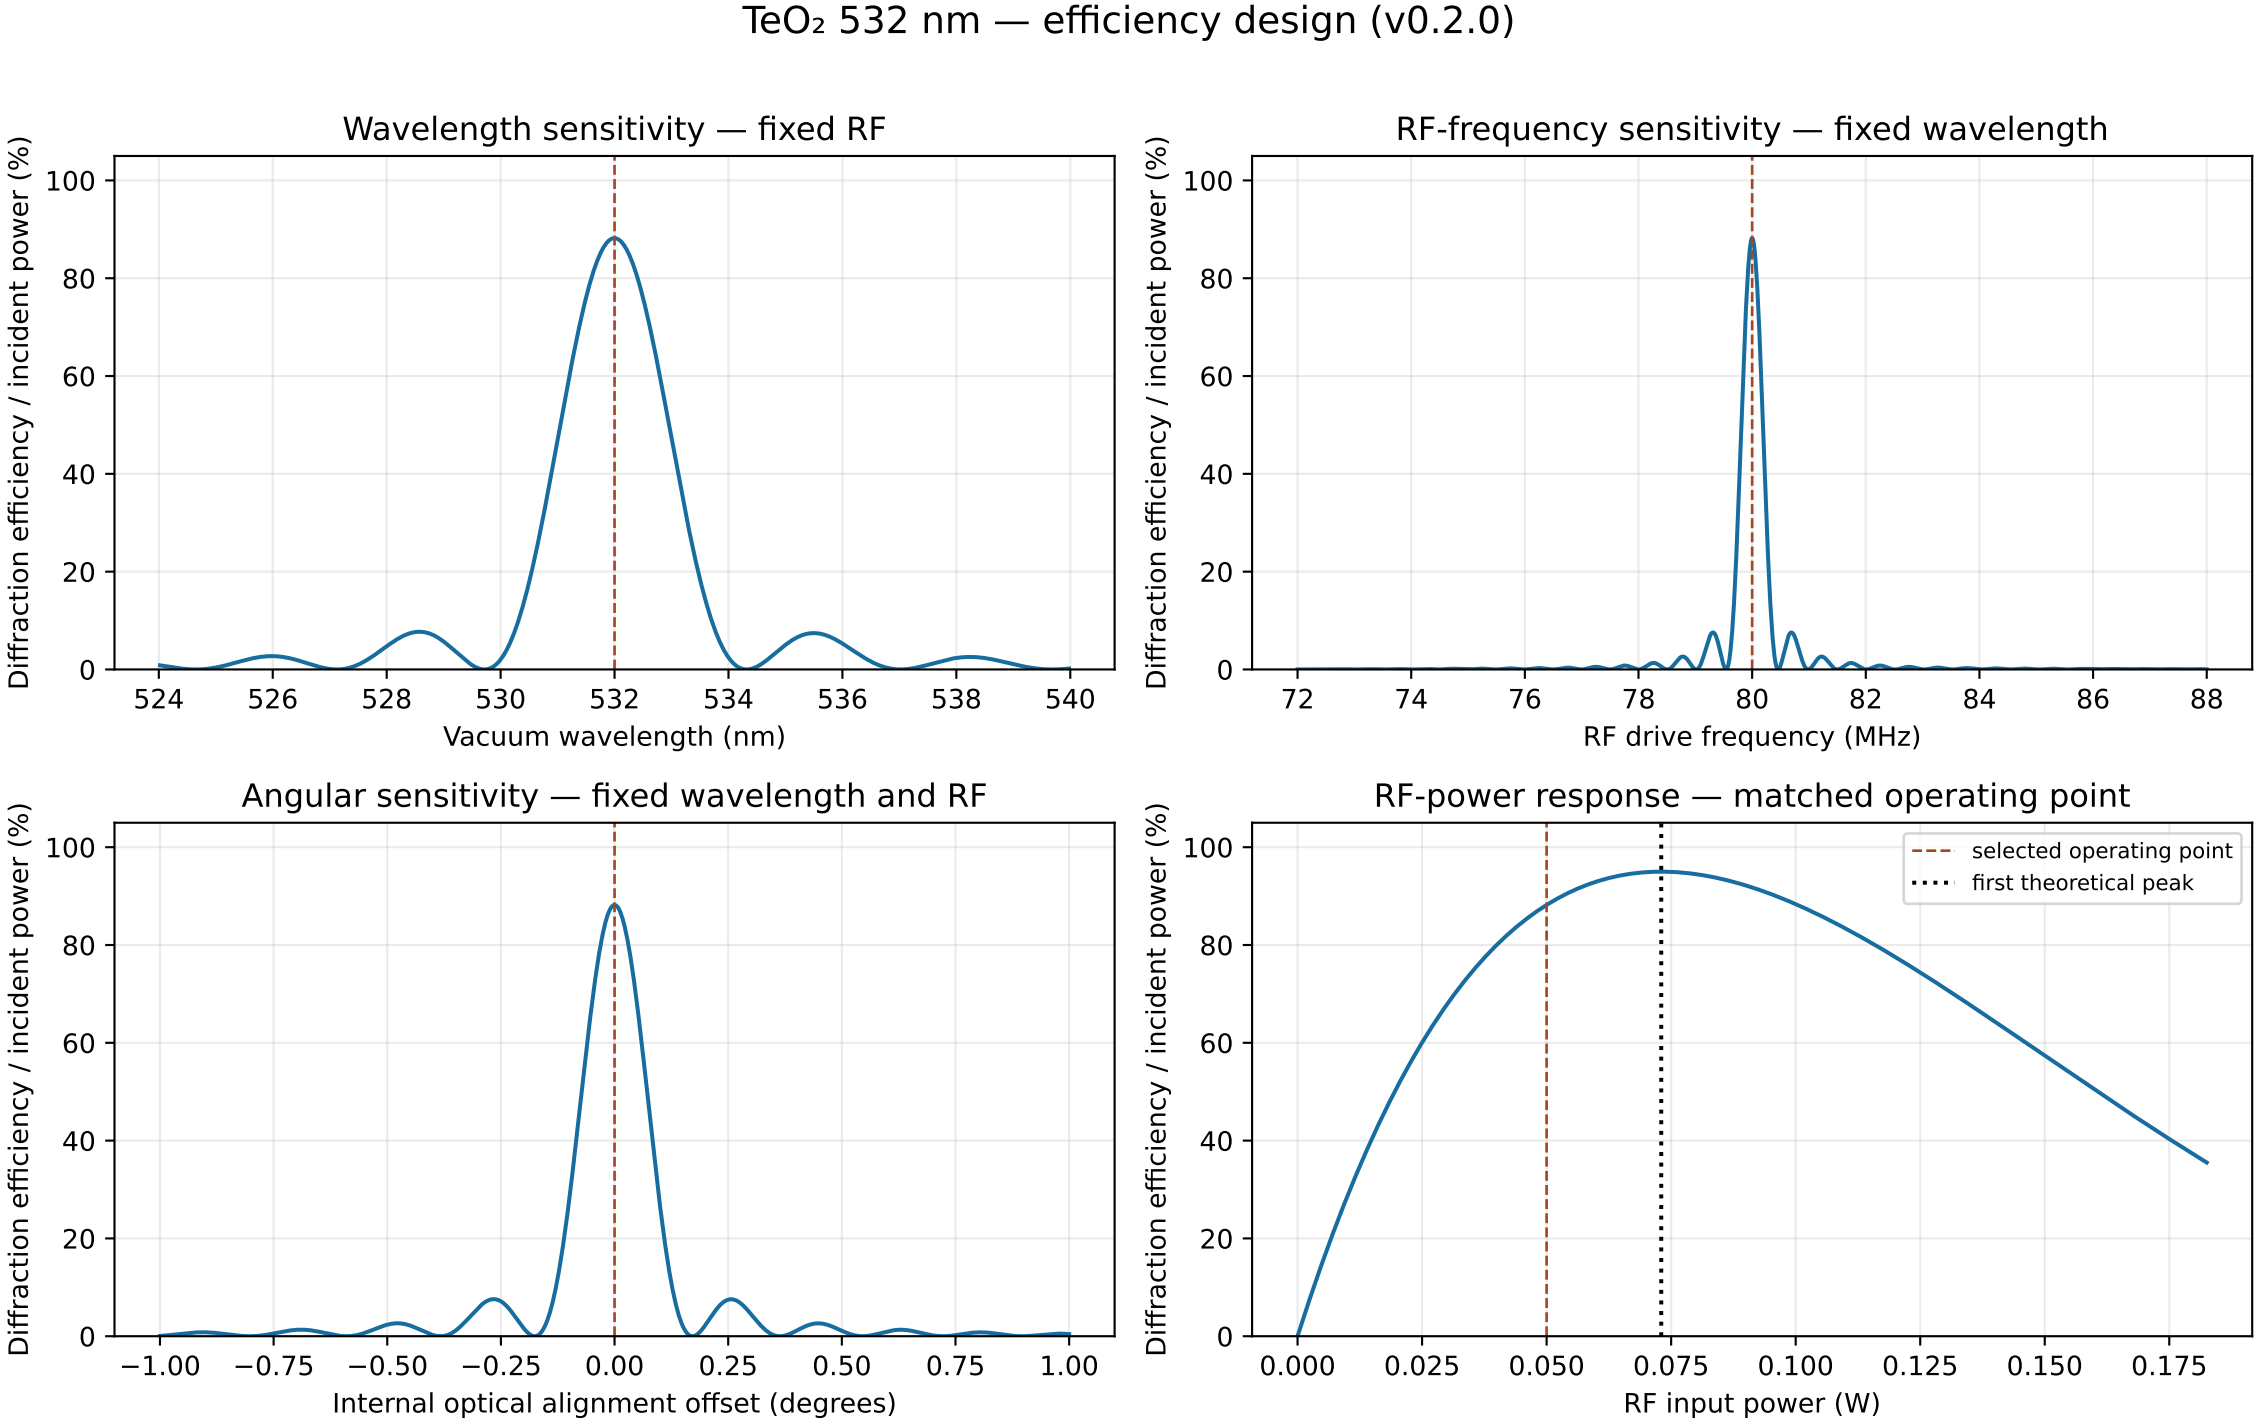
TeO₂ 532 nm — efficiency design (v0.2.0)
Wavelength sensitivity — fixed RF
Diffraction efficiency / incident power (%)
Vacuum wavelength (nm)
RF-frequency sensitivity — fixed wavelength
RF drive frequency (MHz)
Angular sensitivity — fixed wavelength and RF
Internal optical alignment offset (degrees)
RF-power response — matched operating point
selected operating point
first theoretical peak
RF input power (W)
Fixed acoustic cut; nominal RF power 0.05 W except power sweep. Fixed boundary; internal angles; no retuning. Optical activity omitted.