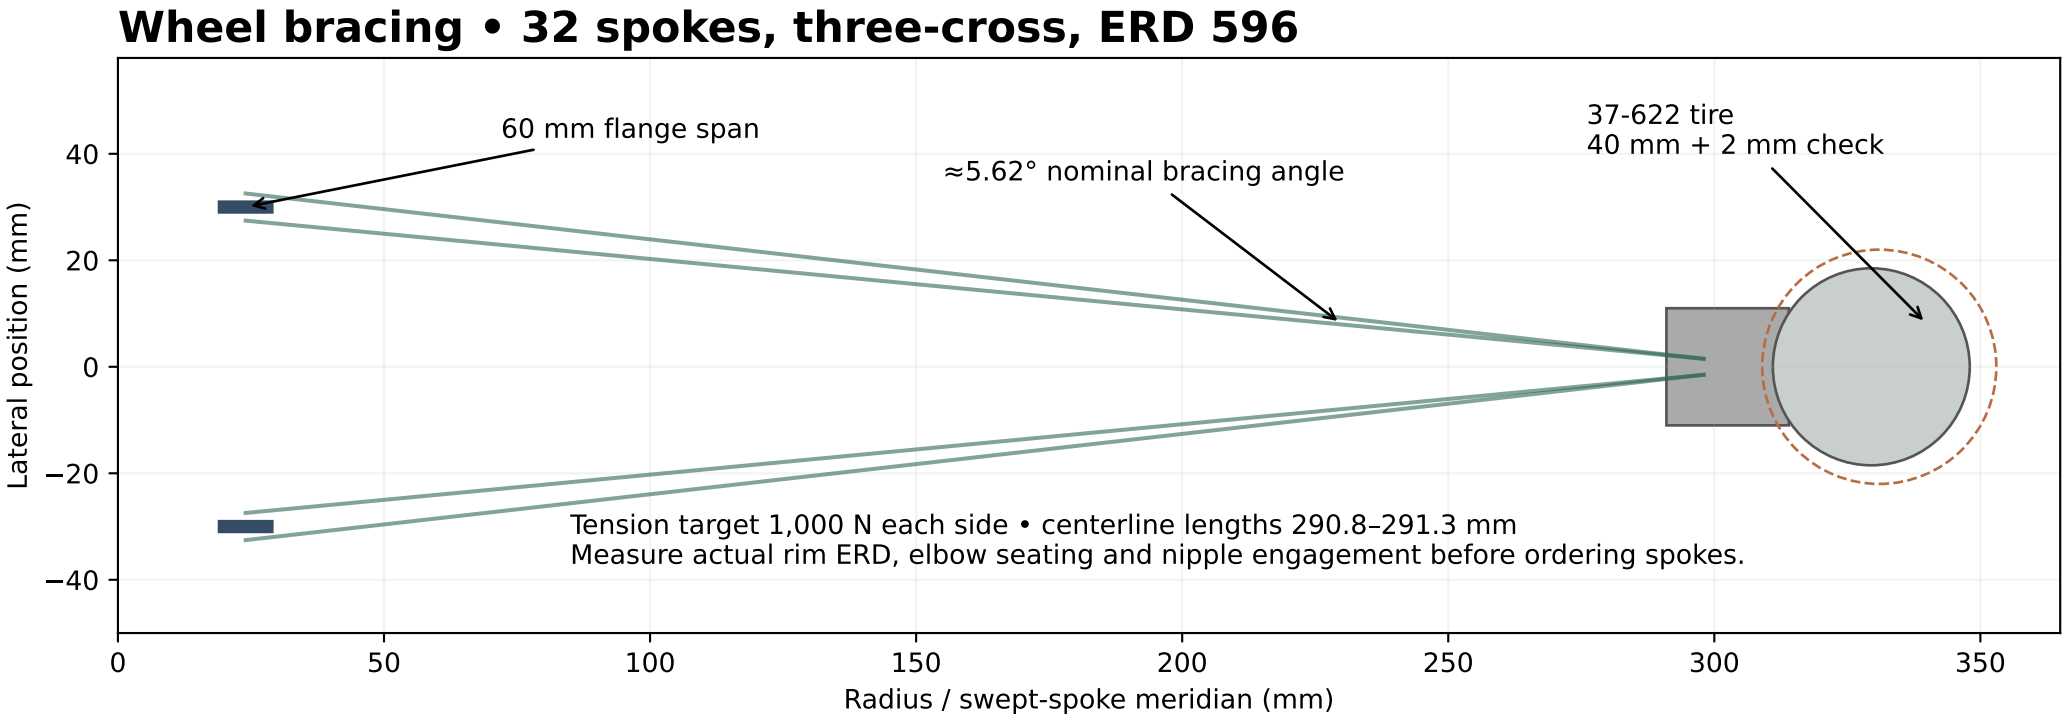
Wheel bracing • 32 spokes, three-cross, ERD 596
60 mm flange span
≈5.62° nominal bracing angle
37-622 tire
40 mm + 2 mm check
Tension target 1,000 N each side • centerline lengths 290.8–291.3 mm
Measure actual rim ERD, elbow seating and nipple engagement before ordering spokes.
Lateral position (mm)
Radius / swept-spoke meridian (mm)
40
20
0
−20
−40
0
50
100
150
200
250
300
350