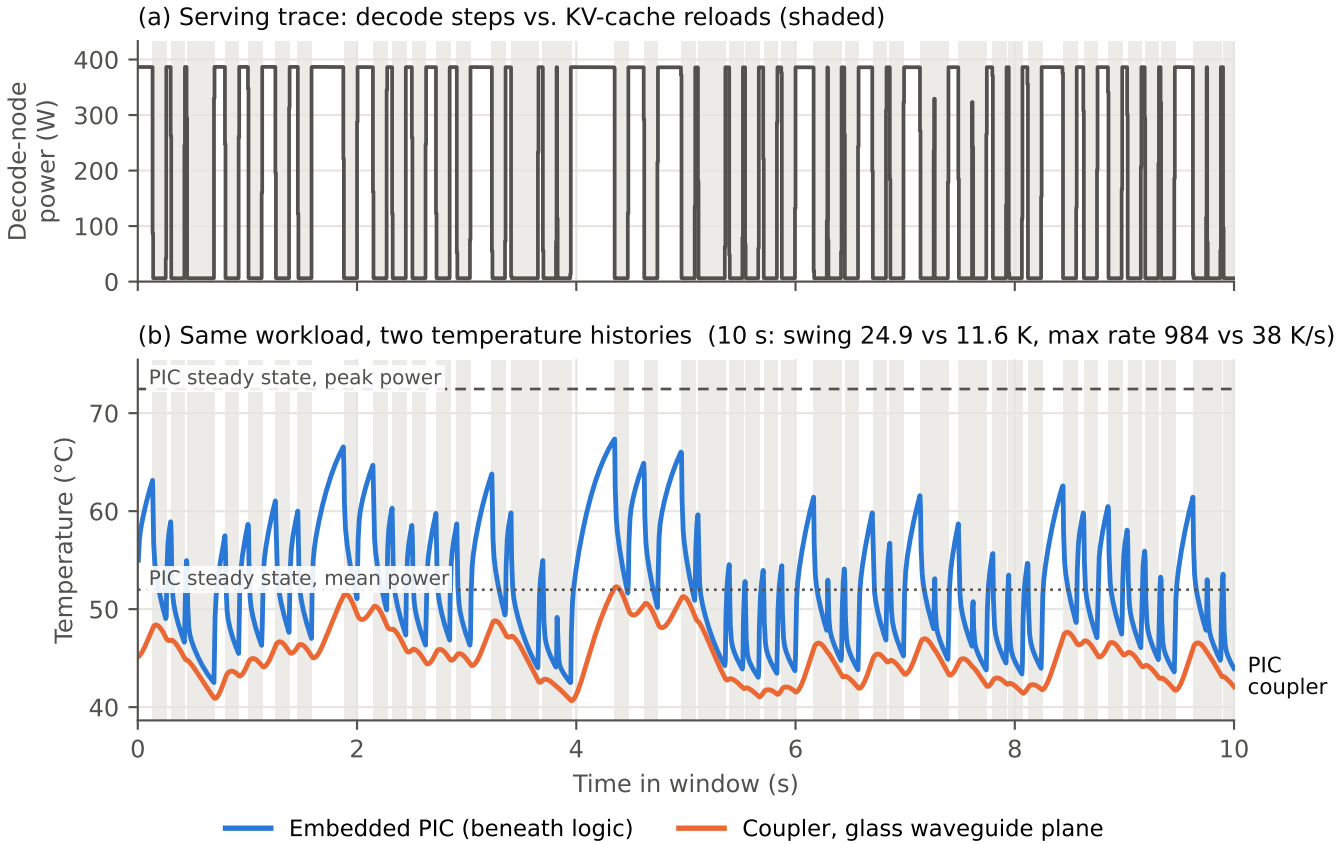
(a) Serving trace: decode steps vs. KV-cache reloads (shaded)
Decode-node power (W)
400
300
200
100
0
(b) Same workload, two temperature histories (10 s: swing 24.9 vs 11.6 K, max rate 984 vs 38 K/s)
PIC steady state, peak power
PIC steady state, mean power
Temperature (°C)
70
60
50
40
PIC coupler
0
2
4
6
8
10
Time in window (s)
Embedded PIC (beneath logic)
Coupler, glass waveguide plane