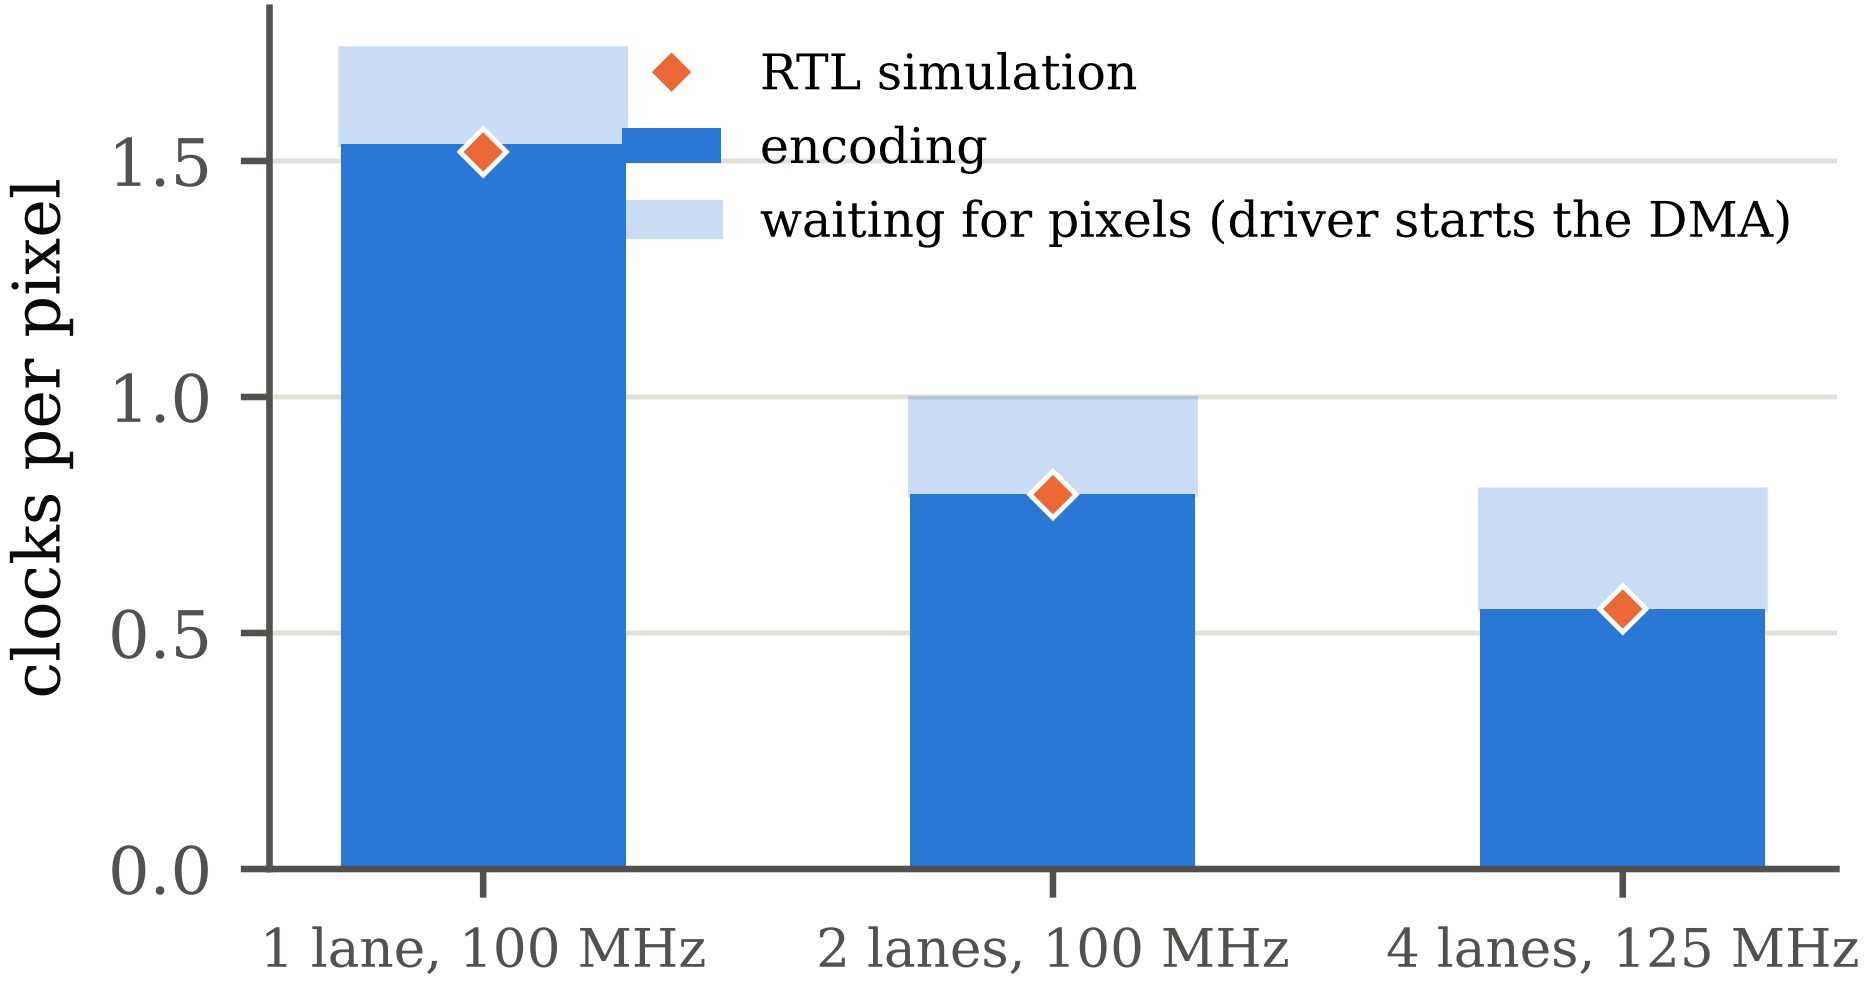
clocks per pixel
0.0
0.5
1.0
1.5
RTL simulation
encoding
waiting for pixels (driver starts the DMA)
1 lane, 100 MHz
2 lanes, 100 MHz
4 lanes, 125 MHz