

DS8907

DS8907 AM/FM Digital Phase-Locked Loop Frequency Synthesizer



Literature Number: SNOSBR1A

DS8907 AM/FM Digital Phase-Locked Loop Frequency Synthesizer

General Description

The DS8907 is a PLL synthesizer designed specifically for use in AM/FM radios. It contains the reference oscillator, a phase comparator, a charge pump, a 120 MHz ECL/I²L dual modulus programmable divider, and an 18-bit shift register/latch for serial data entry. The device is designed to operate with a serial data controller generating the necessary division codes for each frequency, and logic state information for radio function inputs/outputs.

The Colpitts reference oscillator for the PLL operates at 4 MHz. A chain of dividers is used to generate a 500 kHz clock signal for the external controller. Additional dividers generate a 25 kHz reference signal for FM and a 10 kHz reference signal for AM. One of these reference signals is selected by the data from the controller for use by the phase comparator.

Data is transferred between the frequency synthesizer and the controller via a 3 wire bus system. This consists of a data input line, an enable line, and a clock line. When the enable line is low, data can be shifted from the controller into the frequency synthesizer. When the enable line is transitioned from low to high, data entry is disabled and data present in the shift register is latched.

From the controller 20-bit data stream, the first 2 bits address the device permitting other devices to share the same bus. Of the remaining 18-bit data word, the next 13 bits are used for the PLL divide code. The remaining 5 bits are connected via latches to output pins. These 5 bits can be used to drive radio functions such as gain, mute, FM, AM and stereo only. These outputs are open collector. Bit 16 is used internally to select the AM or FM local oscillator input and to select between the 10 kHz and 25 kHz reference. A high level at bit 16 indicates FM and a low level indicates AM.

The PLL consists of a 13-bit programmable I²L divider, an ECL phase comparator, an ECL dual modulus (p/p + 1) prescaler, and a high speed charge pump. The programma-


ble divider divides by (N + 1), N being the number loaded into the shift register (bits 1–13 after address). It is clocked by the AM input via an ECL ÷ 7⁶/₆ prescaler, or through a ÷ 6³/₄ prescaler from the FM input. The AM input will work at frequencies up to 15 MHz, while the FM input works up to 120 MHz. The AM band is tuned with a frequency resolution of 10 kHz and the FM band is tuned with a resolution of 25 kHz. The buffered AM and FM inputs are self biased and can be driven directly by the VCO through a capacitor. The ECL phase comparator produces very accurate resolution of the phase difference between the input signal and the reference oscillator. The high speed charge pump consists of a switchable constant current source (–0.3 mA) and a switchable constant current sink (+0.3 mA). If the VCO frequency is low, the charge pump will source current, and sink current if the VCO frequency is high. When using an AFC the charge pump output may be forced into TRI-STATE® by applying a low level to the charge pump enable input.

A separate V_{CCM} pin (typically drawing 1.5 mA) powers the oscillator and reference chain to provide controller clocking frequencies when the balance of the PLL is powered down.

Features

- Uses inexpensive 4 MHz reference crystal
- F_{IN} capability greater than 120 MHz allows direct synthesis at FM frequencies
- FM resolution of 25 kHz allows usage of 10.7 MHz ceramic filter distribution
- Serial data entry for simplified control
- 50 Hz output for "time-of-day" reference driven from separate low power V_{CCM}
- 5-open collector buffered outputs for controlling various radio functions
- Separate AM and FM inputs. AM input has 15 mV (typical) hysteresis

Connection Diagram

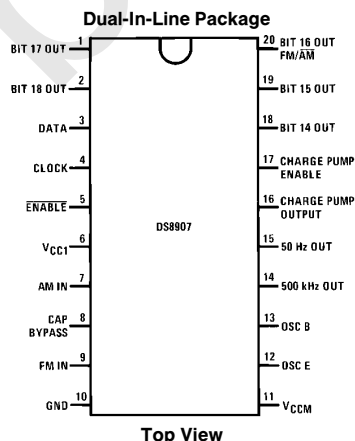

Order Number DS8907N
See NS Package Number N20A

TL/F/7511–1

TRI-STATE® is a registered trademark of National Semiconductor Corporation.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V _{CC1})	7V
(V _{CCM})	7V
Input Voltage	7V
Output Voltage	7V

Storage Temperature Range	– 65°C to + 150°C
Lead Temperature (Soldering, 4 sec.)	260°C

Operating Conditions

	Min	Max	Units
Supply Voltage, V _{CC}			
V _{CC1}	4.75	5.25	V
V _{CCM}	4.5	6.0	V
Temperature, T _A	0	70	°C

DC Electrical Characteristics (Notes 2 and 3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{IH}	Logical “1” Input Voltage		2.1			V
I _{IH}	Logical “1” Input Current	V _{IN} = 2.7V		0	10	μA
V _{IL}	Logical “0” Input Voltage				0.7	V
I _{IL}	Logical “0” Input Current	Data, Clock, and <u>ENABLE</u> Inputs, V _{IN} = 0V		– 5	– 25	μA
I _{IL}	Logical “0” Input Current	Charge Pump Enable, V _{IN} = 0V		– 250	– 450	μA
I _{OH}	Logical “1” Output Current All Bit Outputs, 50 Hz Output	V _{OH} = 5.25V			50	μA
	500 kHz Output	V _{OH} = 2.4V, V _{CCM} = 4.5V			– 250	μA
V _{OL}	Logical “0” Output Voltage All Bit Outputs	I _{OL} = 5 mA			0.5	V
	50 Hz Output, 500 Hz Output	I _{OL} = 250 μA			0.5	V
I _{CC1}	Supply Current (V _{CC1})	All Bits Outputs High		90	160	mA
I _{CCM(Standby)}	V _{CCM} Supply Current	V _{CCM} = 6.0V, All Other Pins Open		1.5	4.0	mA
I _{OUT}	Charge Pump Output Current	1.2V ≤ V _{OUT} ≤ V _{CCM} – 1.2V V _{CCM} ≤ 6.0V	Pump Up Pump Down TRI-STATE	– 0.10 0.10 0	– 0.30 0.30 ± 100	– 0.6 0.6 nA
I _{CCM(OPERATE)}	V _{CCM} Supply Current	V _{CCM} = 6.0V, V _{CC1} = 5.25V, All Other Pins Open		2.5	6.0	mA

AC Electrical Characteristics V_{CC} = 5V, T_A = 25°C, t_r ≤ 10 ns, t_f ≤ 10 ns

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{IN(MIN)(F)}	F _{IN} Minimum Signal Input	AM and FM Inputs, 0°C ≤ T _A ≤ 70°C		20	100	mV (rms)
V _{IN(MAX)(F)}	F _{IN} Maximum Signal Input	AM and FM Inputs, 0°C ≤ T _A ≤ 70°C	1000	1500		mV (rms)
F _{OPERATE}	Operating Frequency Range (Sine Wave Input)	V _{IN} = 100 mV rms 0°C ≤ T _A ≤ 70°C	AM FM	0.4 60	8 120	MHz
R _{IN(FM)}	AC Input Resistance, FM	120 MHz, V _{IN} = 100 mV rms	300			Ω
R _{IN(AM)}	AC Input Resistance, AM	2 MHz, V _{IN} = 100 mV rms	1000			Ω
C _{IN}	Input Capacitance, FM and AM	V _{IN} = 120 MHz	3	6	10	pF
t _{EN1}	Minimum <u>ENABLE</u> High Pulse Width			625	1250	ns
t _{EN0}	Minimum <u>ENABLE</u> Low Pulse Width			375	750	ns
t _{CLKEN0}	Minimum Time Before <u>ENABLE</u> Goes Low That <u>CLOCK</u> Must Be Low			– 50	0	ns
t _{EN0CLK}	Minimum Time After <u>ENABLE</u> Goes Low That <u>CLOCK</u> Must Remain Low			275	550	ns
t _{CLKEN1}	Minimum Time Before <u>ENABLE</u> Goes High That Last Positive <u>CLOCK</u> Edge May Occur			300	600	ns

AC Electrical Characteristics $V_{CC} = 5V$, $T_A = 25^\circ C$, $t_r \leq 10$ ns, $t_f \leq 10$ ns (Continued)








Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{EN1CLK}	Minimum Time After ENABLE Goes High Before an Unused Positive CLOCK Edge May Occur			175	350	ns
t_{CLKH}	Minimum CLOCK High Pulse Width			275	550	ns
t_{CLKL}	Minimum CLOCK Low Pulse Width			400	800	ns
t_{DS}	Minimum DATA Setup Time, Minimum Time before CLOCK That DATA Must Be Valid			150	300	ns
t_{DH}	Minimum DATA Hold Time, Minimum Time after CLOCK That DATA Must Remain Valid			400	800	ns

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.




Note 2: Unless otherwise specified min/max limits apply across the $-40^\circ C$ to $+85^\circ C$ temperature range for the DS8907.

Note 3: All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

Schematic Diagrams (DS8907 AM/FM PLL typical Input/Output Schematics)

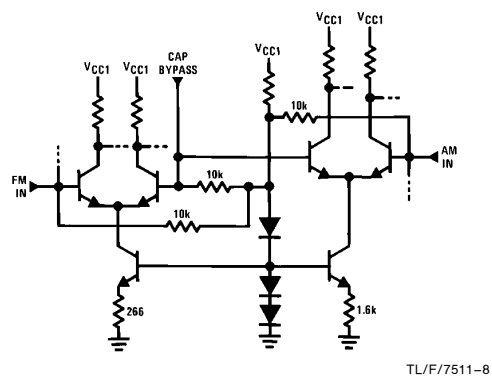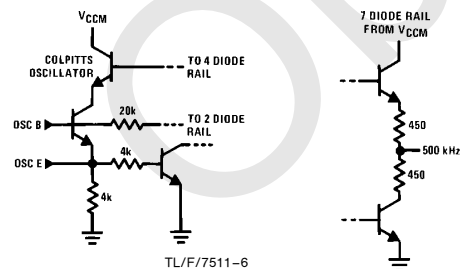

Timing Diagrams*

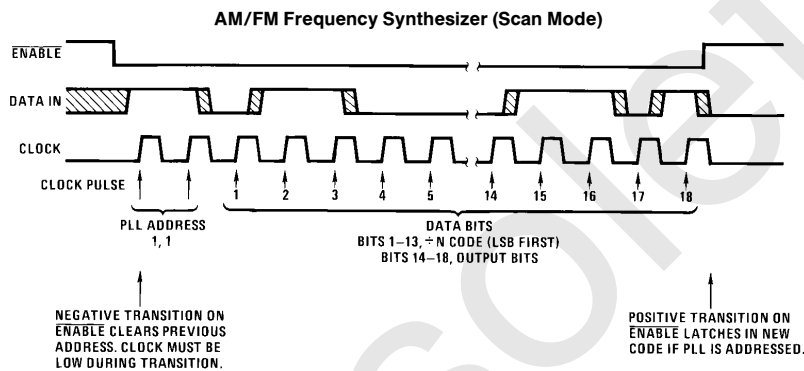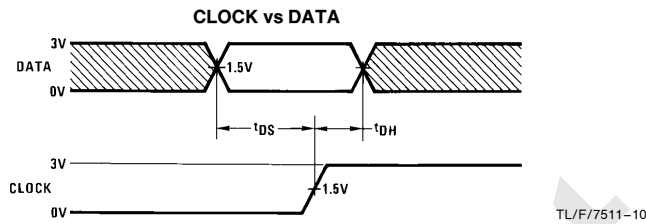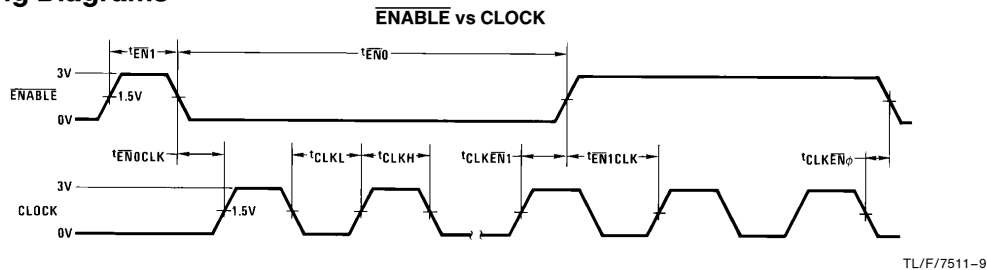

*Timing diagrams are not drawn to scale. Scale within any one drawing may not be consistent, and intervals are defined positive as drawn.

SERIAL DATA ENTRY INTO THE DS8907

Serial information entry into the DS8907 is enabled by a low level on the $\overline{\text{ENABLE}}$ input. One binary bit is then accepted from the DATA input with each positive transition of the CLOCK input. The CLOCK input must be low for the specified time preceding and following the negative transition of the $\overline{\text{ENABLE}}$ input.

The first two bits accepted following the negative transition of the $\overline{\text{ENABLE}}$ input are interpreted as address. If these address bits are *not* 1,1 no further information will be accepted from the DATA inputs, and the internal data latches will *not* be changed when $\overline{\text{ENABLE}}$ returns high.

If these first two bits are 1,1, then all succeeding bits are *accepted* as data, and are shifted successively into the internal shift register as long as $\overline{\text{ENABLE}}$ remains low.

Any data bits preceding the 18th to last bit will be shifted out, and thus are irrelevant. Data bits are counted as any bits *following* two valid address bits (1,1) with the $\overline{\text{ENABLE}}$ low. When the $\overline{\text{ENABLE}}$ input returns high, any further serial data entry is inhibited. Upon this positive transition, the data in the internal shift register is transferred into the internal data latches. Note that until this time, the states of the internal data latches have remained unchanged.


These data bits are interpreted as follows:

Data Bit Position	Data Interpretation
Last	Bit 18 Output (Pin 2)
2nd to Last	Bit 17 Output (Pin 1)
3rd to Last	Bit 16 Output (FM/ $\overline{\text{AM}}$) (Pin 20)
4th to Last	Bit 15 Output (Pin 19)
5th to Last	Bit 14 Output (Pin 18)
6th to Last	MSB of $\div N$ (2^{12})
7th to Last	(2^{11})
8th to Last	(2^{10})
9th to Last	(2^9)
10th to Last	(2^8)
11th to Last	(2^7)
12th to Last	(2^6)
13th to Last	(2^5)
14th to Last	(2^4)
15th to Last	(2^3)
16th to Last	(2^2)
17th to Last	(2^1)
18th to Last	LSB of $\div N$ (2^0)

Note: The actual divide code is $N + 1$, i.e., the number loaded plus 1.


Typical Application

Electronically Tuned Radio Controller System; Direct Drive LED

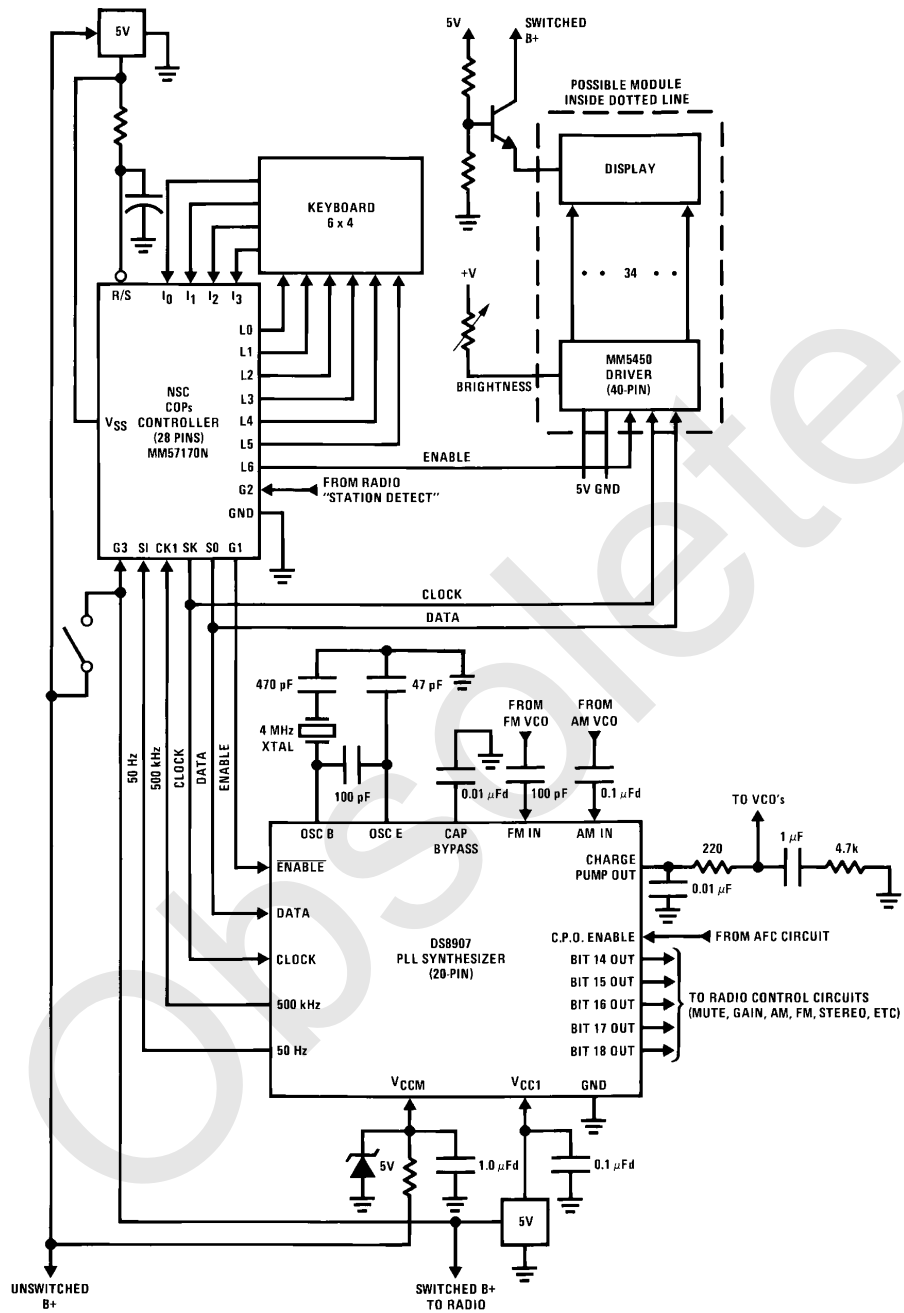

TL/F/7511-12

Logic Diagram

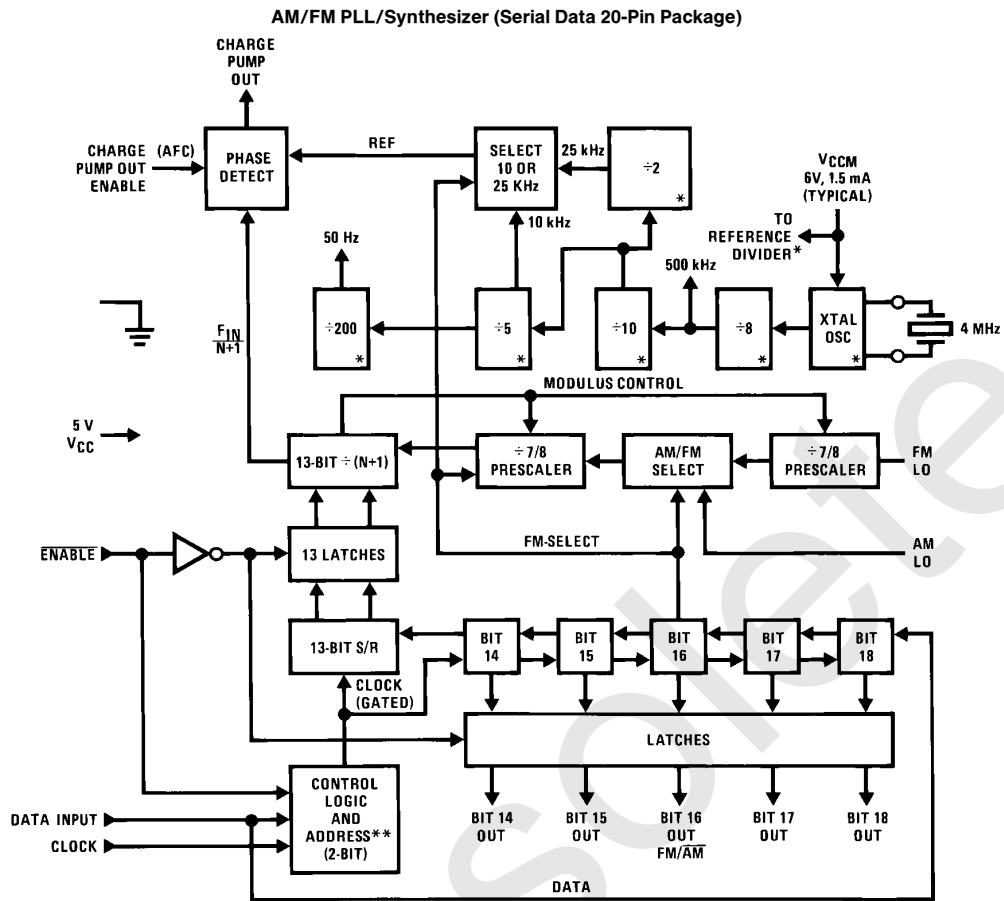


*Sections operating from V_{CCM} supply.

**Address (1, 1)

TL/F/7511-13

Obsolete

Physical Dimensions inches (millimeters)

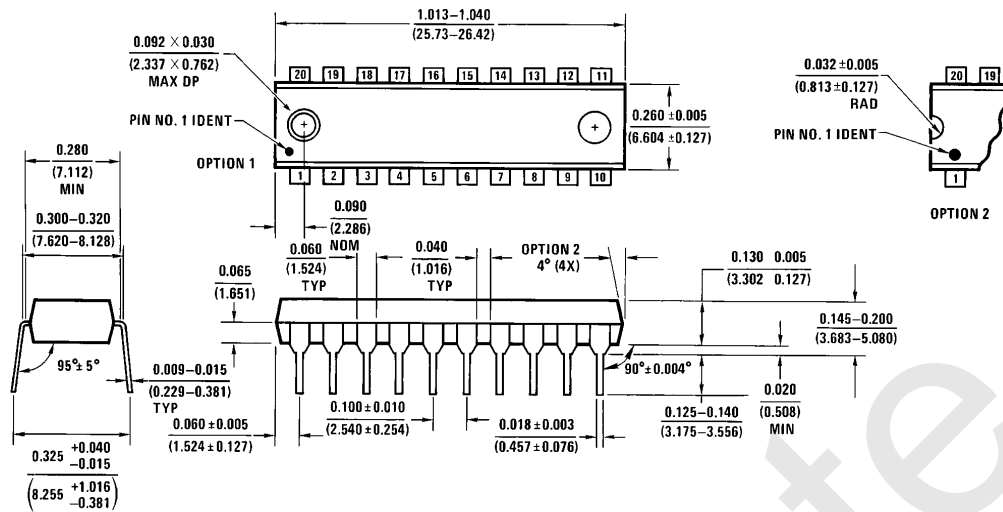

Molded Dual-In-Line Package (N)
Order Number DS8907N
NS Package Number N20A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: (800) 272-9959
Fax: (800) 737-7018

National Semiconductor Europe

Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.

19th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.

Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated