


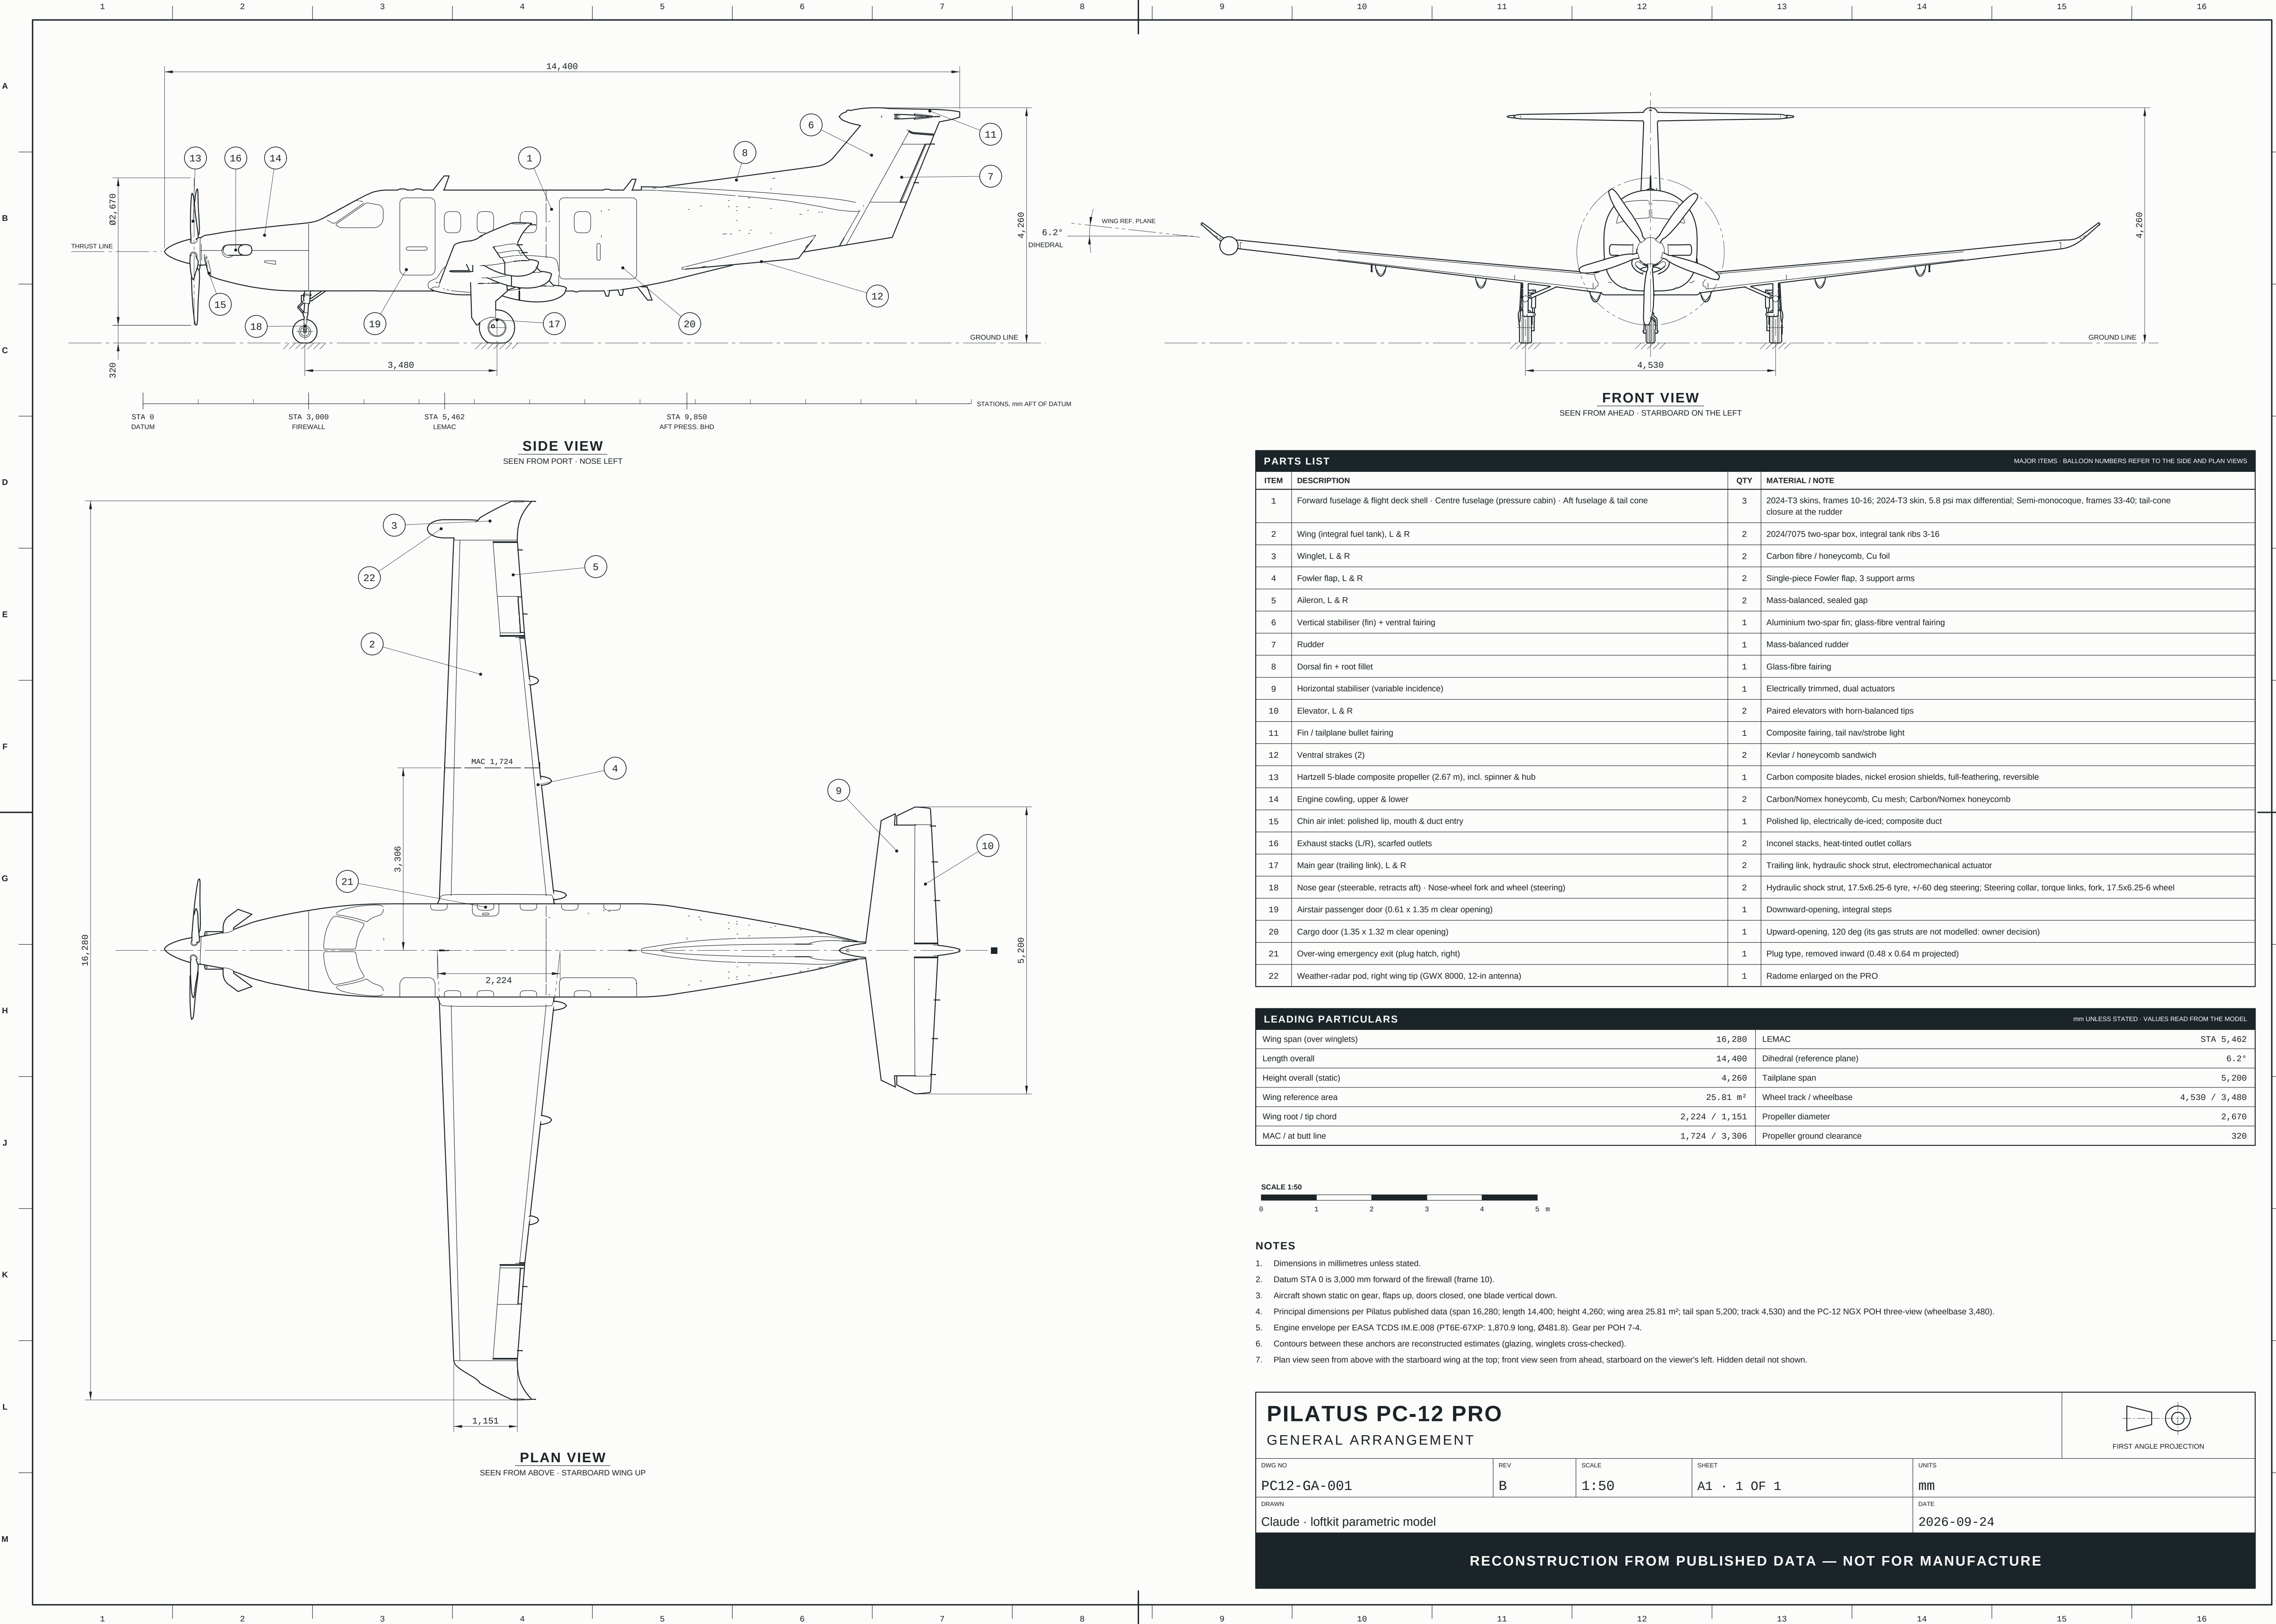


PARTS LIST				MAJOR ITEMS - BALLOON NUMBERS REFER TO THE SIDE AND PLAN VIEWS	
ITEM	DESCRIPTION	QTY	MATERIAL / NOTE		
1	Forward fuselage & flight deck shell · Centre fuselage (pressure cabin) · Aft fuselage & tail cone	3	2024-T3 skins, frames 10-16; 2024-T3 skin, 5.8 psi max differential; Semi-monocoque, frames 33-40; tail-cone closure at the rudder		
2	Wing (integral fuel tank), L & R	2	2024/7075 two-spar box, integral tank ribs 3-16		
3	Winglet, L & R	2	Carbon fibre / honeycomb, Cu foil		
4	Fowler flap, L & R	2	Single-piece Fowler flap, 3 support arms		
5	Aileron, L & R	2	Mass-balanced, sealed gap		
6	Vertical stabiliser (fin) + ventral fairing	1	Aluminium two-spar fin; glass-fibre ventral fairing		
7	Rudder	1	Mass-balanced rudder		
8	Dorsal fin + root fillet	1	Glass-fibre fairing		
9	Horizontal stabiliser (variable incidence)	1	Electrically trimmed, dual actuators		
10	Elevator, L & R	2	Paired elevators with horn-balanced tips		
11	Fin / tailplane bullet fairing	1	Composite fairing, tail nav/strobe light		
12	Ventral strakes (2)	2	Kevlar / honeycomb sandwich		
13	Hartzell 5-blade composite propeller (2.67 m), incl. spinner & hub	1	Carbon composite blades, nickel erosion shields, full-feathering, reversible		
14	Engine cowling, upper & lower	2	Carbon/Nomex honeycomb, Cu mesh; Carbon/Nomex honeycomb		
15	Chin air inlet: polished lip, mouth & duct entry	1	Polished lip, electrically de-iced; composite duct		
16	Exhaust stacks (L/R), scarfed outlets	2	Inconel stacks, heat-tinted outlet collars		
17	Main gear (trailing link), L & R	2	Trailing link, hydraulic shock strut, electromechanical actuator		
18	Nose gear (steerable, retracts aft) · Nose-wheel fork and wheel (steering)	2	Hydraulic shock strut, 17.5x6.25-6 tyre, +/-60 deg steering; Steering collar, torque links, fork, 17.5x6.25-6 wheel		
19	Airstair passenger door (0.61 x 1.35 m clear opening)	1	Downward-opening, integral steps		
20	Cargo door (1.35 x 1.32 m clear opening)	1	Upward-opening, 120 deg (Its gas struts are not modelled: owner decision)		
21	Over-wing emergency exit (plug hatch, right)	1	Plug type, removed inward (0.48 x 0.64 m projected)		
22	Weather-radar pod, right wing tip (GWX 8000, 12-in antenna)	1	Radome enlarged on the PRO		

LEADING PARTICULARS				mm UNLESS STATED - VALUES READ FROM THE MODEL	
Wing span (over winglets)	16,280	LEMAC		STA 5,462	
Length overall	14,400	Dihedral (reference plane)		6.2°	
Height overall (static)	4,260	Tailplane span		5,200	
Wing reference area	25.81 m²	Wheel track / wheelbase		4,530 / 3,480	
Wing root / tip chord	2,224 / 1,151	Propeller diameter		2,670	
MAC / at butt line	1,724 / 3,306	Propeller ground clearance		320	

- NOTES
- Dimensions in millimetres unless stated.
 - Datum STA 0 is 3,000 mm forward of the firewall (frame 10).
 - Aircraft shown static on gear, flaps up, doors closed, one blade vertical down.
 - Principal dimensions per Pilatus published data (span 16,280; length 14,400; height 4,260; wing area 25.81 m²; tail span 5,200; track 4,530) and the PC-12 NGX POH three-view (wheelbase 3,480).
 - Engine envelope per EASA TCDS IM.E.008 (PT6E-67XP: 1,870.9 long, Ø481.8). Gear per POH 7-4.
 - Contours between these anchors are reconstructed estimates (glazing, winglets cross-checked).
 - Plan view seen from above with the starboard wing at the top; front view seen from ahead, starboard on the viewer's left. Hidden detail not shown.

PILATUS PC-12 PRO

GENERAL ARRANGEMENT



FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-GA-001	B	1:50	A1 · 1 OF 1	mm
DRAWN				DATE
Claude · loftkit parametric model				2026-09-24

RECONSTRUCTION FROM PUBLISHED DATA — NOT FOR MANUFACTURE