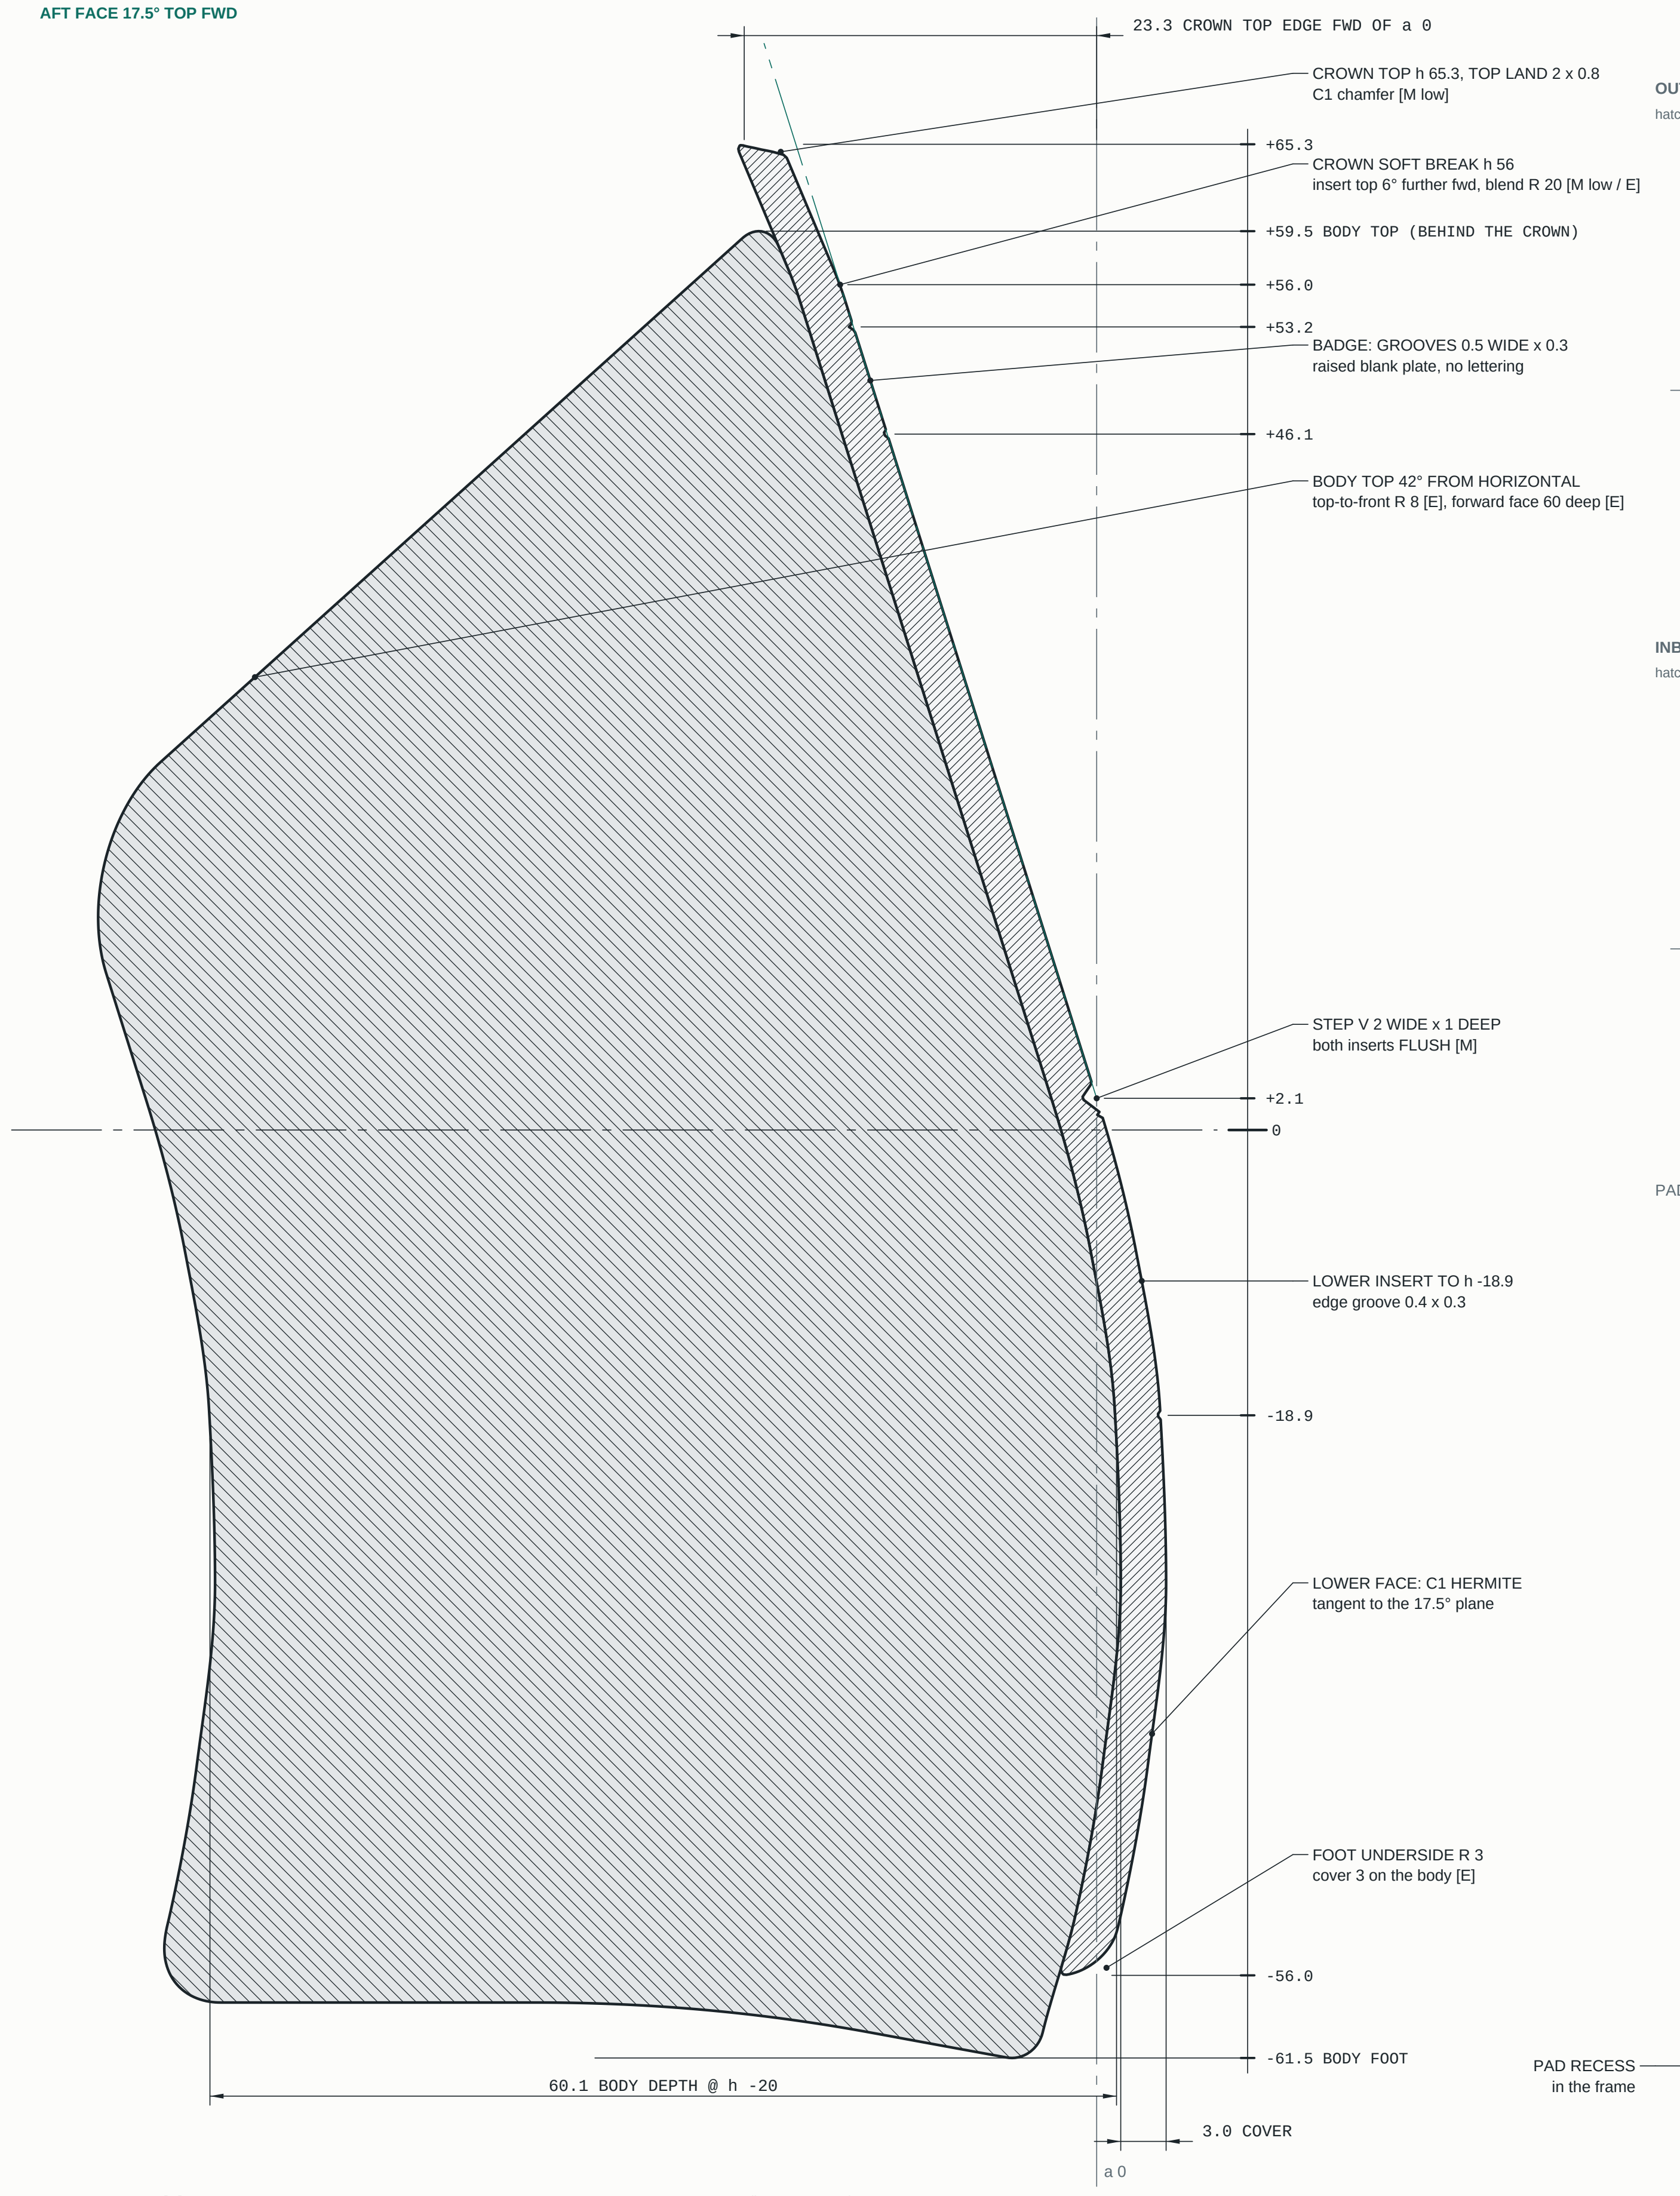
AFT FACE 17.5° TOP FWD
23.3 CROWN TOP EDGE FWD OF a 0
CROWN TOP h 65.3, TOP LAND 2 x 0.8
C1 chamfer [M low]
+65.3
CROWN SOFT BREAK h 56
insert top 6° further fwd, blend R 20 [M low / E]
+59.5 BODY TOP (BEHIND THE CROWN)
+56.0
+53.2
BADGE: GROOVES 0.5 WIDE x 0.3
raised blank plate, no lettering
+46.1
BODY TOP 42° FROM HORIZONTAL
top-to-front R 8 [E], forward face 60 deep [E]
STEP V 2 WIDE x 1 DEEP
both inserts FLUSH [M]
+2.1
0
h 0
LOWER INSERT TO h -18.9
edge groove 0.4 x 0.3
-18.9
LOWER FACE: C1 HERMITE
tangent to the 17.5° plane
FOOT UNDERSIDE R 3
cover 3 on the body [E]
-56.0
-61.5 BODY FOOT
60.1 BODY DEPTH @ h -20
3.0 COVER
a 0

BODY: 60 DEEP [E], ITS TOP A PLANE 42° FROM THE HORIZONTAL THROUGH THE TOP LINE (h 60.5 AT u 0); THE R 2 AFT x TOP ROUND LOWERS THE SECTION'S TOP TO 59.5
rounds in order: aft R 2, top R 2, forward R 8, foot R 5 [E]; one moulding with the grips (R 3)
PLANE u 0 (CUTTING PLANE Z-Z ON L6Y FRONT ELEVATION)

SECTION Z-Z

YOKE CENTRELINE u 0, FROM OUTBOARD, NOSE LEFT - 2:1

OUTBOARD GRIP, NORMAL TO THE AXIS, LOOKING DOWN IT (FWD UP, PAD DOWN; OUTBOARD LEFT)
hatched: the cut of the black moulding; dashed phantom: the grip alone where the moulding runs on into the web

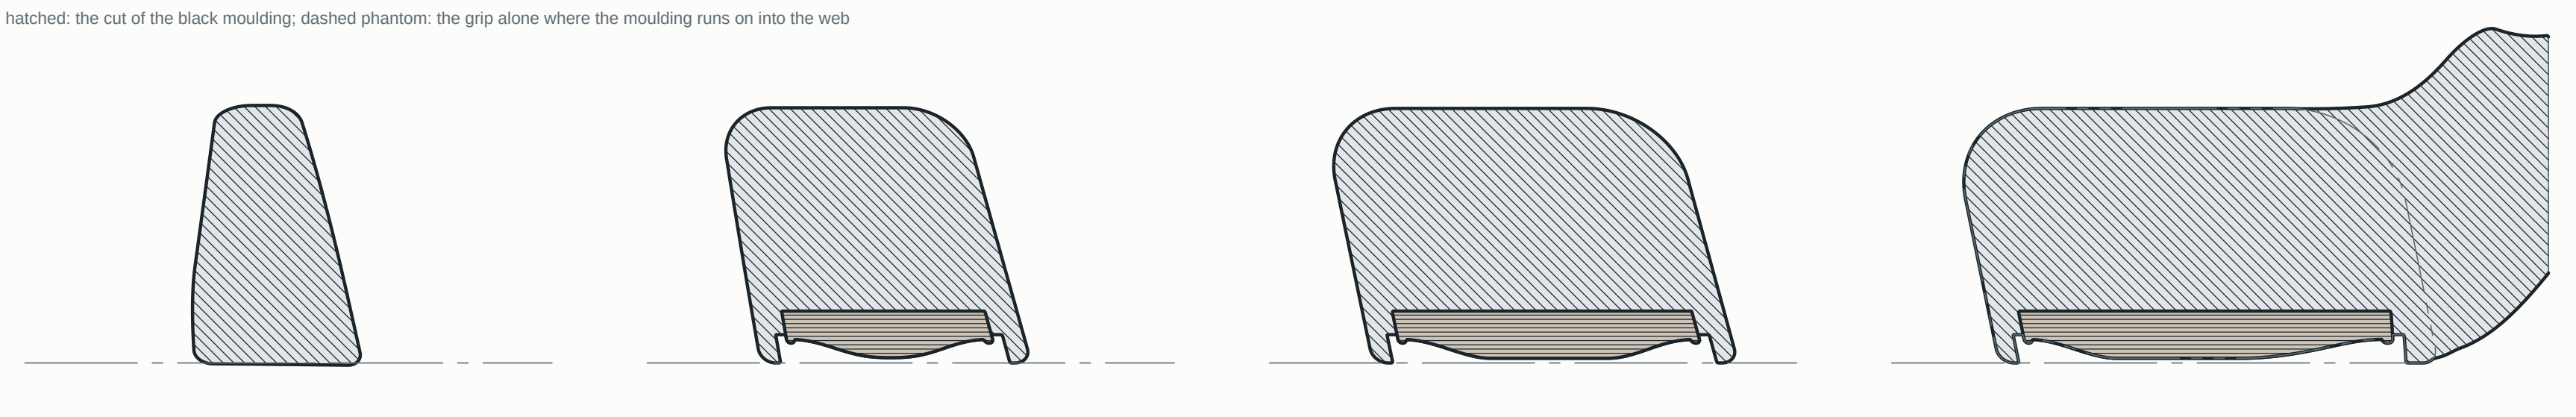
GRIP 17.8 x 27.6 = 27.2 + 0.3 LIP
A1-A1
h -30 - 1:1

GRIP 32.0 x 27.1
A2-A2
h -10 - 1:1

GRIP 42.5 x 27.0
A3-A3
h 14 - 1:1

GRIP 50.0 x 27.0
A4-A4
h 40 - 1:1

INBOARD GRIP, NORMAL TO THE AXIS, LOOKING DOWN IT (FWD UP, PAD DOWN; INBOARD RIGHT)
hatched: the cut of the black moulding; dashed phantom: the grip alone where the moulding runs on into the neck

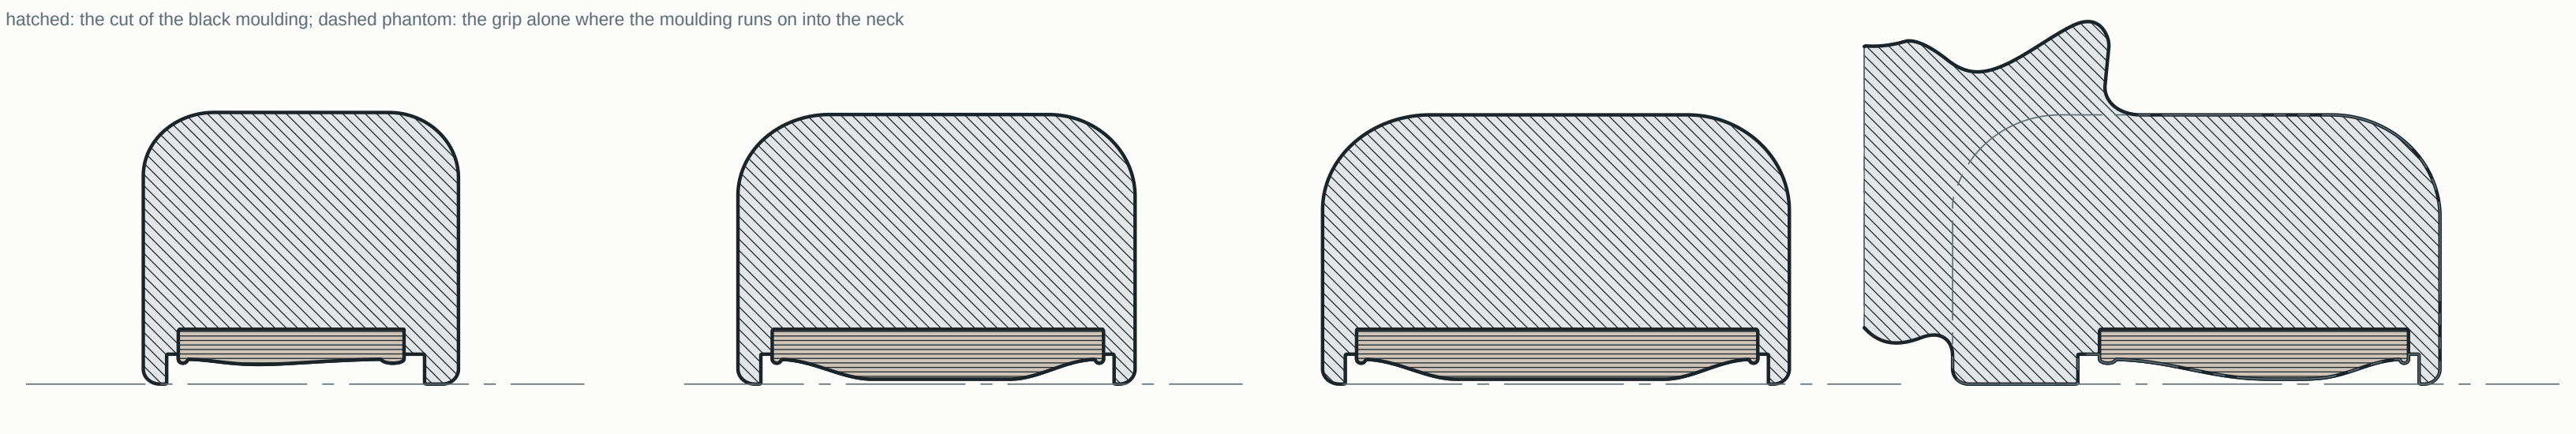
GRIP 31.6 x 27.2
N1-N1
h -30 - 1:1

GRIP 39.8 x 27.0
N2-N2
h -10 - 1:1

GRIP 46.8 x 27.0
N3-N3
h 14 - 1:1

GRIP 48.9 x 27.0
N4-N4
h 40 - 1:1

PAD: leather 2.5 below the 2 frame, crowned to 0.5 below over 8; groove 1 x 0.5 + bead 0.4; frame roll R 1.5; forward R 11 [E] <= 0.45 x half-width; depth 27 (grip_depth) [M]

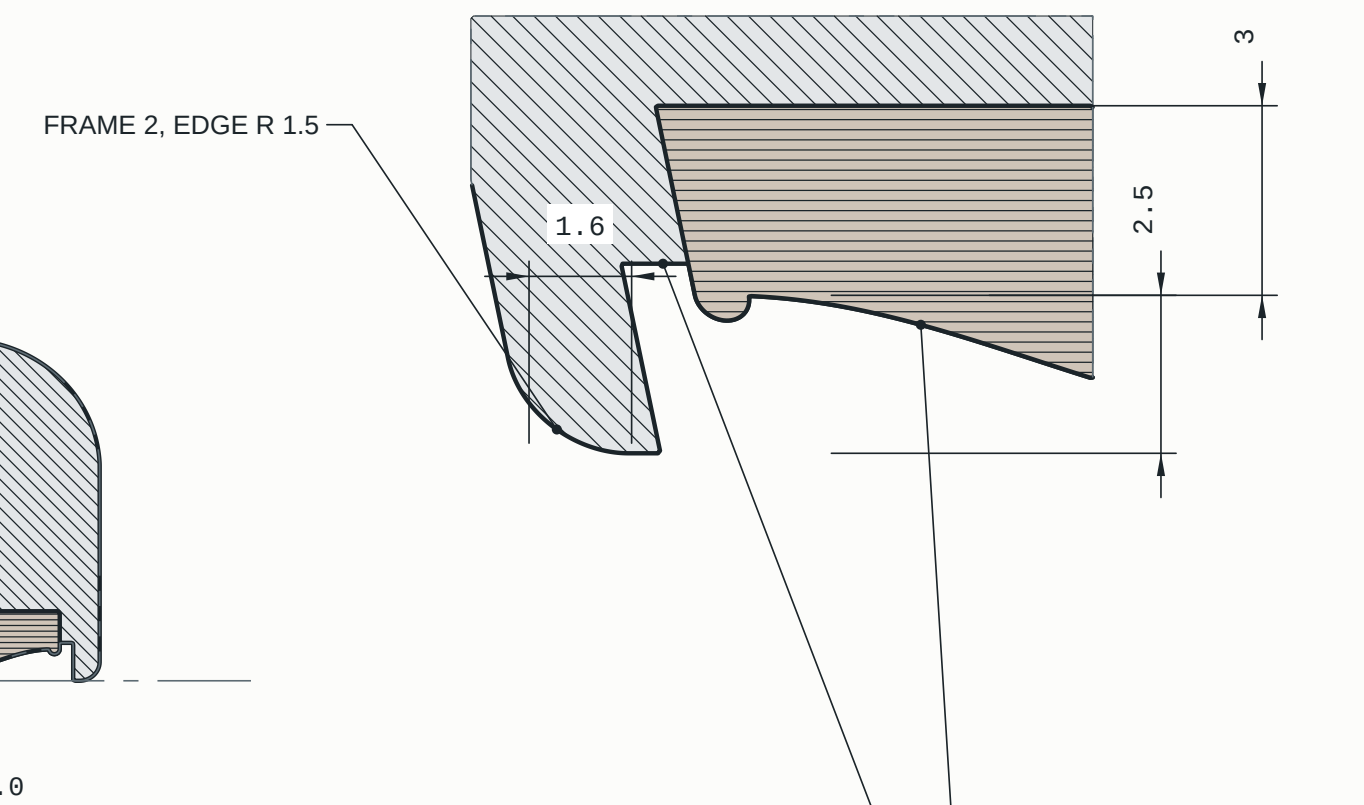
FRAME 2, EDGE R 1.5
1.6
3
2.5
LEATHER PAD 3 [E]
hatched apart: its own material
GROOVE 1 x 0.5, BEAD 0.4
leather 2.5 below the frame,
crowned to 0.5 over 8

DETAIL S

A3 OUTER PAD EDGE - 5:1

AXIAL PLANES (AXIS + AFT NORMAL), FWD LEFT

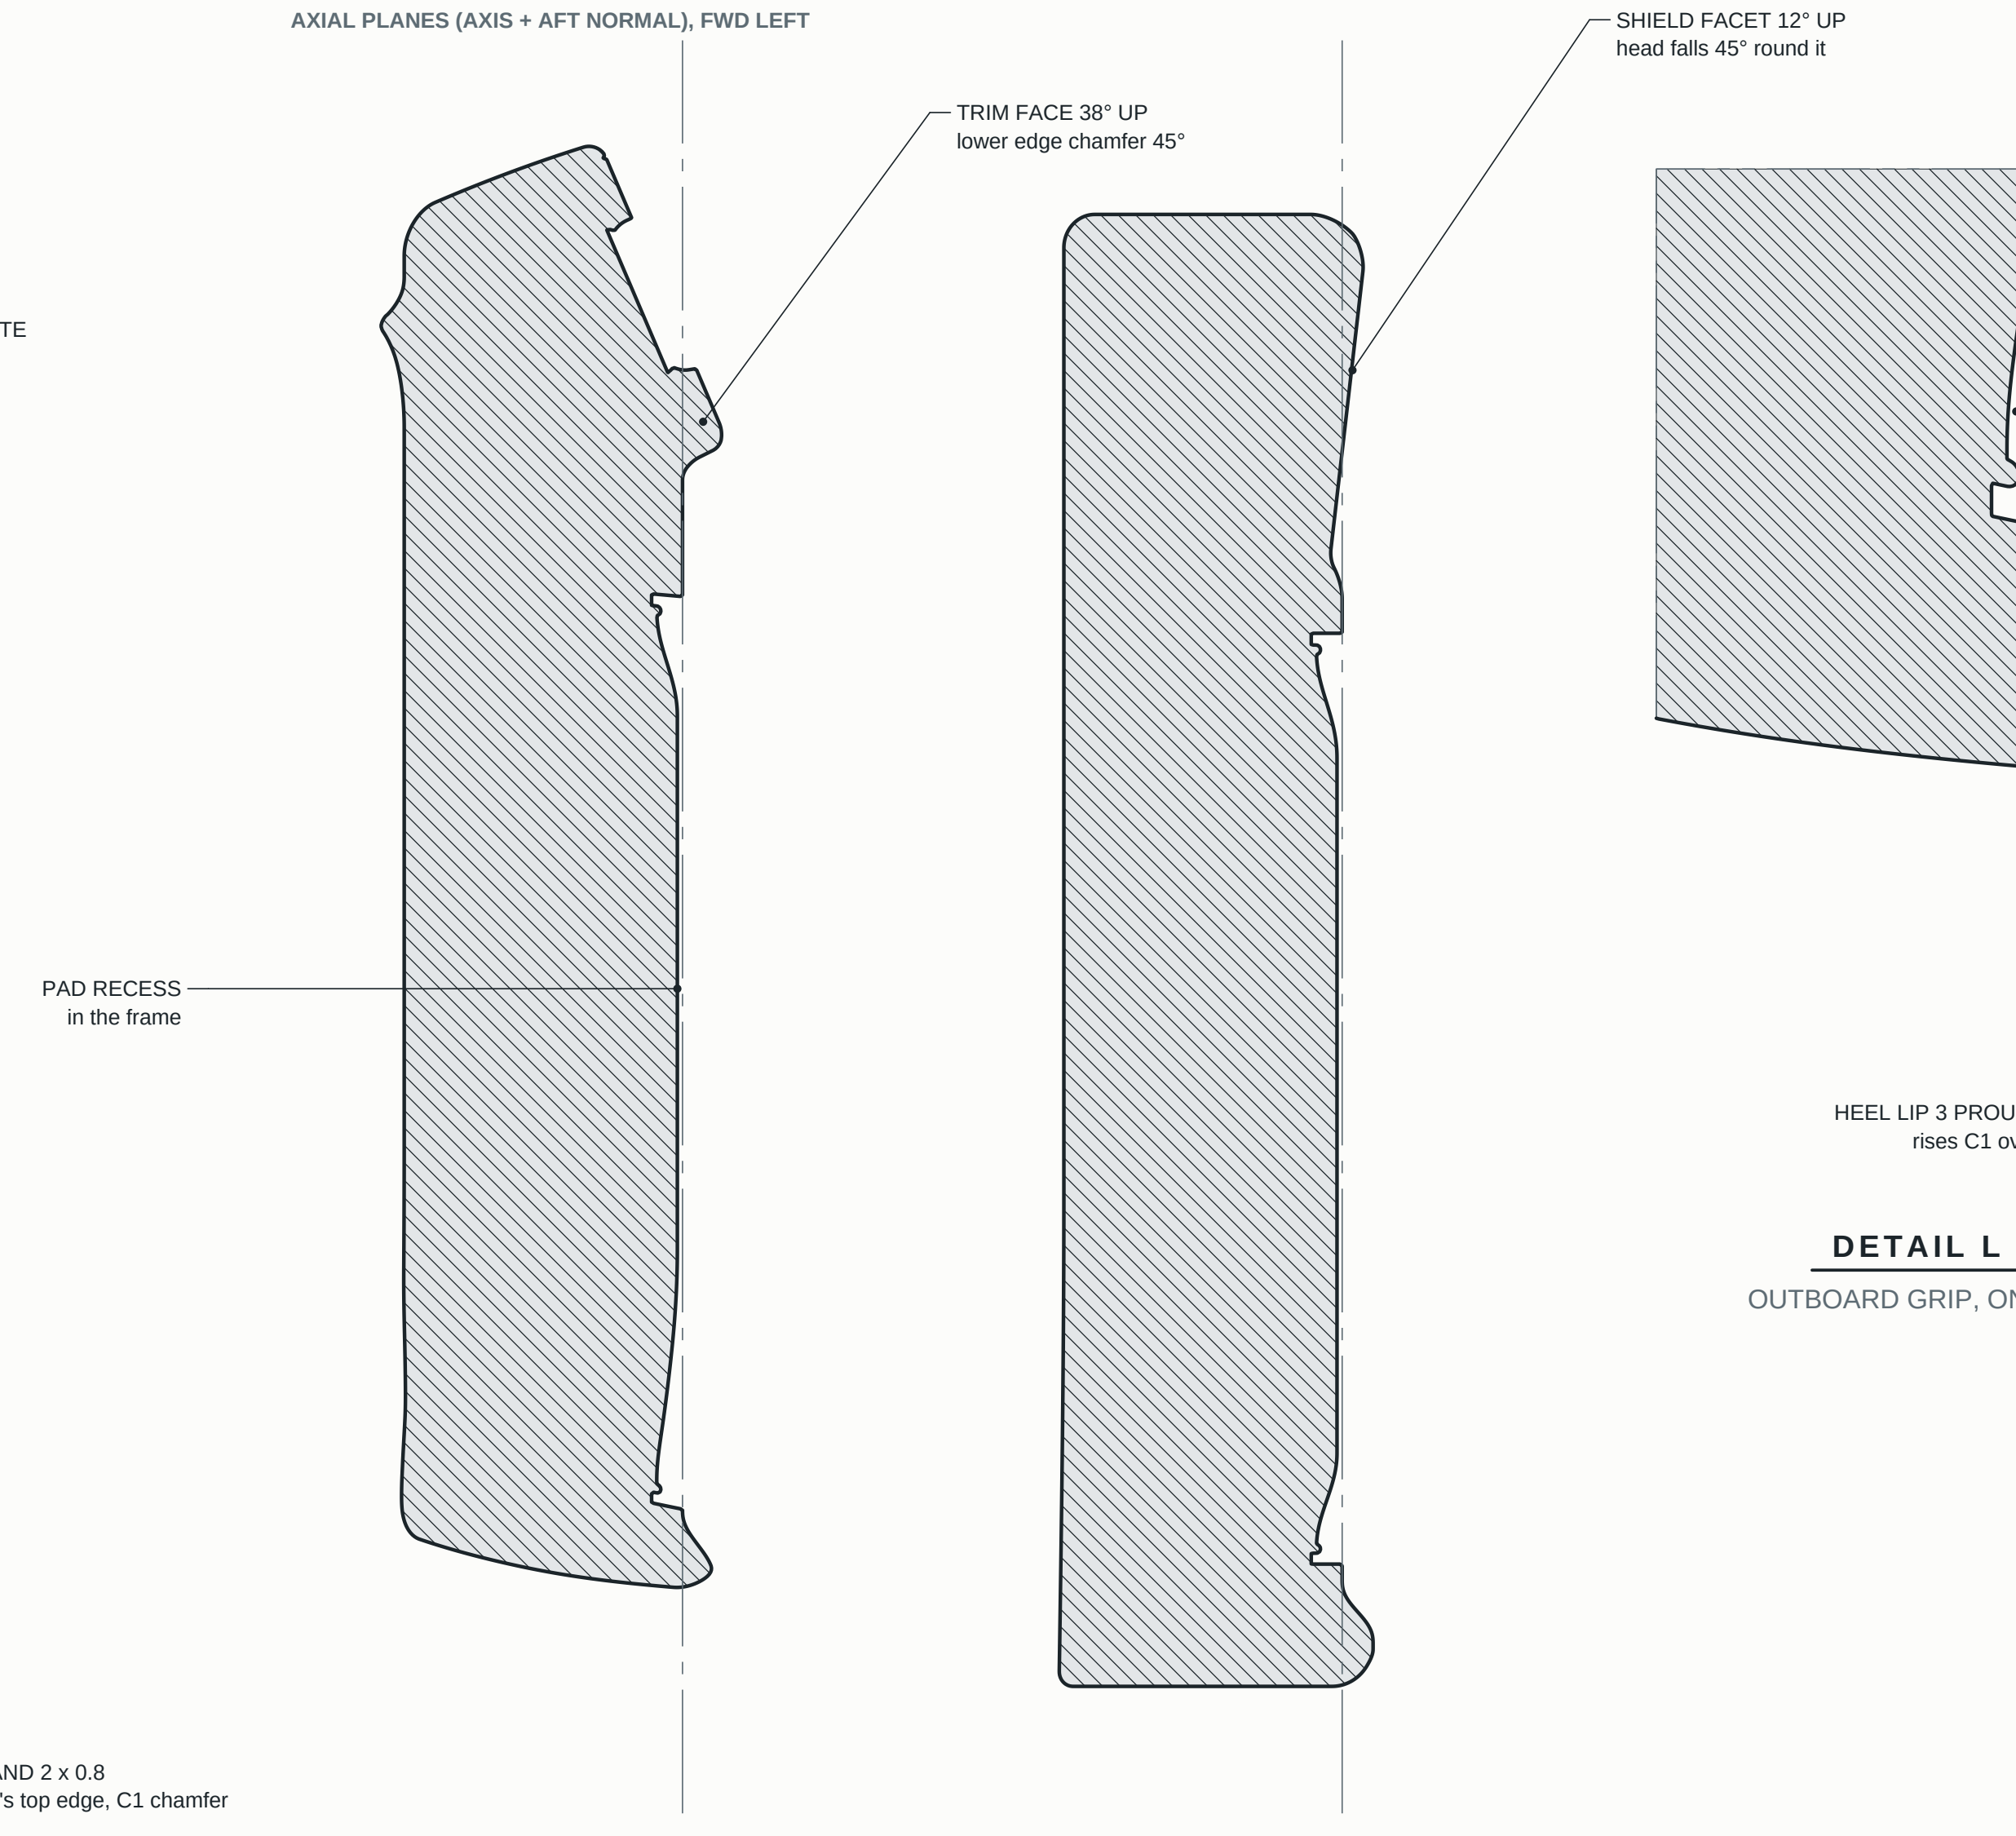
TRIM FACE 38° UP
lower edge chamfer 45°
SHIELD FACET 12° UP
head falls 45° round it
PAD RECESS
in the frame

P-P
OUTBOARD GRIP - 1:1

Q-Q
INBOARD GRIP - 1:1

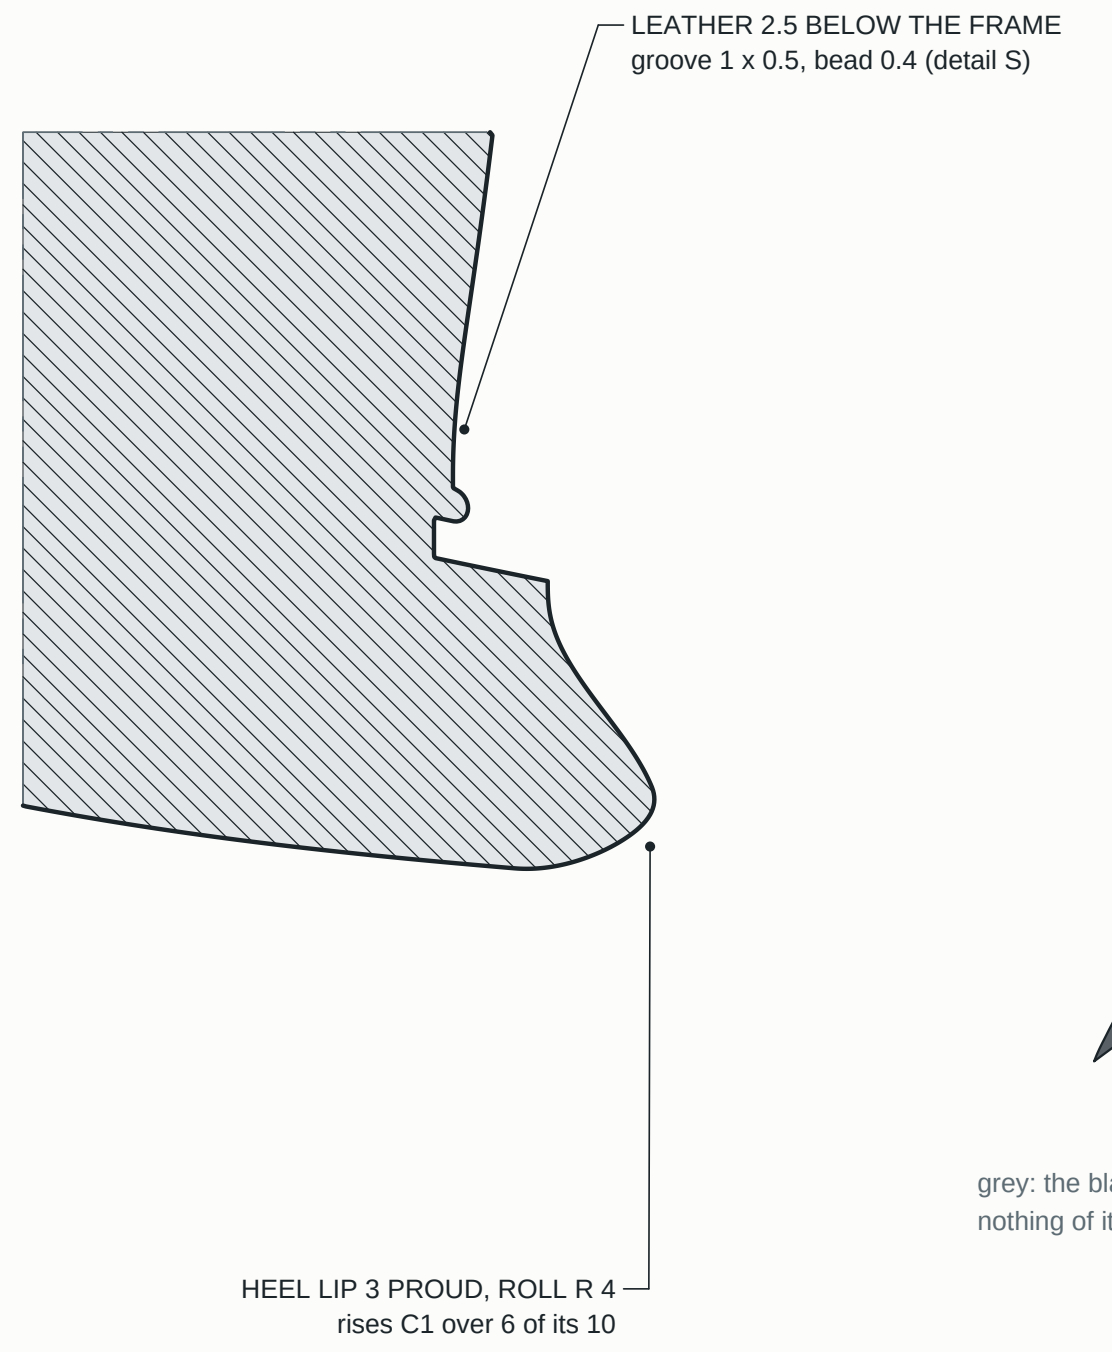
LEATHER 2.5 BELOW THE FRAME
groove 1 x 0.5, bead 0.4 (detail S)
HEEL LIP 3 PROUD, ROLL R 4
rises C1 over 6 of its 10

DETAIL L - HEEL LIP

OUTBOARD GRIP, ON P-P, AFT RIGHT - 3:1

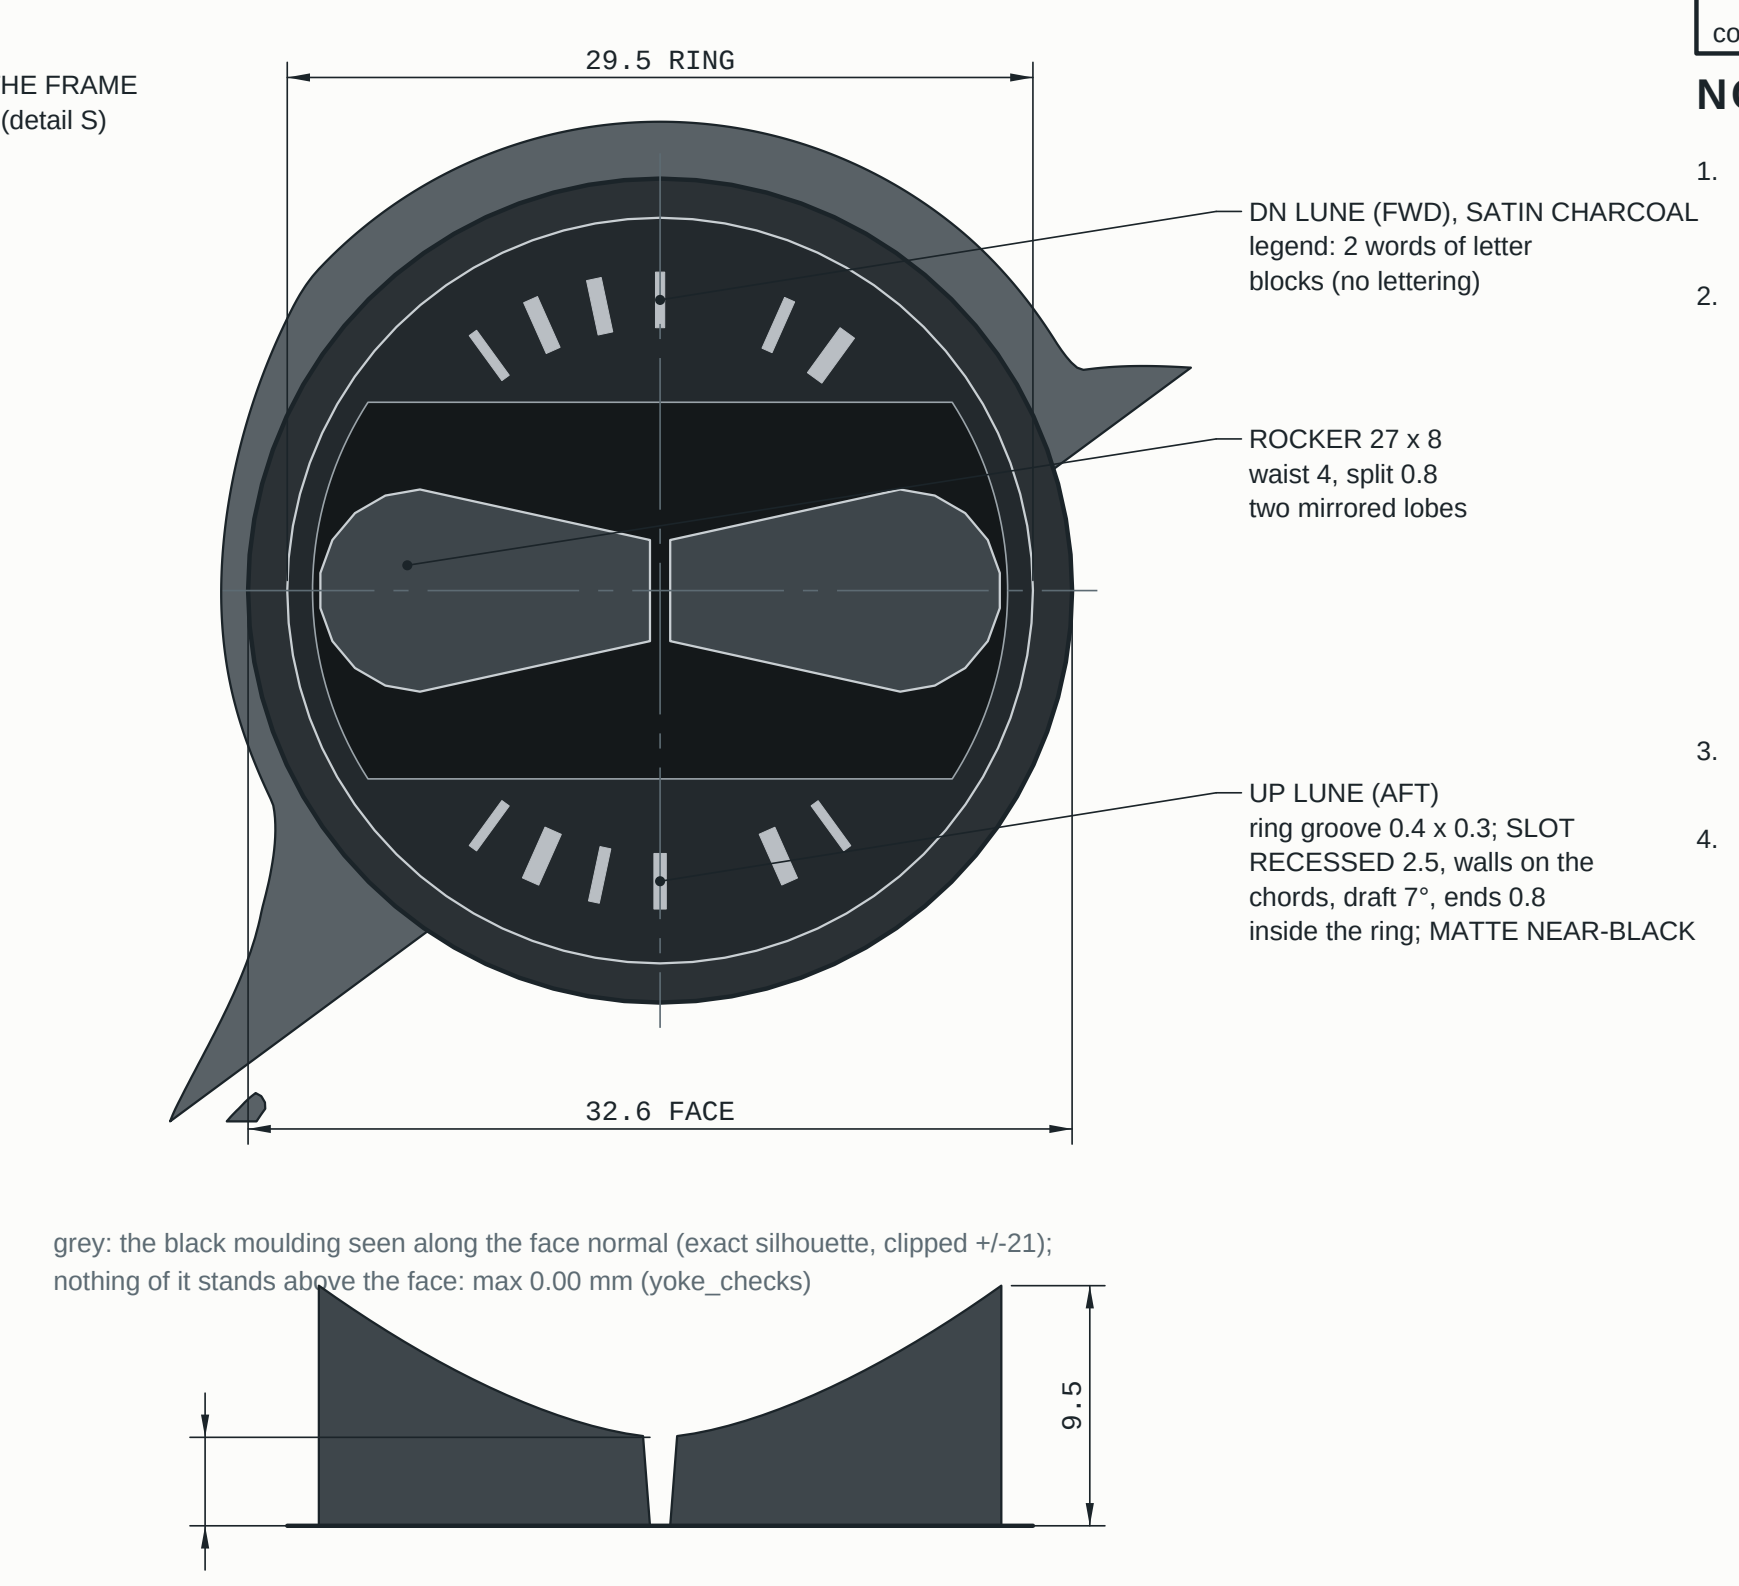
29.5 RING
DN LUNE (FWD), SATIN CHARCOAL
legend: 2 words of letter
blocks (no lettering)
ROCKER 27 x 8
waist 4, split 0.8
two mirrored lobes
UP LUNE (AFT)
ring groove 0.4 x 0.3; SLOT
RECESSED 2.5, walls on the
chords, draft 7°, ends 0.8
inside the ring; MATTE NEAR-BLACK
32.6 FACE
grey: the black moulding seen along the face normal (exact silhouette, clipped +/-21);
nothing of it stands above the face: max 0.00 mm (yoke_checks)
9.5
3.5

SADDLE (EXPONENT 1.6) [M low], CROWNED 0.6 ACROSS, TOP EDGES R 0.5
LOBES FROM THE SLOT FLOOR 2.5 BELOW THE FACE (HIDDEN)
AXIS: the face normal (-0.14, 0.62, 0.78) through (111.5, 82.0, a -27.0)

DETAIL F - TRIM HEAD

VIEW NORMAL TO THE ROUND FACE (38° UP) - 2:1

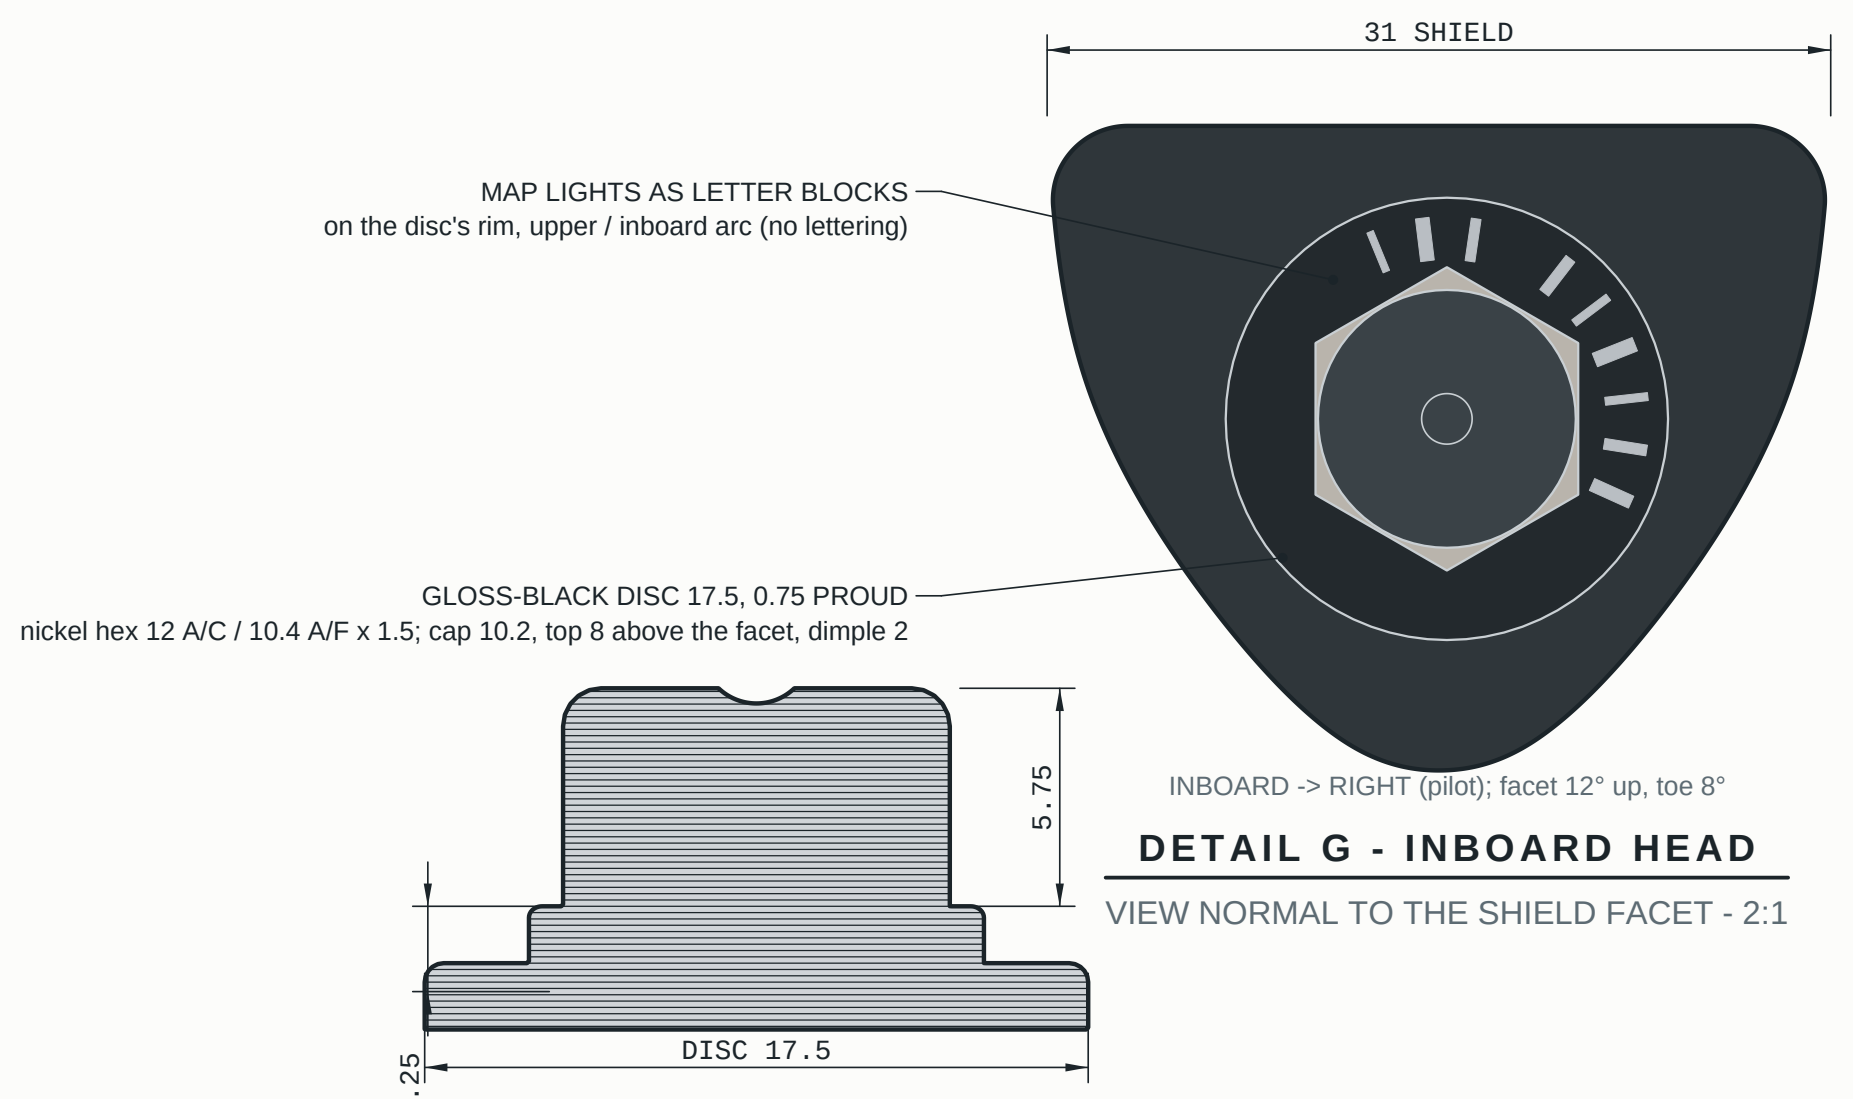
31 SHIELD
MAP LIGHTS AS LETTER BLOCKS
on the disc's rim, upper / inboard arc (no lettering)
GLOSS-BLACK DISC 17.5, 0.75 PROUD
nickel hex 12 A/C / 10.4 A/F x 1.5; cap 10.2, top 8 above the facet, dimple 2
5.75
2.25
DISC 17.5
INBOARD -> RIGHT (pilot); facet 12° up, toe 8°

DETAIL G - INBOARD HEAD

VIEW NORMAL TO THE SHIELD FACET - 2:1

DISC 0.75 PROUD R 0.5; HEX 10.4 A/F x 1.5; CAP 10.2, TOP R 1, DIMPLE 2 x 0.4 [E]
BUTTON: EXACT CUT ALONG THE FACET NORMAL - 3:1
AXIS: the facet normal through (-106.3, 76.0, a -23.9); facet point (-106, 75.6, a -23.8)

UP-INBOARD

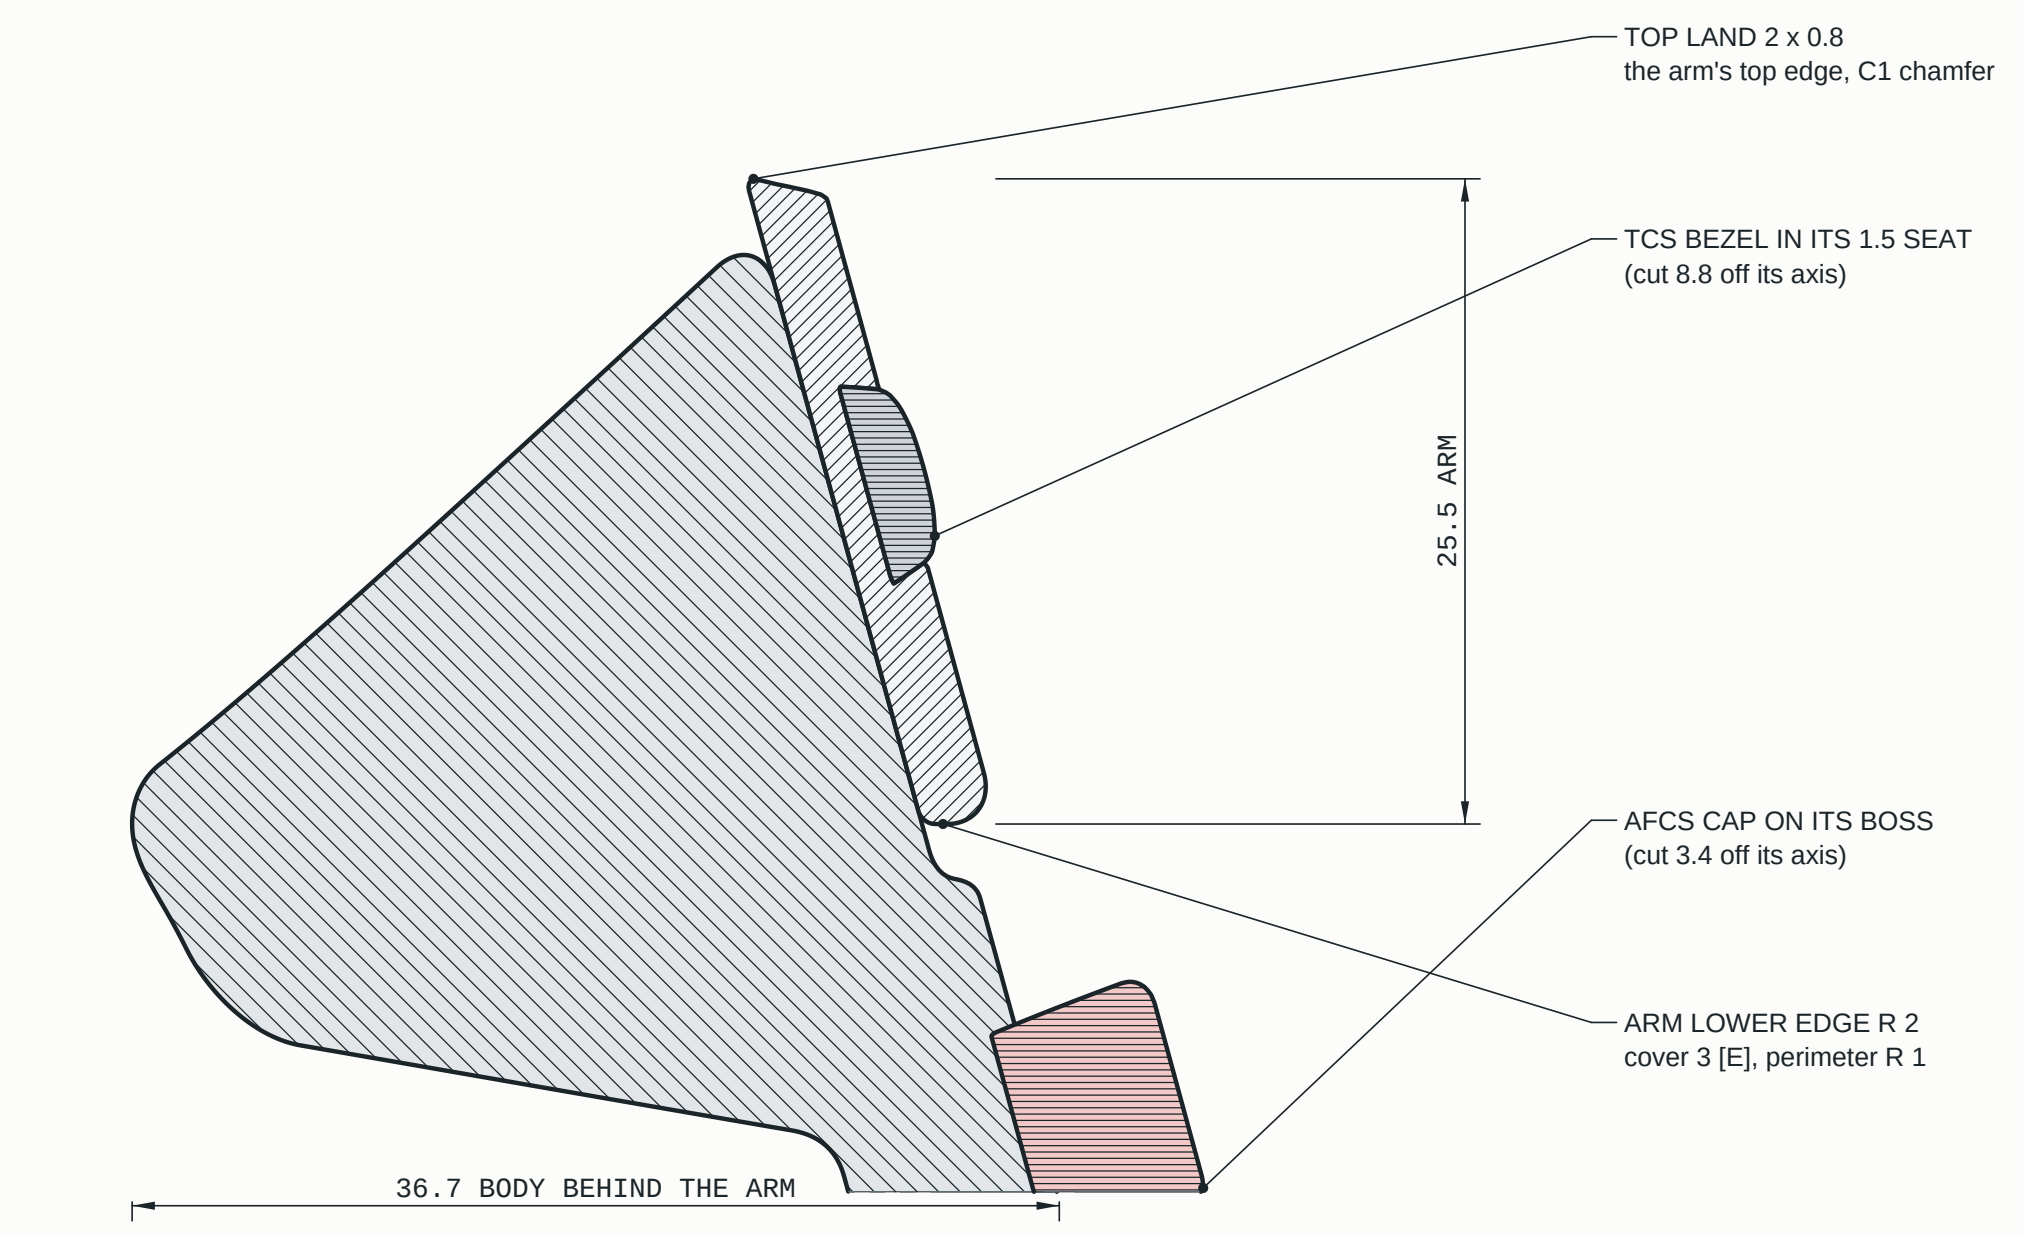
TOP LAND 2 x 0.8
the arm's top edge, C1 chamfer
TCS BEZEL IN ITS 1.5 SEAT
(cut 8.8 off its axis)
25.5 ARM
AFCS CAP ON ITS BOSS
(cut 3.4 off its axis)
ARM LOWER EDGE R 2
cover 3 [E], perimeter R 1
36.7 BODY BEHIND THE ARM
FWD <- -> AFT

SECTION K-K

THROUGH (52, 45) NORMAL TO THE ARM (30° UP OUTBOARD), LOOKING INBOARD (L6Y FRONT ELEVATION) - 2:1

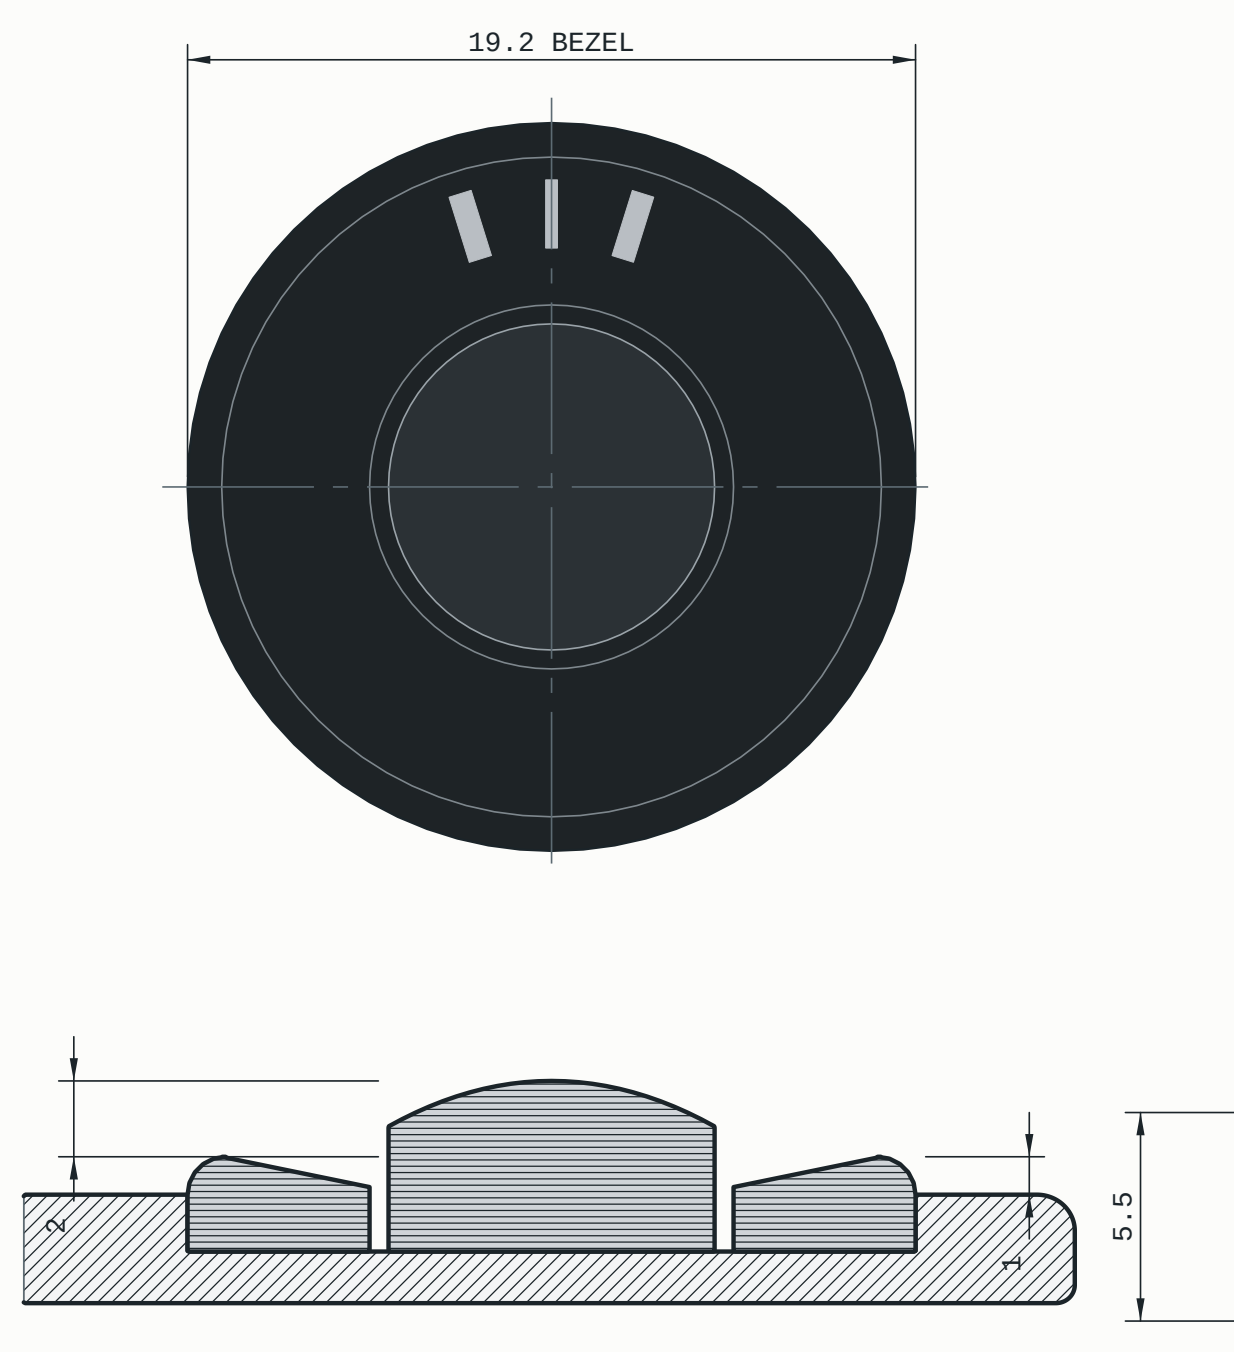
19.2 BEZEL
2
1

bezel 1 proud, dish r 4.8-8.7 0.8 deep [E]; button dome 1.2, its top 2 ABOVE the bezel [M low]
AXIS: the 17.5° face's normal through (58.5, 51.4, a -15.5)

DETAIL D - TCS

u 58.5 h 51.4 ON THE WHITE ARM; PROFILE = EXACT CUT - 3:1

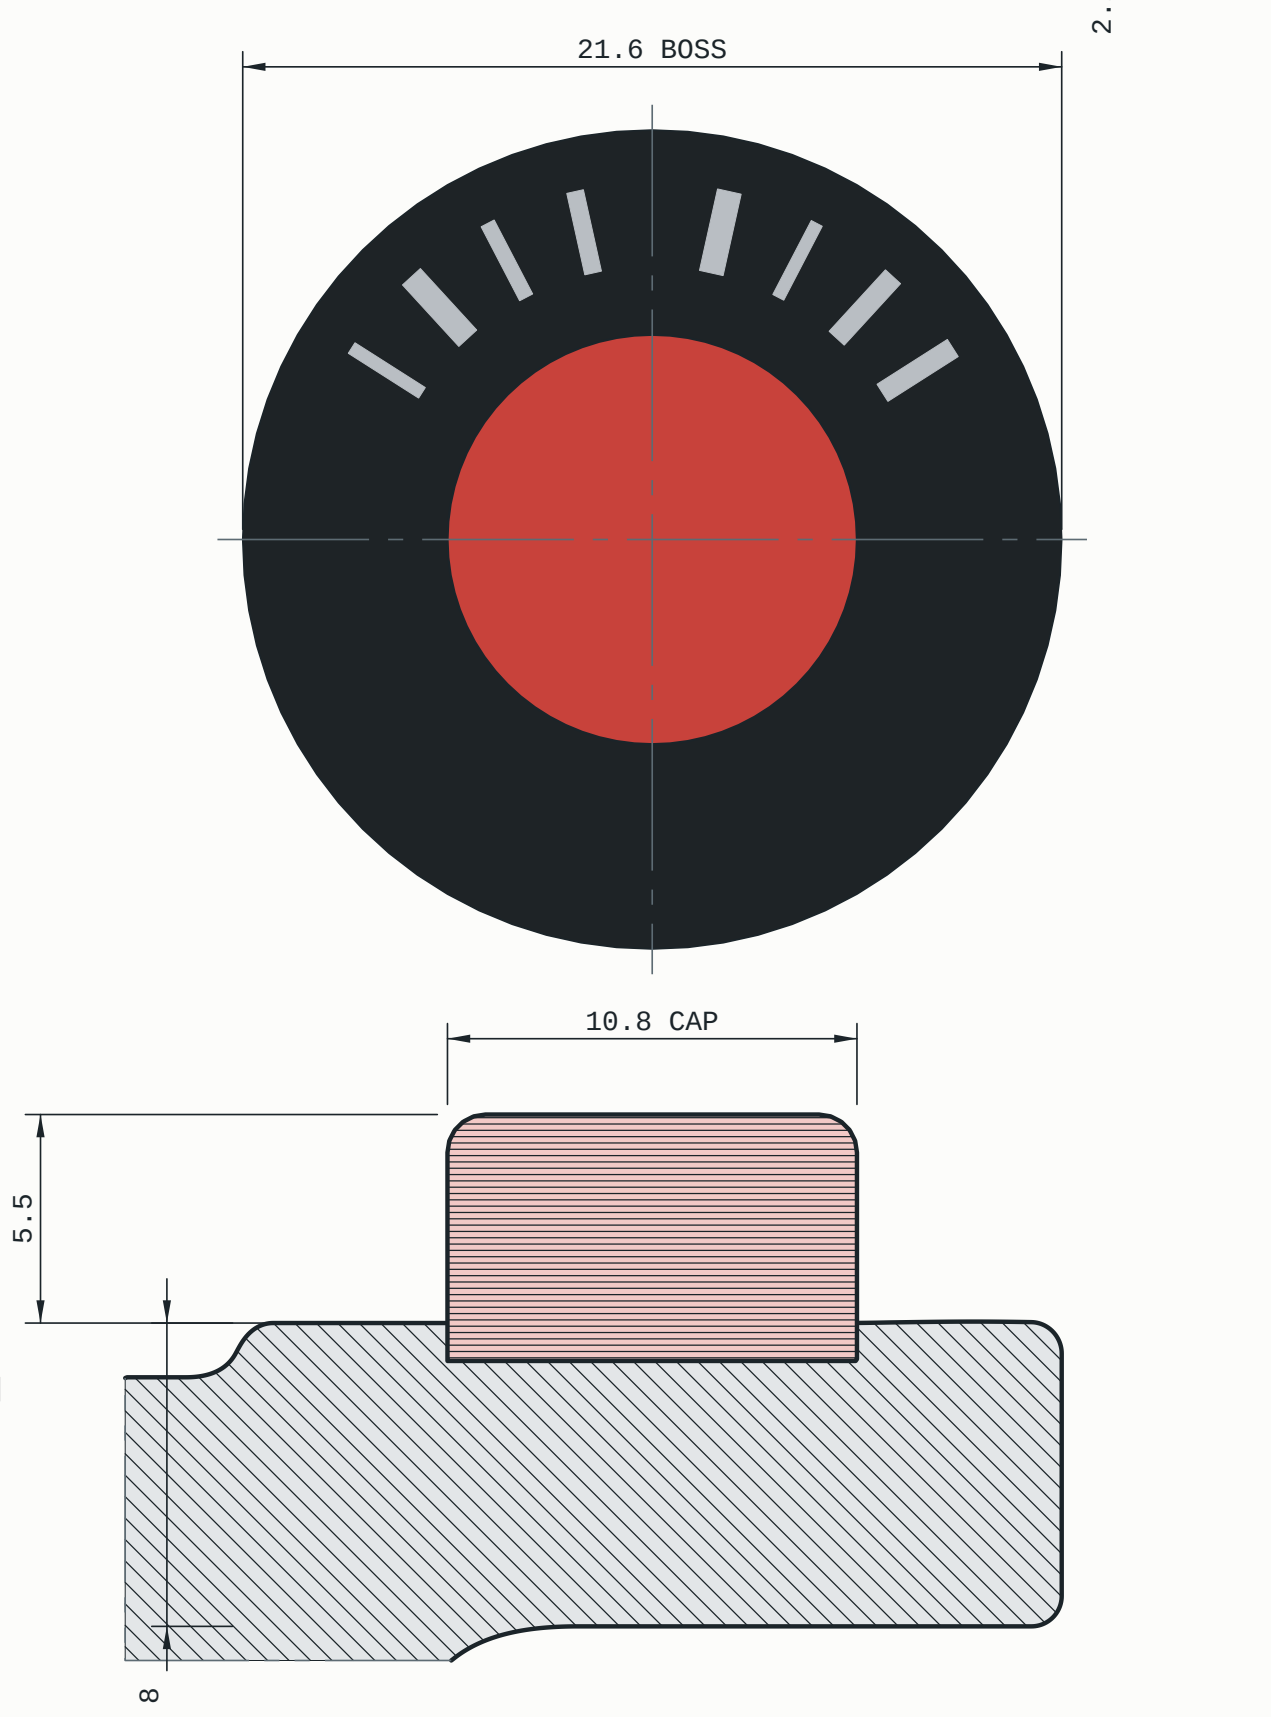
21.6 BOSS
10.8 CAP
5.5
8

boss 1.5 proud of the body [E], 8 deep: its back free over the hand slot; edge R 0.8, cap top R 1
AXIS: the 17.5° face's normal through the boss face (60.6, 23.4, a -8.2) = face - cover 3 + 1.5

DETAIL E - AFCS DISCONNECT

u 60.6 h 23.4; BOSS = A SOLID OF THE MOULDING; PROFILE = EXACT CUT - 3:1

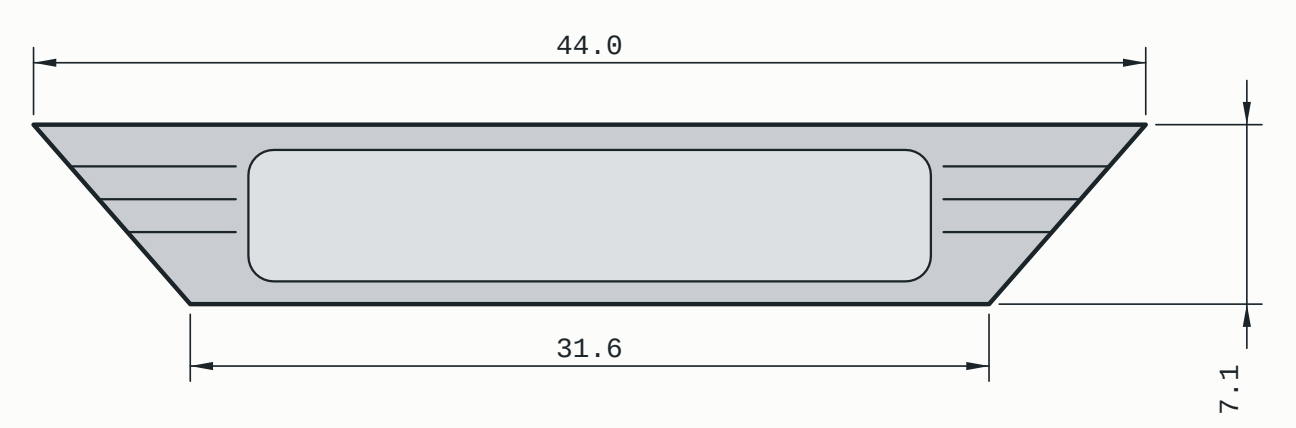

RAISED BLANK PLATE 27.0 x 5.2, 0.2 PROUD, R 1 / EDGE R 0.2 (NO LETTERING); GROOVES 0.5 x 0.3 CUT IN THE INSERT

DETAIL H - BADGE

ABSTRACT WINGED PLATE, TOP AT h 53.2 - 2:1

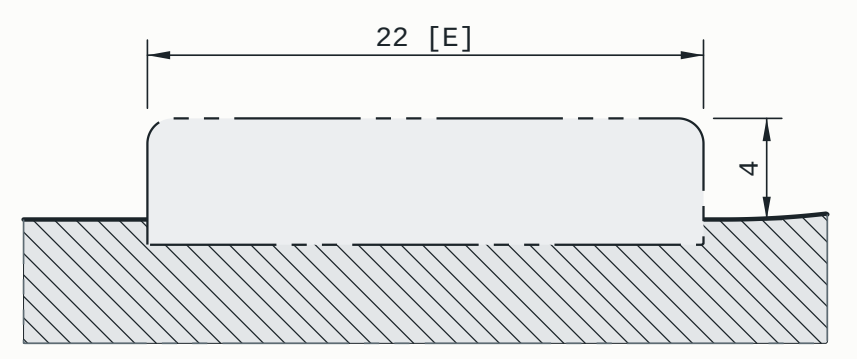

h 56 ON THE FORWARD FACE, 10 WIDE, TOP R 1, FLAT TOP
AXIS: THE FORWARD FACE'S NORMAL THROUGH (106.9, 52.2, -43.2)

DETAIL W1 - OUTBOARD: PTT TRIGGER [E]

PLACEHOLDER (PHANTOM), NEVER SEEN; FWD UP, GRIP AXIS ACROSS - 2:1

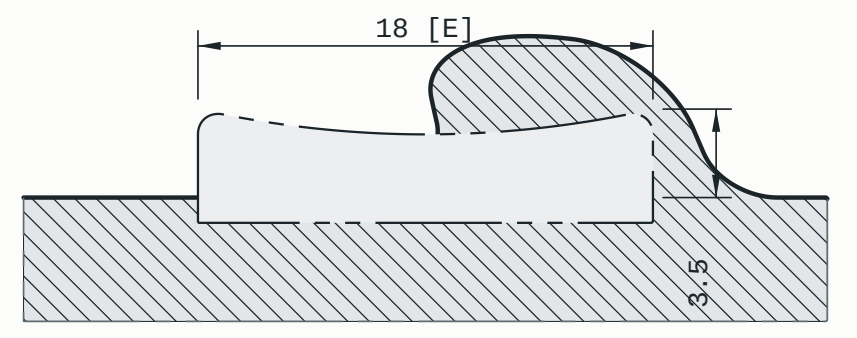

h 50 ON THE FORWARD FACE, 10 WIDE, TOP R 1, SADDLE 1
AXIS: THE FORWARD FACE'S NORMAL THROUGH (-99.4, 41.2, -39.0)

DETAIL W2 - INBOARD: CHECKLIST ROCKER [E]

PLACEHOLDER (PHANTOM), NEVER SEEN; FWD UP, GRIP AXIS ACROSS - 2:1

PHOTO CHECK (rev M): THE DRAWN SOLIDS RAY-CAST THROUGH THE PHOTO CAMERAS (mm, + = drawn wider)

PHOTO (CAMERA)	COVER LM	HEADS	GRIP OUT: OUTER / SLOT (mean, max)	GRIP IN: OUTER / SLOT (mean, max)	PADS mean (max)
P1046408 pilot (panel_408)	1.4 / 2.7	2.1 / 1.4	+0.2, +3.9 / +1.0, +5.0	+0.4, -5.8 / -1.8, -4.2	out 0.7 (2.5); in 0.6 (1.3)
P1046408 co-pilot (panel_408)	1.8 / 3.9	2.9 / 1.0	+1.1, +6.6 / +0.7, +2.1	-0.4, -2.8 / +0.1, +3.3	out 1.7 (3.4); in 0.8 (1.9)
P1046410 pilot	0.8 / 1.6	5.4 / 0.7	-0.5, -6.9 / +0.2, -6.1	-0.6, -7.6 / +2.9, +6.2	-
Mexico press, pilot	1.7 / 3.9	1.7 / 2.3	+2.3, +5.5 / +0.7, +1.2	-1.9, -7.8 / +0.4, +1.3	in 1.9 (5.1)
Mexico press, co-pilot	1.9 / 3.1	0.9 / 0.6	+0.3, +6.7 / +0.5, +2.6	+1.7, +4.8 / -3.9, -6.8	out 1.1 (2.7)
P1046409 co-pilot (two-view camera)	1.0 / 2.1	6.8 / 2.7	-2.1, -7.7 / +0.5, +9.8	+0.7, +7.8 / -2.9, -7.4	out 1.7 (4.3); in 3.4 (6.9)
rev L, P1046408 pilot (judges r4)	1.4 / 2.7	2.1 / 1.4	+0.3, +4.6 / +1.1, +6.6	+0.4, +6.2 / -1.8, -4.2	out 0.7; in 0.6

GRIP SIDES PER BAND OF h: SIGNED MAX mm (h -50..-30 \| -30..-10 \| -10..10 \| 10..30)

SIDE	P408 L	P408 R	P410 L	MEX L	MEX R	P409 R
OUT SLOT	+5.0 +1.9 +1.1 +0.4	+1.9 +2.1 +0.8 +0.5	+5.2 +1.9 -1.3 -6.1	. . +1.2 +0.9	+2.6 +2.3 -1.0 -1.6	+9.8 +1.6 -0.8 -5.1
OUT OUTER	+2.8 -0.8 -0.3 -0.8	+3.6 +1.1 . .	-4.4 +3.1 -1.5 -0.6	. . . .	-2.1 . -5.5 -0.7	-7.1 +5.8 -4.7 -7.7
IN SLOT	-2.5 -4.2 -4.1 -1.8	-0.8 -2.3 +1.8 +3.3	+2.4 +3.4 +5.4 +6.2	. +0.3 +1.3 +1.0	. -5.3 -3.2 -6.8	-7.4 -5.0 -7.3 +1.1
IN OUTER	-5.8 -5.2 -1.1 +0.9	-2.8 -2.1 -0.9 -1.0	-5.3 -7.6 -6.5 +1.2	+6.4 -7.8 -6.5 -7.2	+4.8 +2.0 +2.5 +2.2	+7.8 -6.2 -7.0 -6.5

GRIP PLANES (rev L, judges FID3-01): rake / toe / a0 / walls / depth fitted per grip to the curated rows and pad traces of 6 views -- P1046408 L / R, P1046410, Mexico L / R and P1046409 (posed this round: a two-view camera with panel_408, 25° from inboard) -- with the front outline held: outboard 20.4° / 6.9° / -4.4 / 0.64, depth 30 / 27 / 22 at h -47 / 0 / 45; inboard 21.3° / 16.7° / -6.1 / 0.04 (its depth above h 0 unconstrained: no view sees the inboard forward face). Table: 20 / 18 / -3.75, -6.0 / 0.6, 0 / 27.5 at the bottom, 27 above. Outboard cost +7 % at rake -2.5°, +8 % at a0 +/-5, +10 % at a bottom depth +/-4; the TOE is weak (7..22 within +7 %, inboard 0..26 within the noise; open point 2 of L6Y). The AOPA views are CHECK ONLY (one radial term; the co-pilot outer -11 / -22, slot -12 / -15, pad 9.5): not fitted, not tabled. Rev M (judges FID4-05): that co-pilot camera is EXTRAPOLATED from the pilot-yoke solution -- not a degenerate pose; its re-calibration on the panel round the co-pilot yoke is open, the toe / depth law / head depths stay [M weak].

INBOARD NECK (criterion, P1046408): the drawn moulding's top edge vs the strongest photo edge per pixel column, arm tip to head -- pilot mean -1.3, |mean| 2.3, max -7.4 mm (against the red placard; the max where the edge turns vertical under the head, ill-posed per column); co-pilot -4.6, max -7.5: there the search locks onto the PFD's text rows above the neck (overlay inspected: the drawn edge lies on the photo's neck, dark on dark). Rev L raised the last three samples 0.6-2.2 mm (body_in).

Pose per photo fitted to the COVER landmarks only (TCS, AFCS, badge, step ends, lower-insert corners, foot; P1046409 with its own picks); heads, grips, pads, neck and shell are checks. Grip rows: the CURATED photo silhouettes -- auto edges per image row in the near views with the panel recesses masked, the inboard slot sides hand-traced and snapped past the J band / panel seam, P1046409 traced at 4x; slot rows above h 24 (the arm's underside, not the grip) not scored -- against the ray-cast grip's own hits (part-labelled), per image row, h on the grip axis. The band maxima below h -37 are the rows that cut the grips' rounded bottom ends (1 mm of height reads 3-10 mm of width there); above it the row medians are 0.5-0.7 (outboard slot), 0.3-2.6 (outer sides), 0.4-3.5 (inboard slot), 90 % of the rows within 1-6.6. Overlays: refs/cache/overlays/yoke (private).

CORNERS & RADII (every other sample is on a C2 spline); NO OTHER EDGE IS SHARP

OUTLINE	N	CORNERS: SAMPLE #, (u, h), RADIUS (curve_law)
shell (white cover), half	49	#4 (22, 62.8) R 3; #10 (33.7, 52) R 1.5; #21 (66, 60.2) R 2; #22 (72.3, 54.8) R 2; #23 (72.3, 47.8) R 2; #24 (69, 44.6) R 2; #45 (20, -55.3) R 6
lower insert, half	8	#0 (0, 1) R 0; #1 (12.6, 3) R 0.5
outboard grip aft face	38	#6 (130.5, 93.6) R 4; #20 (136.6, -30.4) R 5; #23 (121, -35.5) R 9
inboard grip aft face	37	#2 (91.4, 84) R 4; #6 (118.5, 87.6) R 6; #10 (125.6, 60) R 3; #21 (140.5, -36) R 5; #24 (118.5, -45.8) R 4
outboard pad	29	#0 (125.5, 60) R 3; #7 (91, 38) R 5; #16 (123.5, -28.4) R 3; #19 (134.8, -25.5) R 4
inboard pad	31	#0 (127.8, 55.3) R 3; #7 (89.4, 32) R 4; #17 (116, -34.4) R 3; #21 (139, -29.6) R 4
shield facet	9	#0 (-15.5, 12) R 3; #1 (15.5, 12) R 3
black body, outboard half	37	NO CORNERS: one C2 run joined to the other half at u 0 (rev M, judges DR4-07); its first 12 samples are the top edge (body_top)
black body, inboard half	35	NO CORNERS: one C2 run joined to the other half at u 0 (rev M, judges DR4-07); its first 11 samples are the top edge (body_top)
insert corners	-	junction R 0; step_end R 0.5
cover edges	-	perimeter R 1; arm lower R 2; foot underside R 3; tip facet corners R 2
grip edges	-	frame roll R 1.5; forward R 11 [E] capped at 0.45 x the inscribed half-width; heel R 4; trim face R 1.5; pad step crisp, groove 1 x 0.5, bead 0.4
body edges	-	rounds in order: sides x aft face R 2, x top plane R 2, x forward face R 8 [E] easing to R 5 under the foot, R 3 behind the arms / necks [E]; under the foot the side draft's offset capped at 4 [E]; AFCS boss aft edge R 0.8, back edge R 0.8, blend R 1.5
moulding	-	body + grips joined by a ROLLING-BALL round R 3 (none where their faces run flush); then each pad's pocket, groove and bead (pad_finish); the web's aft face on the trim face's plane 3.5 below it, joined to the grip plane over 8; the low neck's aft face onto the shield facet's plane 0.5 below it over |u| 76-90; body top line a C2 cubic
head zone out / in	-	aft side: prism trimmed 3 inside the head above h 67 / 61, drafted 3 / 1 per mm below from a bend of R 4, cut R 1.5; head chamfer R 3, floor R 3 at h 62 / 50; head-to-prism R 3; then walls (aft edge R 1.5 -> 2) and forward face (R 11 capped -> 3; over the head's top onto it R 3); shield facet edge R 1.5, its directrix tangent at the widest points (no corner)
cover features	-	crown soft break R 20; top land C1 chamfer 2 x 0.8; TCS seat 1.5 deep

NOTES

1. CURVE LAW (rev M text, judges DR4-03): each outline split at its corner samples into runs, each run a C2 cubic spline on centripetal knots ('natural' ends at corners, periodic for a closed outline without corners), 0.05 sampling (arcs too); corners R 0 sharp, R > 0 a tangent fillet (cubic Bezier arc; tangent length R tan(th/2) capped at 0.45 of the shorter run -- none capped); YOKE_DESIGN curve_law; the solids use the EXACT distance to these polylines (beyond 0.3 mm a C2 B-spline of exact node distances, blended C2).
2. ACCEPTANCE (model/yoke_checks.py, judges DR2-01..04, DR4-01 / 02): fields: zero level vs the curve-law polylines, max shell 0.0059, grip_out 0.0045, grip_in 0.0079, pad_out 0.0045, pad_in 0.0045, body 0.0052 mm; curve law (C2): max relative curvature jump at the interior samples 8.3e-07 over 301 samples of 10 outlines; nothing above the trim face: max 0.00 mm; above the shield facet: max 0.00 mm; untabled cusps (contour turning > 25 deg within +-0.15 mm AND the surface normals turning as much): grip_out 0 / 54 sections, grip_in 0 / 54 sections, necks / web / heads (u planes) 0 / 19 sections, horizontal (h planes) 0 / 16 sections, Z-Z 0, K-K 0 (52 contour tips set aside: planes grazing a tabled round, the normals turning less); black moulding one piece per side in every horizontal section h 62..94 (step 2; none above a head's top): yes; CREASES (rev M, judges DR4-02; adaptive scan of 14 views incl. sides / below: every pixel pair turning > 4 deg refined 2 x 16x, a crease when the turn stays in one sub-step): untabled 0; 2218 tabled crease pixels set aside, 86562 candidate pairs resolved as rounds; joins read smooth fields at the rounds' own surface points (a ridge = a unit gradient turning > 20 deg within 0.01 mm; min |grad| in brackets): body x outboard grip (R 3) 6 / 6934 points (|grad| >= 0.59), body x inboard grip (R 3) 0 / 3023 points (|grad| >= 0.70), outboard prism aft side x head (R 3) 1 / 2593 points (|grad| >= 0.56), inboard prism aft side x head (R 3) 0 / 1510 points (|grad| >= 0.94); pads EXPOSED as drawn (judges DR4-01; the moulding ray-cast from aft vs the drawn leather / groove / bead heights inside each pad outline): out 0.0 mm2 off by > 0.05 (max 0.00), buried 0.0 mm2, in 0.0 mm2 off by > 0.05 (max 0.00), buried 0.0 mm2; fillets reduced by the 0.45-of-run cap (judges DR4-03): none; vertex normals vs analytic (depth-map meshes 0.25 mm from aft, 0.4 from above-aft / the front; 95th / 99th / max deg; tabled creases, the cover's 0.8 mm top land and part boundaries apart): cover stem / inserts 0.00 / 0.06 / 0.7 (creases 21); cover arm + TCS 0.15 / 0.79 / 4.3 (creases 8); outboard grip pad / frame 0.36 / 1.19 / 29.4 (creases 2); inboard grip pad / frame 0.31 / 1.54 / 4.2 (creases 30); outboard head + face 0.73 / 1.92 / 5.4 (creases 73); inboard head + shield 0.65 / 1.57 / 5.3 (creases 4); web (aft) 0.46 / 1.83 / 30.3 (creases 6); body top + web top (from above-aft) 0.01 / 0.85 / 12.0 (creases 6); forward faces (from the front) 0.43 / 1.35 / 10.1 (creases 10).
3. SECTIONS: exact contours of the solids (model/yoke_geom.py) on the cutting planes; the black body and the grips are one moulding (a rolling-ball round R 3), the white cover a separate part, the leather pad hatched apart (its 3.0 layer [E]); where a section is clipped to its window the cut edge is a thin phantom break line.
4. Sources per value: the [M] / [E] / [S] tags of YOKE_DESIGN (printed in model/interior.py).

OWNER DECISION 2026-10-11 (fit_check 30c):
THE J BAND AND THE U RECESS RE-CENTRED ON THE COLUMN AXIS = THE HUB (WL 1845; ROLL PIVOT AND KNEE RESULTS KEPT). REASON: THE PHOTOS READ THE JOINT LINE, I.E. THE COLUMN AXIS, AT WL 1821 +/-10, 24 UNDER THE HUB: BAND AND RECESS DRAWN 24 UP WITH THE AXIS

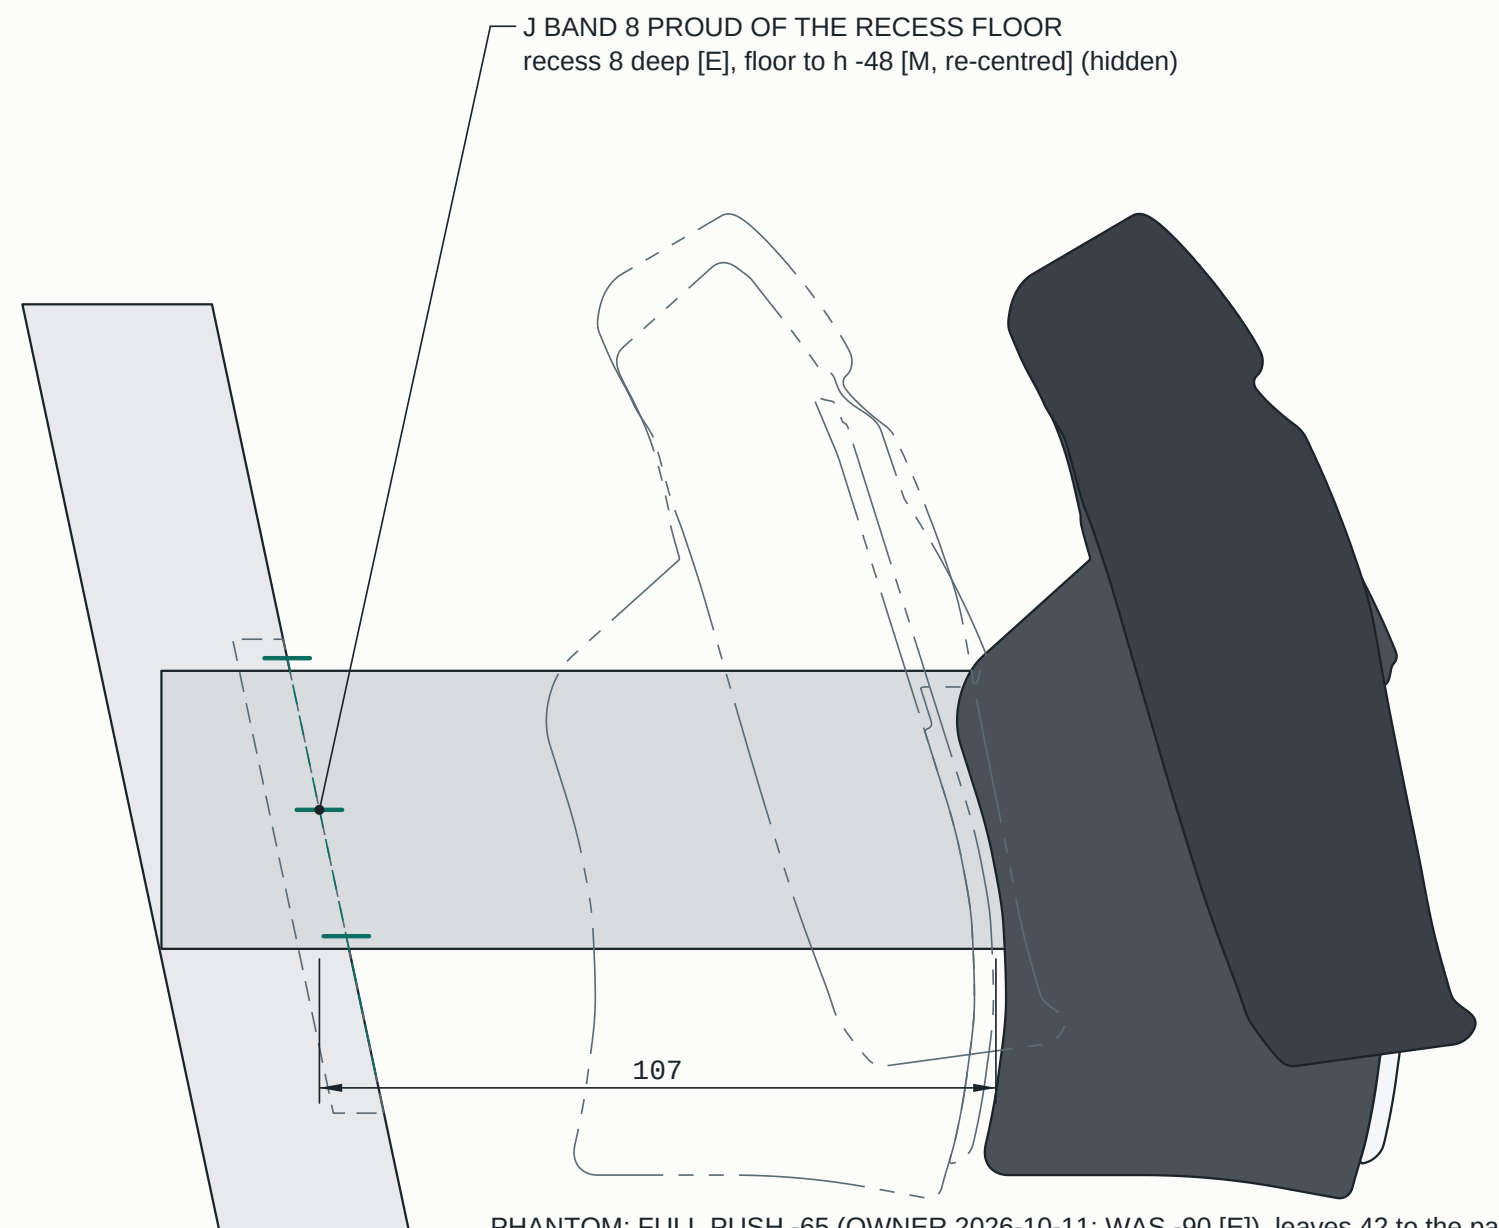
J BAND 8 PROUD OF THE RECESS FLOOR
recess 8 deep [E], floor to h -48 [M, re-centred] (hidden)
107

PHANTOM: FULL PUSH -65 (OWNER 2026-10-11; WAS -90 [E]), leaves 42 to the panel

DETAIL J - COLUMN, SIDE

AT THE LOWER PANEL, FROM OUTBOARD - 1:2

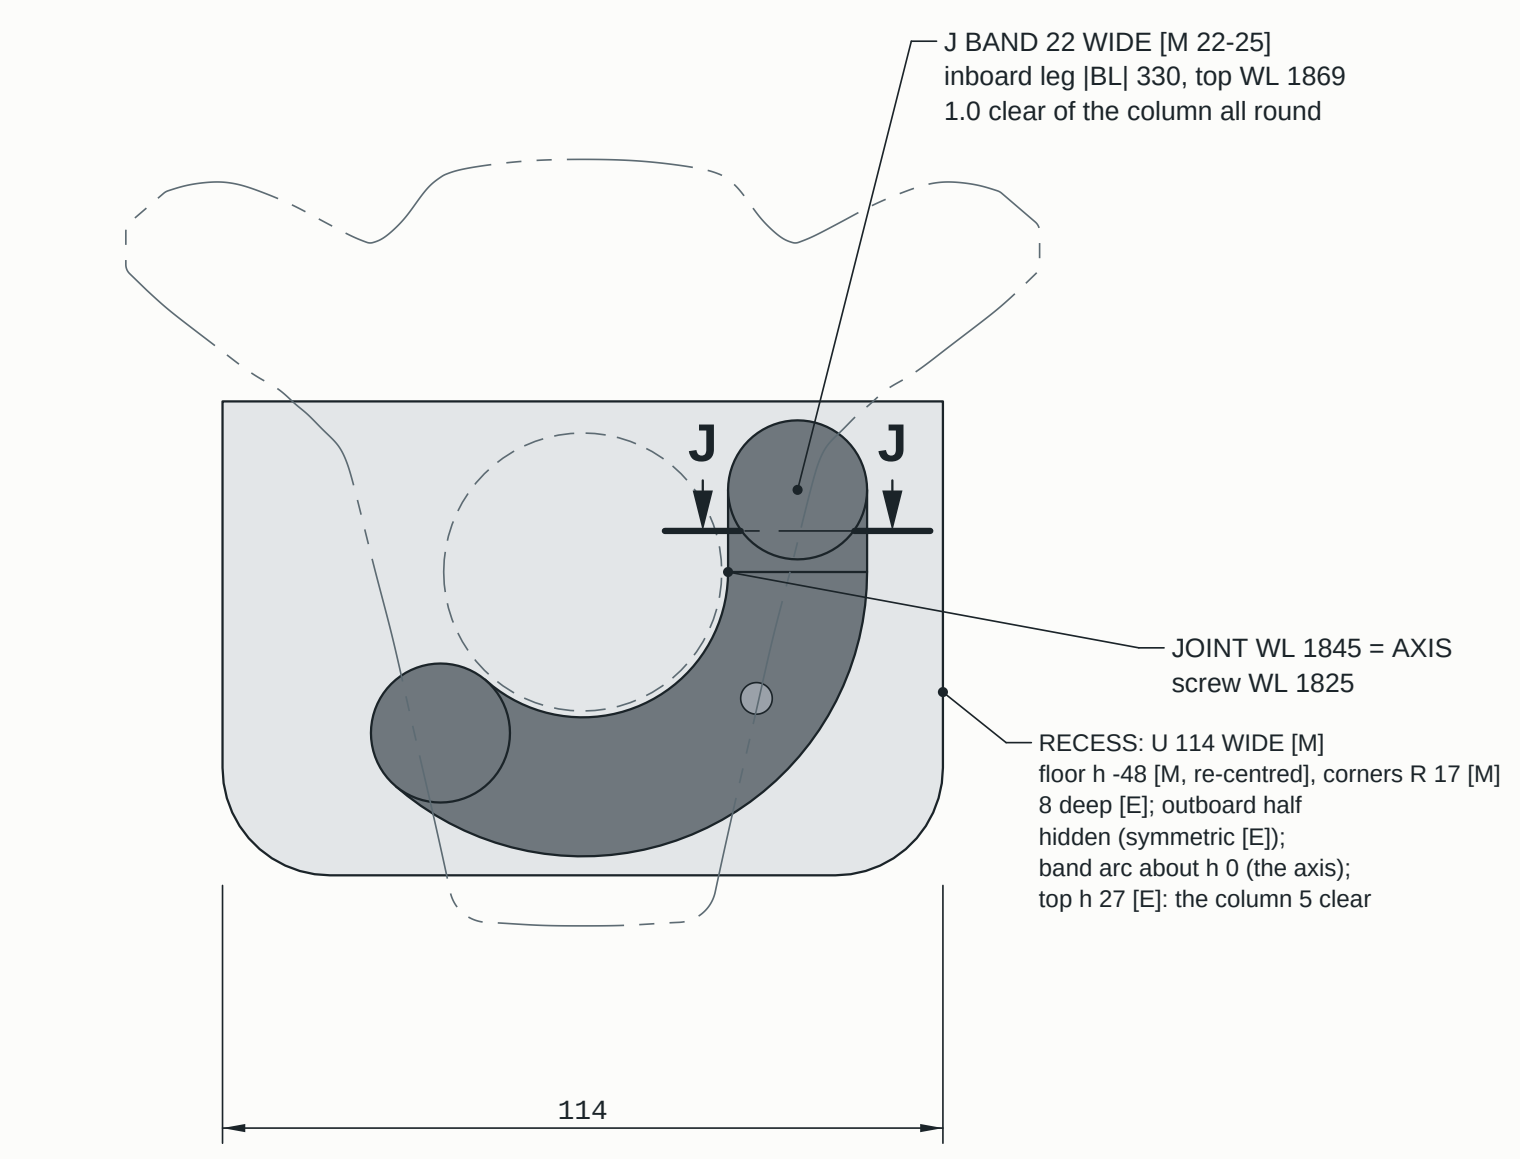
J BAND 22 WIDE [M 22-25]
inboard leg |BL| 330, top WL 1869
1.0 clear of the column all round
J
J
JOINT WL 1845 = AXIS
screw WL 1825
RECESS: U 114 WIDE [M]
floor h -48 [M, re-centred], corners R 17 [M]
8 deep [E]; outboard half
hidden (symmetric [E]);
band arc about h 0 (the axis);
top h 27 [E]: the column 5 clear
114

phantom: the shell; hidden: the column dia 44 (matte near-black)
viewer (rev P): the free yokes parked -35 [M: unlocked photos], 72 of the column to the panel

DETAIL J - SURROUND, FRONT

LOOKING FORWARD (PILOT; INBOARD RIGHT) - 1:2

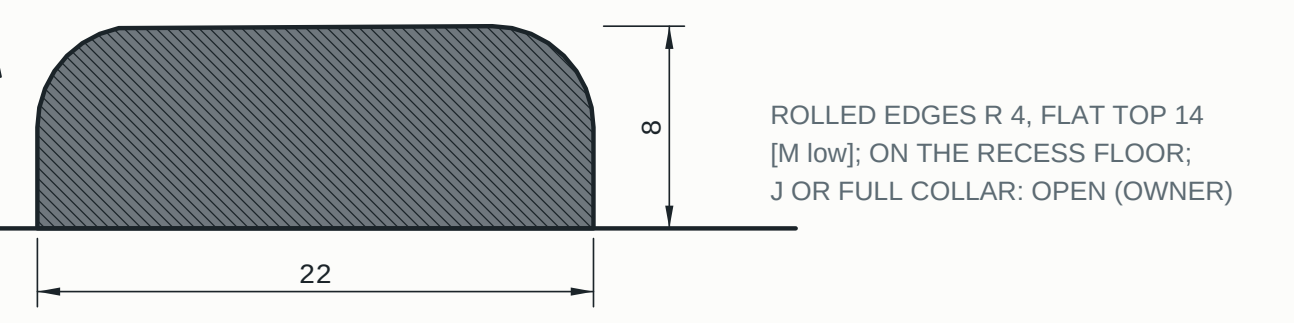

ROLLED EDGES R 4, FLAT TOP 14
[M low]; ON THE RECESS FLOOR;
J OR FULL COLLAR: OPEN (OWNER)

SECTION J-J - BAND

ACROSS THE VERTICAL LEG (P1046410 / 09) - 2:1

REVISIONS - PC12-L6Y2

REV	DATE	DESCRIPTION
A	2026-10-05	first issue with L6Y rev B (judges r1): exact sections of the rev J solids, grip profiles with the heel lip, trim face / shield, switch profiles, column surround, corner table, photo check
B	2026-10-05	rev K (judges r2): exact-field solids; Z-Z / K-K with ordinates; cusp-free grip sections; pad groove + bead, heel lip R 4; D / E / G exact switch cuts; J-J; acceptance; photo check on curated silhouettes, grip planes fitted to 7 views
C	2026-10-05	rev L (judges r3): K-K through TCS / AFCS; grip sections cut the moulding; dimensions off the solids; head-zone surfaces and rounds tabled; acceptance on heads / necks / web / tops / forward faces + one-piece and C2 rows; photo check on 6 views; detail J U recess
D	2026-10-05	rev M (judges r4): pads exposed as drawn (pocket cut after the join); rolling-ball R 3 joins; head zones share walls / forward face; leather hatched apart; detail S, break lines, detail W [E] switches; adaptive crease / ridge / pad acceptance, all clean (head top R 3 onto the forward face, body sides x top rolling ball, C2 forward-radius cap, tangent inboard directrix, 0.05 sampling, C2 fields); photo check re-run
E	2026-10-11	rev N (3-D judges r1): F rocker slot 2.5 deep (draft 7 deg), letter-block legends in the pilot's reading order; G MAP LIGHTS blocks, satin-nickel collar; H raised blank plate; J recess to h 27, band 22 wide; OWNER DECISIONS 2026-10-11: J band + recess re-centred on the column axis (hub WL 1845; photos 1821), push 65 (was 90 [E])
F	2026-10-11	rev O (3-D judges r2): G push button = gloss-black legend disc 17.5 + nickel hex 12 A/C + cap 10.2, MAP LIGHTS on the disc; F rocker ends 9.5, crowned 0.6; H one outline groove, plate 0.2; legends 0.35 of the pitch
G	2026-10-11	rev P (3-D judges r3): F satin charcoal lunes, near-black matte slot; legends 0.22 of the pitch, uneven; J the band's hook ends round (tip at 330 deg), the viewer's parked rest 35 forward (YOKE rest), column matte near-black

PILATUS PC-12 PRO

PC-24-STYLE CONTROL YOKE - SECTIONS & DETAILS

FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-L6Y2	G	AS SHOWN	A1 · 2 OF 2	mm

DRAWN
Claude - loftkit parametric model

DATE
2026-10-11

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION