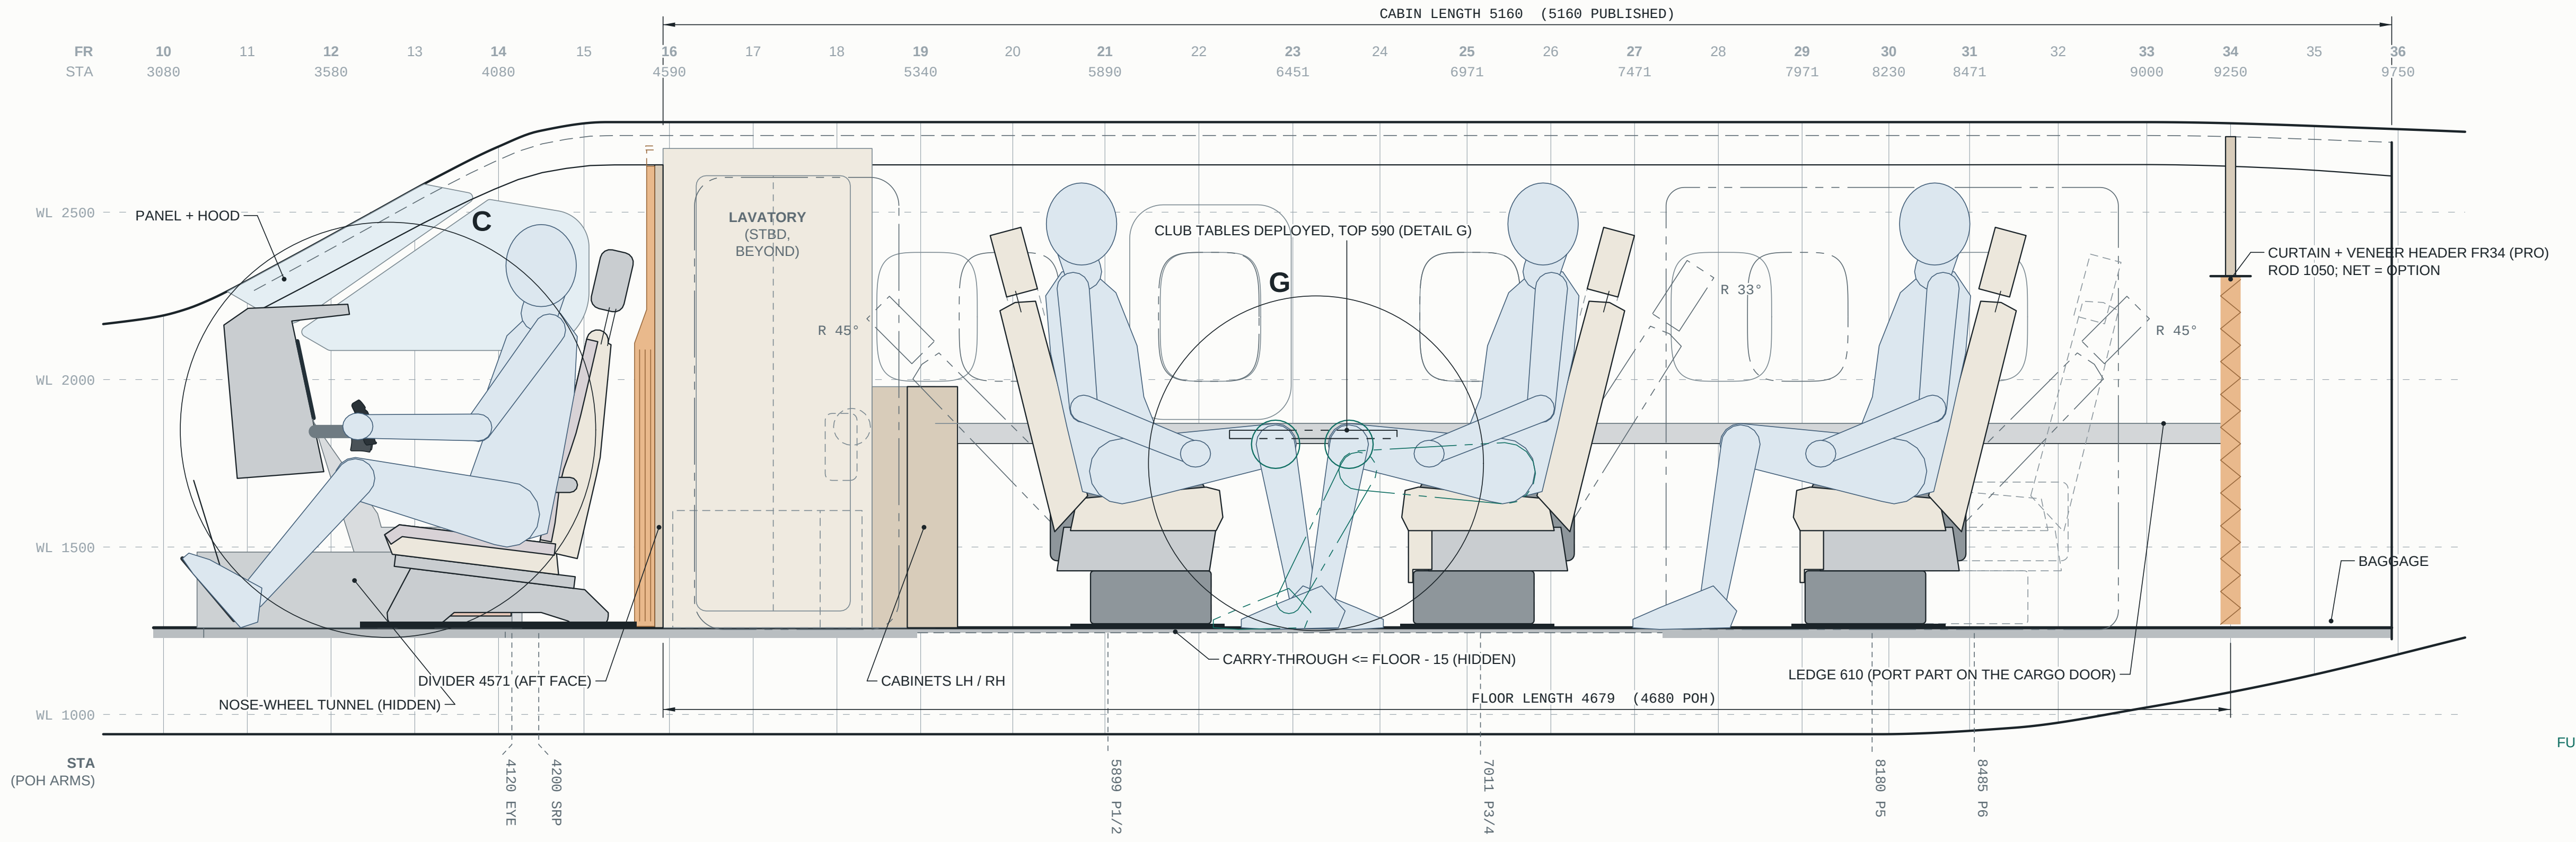

INBOARD PROFILE AT BL 375 P

SEEN FROM PORT, PORT SIDEWALL REMOVED - PHANTOM R n°: RECLINE REACHED - SCALE 1:20

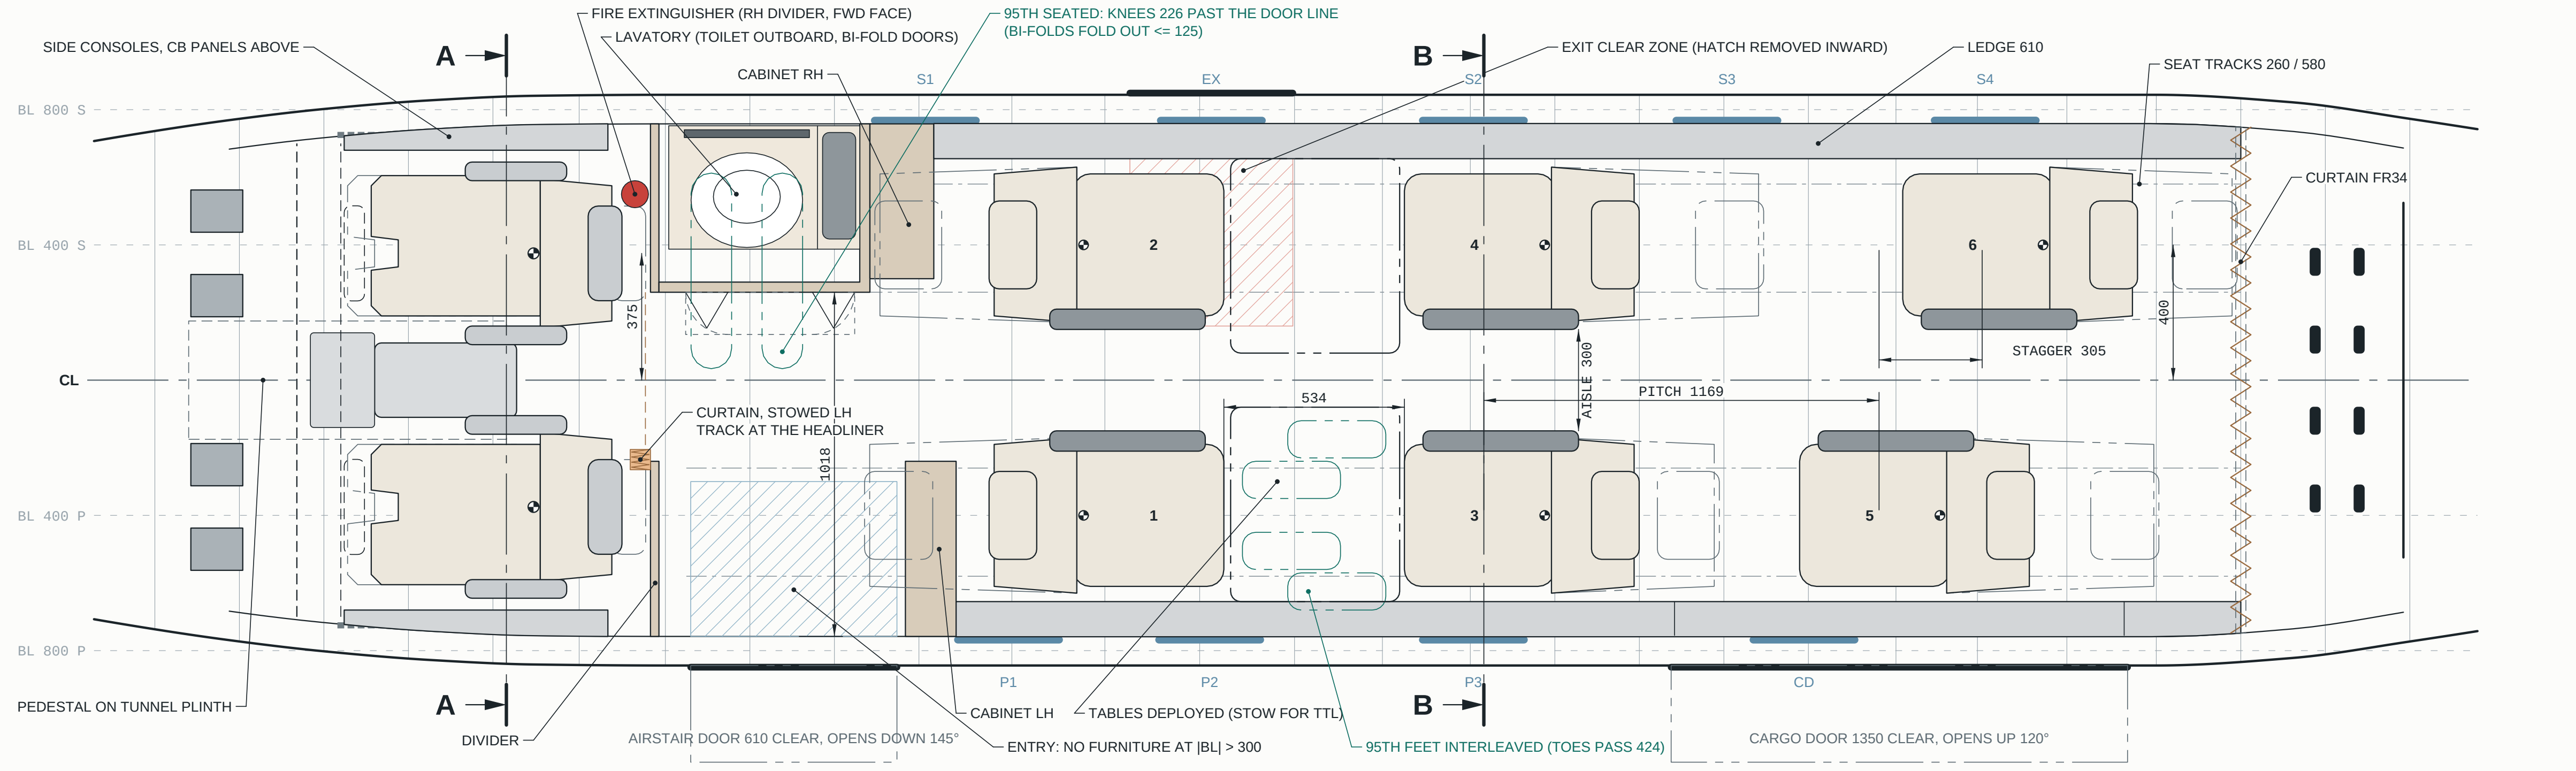
SIDE CONSOLES, CB PANELS ABOVE
A
FIRE EXTINGUISHER (RH DIVIDER, FWD FACE)
LAVATORY (TOILET OUTBOARD, BI-FOLD DOORS)
95TH SEATED: KNEES 226 PAST THE DOOR LINE
(BI-FOLDS FOLD OUT <= 125)
CABINET RH
B
EXIT CLEAR ZONE (HATCH REMOVED INWARD)
LEDGE 610
SEAT TRACKS 260 / 580
S1
EX
S2
S3
S4
CURTAIN FR34
BL 800 S
BL 400 S
CL
BL 400 P
BL 800 P
2
4
6
1
3
5
375
1018
534
AISLE 300
PITCH 1169
STAGGER 305
400
CURTAIN, STOWED LH
TRACK AT THE HEADLINER
P1
P2
P3
CD
PEDESTAL ON TUNNEL PLINTH
A
DIVIDER
CABINET LH
TABLES DEPLOYED (STOW FOR TTL)
B
AIRSTAIR DOOR 610 CLEAR, OPENS DOWN 145°
ENTRY: NO FURNITURE AT |BL| > 300
95TH FEET INTERLEAVED (TOES PASS 424)
CARGO DOOR 1350 CLEAR, OPENS UP 120°

PLAN AT CUSHION HEIGHT (WL 1689)

SEEN FROM ABOVE, STARBOARD UP - EX-6S-2 LAYOUT - PHANTOM BEHIND EACH SEAT: RECLINED BACK - SCALE 1:20

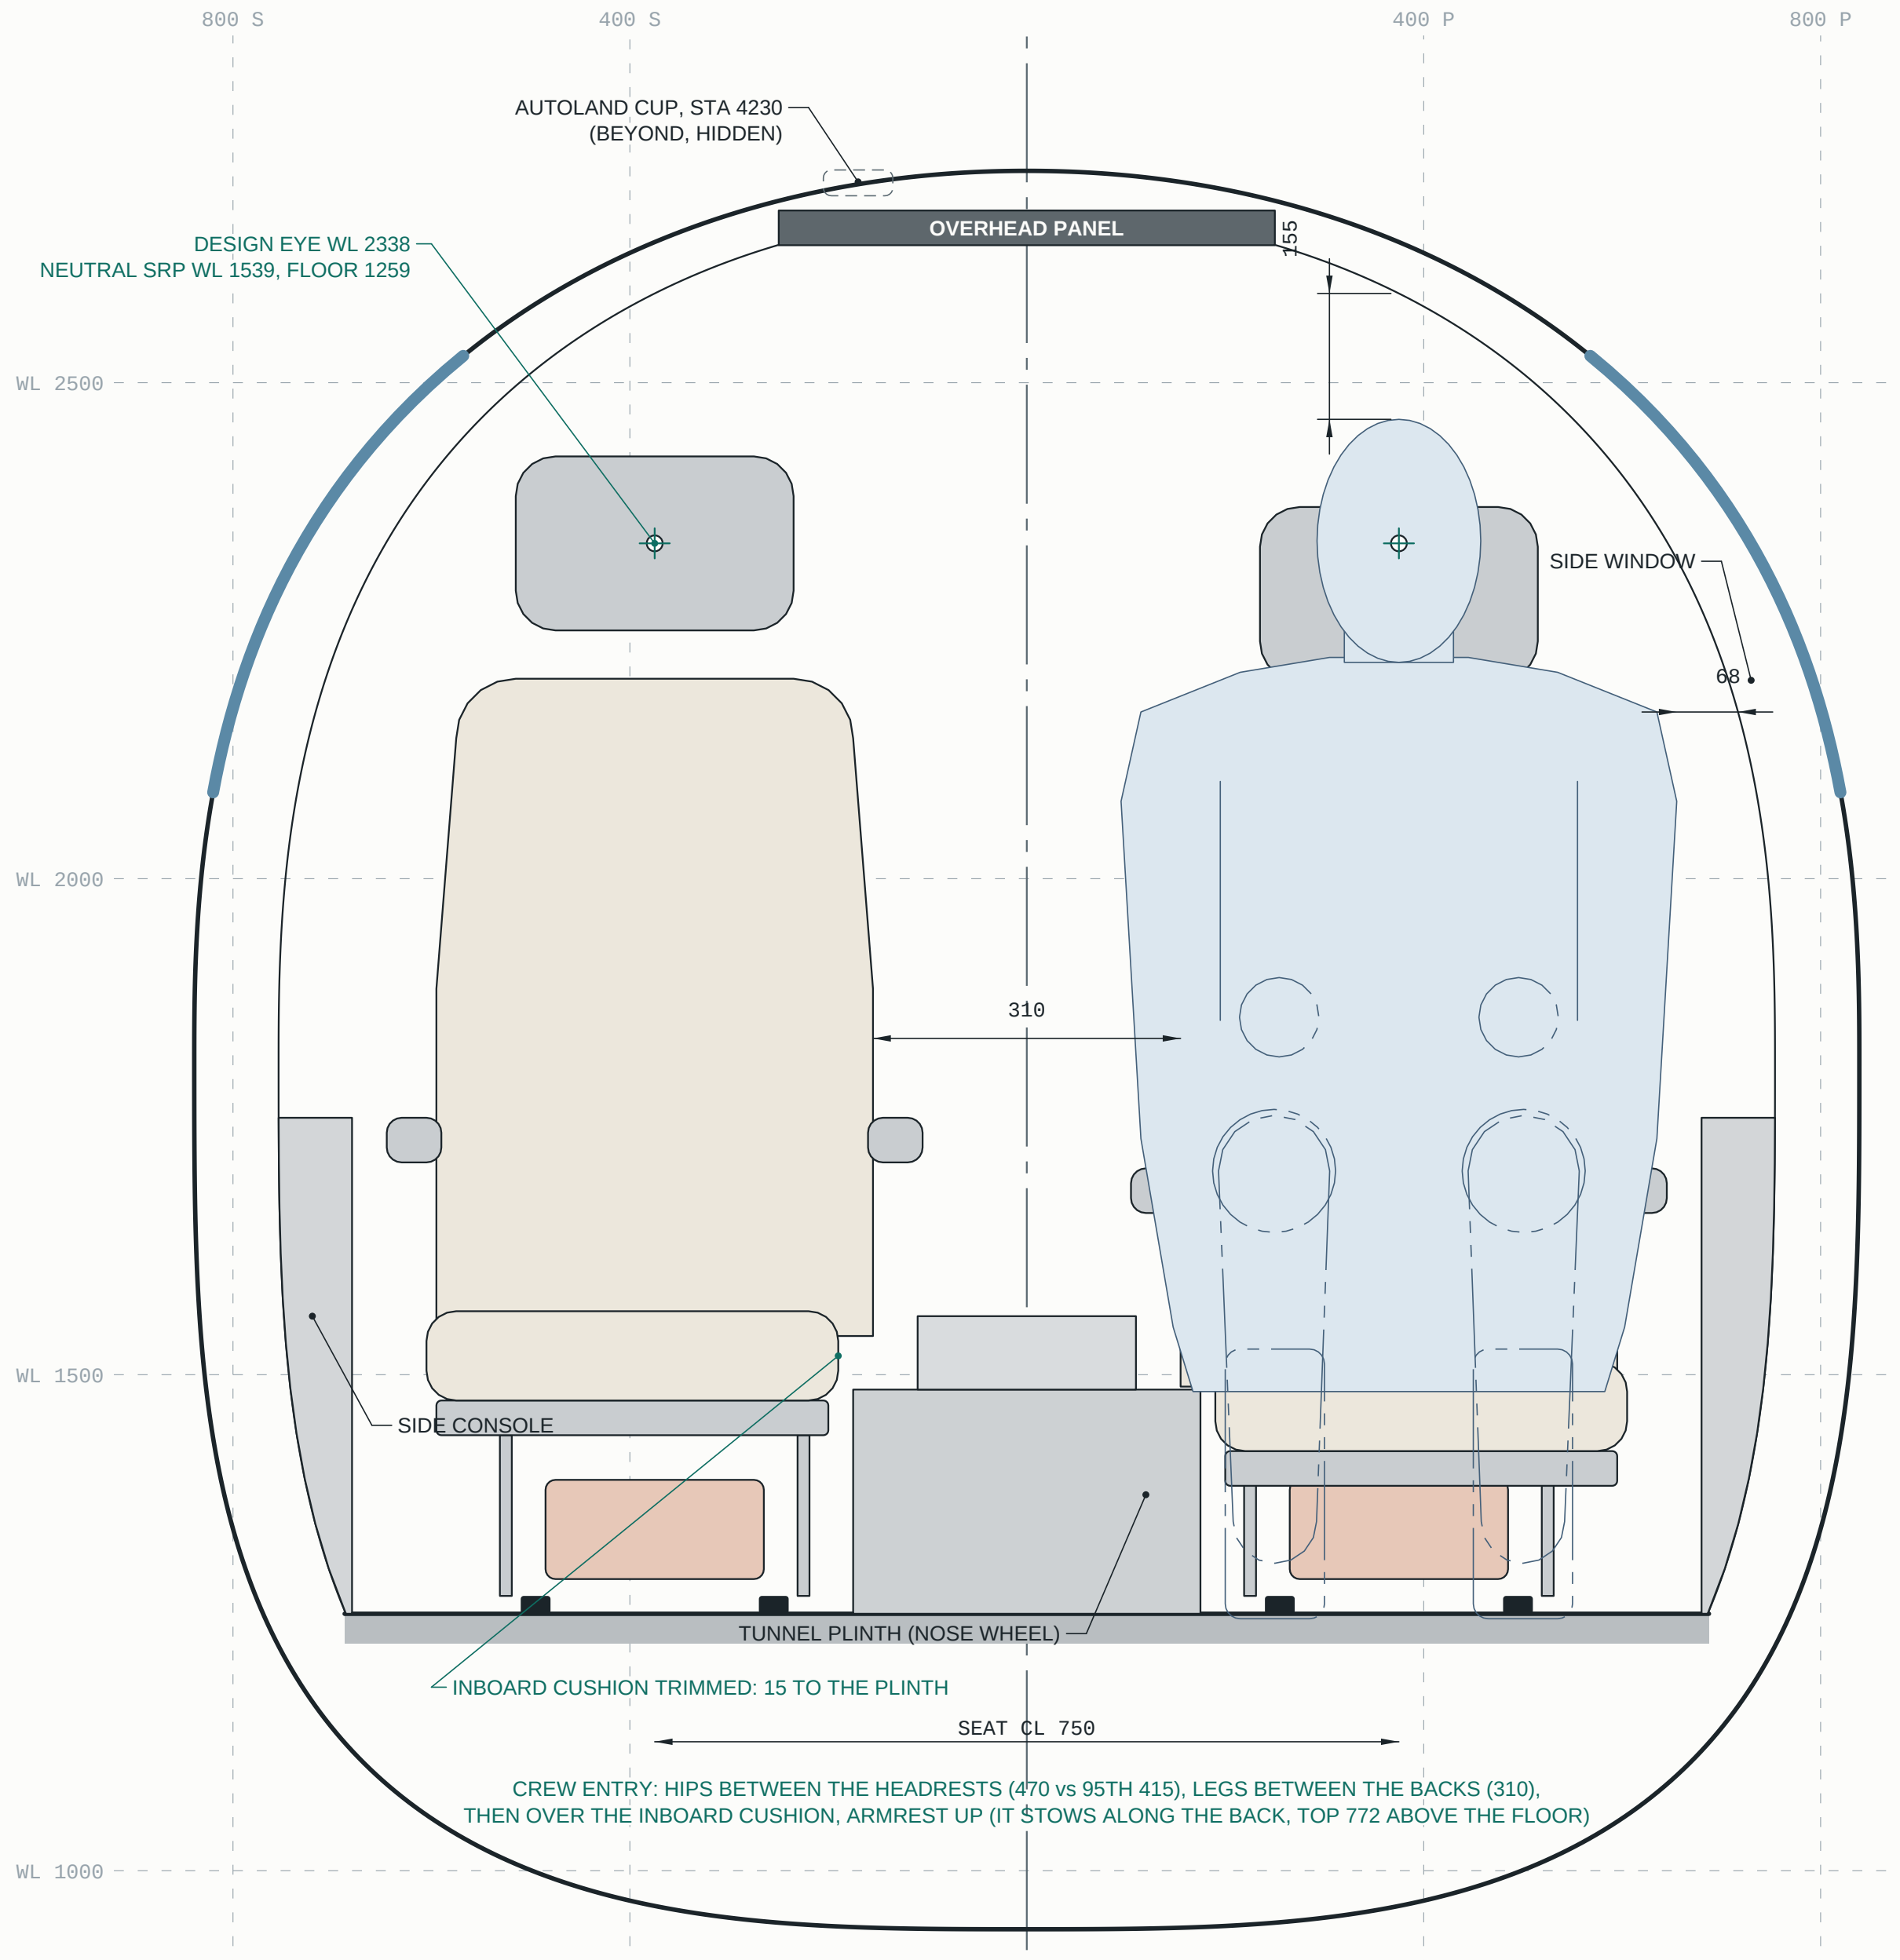
800 S
400 S
400 P
800 P
AUTOLAND CUP, STA 4230
(BEYOND, HIDDEN)
OVERHEAD PANEL
155
DESIGN EYE WL 2338
NEUTRAL SRP WL 1539, FLOOR 1259
WL 2500
WL 2000
WL 1500
WL 1000
SIDE WINDOW
68
310
SIDE CONSOLE
TUNNEL PLINTH (NOSE WHEEL)
INBOARD CUSHION TRIMMED: 15 TO THE PLINTH
SEAT CL 750
CREW ENTRY: HIPS BETWEEN THE HEADRESTS (470 vs 95TH 415), LEGS BETWEEN THE BACKS (310),
THEN OVER THE INBOARD CUSHION, ARMREST UP (IT STOWS ALONG THE BACK, TOP 772 ABOVE THE FLOOR)

SECTION A-A

STA 4120, LOOKING AFT (STBD LEFT) - SCALE 1:10
PHANTOM: KNEES, LEGS, HANDS FORWARD OF THE CUT

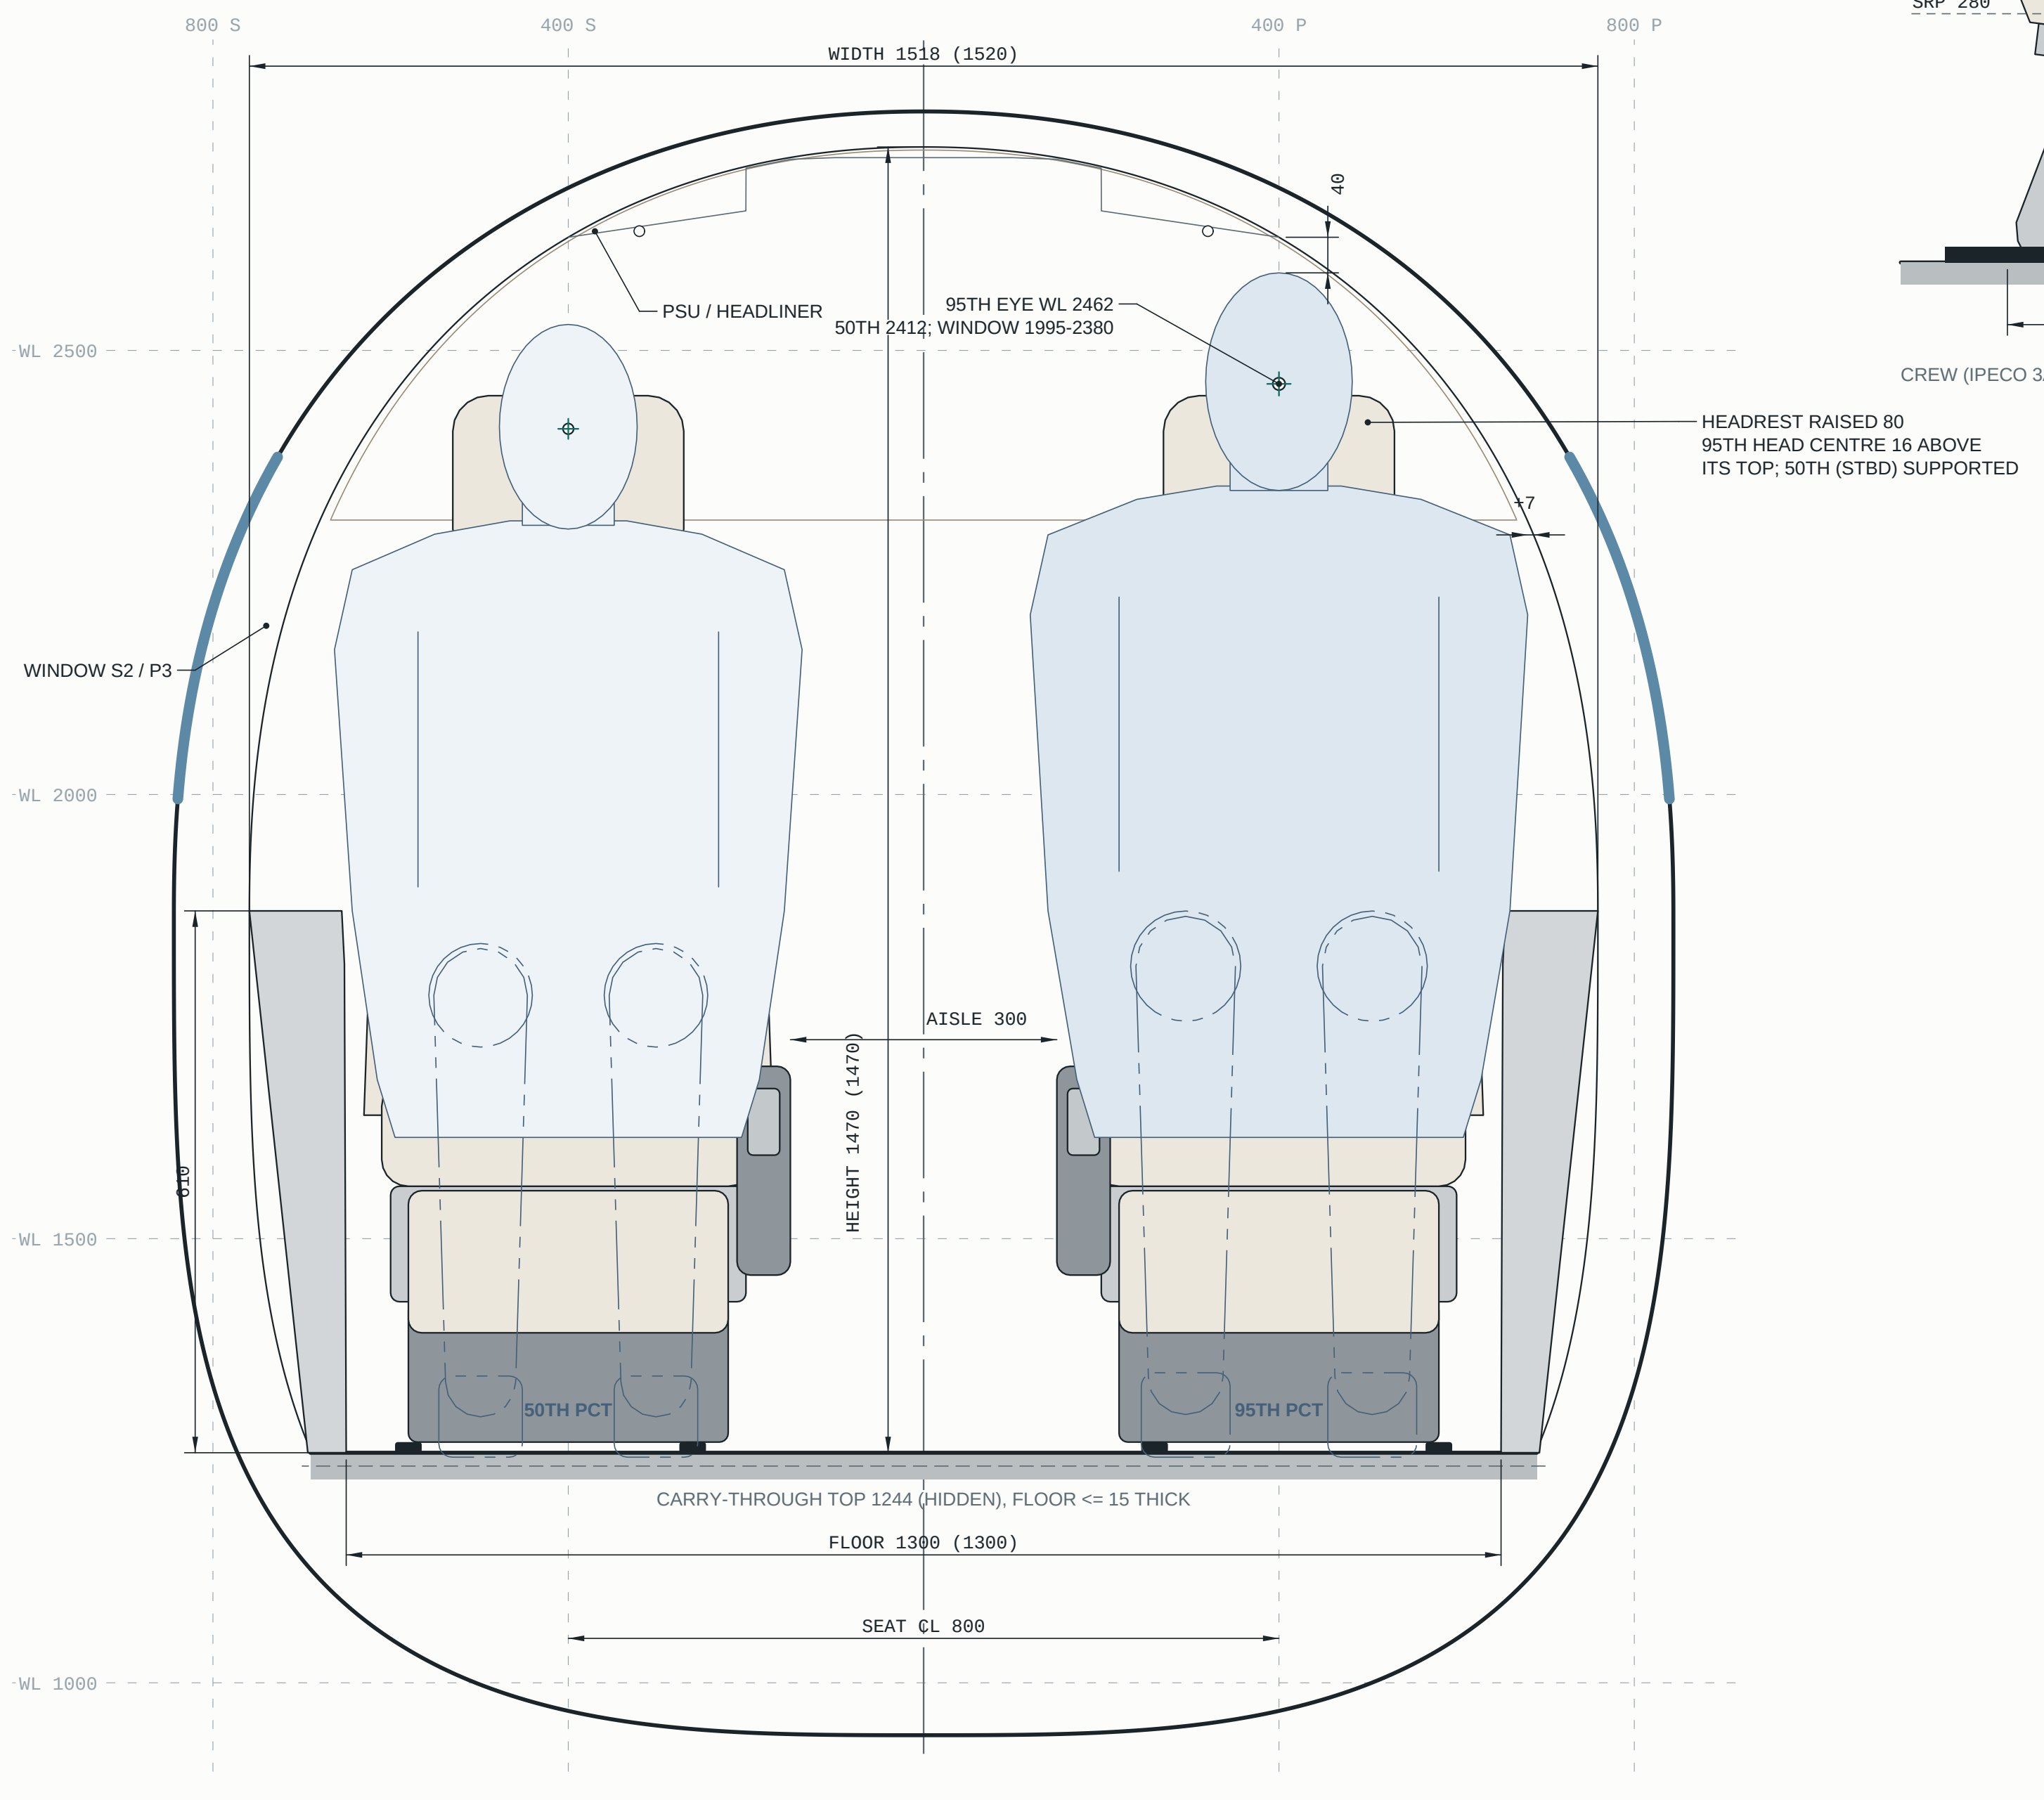

SECTION B-B

STA 7011, LOOKING AFT (STBD LEFT) - SCALE 1:10
PHANTOM: KNEES, LEGS FORWARD OF THE CUT - BROWN: FR34 HEADER + ROD, BEYOND

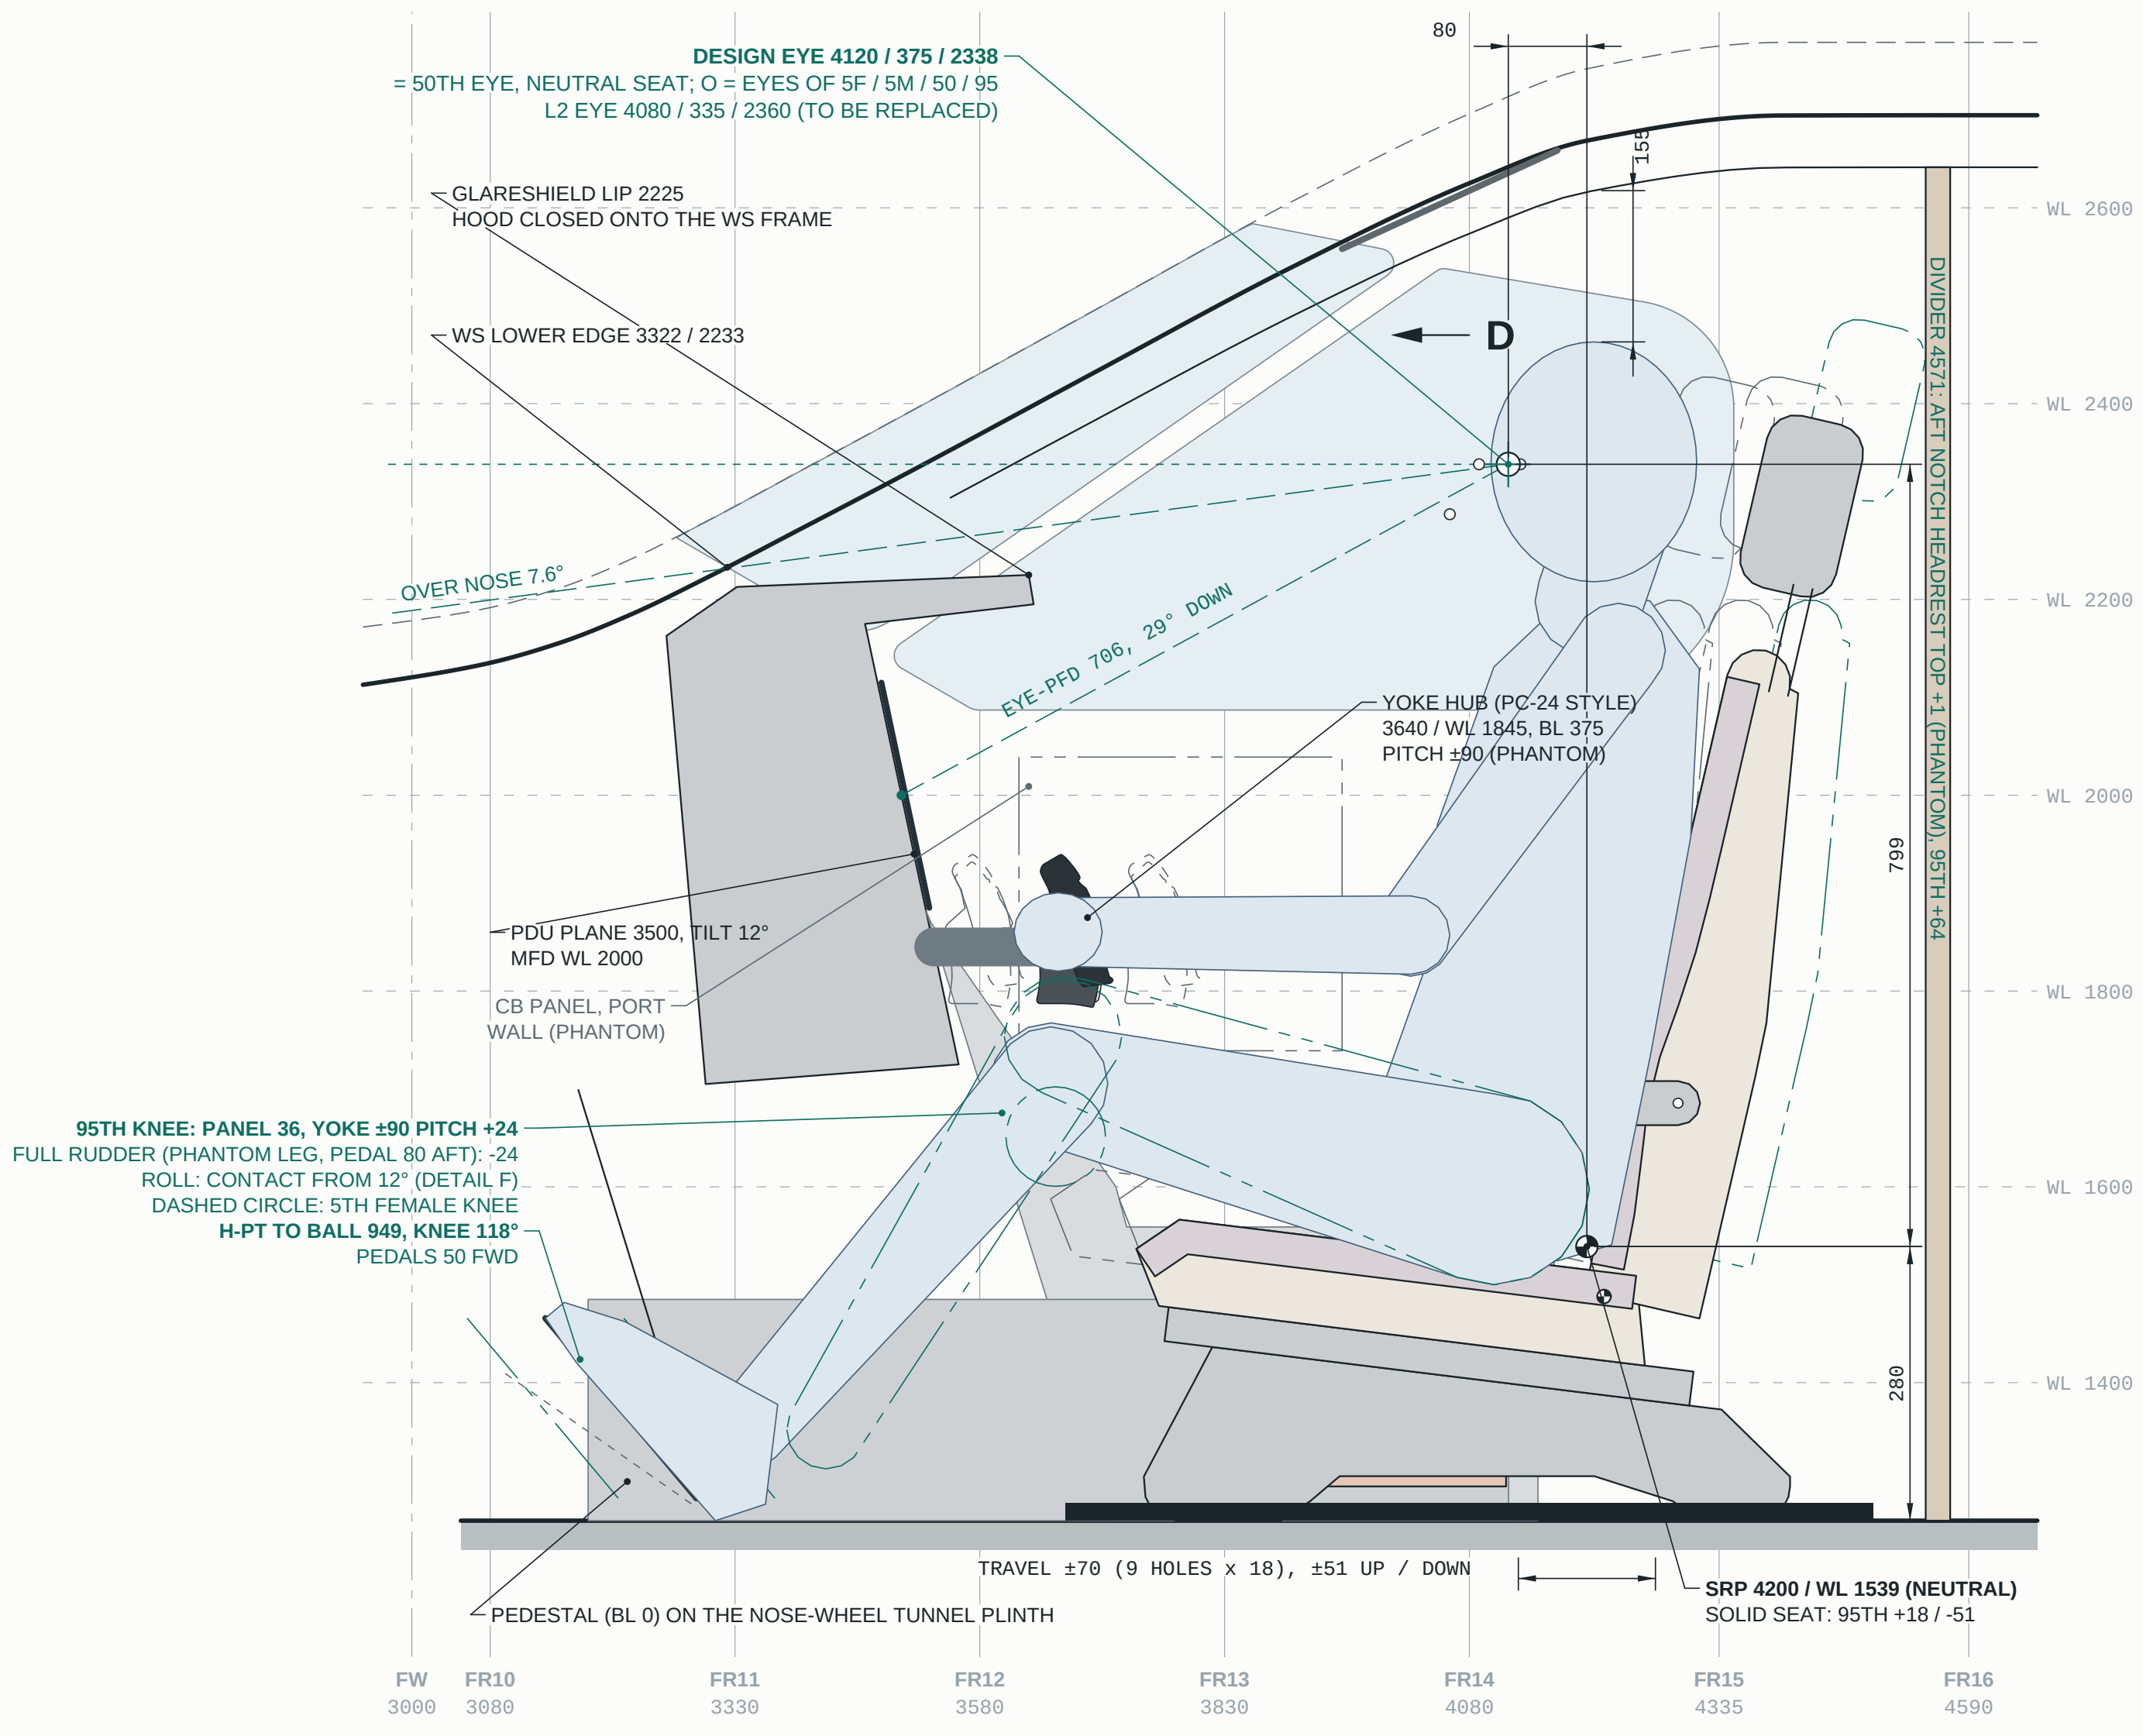
DESIGN EYE 4120 / 375 / 2338
= 50TH EYE, NEUTRAL SEAT; O = EYES OF 5F / 5M / 50 / 95
L2 EYE 4080 / 335 / 2360 (TO BE REPLACED)
80
155
GLARESHIELD LIP 2225
HOOD CLOSED ONTO THE WS FRAME
WS LOWER EDGE 3322 / 2233
D
OVER NOSE 7.6°
EYE-PFD 706, 29° DOWN
YOKE HUB (PC-24 STYLE)
3640 / WL 1845, BL 375
PITCH ±90 (PHANTOM)
PDU PLANE 3500, TILT 12°
MFD WL 2000
CB PANEL, PORT
WALL (PHANTOM)
95TH KNEE: PANEL 36, YOKE ±90 PITCH +24
FULL RUDDER (PHANTOM LEG, PEDAL 80 AFT): -24
ROLL: CONTACT FROM 12° (DETAIL F)
DASHED CIRCLE: 5TH FEMALE KNEE
H-PT TO BALL 949, KNEE 118°
PEDALS 50 FWD
DIVIDER 4571: AFT NOTCH HEADREST TOP +1 (PHANTOM), 95TH +64
799
280
WL 2600
WL 2400
WL 2200
WL 2000
WL 1800
WL 1600
WL 1400
TRAVEL ±70 (9 HOLES x 18), ±51 UP / DOWN
PEDESTAL (BL 0) ON THE NOSE-WHEEL TUNNEL PLINTH
SRP 4200 / WL 1539 (NEUTRAL)
SOLID SEAT: 95TH +18 / -51
FW
3000
FR10
3080
FR11
3330
FR12
3580
FR13
3830
FR14
4080
FR15
4335
FR16
4590

DETAIL C - CREW STATION

LEFT SEAT, BL 375 P, SEEN FROM PORT - SCALE 1:10

SEAT MAP - EX-6S-2 (STA / BL mm)

SEAT	FACING	BL	CUSH. FRONT	OCCUP. (POH)	SRP STA	BACK REAR	RECLINE	WINDOW
PILOT	FWD	-375	3720	4071	4200	4462	-	-
CO-PILOT	FWD	+375	3720	4071	4200	4462	-	-
PAX 1	AFT	-400	6242	5899	5827	5537	45°	P1 -294
PAX 2	AFT	+400	6242	5899	5827	5537	42°	EX +306
PAX 3	FWD	-400	6776	7011	7191	7481	33°	P3 -31
PAX 4	FWD	+400	6776	7011	7191	7481	45°	S2 -31
PAX 5	FWD	-400	7945	8180	8360	8650	45°	CD -222
PAX 6	FWD	+400	8250	8485	8665	8955	38°	S4 +9

Occupant = POH NGX Report 02406 W&B arm (datum = model datum). Crew: centre notch, ±70. Recline: reached, raised headrest (limit on L6B). Window: nearest, offset.

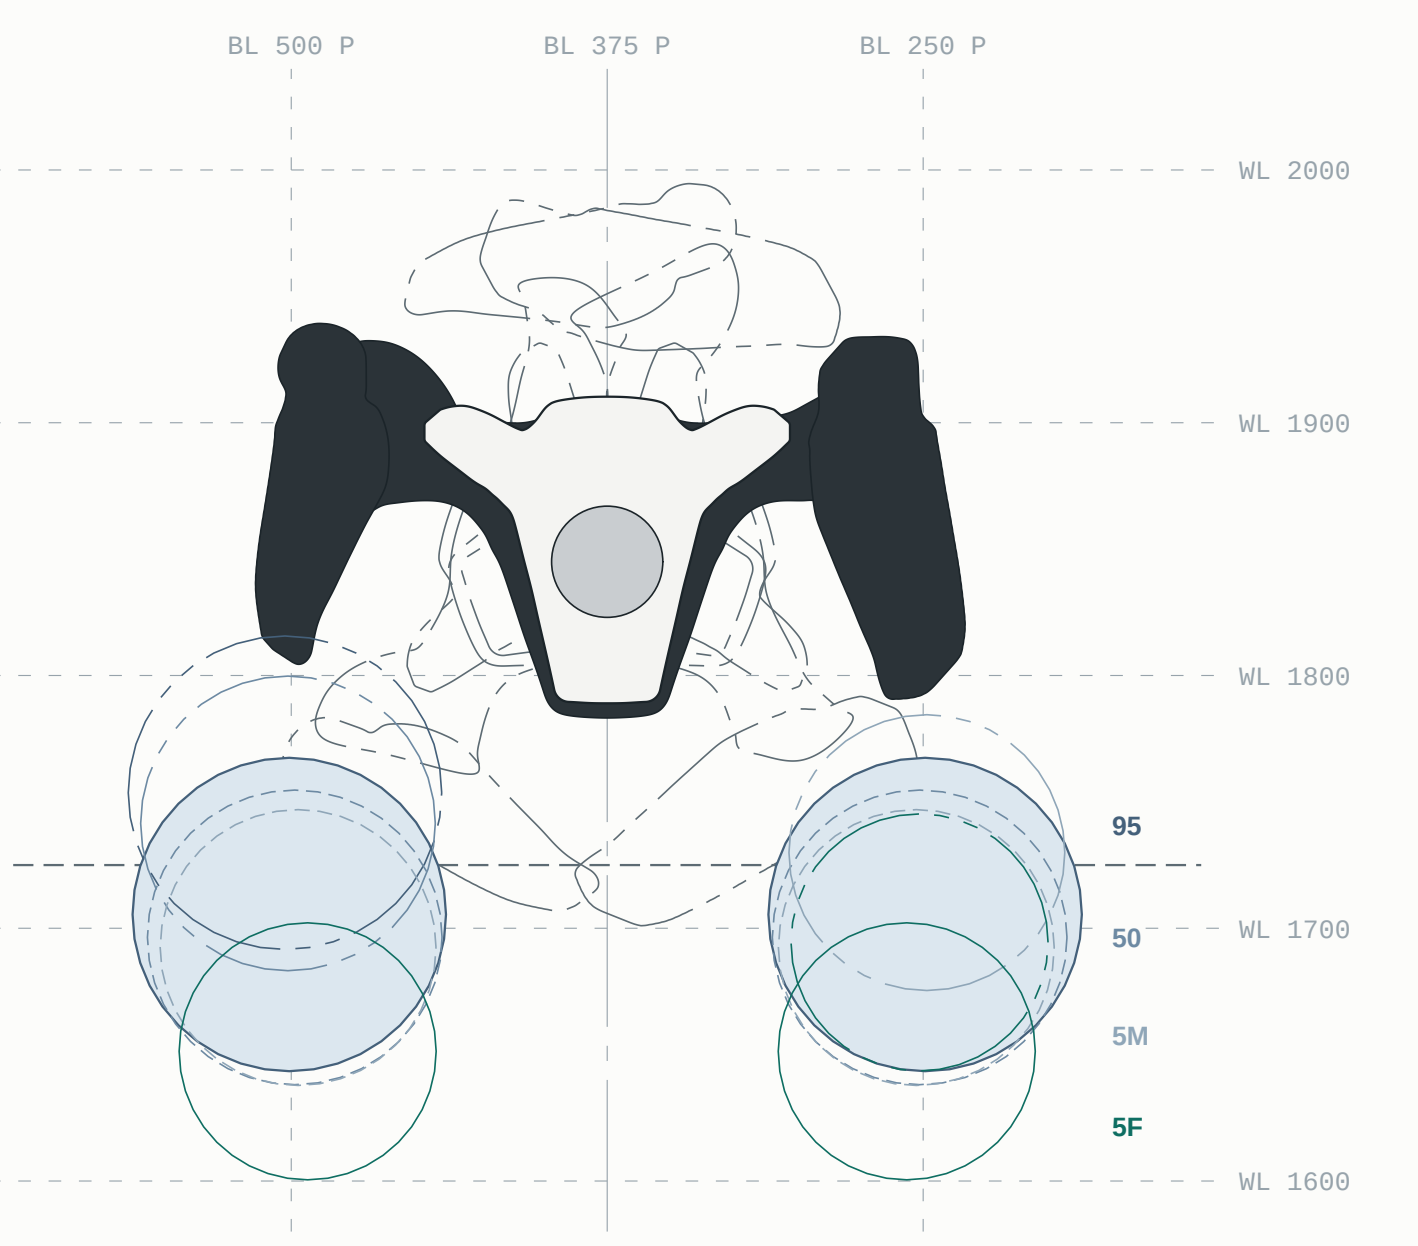

ROLL ±70° [E] PHANTOM; SOLID CIRCLES: KNEES AT EACH SETTING, NEUTRAL PEDALS;
PHANTOM CIRCLES: THE UP-KNEE AT FULL RUDDER (PEDAL 80 AFT)

95TH: NEUTRAL PEDALS +24 WINGS LEVEL, CONTACT FROM 12° ROLL; FULL RUDDER -24
50TH: +36, CONTACT FROM 22°; FULL RUDDER -8, CONTACT FROM 0° (OPEN POINT, L6B)

DETAIL F - YOKE SWEEP vs KNEES

LEFT SEAT, LOOKING FORWARD AT THE KNEES (STA 3653) - SCALE 1:5

LEGEND

━━━	section cut (OML, floor)
───	headliner / sidewall lining
─── ‐ ‐	port wall item (removed)
‐ ‐ ‐ ‐ ‐ ‐	hidden (carry-through, tunnel, lav)
— — — —	sight line from the design eye
─── ‐ ‐	travel / recline / deployed
─── ‐ ‐	full rudder, table posture, 5F knee
▭	95th-pct male manikin
▭	50th-pct male manikin
▭	seat (leather)
▭	veneer: divider, lav, cabinets, header
▭	pleated curtain: FR34, divider
▭	ledge / console

NOTES, CHECK TABLES, REACH, DEVIATIONS & DECISIONS, KEY PARAMETERS AND THE OPEN POINTS FOR THE OWNER: SHEET L6B (PC12-L6 SHEET 2 OF 2).

SYMBOLS

◑	seat reference point (SRP)
⌖	design eye / seated eye
▬	window (plan: on the sidewall)
▨	exit / entry clear zone

SCALE 1:20
0 0.5 1 1.5 m

SCALE 1:10
0 0.2 0.4 0.6 0.8 m

SCALE 1:5
0 0.1 0.2 0.3 0.4 m

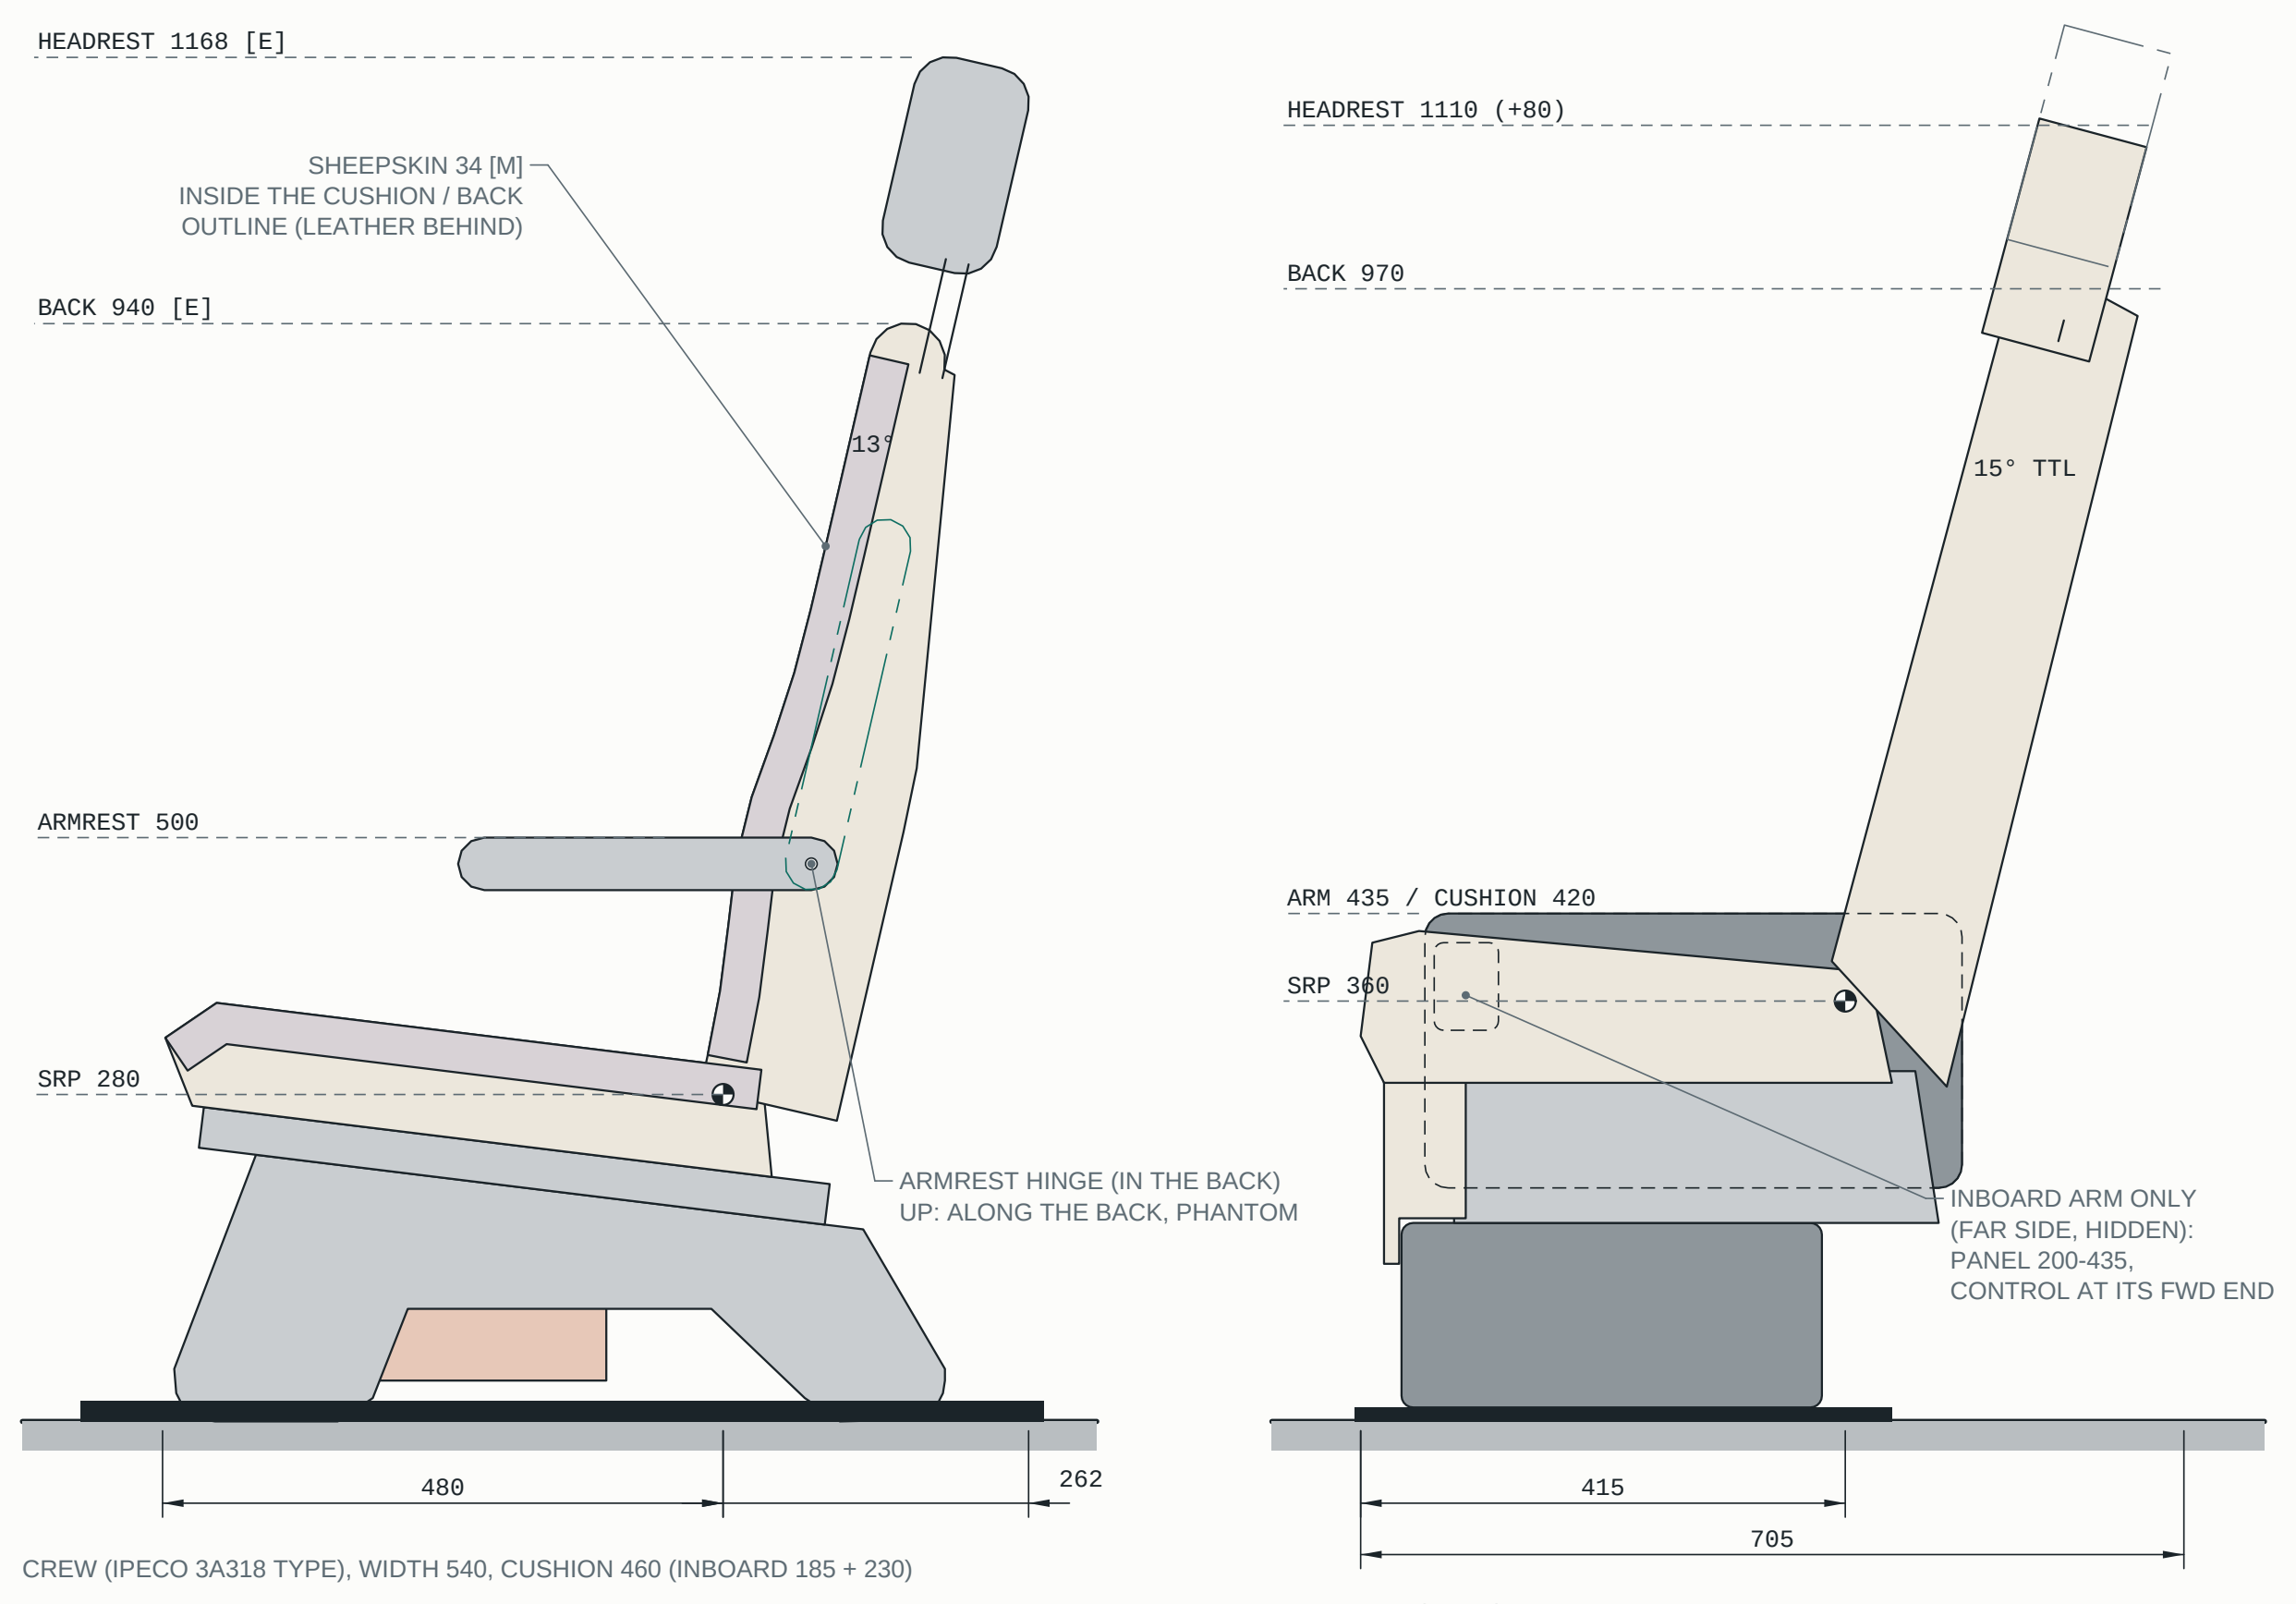

CREW (IPECO 3A318 TYPE), WIDTH 540, CUSHION 460 (INBOARD 185 + 230)

EXECUTIVE (PAX 3), WIDTH 500, CUSHION 420

DETAIL E - SEATS

CREW (NEUTRAL) / EXECUTIVE (UPRIGHT), SEEN FROM PORT - HEIGHTS ABOVE THE FLOOR - SCALE 1:10

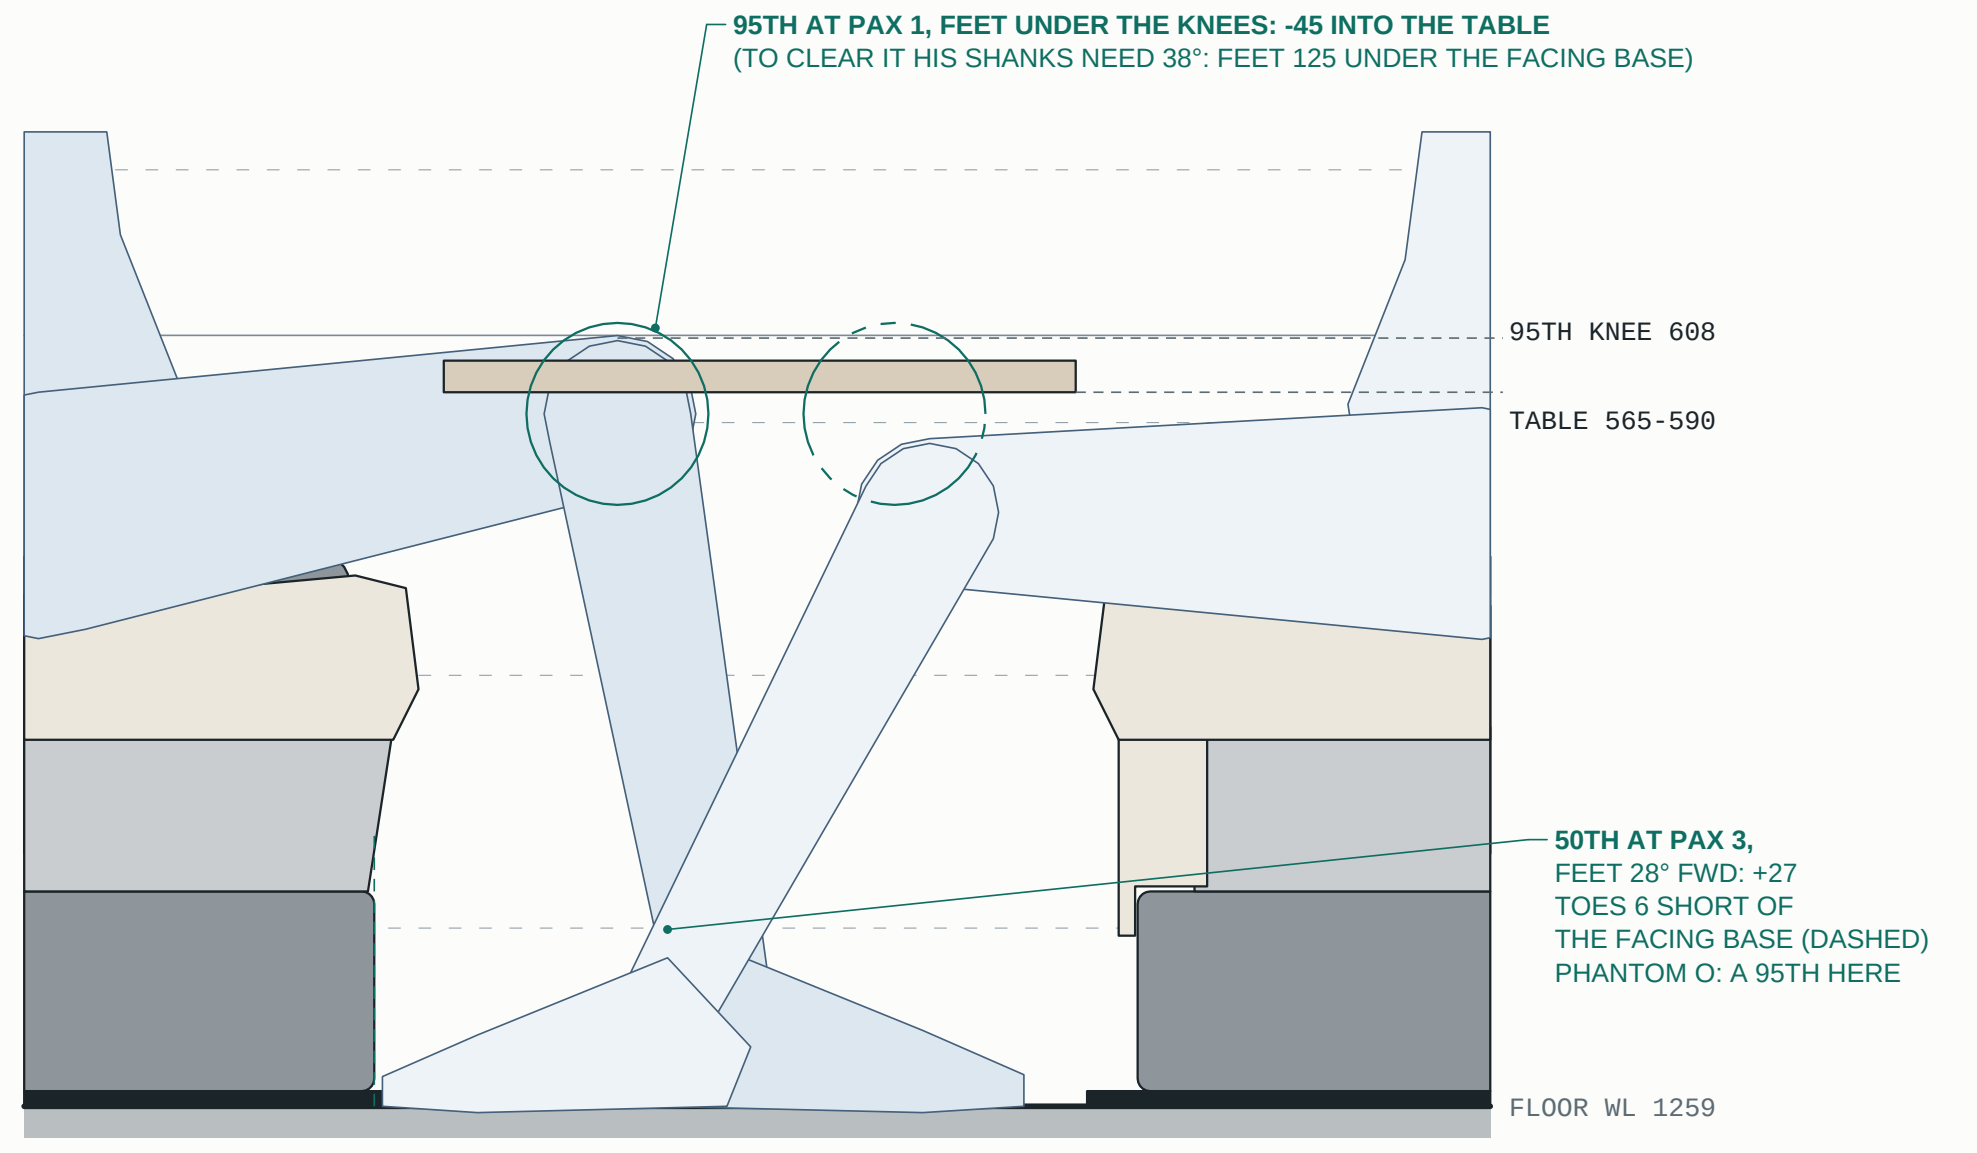

DETAIL G - CLUB TABLE vs LEGS

PAX 1 (95TH) / PAX 3 (50TH), BL 400 P, SEEN FROM PORT - SCALE 1:10

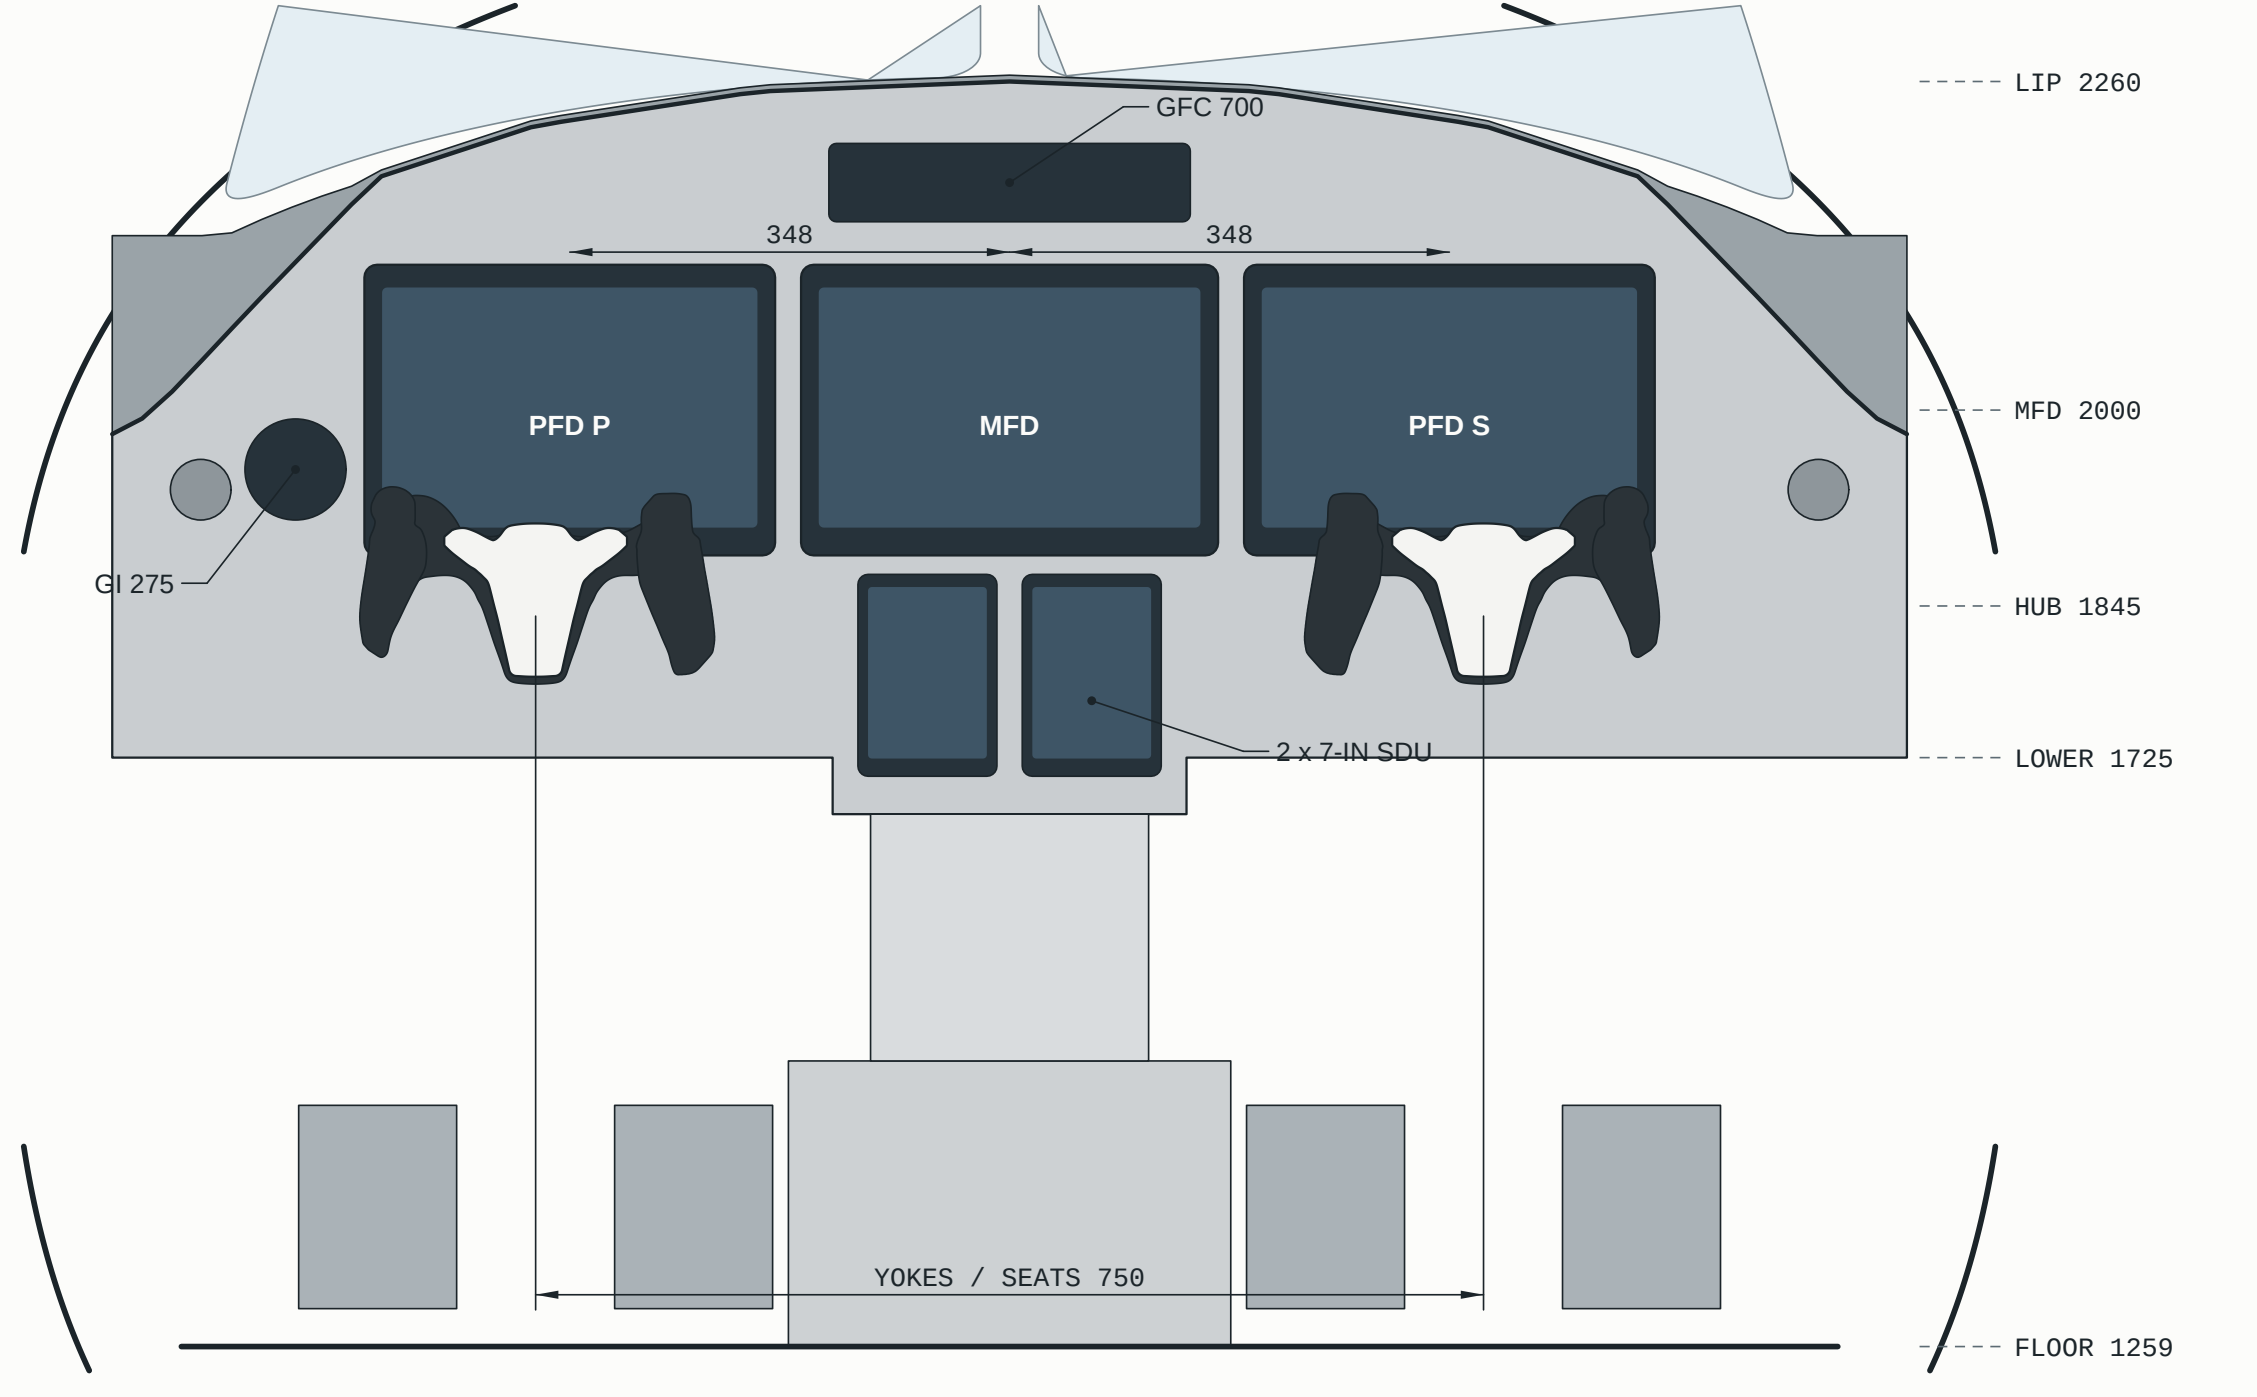

VIEW D - PANEL

LOOKING FORWARD (STBD RIGHT) AT STA 3500 - SCALE 1:10

REVISIONS - PC12-L6

REV	DATE	DESCRIPTION
A	-	first issue of the interior (legacy 3-D interior, not drawn from parameters)
B	2026-09-24	Stage-2 parameter tables (model/interior.py); crew / cabin checks; review r1
C	2026-09-26	review r2: yoke grips from the measured span, SDUs, one-arm cabin seats, lavatory, full rudder, grasp / touch reach, crew armrest hinge; review r3: divider curtain + extinguisher + autoland drawn, lav cabinet 350 [M], pedals +/-125 [M] with the crew knees on the hip-pedal line, knee / yoke sensitivity and POH-arm CG cross-check (L6B), 5th-female open point, section phantoms, seat tracks from parameters
D	2026-09-26	Stage-3 review r2: crew sheepskin 34 [M] drawn inside the cushion / back outline (the 3-D cover had stood proud of it), yoke grips r 15.5 x 140 [M] (P1046408), crew tracks end 15 mm past the rear foot (clear of the stowed curtain, L6B)
E	2026-09-27	Stage-3 review r3: legrest under the cushion of the forward-facing executive seats [M] (P1046402-05); PC-24 yoke face: white goblet shield (top +/-70) on a black body, grip heads r 20 [M] (P1046408); PCL paddle grip [M]; armrest vs pedestal row (L6B); yoke-roll knee contact recorded as an owner decision
F	2026-10-03	Stage-4 final judge r1 (I2, P1046408 re-measured): yoke shield a full U (half-width fractions 0.80 / 0.50 at 1/2 / 4/5 of its height, ~0.86 / 0.66 of the top width; the goblet left a broad black body), grips 160 long (tops 20 higher), heads r 18 over 42 [M]
G	2026-10-03	model judging r1: headliner soffit bands (LINING soffit: 50 step at the raised channel's edge, straight band to the lining at |BL| 400, P1046402 / 04 / 06) carrying the PSU pods (psu_bl 370 -> 320) and downlights, cabin headroom to the headliner underside (L6B); PDU bezel tops visible from the design eyes under the eyebrow fascia (L6B row)
H	2026-10-05	flight deck r1 (owner: details): yoke re-measured on P1046408 / 09 and the JTF elevation -- hub 140 x 120, white Y shield (horns to +/-70, mid-height +/-39, round 45 foot), paddle grips r 16 widening to 21 over their top 90 (no round head); CCD palm grip 100 x 85, top 385 above the floor [M]; glareshield lip arch from both JTF elevations (outboard 15-70 lower); GI 275 unit 82.6 square over its 79.4 cut-out [S]; SDUs 110 x 195 [M]
I	2026-10-05	yoke rev I (owner: 'the yoke isn't quite right especially if you look at the details'): the outline, side profile and switches of the new yoke detail sheet PC12-L6Y (interior.YOKE_DESIGN: 8 PRO photos + a 4-photo bundle adjustment) -- a Y shell with a raised silver crown (-56 .. +67), black rim / necks, open hand slots, grips hanging from the arm tips (heads 95, bottoms -42, span 283), the aft face 17.5 deg top forward, grips raked 20 and toed out 13 / 28 deg; the knee sweep takes each piece's own fore-aft slab (detail F, L6B)
J	2026-10-05	yoke rev J (L6Y judges r1): the yoke as solids (model/yoke_geom.py, sheets L6Y / L6Y2) -- crown 65.3, outboard web / inboard low neck, round trim-face and shield heads (97 / 90), grips refitted per grip, toe 18 / 18; L6 / L6B take its outline and sweep pieces
K-L	2026-10-05	yoke rev K / L (L6Y judges r2 / r3): exact 2-D fields, switches as solids, grip planes fitted to the photos, head zones, C2 outlines; knee sweep fixed (a grip band was dropped)
M	2026-10-05	owner: L6Y rev D approved as the 3-D basis; the 95th's 24 level (< 25, criterion kept), contact 12.5 deg: ACCEPTED AS MEASURED; yoke rev M (judges r4 drafting cleanup)

PILATUS PC-12 PRO

INTERIOR ARRANGEMENT - FLIGHT DECK & CABIN

FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-L6	M	AS SHOWN	A1 · 1 OF 2	mm

DRAWN	DATE
Claude - loftkit parametric model	2026-10-05

RECONSTRUCTION FROM PUBLISHED DATA - NOT FOR CONSTRUCTION