
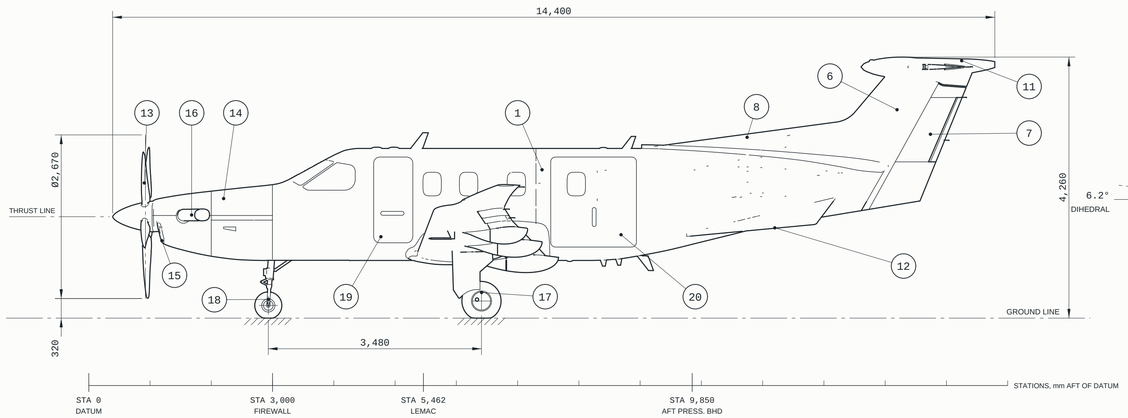


SIDE VIEW

SEEN FROM PORT · NOSE LEFT

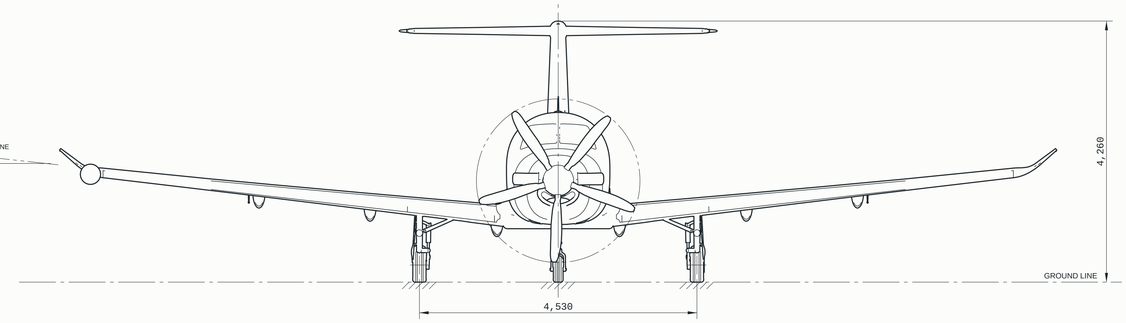

FRONT VIEW

SEEN FROM AHEAD · STARBOARD ON THE LEFT

PLAN VIEW

SEEN FROM ABOVE · STARBOARD WING UP

PARTS LIST

MAJOR ITEMS · BALLOON NUMBERS REFER TO THE SIDE AND PLAN VIEWS

ITEM	DESCRIPTION	QTY	MATERIAL / NOTE
1	Forward fuselage & flight deck shell · Centre fuselage (pressure cabin) · Aft fuselage & tail cone	3	2024-T3 skins, frames 10-16; 2024-T3 skin, 5.8 psi max differential; Semi-monocoque, frames 33-40; tail-cone closure at the rudder
2	Wing (integral fuel tank), L & R	2	2024/7075 two-spar box, integral tank ribs 3-16
3	Winglet, L & R	2	Carbon fibre / honeycomb, Cu foil
4	Fowler flap, L & R	2	Single-piece Fowler flap, 3 support arms
5	Aileron, L & R	2	Mass-balanced, sealed gap
6	Vertical stabiliser (fin) + ventral fairing	1	Aluminium two-spar fin; glass-fibre ventral fairing
7	Rudder	1	Mass-balanced rudder
8	Dorsal fin + root fillet	1	Glass-fibre fairing
9	Horizontal stabiliser (variable incidence)	1	Electrically trimmed, dual actuators
10	Elevator, L & R	2	Paired elevators with horn-balanced tips
11	Fin / tailplane bullet fairing	1	Composite fairing, tail nav/strobe light
12	Ventral strakes (2)	2	Kevlar / honeycomb sandwich
13	Hartzell 5-blade composite propeller (2.67 m), incl. spinner & hub	1	Carbon composite blades, nickel erosion shields, full-feathering, reversible
14	Engine cowling, upper & lower	2	Carbon/Nomex honeycomb, Cu mesh; Carbon/Nomex honeycomb
15	Chin air inlet: polished lip, mouth & duct entry	1	Polished lip, electrically de-iced; composite duct
16	Exhaust stacks (L/R), scarfed outlets	2	Inconel stacks, heat-tinted outlet collars
17	Main gear (trailing link), L & R	2	Trailing link, hydraulic shock strut, electromechanical actuator
18	Nose gear (steerable, retracts aft) · Nose-wheel fork and wheel (steering)	2	Hydraulic shock strut, 17.5x6.25-6 tyre, +/-60 deg steering; Steering collar, torque links, fork, 17.5x6.25-6 wheel
19	Airstair passenger door (0.61 x 1.35 m clear opening)	1	Downward-opening, integral steps
20	Cargo door (1.35 x 1.32 m clear opening)	1	Upward-opening, 120 deg (its gas struts are not modelled: owner decision)
21	Over-wing emergency exit (plug hatch, right)	1	Plug type, removed inward (0.48 x 0.64 m projected)
22	Weather-radar pod, right wing tip (GWX 8000, 12-in antenna)	1	Radome enlarged on the PRO

LEADING PARTICULARS

mm UNLESS STATED · VALUES READ FROM THE MODEL

Wing span (over winglets)	16,280	LEMAC	STA 5,462
Length overall	14,400	Dihedral (reference plane)	6.2°
Height overall (static)	4,260	Tailplane span	5,200
Wing reference area	25.81 m²	Wheel track / wheelbase	4,530 / 3,480
Wing root / tip chord	2,224 / 1,151	Propeller diameter	2,670
MAC / at butt line	1,724 / 3,306	Propeller ground clearance	320

SCALE 1:50

0 1 2 3 4 5 m

NOTES

1. Dimensions in millimetres unless stated.
2. Datum STA 0 is 3,000 mm forward of the firewall (frame 10).
3. Aircraft shown static on gear, flaps up, doors closed, one blade vertical down.
4. Principal dimensions per Pilatus published data (span 16,280; length 14,400; height 4,260; wing area 25.81 m²; tail span 5,200; track 4,530) and the PC-12 NGX POH three-view (wheelbase 3,480).
5. Engine envelope per EASA TCDS IM.E.008 (PT6E-67XP: 1,870.9 long, Ø481.8). Gear per POH 7-4.
6. Contours between these anchors are reconstructed estimates (glazing, winglets cross-checked).
7. Plan view seen from above with the starboard wing at the top; front view seen from ahead, starboard on the viewer's left. Hidden detail not shown.

PILATUS PC-12 PRO

GENERAL ARRANGEMENT

FIRST ANGLE PROJECTION

DWG NO	REV	SCALE	SHEET	UNITS
PC12-GA-001	B	1:50	A1 · 1 OF 1	mm

DRAWN	DATE
Claude · loftkit parametric model	2026-09-24

RECONSTRUCTION FROM PUBLISHED DATA — NOT FOR MANUFACTURE